




Questo è l'esercizio per oggi, gli screenshot sono in ordine sequenziale per consegne j,k,l,m,n,o la parte per la connessione di emacs è invece in fondo perché ho dovuto riabilitare la macchina per internet e poi continuare con l'esercizio

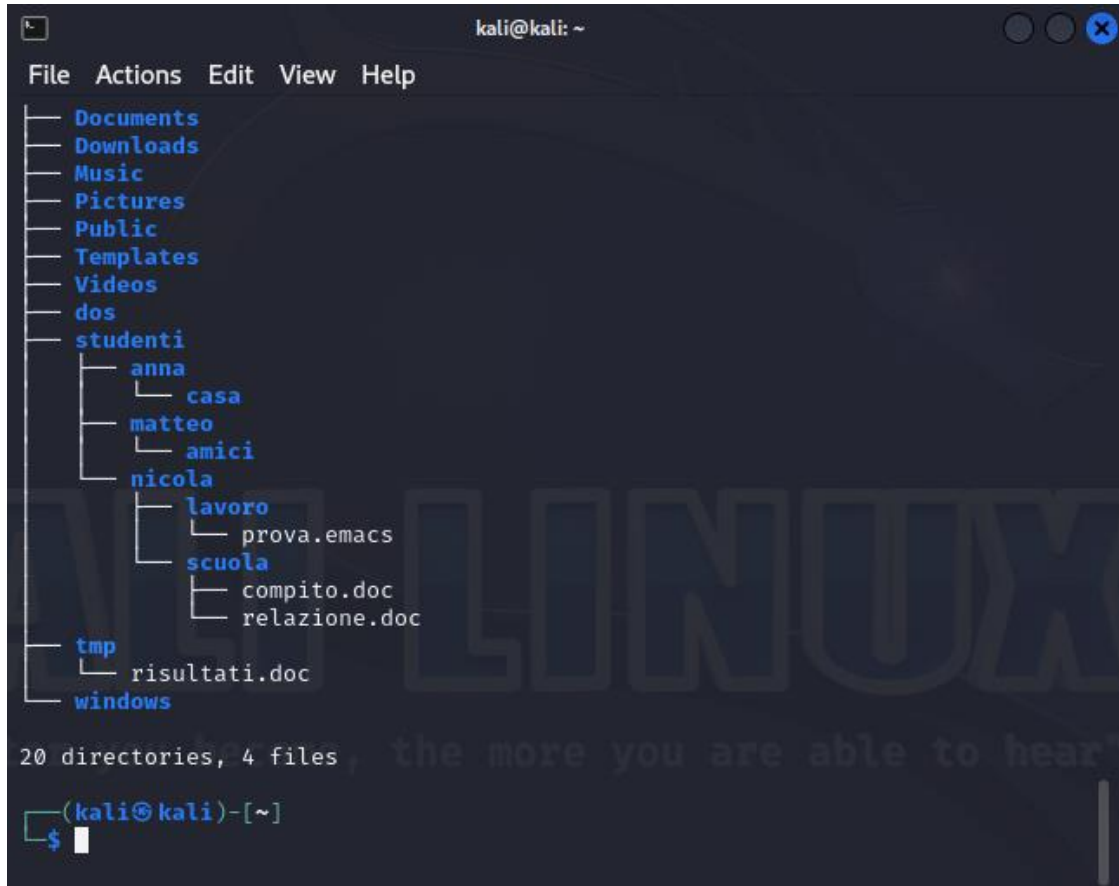

```
kali@kali: ~  
File Actions Edit View Help  
Documents  
Downloads  
Music  
Pictures  
Public  
Templates  
Videos  
dos  
studenti  
├── anna  
│   ├── casa  
│   ├── matteo  
│   │   ├── amici  
│   │   └── nicola  
│       ├── lavoro  
│       │   ├── prova.emacs  
│       │   └── scuola  
│       │       ├── compito.doc  
│       │       └── relazione.doc  
└── tmp  
    └── risultati.doc  
windows  
  
20 directories, 4 files  
(kali@kali)-[~]  
$
```

```
kali@kali: ~  
File Actions Edit View Help  
├── matteo  
│   ├── amici  
│   └── nicola  
│       ├── lavoro  
│       │   └── prova.emacs  
│       └── scuola  
│           ├── compito.doc  
│           └── relazione.doc  
├── tmp  
│   └── risultati.doc  
└── windows  
  
20 directories, 4 files  
  
(kali@kali)-[~]  
$ emacs 6  
[1] 18279  
  
(kali@kali)-[~]  
$ Command 'emacs' not found, did you mean:  
  command 'jmacs' from deb joe  
  command 'jmacs' from deb joe-jupp  
Try: sudo apt install <deb name>  
[1] + exit 127  emacs  
(kali@kali)-[~]  
$
```


```
kali@kali: ~  
File Actions Edit View Help  
├── lavoro  
│   └── prova.emacs  
├── scuola  
│   ├── compito.doc  
│   └── relazione.doc  
├── tmp  
│   └── risultati.doc  
└── windows  
  
20 directories, 4 files  
  
(kali@kali)-[~]  
$ emacs 6  
[1] 18279  
  
(kali@kali)-[~]  
$ Command 'emacs' not found, did you mean:  
  command 'jmacs' from deb joe  
  command 'jmacs' from deb joe-jupp  
Try: sudo apt install <deb name>  
[1] + exit 127  emacs  
(kali@kali)-[~]  
$ jobs  
  
(kali@kali)-[~]  
$
```

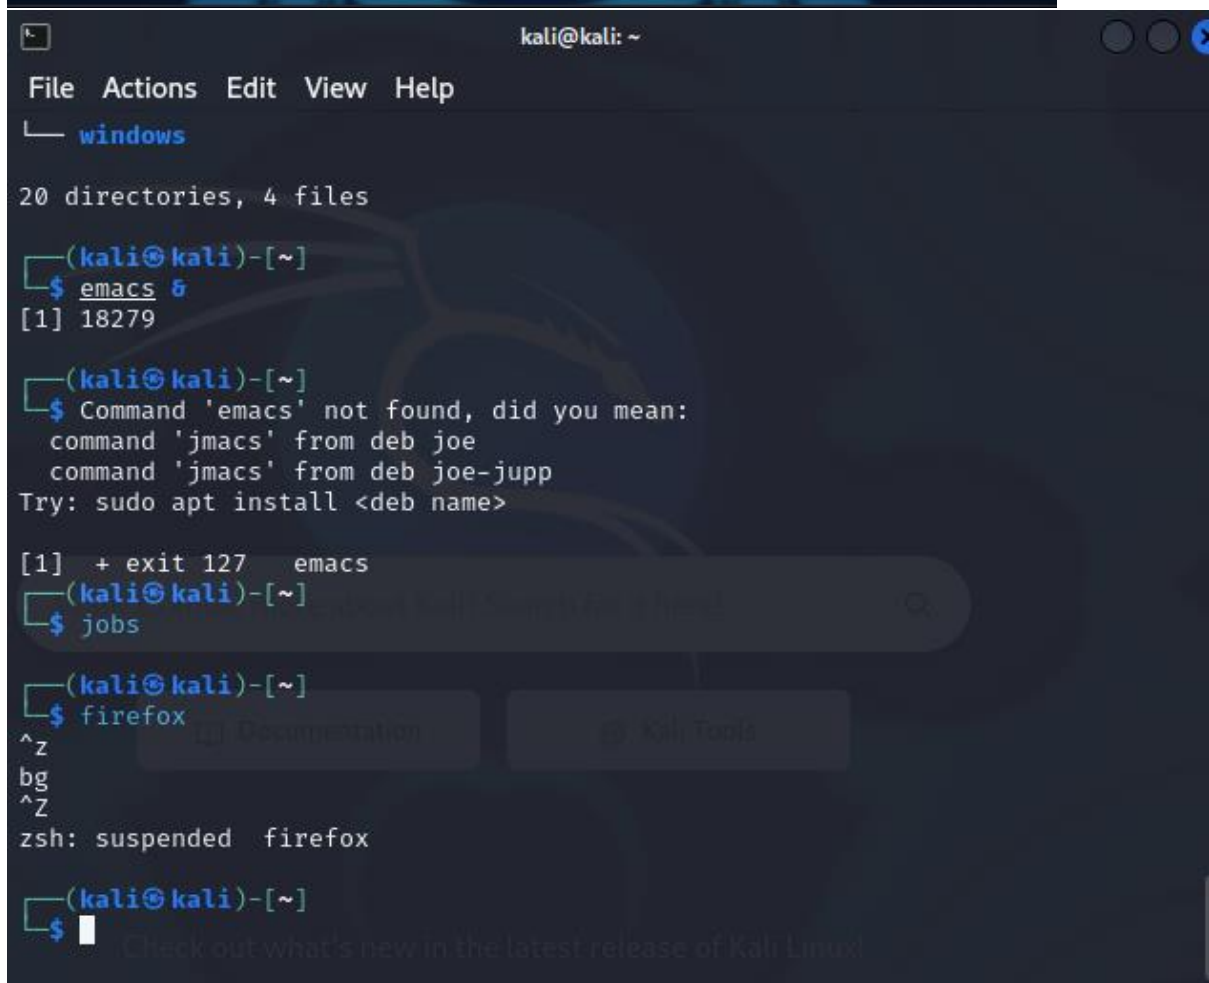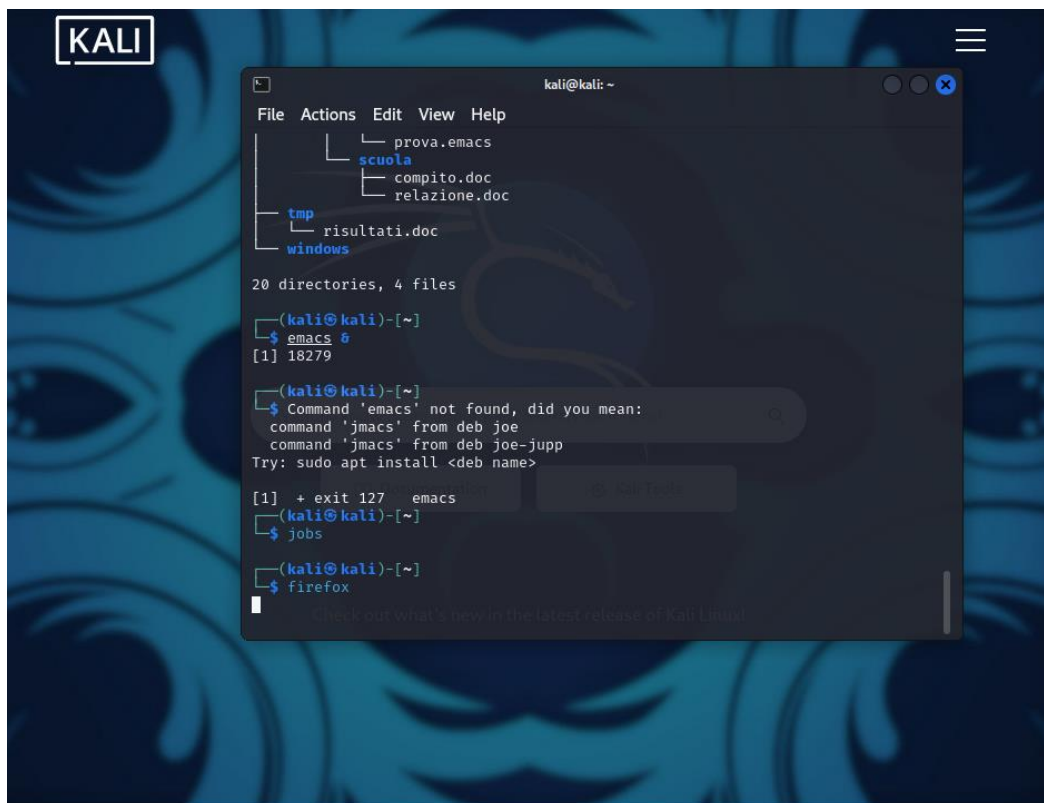


```
kali@kali: ~  
File Actions Edit View Help  
(kali@kali)-[~]  
$ emacs &  
[1] 18279  
  
(kali@kali)-[~]  
$ Command 'emacs' not found, did you mean:  
  command 'jmacs' from deb joe  
  command 'jmacs' from deb joe-jupp  
Try: sudo apt install <deb name>  
  
[1] + exit 127  emacs  
(kali@kali)-[~]  
$ jobs  
  
(kali@kali)-[~]  
$ firefox  
^Z  
bg  
^Z  
zsh: suspended  firefox  
  
(kali@kali)-[~]  
$ bg  
[1] + continued  firefox  
  
(kali@kali)-[~]  
$ ss
```

```
kali@kali: ~  
File Actions Edit View Help  
(kali@kali)-[~]  
$ Command 'emacs' not found, did you mean:  
  command 'jmacs' from deb joe  
  command 'jmacs' from deb joe-jupp  
Try: sudo apt install <deb name>  
  
[1] + exit 127  emacs  
(kali@kali)-[~]  
$ jobs  
  
(kali@kali)-[~]  
$ firefox  
^Z  
bg  
^Z  
zsh: suspended  firefox  
  
(kali@kali)-[~]  
$ bg  
[1] + continued  firefox  
  
(kali@kali)-[~]  
$ jobs  
[1] + running    firefox  
  
(kali@kali)-[~]  
$
```

```
kali@kali: ~  
File Actions Edit View Help  
^z  
bg  
^Z  
zsh: suspended  firefox  
  
(kali@kali)-[~]  
$ bg  
[1] + continued  firefox  
  
(kali@kali)-[~]  
$ jobs  
[1] + running    firefox  
  
(kali@kali)-[~]  
$ fg %emacs  
fg: job not found: emacs  
  
(kali@kali)-[~]  
$ du sh  
du: cannot access 'sh': No such file or directory  
  
(kali@kali)-[~]  
$ du -sh  
29M .  
  
(kali@kali)-[~]  
$
```

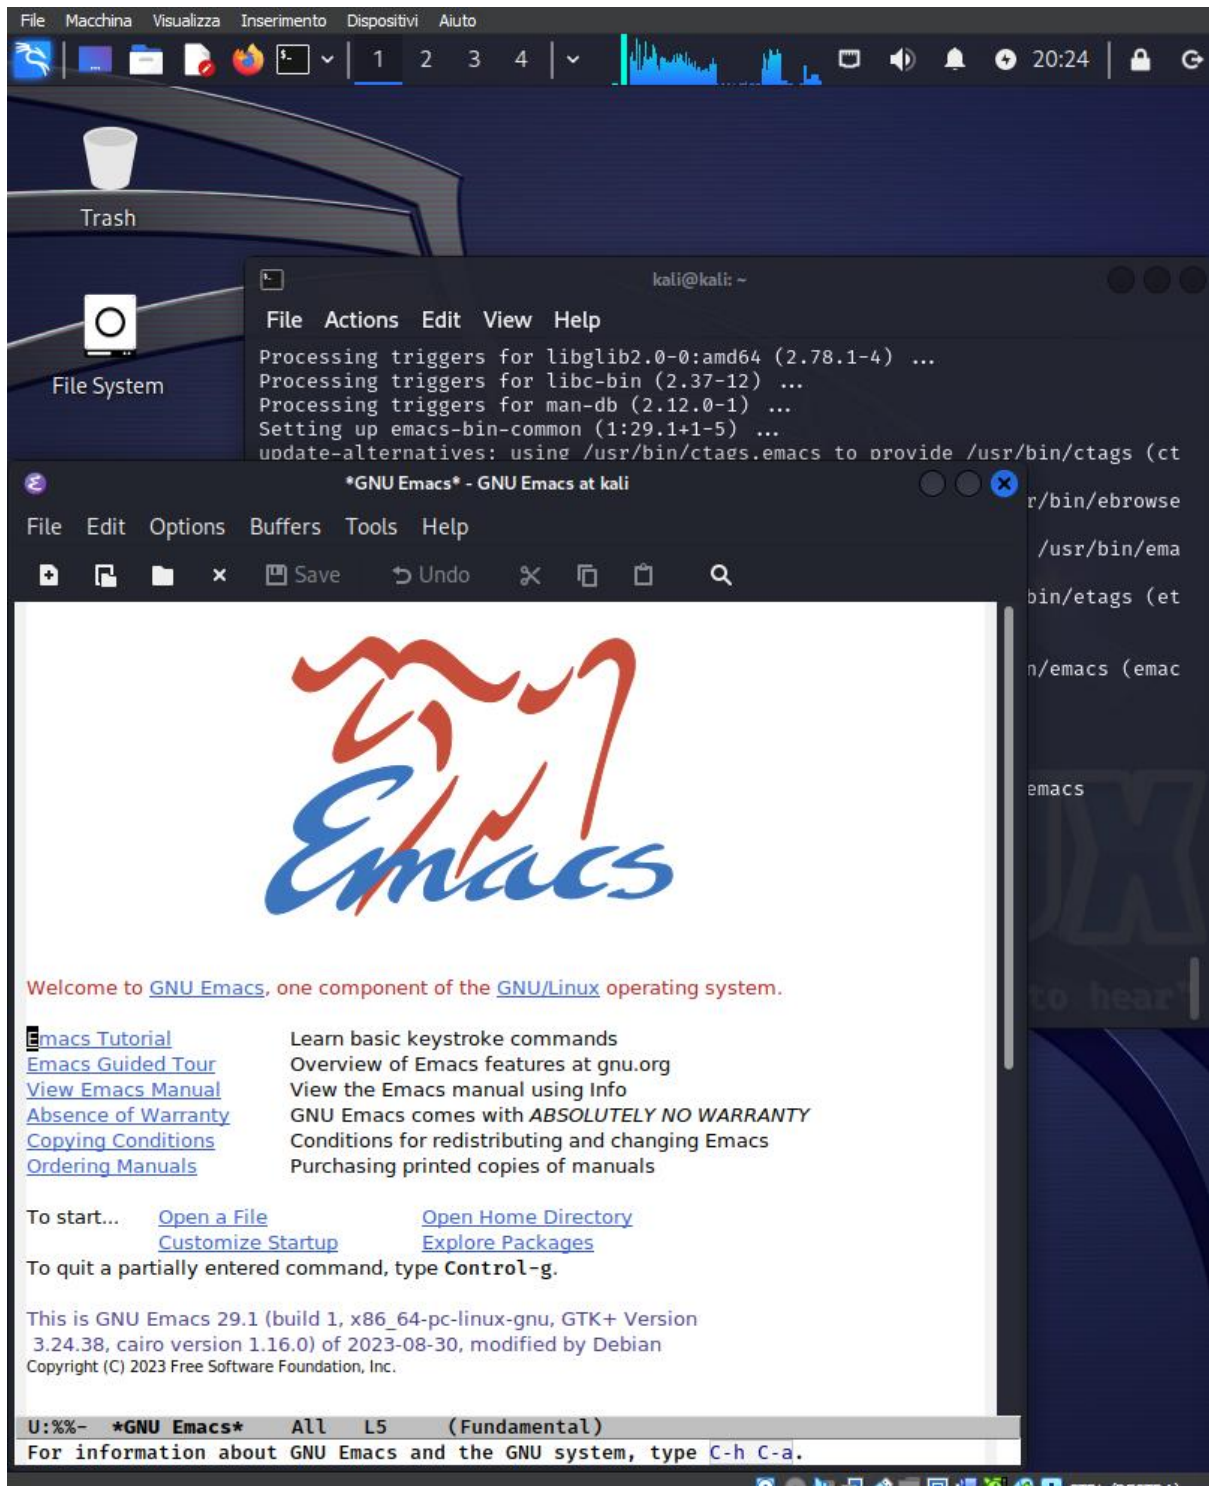

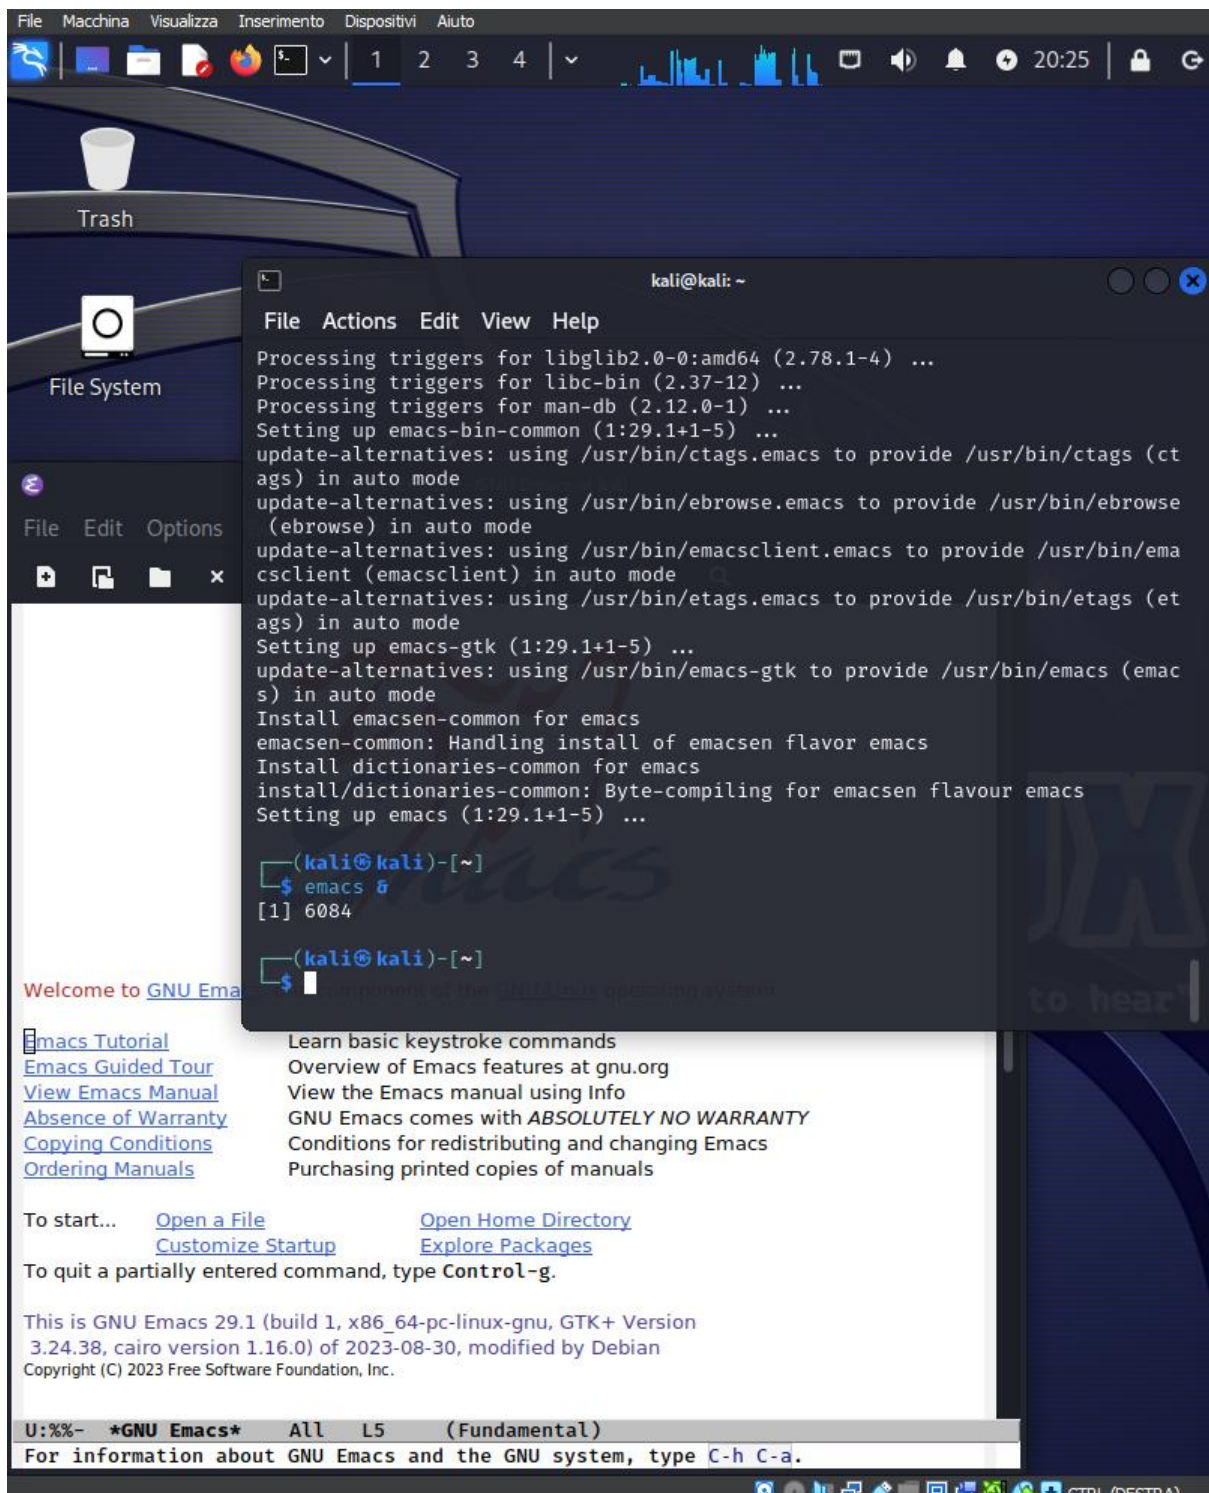

```
kali@kali: ~  
File Actions Edit View Help  
update-alternatives: using /usr/bin/ctags.emacs to provide /usr/bin/ctags (ctags) in auto mode  
update-alternatives: using /usr/bin/ebrowse.emacs to provide /usr/bin/ebrowse (ebrowse) in auto mode  
update-alternatives: using /usr/bin/emacsclient.emacs to provide /usr/bin/emacsclient (emacsclient) in auto mode  
update-alternatives: using /usr/bin/etags.emacs to provide /usr/bin/etags (etags) in auto mode  
Setting up emacs-gtk (1:29.1+1-5) ...  
update-alternatives: using /usr/bin/emacs-gtk to provide /usr/bin/emacs (emacs) in auto mode  
Install emacs-common for emacs  
emacs-common: Handling install of emacs flavor emacs  
Install dictionaries-common for emacs  
install/dictionaries-common: Byte-compiling for emacs flavor emacs  
Setting up emacs (1:29.1+1-5) ...  
  
(kali@kali)-[~]  
$ emacs &  
[1] 6084  
  
(kali@kali)-[~]  
$ jobs  
[1] + running emacs  
  
(kali@kali)-[~]  
$ █ one component of the GNU/Linux operating system.
```

```
kali@kali: ~  
File Actions Edit View Help  
update-alternatives: using /usr/bin/ebrowse.emacs to provide /usr/bin/ebrowse (ebrowse) in auto mode  
update-alternatives: using /usr/bin/emacsclient.emacs to provide /usr/bin/emacsclient (emacsclient) in auto mode  
update-alternatives: using /usr/bin/etags.emacs to provide /usr/bin/etags (etags) in auto mode  
Setting up emacs-gtk (1:29.1+1-5) ...  
update-alternatives: using /usr/bin/emacs-gtk to provide /usr/bin/emacs (emacs) in auto mode  
Install emacs-common for emacs  
emacs-common: Handling install of emacs flavor emacs  
Install dictionaries-common for emacs  
install/dictionaries-common: Byte-compiling for emacs flavor emacs  
Setting up emacs (1:29.1+1-5) ...  
  
(kali@kali)-[~]  
$ emacs &  
[1] 6084  
  
(kali@kali)-[~]  
$ jobs  
[1] + running emacs  
  
(kali@kali)-[~]  
$ fg %emacs  
[1] + running emacs  
█ one component of the GNU/Linux operating system.
```



```
kali@kali: ~  
File Actions Edit View Help  
csclient (emacsclient) in auto mode  
update-alternatives: using /usr/bin/etags.emacs to provide /usr/bin/etags (etags) in auto mode  
Setting up emacs-gtk (1:29.1+1-5) ...  
update-alternatives: using /usr/bin/emacs-gtk to provide /usr/bin/emacs (emacs) in auto mode  
Install emacs-common for emacs  
emacs-common: Handling install of emacs flavor emacs  
Install dictionaries-common for emacs  
install/dictionaries-common: Byte-compiling for emacs flavor emacs  
Setting up emacs (1:29.1+1-5) ...  
  
(kali@kali)-[~]  
$ emacs &  
[1] 6084  
  
(kali@kali)-[~]  
$ jobs  
[1] + running emacs  
  
(kali@kali)-[~]  
$ fg %emacs  
[1] + running emacs  
^C  
  
(kali@kali)-[~]  
$
```