

LOGISTIC REGRESSION

PROBLEM STATEMENT: TO PREDICT AND ANALYZE WHICH GENDER HAS A HIGH CHANCE OF SURVIVAL AT THE TIME OF DISASTER#

IMPORT DATASETS, PYTHON PACKAGES AND LIBRARIES

```
In [1]: import numpy as np
import pandas as pd
from sklearn import preprocessing
import matplotlib.pyplot as plt
# plt.rc("font", size=14)
import seaborn as sns
sns.set(style="white") #white background style for seaborn plots
sns.set(style="whitegrid", color_codes=True)
import warnings
warnings.simplefilter(action='ignore')
```

```
In [2]: train_df = pd.read_csv(r"C:\Users\Dell\Downloads\train.gender_submission.csv")
train_df
```

Out[2]:

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500	NaN	S
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.2833	C85	C
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250	NaN	S
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000	C123	S
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500	NaN	S
...
886	887	0	2	Montvila, Rev. Juozas	male	27.0	0	0	211536	13.0000	NaN	S
887	888	1	1	Graham, Miss. Margaret Edith	female	19.0	0	0	112053	30.0000	B42	S
888	889	0	3	Johnston, Miss. Catherine Helen "Carrie"	female	NaN	1	2	W./C. 6607	23.4500	NaN	S
889	890	1	1	Behr, Mr. Karl Howell	male	26.0	0	0	111369	30.0000	C148	C
890	891	0	3	Dooley, Mr. Patrick	male	32.0	0	0	370376	7.7500	NaN	Q

891 rows × 12 columns

```
In [3]: test_df = pd.read_csv(r"C:\Users\Dell\Downloads\test.gender_submission.csv")
test_df
```

Out[3]:

	PassengerId	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
0	892	3	Kelly, Mr. James	male	34.5	0	0	330911	7.8292	NaN	Q
1	893	3	Wilkes, Mrs. James (Ellen Needs)	female	47.0	1	0	363272	7.0000	NaN	S
2	894	2	Myles, Mr. Thomas Francis	male	62.0	0	0	240276	9.6875	NaN	Q
3	895	3	Wirz, Mr. Albert	male	27.0	0	0	315154	8.6625	NaN	S
4	896	3	Hirvonen, Mrs. Alexander (Helga E Lindqvist)	female	22.0	1	1	3101298	12.2875	NaN	S
...
413	1305	3	Spector, Mr. Woolf	male	NaN	0	0	A.5. 3236	8.0500	NaN	S
414	1306	1	Oliva y Ocana, Dona. Fermina	female	39.0	0	0	PC 17758	108.9000	C105	C
415	1307	3	Saether, Mr. Simon Sivertsen	male	38.5	0	0	SOTON/O.Q. 3101262	7.2500	NaN	S
416	1308	3	Ware, Mr. Frederick	male	NaN	0	0	359309	8.0500	NaN	S
417	1309	3	Peter, Master. Michael J	male	NaN	1	1	2668	22.3583	NaN	C

418 rows × 11 columns

```
In [4]: train_df.shape
```

Out[4]: (891, 12)

```
In [5]: test_df.shape
```

Out[5]: (418, 11)

```
In [6]: train_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 891 entries, 0 to 890
Data columns (total 12 columns):
#   Column          Non-Null Count  Dtype
---  ---
0   PassengerId      891 non-null    int64
1   Survived         891 non-null    int64
2   Pclass          891 non-null    int64
3   Name             891 non-null    object
4   Sex              891 non-null    object
5   Age              714 non-null    float64
6   SibSp            891 non-null    int64
7   Parch           891 non-null    int64
8   Ticket           891 non-null    object
9   Fare             891 non-null    float64
10  Cabin            204 non-null    object
11  Embarked         889 non-null    object
dtypes: float64(2), int64(5), object(5)
memory usage: 83.7+ KB
```

```
In [7]: test_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 418 entries, 0 to 417
Data columns (total 11 columns):
#   Column          Non-Null Count  Dtype
---  ---
0   PassengerId      418 non-null    int64
1   Pclass           418 non-null    int64
2   Name             418 non-null    object
3   Sex              418 non-null    object
4   Age              332 non-null    float64
5   SibSp            418 non-null    int64
6   Parch           418 non-null    int64
7   Ticket           418 non-null    object
8   Fare             417 non-null    float64
9   Cabin            91 non-null     object
10  Embarked         418 non-null    object
dtypes: float64(2), int64(4), object(5)
memory usage: 36.0+ KB
```

To find missing values


```
In [8]: train_df.isnull().sum()
```

```
Out[8]: PassengerId      0  
Survived      0  
Pclass      0  
Name      0  
Sex      0  
Age      177  
SibSp      0  
Parch      0  
Ticket      0  
Fare      0  
Cabin      687  
Embarked      2  
dtype: int64
```

```
In [9]: test_df.isnull().sum()
```

```
Out[9]: PassengerId      0  
Pclass      0  
Name      0  
Sex      0  
Age      86  
SibSp      0  
Parch      0  
Ticket      0  
Fare      1  
Cabin      327  
Embarked      0  
dtype: int64
```

```
In [10]: ax = train_df["Age"].hist(bins=15, density=True, stacked=True, color='cyan', alpha=0.6)
train_df["Age"].plot(kind='density', color='teal')
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

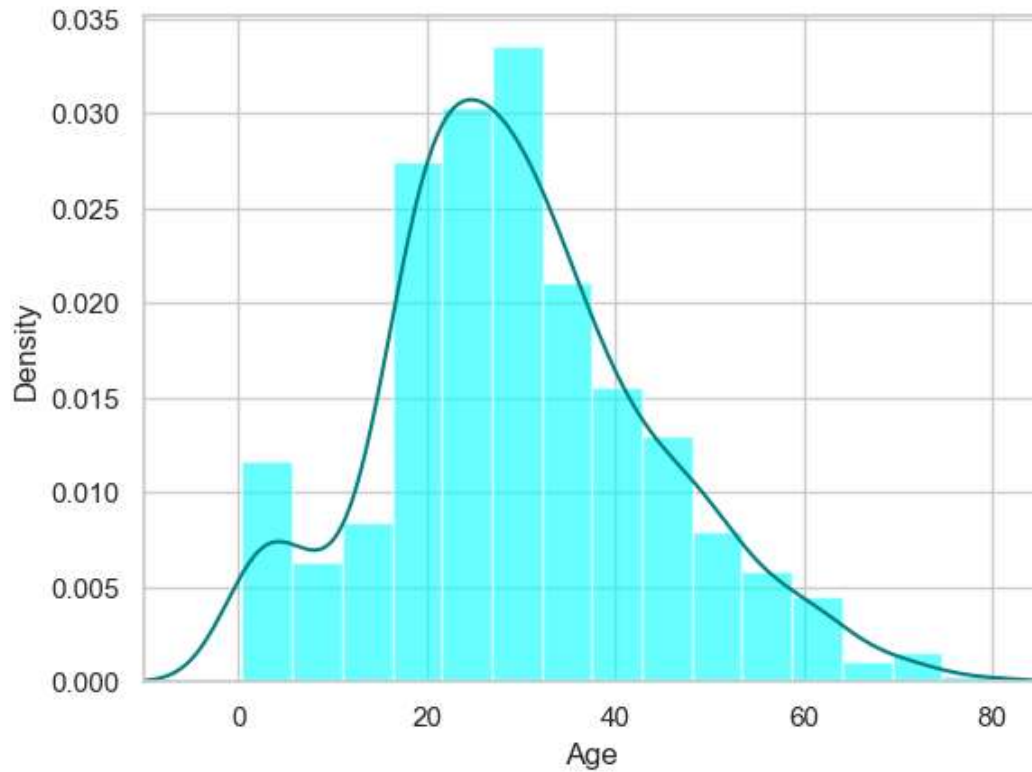

```
In [11]: print(train_df["Age"].mean(skipna=True))
print(train_df["Age"].median(skipna=True))
```

```
29.69911764705882
28.0
```

```
In [12]: print((train_df['Cabin'].isnull().sum()/train_df.shape[0])*100)
```

```
77.10437710437711
```

```
In [13]: print((train_df['Embarked'].isnull().sum()/train_df.shape[0])*100)
```

```
0.22446689113355783
```

```
In [14]: print('Boarded passengers grouped by port of embarkation (C = Cherbourg, Q = Queenstown, S=southampton)')
print(train_df['Embarked'].value_counts())
sns.countplot(x='Embarked', data=train_df, palette='Set2')
plt.show()
```


Boarded passengers grouped by port of embarkation (C = Cherbourg, Q = Queenstown, S=southampton):

S 644

C 168

Q 77

Name: Embarked, dtype: int64

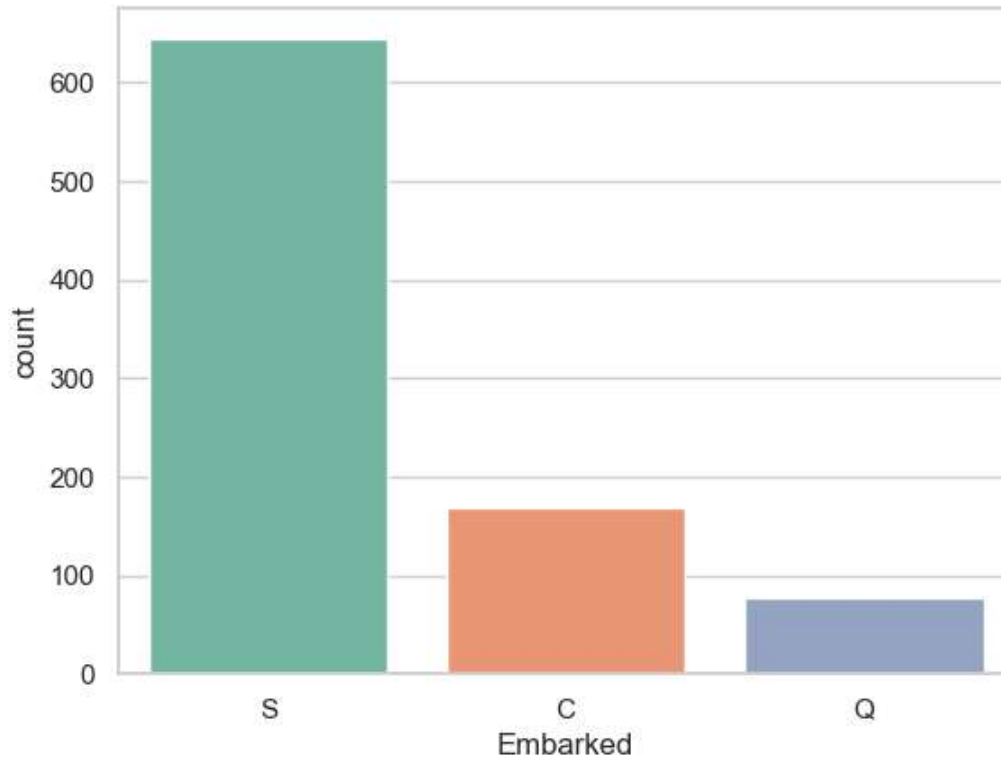

```
In [15]: print(train_df['Embarked'].value_counts().idxmax())
```

S

```
In [16]: train_data = train_df.copy()
train_data["Age"].fillna(train_df["Age"].median(skipna=True), inplace=True)
train_data["Embarked"].fillna(train_df['Embarked'].value_counts().idxmax(), inplace=True)
train_data.drop('Cabin', axis=1, inplace=True)
```

```
In [17]: train_data.isnull().sum()
```


```
Out[17]: PassengerId    0  
Survived      0  
Pclass        0  
Name          0  
Sex           0  
Age           0  
SibSp         0  
Parch         0  
Ticket        0  
Fare          0  
Embarked      0  
dtype: int64
```

```
In [18]: train_data.head()
```

```
Out[18]:
```

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Embarked
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500	S
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.2833	C
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250	S
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000	S
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500	S


```
In [19]: plt.figure(figsize=(15,8))
ax = train_df["Age"].hist(bins=15, density=True, stacked=True, color='teal', alpha=0.6)
train_df["Age"].plot(kind='density', color='teal')
ax = train_data["Age"].hist(bins=15, density=True, stacked=True, color='orange', alpha=0.5)
train_data["Age"].plot(kind='density', color='orange')
ax.legend(['Raw Age', 'Adjusted Age'])
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

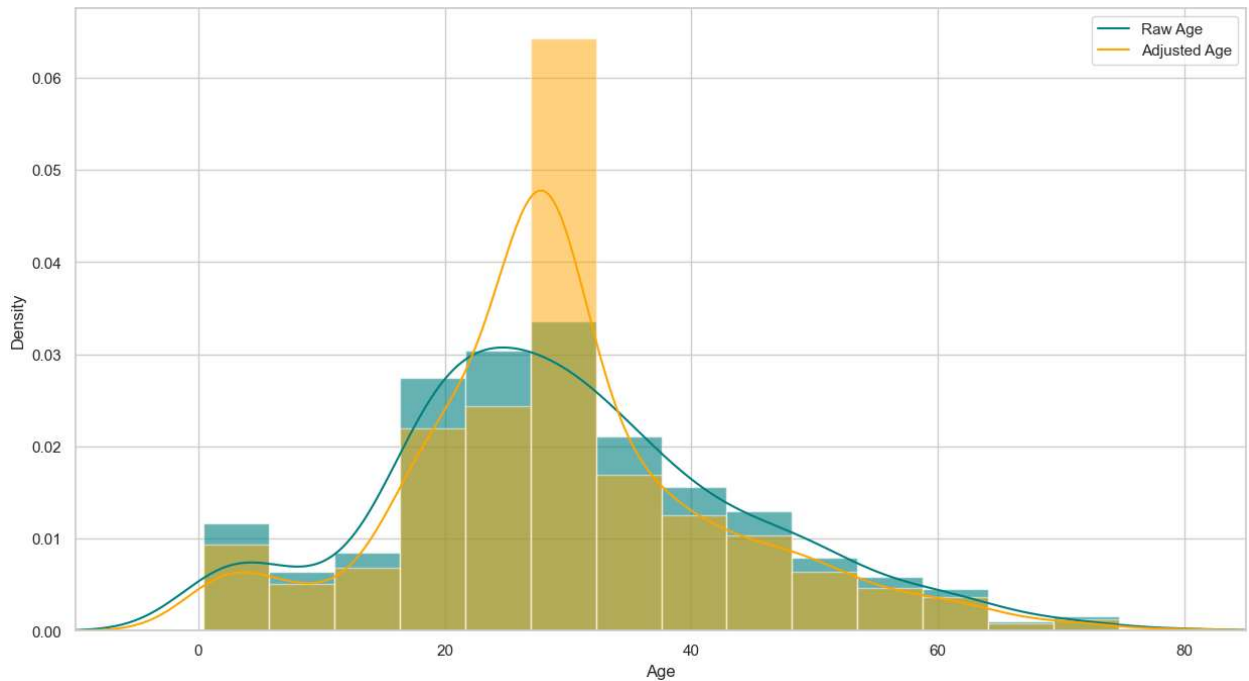

```
In [20]: ## Create categorical variable for traveling alone
train_data['TravelAlone']=np.where((train_data["SibSp"]+train_data["Parch"])>0, 0,1)
train_data.drop('SibSp', axis=1, inplace=True)
train_data.drop('Parch', axis=1, inplace=True)
```

```
In [21]: #create categorical variables and drop some variables
training=pd.get_dummies(train_data, columns=["Pclass","Embarked","Sex"])
training.drop('Sex_female',axis=1, inplace=True)
training.drop('PassengerId', axis=1, inplace=True)
training.drop('Name', axis=1, inplace=True)
training.drop('Ticket', axis=1, inplace=True)
final_train = training
final_train.head()
```

Out[21]:

	Survived	Age	Fare	TravelAlone	Pclass_1	Pclass_2	Pclass_3	Embarked_C	Embarked_Q	Embarked_S
0	0	22.0	7.2500	0	0	0	1	0	0	1
1	1	38.0	71.2833	0	1	0	0	1	0	0
2	1	26.0	7.9250	1	0	0	1	0	0	1
3	1	35.0	53.1000	0	1	0	0	0	0	1
4	0	35.0	8.0500	1	0	0	1	0	0	1

In [22]: `test_df.isnull().sum()`

```
Out[22]: PassengerId    0
         Pclass        0
         Name          0
         Sex           0
         Age           86
         SibSp         0
         Parch         0
         Ticket        0
         Fare          1
         Cabin       327
         Embarked      0
         dtype: int64
```

```
In [23]: test_data = test_df.copy()
test_data["Age"].fillna(train_df["Age"].median(skipna=True), inplace=True)
test_data["Fare"].fillna(train_df["Fare"].median(skipna=True), inplace=True)
test_data.drop('Cabin', axis=1, inplace=True)
test_data['TravelAlone']=np.where((test_data["SibSp"]+test_data["Parch"])>0, 0, 1)
test_data.drop('SibSp', axis=1, inplace=True)
test_data.drop('Parch', axis=1, inplace=True)
testing = pd.get_dummies(test_data, columns=["Pclass", "Embarked", "Sex"])
testing.drop('Sex_female', axis=1, inplace=True)
testing.drop('PassengerId', axis=1, inplace=True)
testing.drop('Name', axis=1, inplace=True)
testing.drop('Ticket', axis=1, inplace=True)
final_test = testing
final_test.head()
```


Out[23]:

	Age	Fare	TravelAlone	Pclass_1	Pclass_2	Pclass_3	Embarked_C	Embarked_Q	Embarked_S	Sex_male
0	34.5	7.8292	1	0	0	1	0	1	0	1
1	47.0	7.0000	0	0	0	1	0	0	1	0
2	62.0	9.6875	1	0	1	0	0	1	0	1
3	27.0	8.6625	1	0	0	1	0	0	1	1
4	22.0	12.2875	0	0	0	1	0	0	1	0




EXPLORATORY DATA ANALYSIS

```
In [24]: plt.figure(figsize=(15,8))
ax = sns.kdeplot(final_train["Age"][final_train.Survived == 1], color="green", shade=True)
sns.kdeplot(final_train["Age"][final_train.Survived == 0], color="lightcoral", shade=True)
plt.legend(['Survived', 'Died'])
plt.title('Density Plot of Age for Surviving Population and Deceased Population')
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

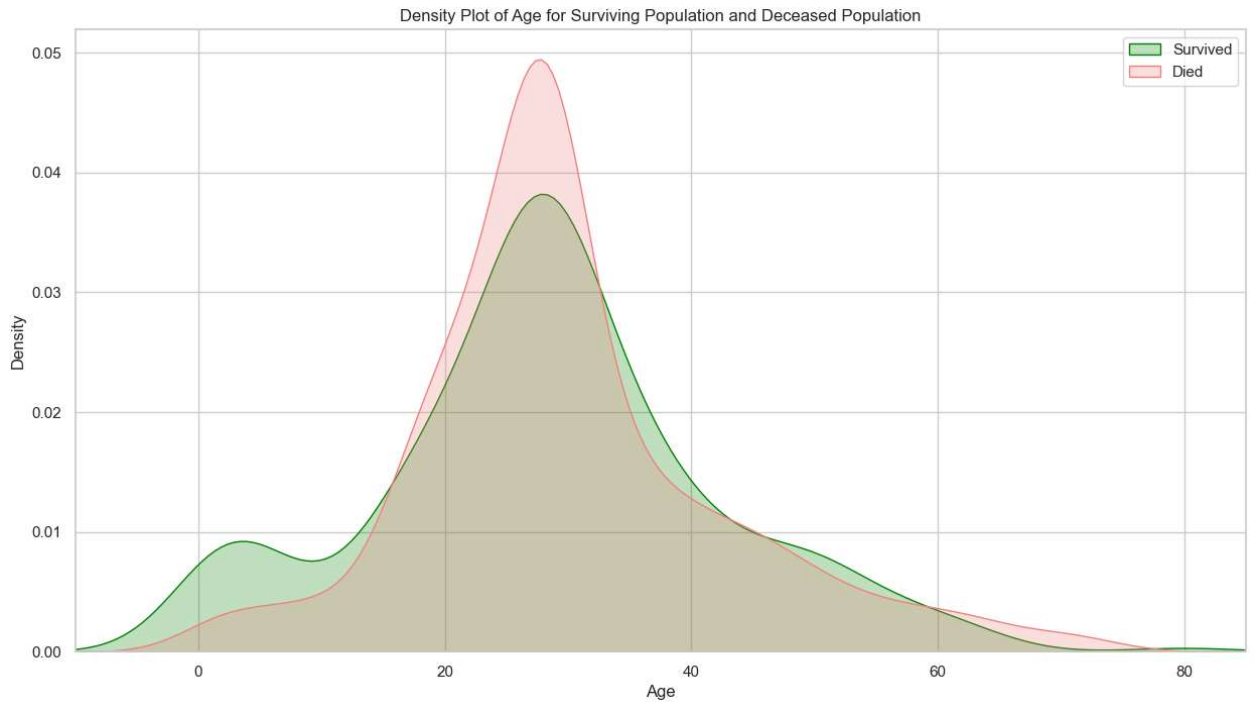

```
In [25]: plt.figure(figsize=(20,8))
avg_survival_byage = final_train[["Age", "Survived"]].groupby(['Age'], as_index=False).mean
g = sns.barplot(x='Age', y='Survived', data=avg_survival_byage, color="LightSeaGreen")
plt.show()
```

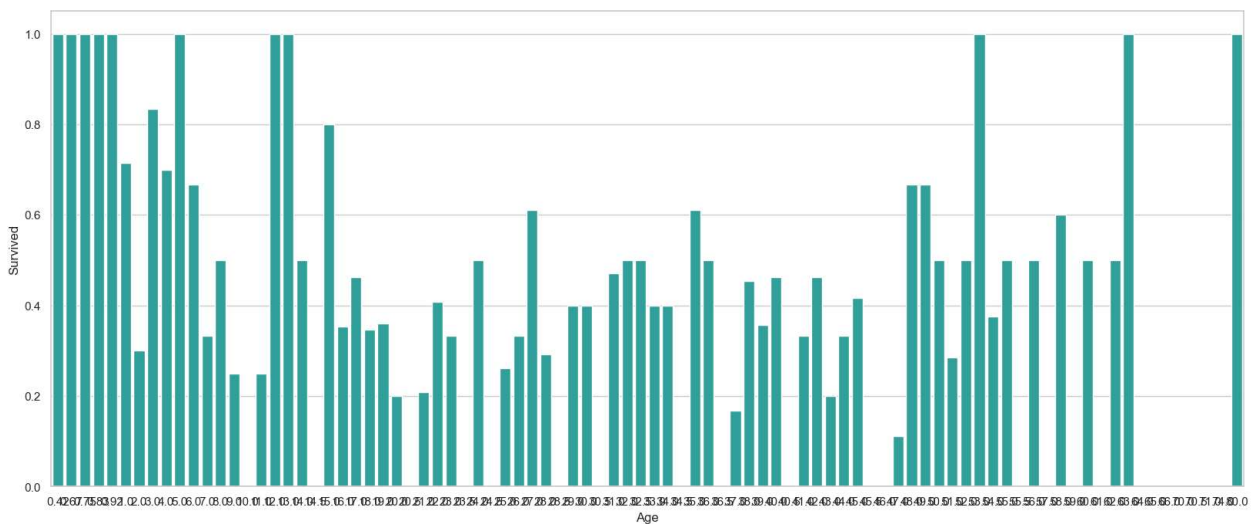


```
In [26]: final_train['IsMinor']=np.where(final_train['Age']<=16, 1, 0)
print(final_train['IsMinor'])
```

```
0      0
1      0
2      0
3      0
4      0
..
886    0
887    0
888    0
889    0
890    0
Name: IsMinor, Length: 891, dtype: int32
```


```
In [27]: final_test['IsMinor']=np.where(final_test['Age']<=16, 1, 0)
print(final_test['IsMinor'])
```

```
0      0
1      0
2      0
3      0
4      0
..
413    0
414    0
415    0
416    0
417    0
Name: IsMinor, Length: 418, dtype: int32
```

```
In [28]: sns.barplot(x='TravelAlone', y='Survived', data=final_train, color="mediumturquoise")
plt.show()
```

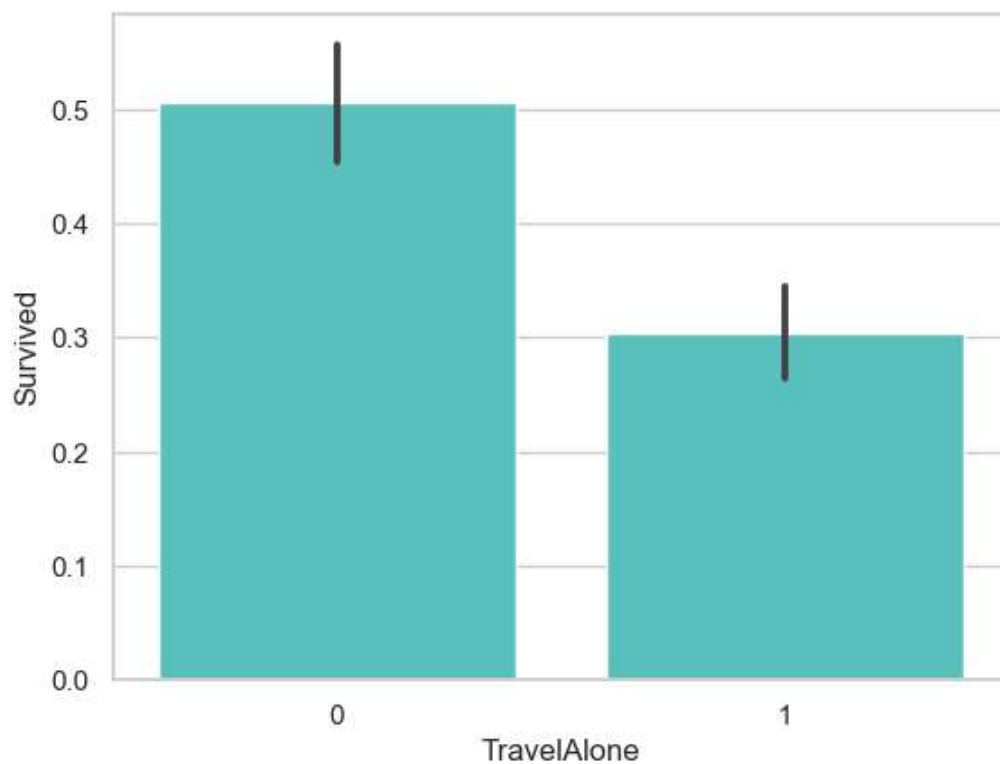

```
In [29]: import seaborn as sns
import matplotlib.pyplot as plt
# Assuming 'train_df' is your DataFrame containing the data
sns.barplot(x='Sex', y='Survived', data=train_df, color='aquamarine')
plt.show()
```

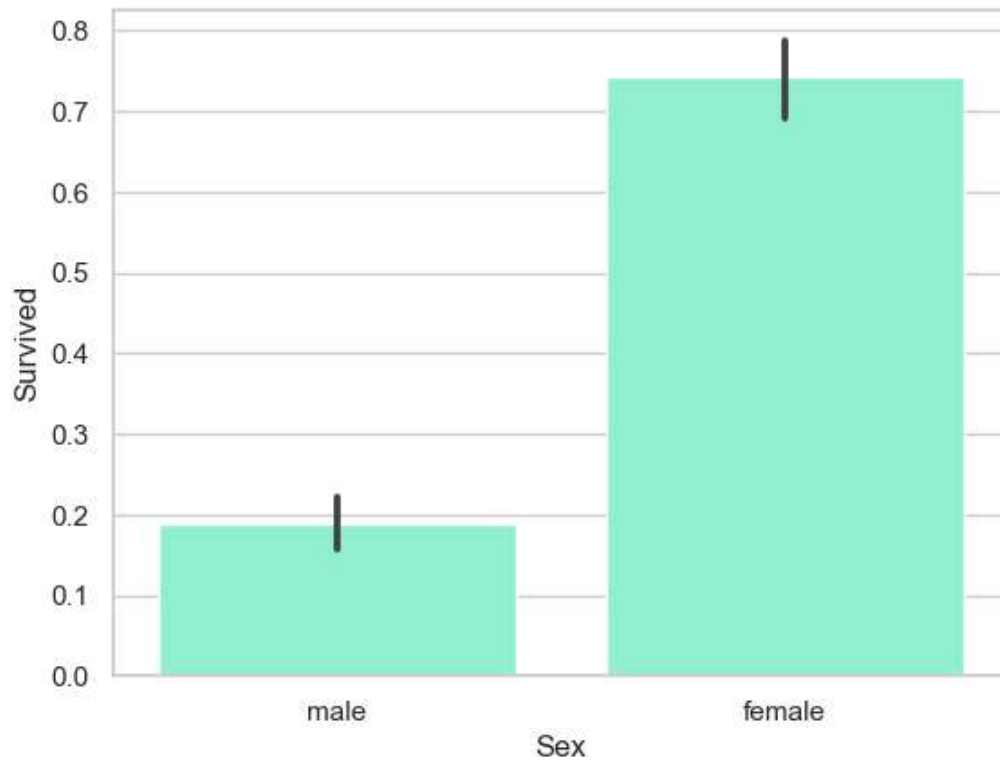

```
In [ ]:
```