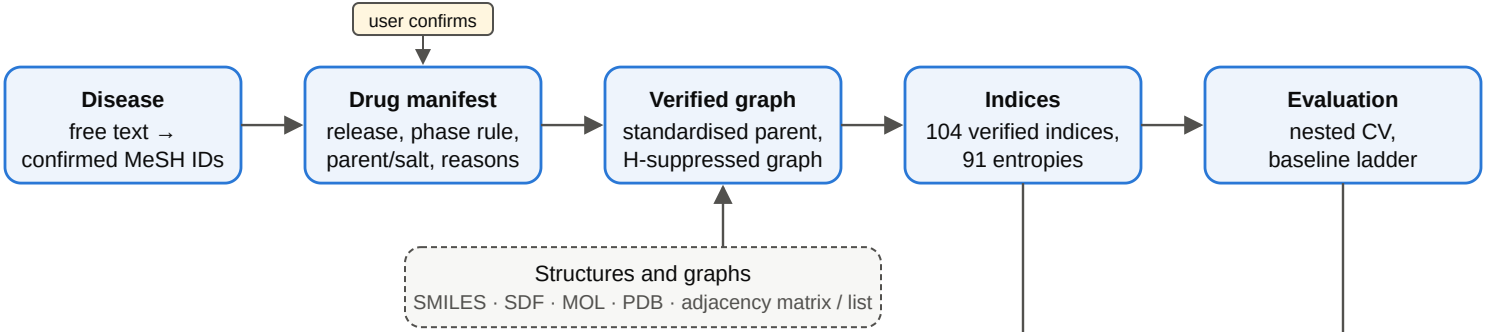


Interfaces: command line (topoqspr headings · cohort · indices · run · rerun)
and the web page (same package; exploratory mode, downloads, index catalogue).

Confirmatory runs use the frozen configuration from the command line.