


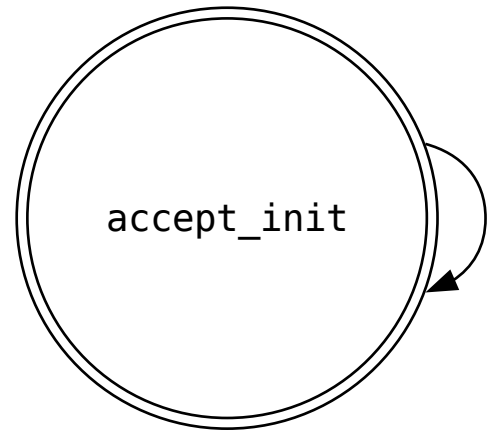

accept_init

`(!((exists_stack s: exists_buffer s, b: modified_before_buffer(s, buffer(s, b), 8))))`