


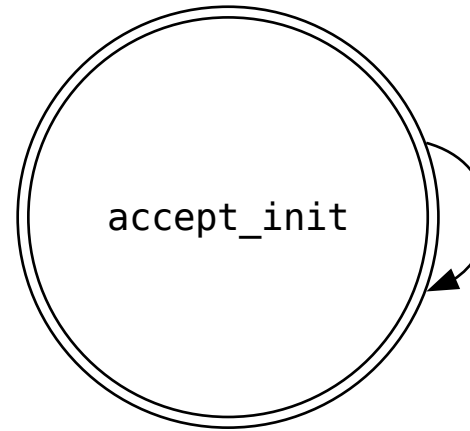

accept_init

`((!((previous_transition() = loop))) || (!((exists_stack s: exists_buffer s, b: (byte(s, end(buffer(s, b))) = Occupied && byte(s, end(buffer(s, b)) - 1) = Modified) ))))`