


Training: (o_t, a_t^*) from reference trace τ^*

a One step at inference

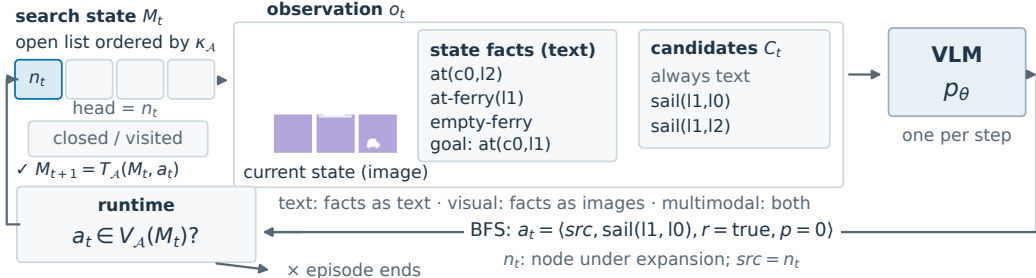

b Execution (BFS, BFWS)

Ferry, first step: $src = n_t, o = sail(l1, l0)$

BFS

$\kappa_A = \langle \sigma \rangle$ (FIFO)

write $\langle src, o, r, p \rangle$

derive $r = \text{true}, p = 0$

$p = |\text{open}| - r$

runtime selects head; retire ends expansion

BFWS

$\kappa_A = \langle w, \#g, g, \sigma \rangle$

write $\langle src, o, r, p \rangle$

copy $r = \text{true}, p = 0$

from candidate

Search control (GBFS, WA*)

κ_A : GBFS h_{add} ; WA* $g + 3h_{\text{add}}$

shuffled menu · no scores



c0 (ref.)



c1

+ initial and goal pages

VLM writes

$\langle \text{expand}, c \rangle$

runtime expands c
and inserts successors

ref.: smallest κ_A