


A trained greedy best-first search trace

Expanded states (cached policy views; h_{add} alongside)

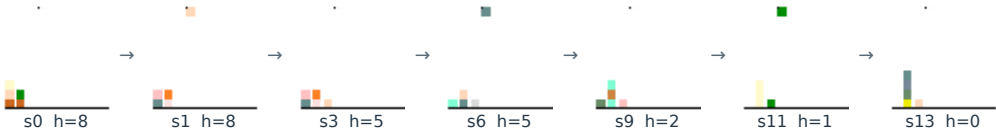

One expansion: s6, $h_{add}=5$

Runtime heap expands s9 ($h_{add}=2$) next

Adapter emits (verbatim)

Textual successor rows

action	g	h	prio	state
putdown(b4)	4	4	4	s7
stack(b4,b1)	4	4	4	s8
stack(b4,b2)*	4	5	5	s3
stack(b4,b3)	4	2	2	s9

```
{"action":{"args":["b4"],
"name":"putdown"},
"source_state_id":"s6"}
{"action":{"args":["b4","b1"],
"name":"stack"},
"source_state_id":"s6"}
{"action":{"args":["b4","b2"],
"name":"stack"},
"source_state_id":"s6"}
{"action":{"args":["b4","b3"],
"name":"stack"},
"source_state_id":"s6"}
```

* closed/pruned by runtime

