


HOW DO YOU TROUBLESHOOT IF VCS CLUSTER IS NOT STARTING ?

July 11, 2014 VCS, Veritas 2,998 Views

How do you start VCS cluster if its not started automatically after the server reboot? Have you ever faced such issues ? If not just see how we can fix these kind of issues on veritas cluster. I have been asking this questions on the Solaris interviews but most of them are fail to impress me by saying some unrelated things with VCS stuffs. If you know the basic of veritas cluster, it will be so easy for to troubleshoot in real time and easy to explain on interviews too.

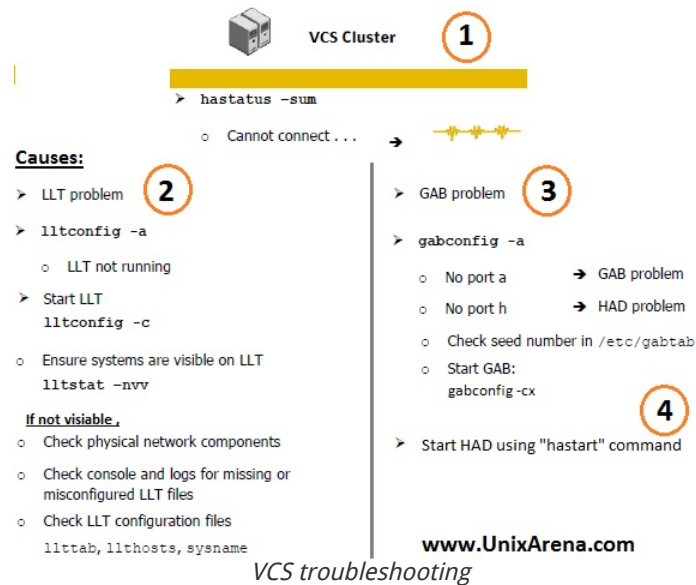

Scenario:

Two nodes are clustered with veritas cluster and you have rebooted one of the server. Rebooted node has come up but VCS cluster was not started (HAD daemon). You are trying to start the cluster using "hastart" command , but its not working.How do you troubleshoot ?

Here we go.

1.Check the cluster status after the server reboot using "hastatus" command.

```
# hastatus -sum |head
Cannot connect to VCS engine
```

2.Trying to start the cluster using hastart . No Luck. ? Still getting same message like above ? Proceed with Step 3.

3.Check the llt and GAB service. If its in disable state, just enable it .

```
[root@UA~]# svcs -a |egrep "llt|gab"
online      Jun_27   svc:/system/llt:default
online      Jun_27   svc:/system/gab:default
[root@UA~]#
```

4.Check the llt(heartbeat) status. Here LLT links looks good.

```
[root@UA ~]# llstat -nv |head
LLT node information:
  Node      State  Link  Status  Address
  0 UA2      OPEN
                HB1   UP      00:91:28:99:74:89
                HB2   UP      00:91:28:99:74:8F
  * 1 UA      OPEN
                HB1   UP      00:71:28:9C:2E:0F
                HB2   UP      00:71:28:9C:2F:9F
[root@UA ~]#
```

5 If the LLT is down , then try to configure using "lltconfig -r" command to configure the private links. Still if you have any issue

But the LLT is down, then try to configure using `hbtooling -c` command to configure the private links. But if you have any issue with LLT links, then need to check with network team to fix the heartbeat links.

6. check the GAB status using `"gabconfig -a"` command.

```
[root@UA ~]# gabconfig -a
GAB Port Memberships
=====
[root@UA ~]#
```

7. As per the above command output, memberships are not seeded. We have to seed the membership manually using `gabconfig` command.

```
[root@UA ~]# gabconfig -cx
[root@UA ~]#
```

8. Check the GAB status now.

```
[root@UA ~]# gabconfig -a
GAB Port Memberships
=====
Port a gen 6d0607 membership 01
[root@UA ~]#
```

Above output indicates that GAB(Port a) is online on both the nodes. (0, 1). To know which node is "0" and which node "1", refer `/etc/llthosts` file.

9. Try to start the cluster using `hastart` command. It should work now.

10. Check the Membership status using `gabconfig`.

```
[root@UA ~]# gabconfig -a
GAB Port Memberships
=====
Port a gen 6d0607 membership 01
Port h gen 6d060b membership 01
[root@UA ~]#
```


Above output indicates that HAD(Port h) is online on both the nodes.

11. Check the cluster status using `hastatus` command. System

```
[root@UA ~]# hastatus -sum |head
-- SYSTEM STATE
-- System      State      Frozen
A UA2          RUNNING   0
A UA           RUNNING   0

-- GROUP STATE
-- Group      System    Probed    AutoDisabled    State
B ClusterService UA      Y         N               ONLINE
B ClusterService UA2     Y         N               OFFLINE

[root@UA ~]#
```

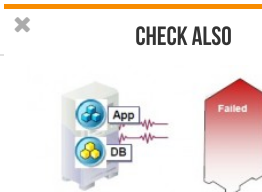

VCS QUESTIONS ANSWERS

I feel this is very useful post for the UNIX admins who want to give ...

This is a very small thing but many of the VCS beginners failed to fix this start-up issue. In interviews too, they are not able to say that, "If the HAD is not starting using `"hastart"` command, I will check the LLT & GAB services and will fix any issues with that. Then I will start the cluster using `hastart`". As an interviewer, everybody will expect this answer.

Hope this article is informative to you.

Share it ! Comment it !! Be Sociable !!!

