

Helios: A Lightweight Path-driven Execution Engine for Hyper-Optimized EVM Clients

Sipeng Xie¹, Qianhong Wu¹, Ruiqi Zhang¹, Minghang Li¹, and Bo Qin²

¹Beihang University, Beijing, China ²Renmin University of China, Beijing, China

{sipengxie, qianhong.wu, ruiqizhang, liminghang}@buaa.edu.cn

bo.qin@ruc.edu.cn

ABSTRACT

Smart contract execution remains a primary scalability bottleneck for Ethereum Virtual Machine (EVM) blockchains. Existing optimization strategies, such as Just-In-Time (JIT) compilation and path-driven speculative execution, face an "optimization dilemma" where the overhead of detailed tracing and artifact management often negates performance gains on modern, highly optimized clients like Revm. We present **Helios**, a path-driven execution engine designed to resolve this trade-off through lightweight asynchronous tracing and persistent frame-level caching. Unlike transaction-level approaches, Helios exploits the strong path locality of individual contract calls to maximize reuse across different transactions, transforming raw traces into Static Single Assignment (SSA) graphs off the critical path. By restricting optimization to static-cost instructions, the system preserves gas-semantic equivalence by construction, mitigating the economic risks associated with aggressive compilation. Evaluation on Ethereum mainnet workloads demonstrates that Helios achieves a median speedup of 6.60× over the state-of-the-art client Revm in Replay Mode, making it well-suited for archive node acceleration. In Online Mode, frequency-based filtering enables effective acceleration of hot paths with negligible storage overhead. These findings establish Helios as a scalable, safe foundation for next-generation EVM infrastructure.

PVLDB Reference Format:

Sipeng Xie¹, Qianhong Wu¹, Ruiqi Zhang¹, Minghang Li¹, and Bo Qin².
Helios: A Lightweight Path-driven Execution Engine for Hyper-Optimized EVM Clients. PVLDB, 14(1): XXX-XXX, 2020.
doi:XX.XX/XXX.XX

PVLDB Artifact Availability:

The source code, data, and/or other artifacts have been made available at URL_TO_YOUR_ARTIFACTS.

1 INTRODUCTION

Smart contract platforms [19, 45, 53, 54] have extended blockchain functionality far beyond cryptocurrency transfers, enabling decentralized finance [48], non-fungible tokens [47], and on-chain governance [25]. At the core of this ecosystem lies the Ethereum Virtual Machine, or EVM, a shared execution layer that powers Ethereum mainnet, Layer-2 rollups, and EVM-compatible sidechains [1, 3,

21, 36, 49]. Together, these systems secure assets worth tens of billions of dollars and process the majority of programmable on-chain activity [8].

They typically follow a Dissemination–Consensus–Execution pipeline [20], in which transactions are broadcast through a peer-to-peer network, ordered into blocks by a consensus protocol, and executed by the EVM on every node to update local state. Because each node must independently re-execute every transaction to verify state transitions, the cost of EVM bytecode interpretation is amplified across thousands of replicas.

A node keeps pace with the chain only if it completes per-block execution within the block interval, and throughput is therefore bounded by the slower of block production and block execution [41, 52]. Consensus-layer advances have progressively shortened block intervals [23, 37, 38, 50], shifting the bottleneck toward execution. Attempts to compensate by raising gas limits or packing more transactions per block [6, 14] only intensify execution pressure, inflating per-block latency and ultimately capping achievable throughput. EVM execution has thus become the dominant scalability constraint, particularly for contract-intensive workloads.

From a data-management perspective, the EVM instantiates a deterministic transaction processor on every node that must sustain two workloads, namely real-time processing of incoming transactions and high-throughput replay of historical transactions for state verification and rollup proving. Because all nodes must agree on state transitions and gas metering underpins both economic consensus and DoS resistance, any viable acceleration strategy must improve execution speed while strictly preserving gas-semantic correctness and cross-replica determinism.

Achieving meaningful acceleration on modern, hyper-optimized execution engines [5, 12] requires overcoming three fundamental tensions. **First**, optimization conflicts with semantic preservation. Standard compiler optimizations such as instruction reordering inherently alter the observable execution trace, violating the strict gas accounting rules that underpin economic consensus [4, 9, 11, 13]. A single gas discrepancy can cause nodes to diverge on state validity. Moreover, Just-In-Time (JIT) compilation introduces security vulnerabilities where maliciously crafted contracts exploit compilation overhead to mount denial-of-service attacks [44]. These constraints demand that any viable acceleration strategy preserve gas semantics by construction. **Second**, instrumentation overhead conflicts with execution latency. On sub-microsecond engines such as Revm [5], the cost of synchronous tracing frequently exceeds execution latency itself, creating what we term the *Optimization Dilemma* [20, 51]. Similarly, operation-level concurrent execution incurs synchronization costs that outweigh parallel gains [35, 39].

This work is licensed under the Creative Commons BY-NC-ND 4.0 International License. Visit <https://creativecommons.org/licenses/by-nc-nd/4.0/> to view a copy of this license. For any use beyond those covered by this license, obtain permission by emailing info@vldb.org. Copyright is held by the owner/author(s). Publication rights licensed to the VLDB Endowment.

Proceedings of the VLDB Endowment, Vol. 14, No. 1 ISSN 2150-8097.

doi:XX.XX/XXX.XX

Any optimization blocking the critical path risks performance regression. **Third**, artifact granularity conflicts with reuse capability. Transaction-level caching faces combinatorial path explosion challenges, as the space of possible paths grows exponentially with contract complexity. This often results in ephemeral artifacts with limited reuse potential across diverse workloads [20, 51].

To assess whether these barriers can be surmounted, we analyzed Ethereum mainnet workloads and derived three critical insights. **First**, fixed-cost computational instructions dominate hot paths, while dynamic state-access operations remain sparse [18, 42]. Restricting acceleration to static-cost instructions therefore enables correctness by construction, since optimizing dynamic operations risks altering the gas schedule. **Second**, optimization-relevant dependencies are largely confined to stack operations. Capturing full memory and storage state incurs prohibitive overhead yet provides negligible utility; lightweight stack-only tracing suffices. **Third**, the top 1% of unique frame-level paths accounts for over 70% of total execution time. Shifting granularity from transactions to call frames thus unlocks high cache hit rates across diverse workloads.

Guided by these insights, we present Helios, a path-driven execution accelerator built on three architectural principles. To preserve safety, Helios employs a hybrid execution model that restricts optimization to static-cost instructions while delegating dynamic-cost operations to the native engine, thereby preserving exact gas semantics by construction. To resolve the optimization dilemma, Helios decouples trace generation from the critical path via asynchronous lightweight tracing that captures only stack-level dependencies. To maximize reuse, Helios organizes artifacts at frame-level granularity, enabling diverse transactions to composably reuse cached paths and converting ephemeral caching into durable components. Frame-level organization also unifies the acceleration paradigm, allowing the same cached artifacts to serve as a predictive accelerator for latency-sensitive validators in Online Mode and as a deterministic processor for throughput-oriented historical replay in Replay Mode.

Realizing this architecture demands both performance optimization and robustness against adversarial conditions. To implement hybrid execution, Helios transforms hot paths into a register-based intermediate representation that separates static instructions for compiled acceleration from dynamic instructions for native fallback. This representation eliminates redundant stack operations for direct data access and enables bulk gas deduction across static instruction sequences. Hot-path execution, however, introduces two risks requiring explicit mitigation. **First**, cached paths may diverge from actual execution when runtime conditions differ from the profiled trace. Helios addresses this through lightweight *control-flow guards* that verify jump targets before each transfer; upon mismatch, execution immediately falls back to the native interpreter. **Second**, adversaries may craft contracts that generate numerous cold paths to overwhelm the cache. Helios counters such path-explosion attacks through *frequency-based filtering* that admits only statistically significant hot paths into the acceleration pipeline, ensuring attack-generated paths remain excluded due to insufficient execution counts.

In summary, this paper makes the following contributions:

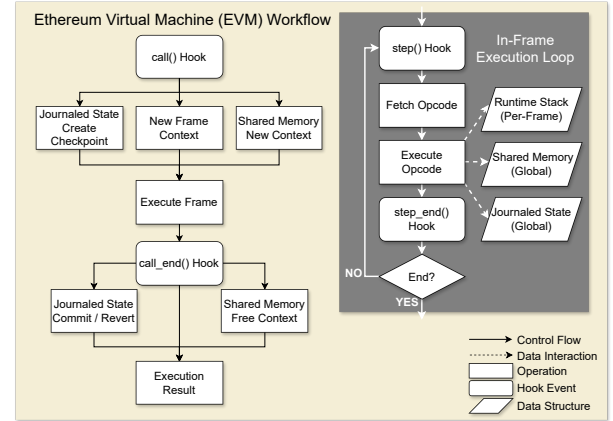


Figure 1: The EVM execution workflow. The process is partitioned into a high-level frame management lifecycle (left) and a low-level, per-opcode execution loop (right).

- We identify the *Optimization Dilemma* on modern execution engines and propose **asynchronous lightweight tracing** that decouples trace generation from the critical path, addressing the overhead barrier without blocking execution.
- We design **frame-level caching with frequency-based filtering** that exploits execution locality to transform ephemeral artifacts into reusable components while providing inherent resistance to path-explosion attacks.
- We develop a **guarded register-based interpreter** that achieves acceleration through direct data access and bulk gas deduction, while runtime control-flow guards ensure semantic equivalence with the native engine.
- We implement Helios on Revm and demonstrate its **architectural versatility**, achieving 6.60× median speedup in Replay Mode and 2× acceleration in Online Mode for real-time validation.

Taken together, Helios advances the state of the art along four dimensions. *Safety*: hybrid execution preserves gas-semantic equivalence by construction, addressing a challenge that has limited JIT and superoptimization approaches. *Efficiency*: asynchronous tracing resolves the optimization dilemma, while the guarded register-based interpreter achieves 6.60× median speedup on the already highly optimized Revm. *Robustness*: control-flow guards and frequency-based filtering protect against path divergence and cache-flooding attacks. *Versatility*: a dual-mode architecture unifies the acceleration landscape, serving both latency-sensitive validators and throughput-oriented archive nodes within a single framework.

2 BACKGROUND & MOTIVATION

2.1 EVM Architecture and Workloads

The Ethereum Virtual Machine operates as a quasi-Turing-complete stack machine [49]. Unlike register-based architectures, the EVM performs all computations on a transient runtime stack using manipulation instructions such as DUP and SWAP to manage operand placement. This design necessitates frequent stack operations that incur significant execution overhead.

Execution is compartmentalized into a hierarchy of call frames. Each frame maintains an isolated memory context and stack while sharing persistent storage access with other frames in the transaction. Resource consumption is metered via gas, which functions as both a validator incentive and a security mechanism against denial-of-service attacks. Gas costs fall into two distinct categories. Static costs are fixed at compile time for computational operations such as arithmetic and stack manipulation. Dynamic costs depend on runtime state, including memory expansion extent and storage access frequency. This distinction is fundamental to our design, as it enables optimization strategies that aggregate static costs while delegating dynamic accounting to native handling logic.

The EVM specification includes a standard hook mechanism to facilitate debugging and tracing. As illustrated in Figure 1, this interface triggers events at key lifecycle points such as opcode execution and frame transitions. This design enables external components to passively observe execution states and capture data dependencies without requiring invasive modifications to the core interpreter logic.

Given this execution model, the performance characteristics of EVM clients vary depending on their operational role. The Ethereum network depends on node archetypes that exhibit divergent operational characteristics [27]. Full nodes operate within fixed block intervals and prioritize the low-latency processing of unpredictable transactions to maintain consensus stability. Archive nodes maintain comprehensive ledger history and emphasize execution throughput to facilitate bulk re-execution of historical states [26, 30, 34].

This operational dichotomy has direct implications for execution acceleration. Full nodes operate in an online mode where execution paths are unknown prior to invocation, precluding ahead-of-time compilation. Acceleration in this context demands minimal response latency while simultaneously generating optimization artifacts for future reuse. Archive nodes operate in a replay mode where execution paths are deterministic and known in advance, enabling aggressive precomputation. Acceleration in this context demands maximum throughput by leveraging cached artifacts across millions of historical transactions. Existing acceleration strategies, however, tend to optimize for one mode at the expense of the other. Systems designed for replay prioritize throughput but lack the responsiveness required for online validation [30]. Conversely, systems targeting online execution prioritize latency but produce ephemeral artifacts with limited reuse potential for historical replay [20, 51]. A unified acceleration framework must bridge this divide, achieving both low-latency responsiveness and high-throughput batch processing within a single architectural paradigm.

2.2 Challenges of EVM Acceleration

Accelerating EVM execution while preserving semantic correctness presents three interconnected challenges: the limitations of contract-level compilation, the overhead dilemma on modern engines, and the granularity mismatch of existing caching strategies. We examine each in turn.

2.2.1 The Compilation Limitation. Contract-level optimization, exemplified by JIT compilation, faces two critical limitations in permissionless blockchain environments. **First**, JIT compilation can

Table 1: Performance degradation of path-driven optimization on modern EVMs.

System	Client	Latency	Tracing	Speedup	Artifact
Native	Geth	398.4 μ s	–	1.0×	–
Forerunner	Geth	68.1 μ s	742.6 μ s	5.8×	910KB
Native	Revm	62.0 μ s	–	1.0×	–
Forerunner	Revm	39.2 μ s	381.5 μ s	1.6×	663KB
Parallel	Revm	417.7 μ s	–	0.2×	–

introduce security vulnerabilities. Attackers can construct pathological code patterns, such as deeply nested conditional branches, to trigger exponential compilation complexity. This computational asymmetry allows malicious actors to exhaust validator resources via low-gas transactions, constituting a denial-of-service vector known as JIT bombs [4, 9, 11, 13, 44]. **Second**, JIT compilation risks gas-semantic discrepancies. Aggressive compiler optimizations such as instruction reordering and dead code elimination alter the observable execution trace, violating the strict gas accounting rules that underpin economic consensus. Any systematic deviation from the canonical gas schedule results in incorrect validator compensation and impedes the deployment of production clients [11, 13].

These constraints suggest that contract-level compilation faces significant challenges in permissionless execution environments. Path-driven optimization emerges as a safer paradigm by restricting acceleration to actually executed paths, thereby bounding optimization costs to the runtime trace and inherently avoiding dead code and unreachable branches. Yet path-driven approaches introduce a distinct correctness challenge [20, 39, 51]. Cached paths are derived from historical traces, but blockchain state evolves continuously as new transactions modify storage. When runtime conditions diverge from the profiled trace, executing a cached path without verification risks producing incorrect state transitions. This observation motivates the need for runtime guards that detect path divergence and trigger safe fallback. Beyond correctness, existing path-driven approaches encounter the optimization dilemma on modern execution engines.

2.2.2 The Optimization Dilemma. Existing path-driven schemes face a phenomenon we term the *Optimization Dilemma*. On slower engines such as Geth [10], transaction execution dominates end-to-end latency, rendering additional instrumentation costs negligible. A prior path-driven system [20] achieves a 5.8× speedup on Geth. However, on highly optimized engines such as Revm [5], execution becomes inexpensive and auxiliary overhead emerges as the primary bottleneck. The same system achieves a more modest 1.6× on Revm. Table 1 quantifies this shift using a representative Uniswap V2 swap transaction [2].

Three categories of auxiliary overhead contribute to this dilemma. **First**, synchronous tracing dominates the critical path. On Revm, capturing full execution state is approximately six times slower than native execution and nearly ten times slower than optimized execution. Synchronous instrumentation on the critical path tends

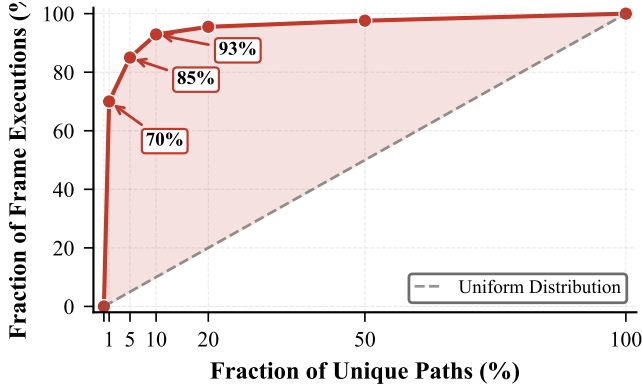


Figure 2: Path locality in EVM execution follows an extreme Pareto distribution: the top 1% of unique paths account for 70% of frame executions (5,000 mainnet blocks). The shaded region shows deviation from uniform distribution.

to negate the speedup from optimization. **Second**, artifact management incurs substantial fixed costs. Loading and parsing a 663 KB artifact to accelerate a task completing in tens of microseconds introduces I/O latency that does not scale with execution time. **Third**, fine-grained concurrency yields limited benefits. We implemented a dependency-graph-driven parallel executor on Revm to evaluate instruction-level parallelism. As shown in Table 1, this approach achieves approximately 0.2× the throughput of sequential execution. The root cause is granularity mismatch. Individual opcode execution requires approximately 20 nanoseconds, while thread synchronization and context switching require hundreds of nanoseconds [35, 39]. Coordination overhead typically exceeds parallel gains at this granularity.

These observations collectively suggest that synchronous tracing, heavyweight artifacts, and fine-grained parallelism present significant challenges for high-performance execution engines. Effective acceleration requires asynchronous optimization decoupled from the critical path, lightweight trace representations, and sequential execution of optimized code.

2.2.3 The Granularity Mismatch. Beyond auxiliary overhead, existing path-driven strategies employ transaction-level caching [20, 39, 51], treating the entire execution trace as the atomic optimization unit. This granularity creates a combinatorial challenge where slight variations in call sequences invalidate cached artifacts, often resulting in a use-once-discard lifecycle that limits reuse.

Our analysis of Ethereum mainnet workloads reveals significant redundancy at finer granularity. As shown in Figure 2, unique frame-level paths follow a Pareto distribution where the top 1% accounts for over 70% of total execution time. While unique transaction combinations are vast, individual contract calls function as repetitive building blocks. Shifting the optimization unit from transactions to frames exploits this locality and amortizes compilation costs across thousands of invocations. However, finer granularity alone does not eliminate the cache-flooding risk. In permissionless environments, adversaries can craft contracts that generate numerous unique paths, each triggering cache insertion without

subsequent reuse. Effective caching must therefore incorporate admission control that distinguishes frequently reused paths from adversarially generated noise.

2.3 Our Approach

The preceding analysis motivates Helios, a path-driven execution engine designed for safety, efficiency, and versatility. Helios adopts three architectural principles that directly address the challenges of compilation risks, optimization overhead, and granularity mismatch.

To address the *Compilation Limitation*, Helios abandons full JIT compilation in favor of a hybrid execution model. The engine compiles only static-cost instructions into a register-based intermediate representation for acceleration, while delegating dynamic-cost operations to the native interpreter. This separation preserves gas-semantic equivalence by construction. To mitigate the risk of path divergence in a mutable blockchain environment, Helios embeds lightweight *control-flow guards* within optimized paths. These guards verify jump targets against the current execution context and trigger immediate fallback to native execution upon detecting any deviation.

To resolve the *Optimization Dilemma*, Helios decouples instrumentation from the critical path through an asynchronous tracing pipeline that generates optimization artifacts in the background without blocking transaction processing. Leveraging the insight that relevant dependencies are confined to the stack, Helios employs a lightweight shadow-stack tracer that captures necessary data flows without the prohibitive overhead of full memory or storage snapshots. The resulting hot paths are transformed into a register-based intermediate representation that achieves acceleration through direct data access and bulk gas deduction across static instruction sequences.

To overcome the *Granularity Mismatch*, Helios shifts the atomic unit of caching from transactions to call frames. This granularity exploits the high path locality of individual contract calls, converting ephemeral traces into reusable components. To defend against cache-flooding attacks, the system integrates *frequency-based filtering* that admits only statistically significant paths into the acceleration pipeline. This frame-level architecture also unifies the acceleration paradigm, allowing the same guarded artifacts to serve as predictive accelerators for latency-sensitive validators in Online Mode and as deterministic processors for throughput-oriented historical replay in Replay Mode.

3 THE DESIGN OF HELIOS

3.1 Overview

Helios is a path-driven execution engine designed to accelerate EVM transaction processing. Its architecture comprises four coordinated components. The Helios Engine orchestrates execution. The Path Cache indexes optimized graphs for reuse. The Path Tracer captures execution traces. The SSA Optimizer compiles them into an optimized intermediate representation. Figure 3 illustrates the system architecture and data flow.

Upon contract invocation, the Helios Engine queries the Path Cache using a path identifier derived from the contract identity and call signature. On a cache miss, the engine delegates execution

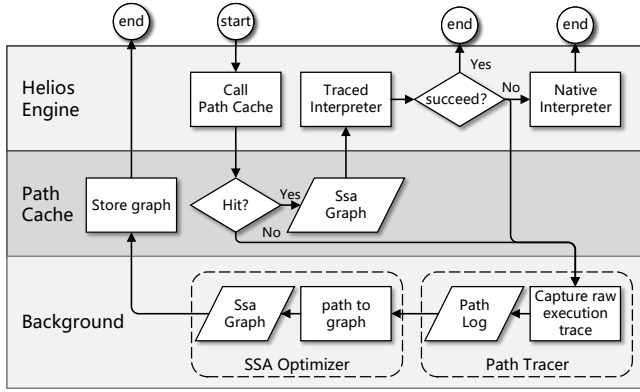


Figure 3: Overview of the Helios architecture.

to the Native Interpreter. This delegation simultaneously initiates an asynchronous optimization pipeline. The Path Tracer captures the raw execution trace as a PathLog, a linear sequence of executed opcodes with their data dependencies. The SSA Optimizer transforms this PathLog into an optimized SsaGraph, a directed acyclic graph that makes data flow explicit. The Path Cache then stores the SsaGraph for future reuse. Running in parallel with the Native Interpreter, this pipeline allows optimization to proceed without blocking the critical execution path.

On a cache hit, the engine retrieves the corresponding SsaGraph and dispatches it to the Traced Interpreter, which performs speculative execution validated by runtime control-flow guards. An execution failure triggers a fallback to the Native Interpreter and re-initiates the optimization pipeline. Successful execution concludes the transaction with reduced overhead.

Helios supports two operational modes. Online mode targets full nodes and validators handling transactions with unknown paths, where cache misses and guard failures may occur. Replay mode targets archive nodes reprocessing historical blocks. A pre-computed TxPlan guarantees cache hits for every call frame, allowing the engine to bypass control-flow guards and the optimization pipeline for maximum throughput.

3.2 Key Data Structures

Helios represents and indexes transaction paths through a small set of data abstractions that govern both Online and Replay modes.

Path Representation. Execution paths are first captured as a PathLog, a raw linear trace produced by the Path Tracer. A PathLog is a sequence of entries, each recording an opcode together with its stack data dependencies, expressed as references to the outputs of preceding operations. The optimization pipeline consumes this representation and transforms it into an SsaGraph, a directed acyclic graph inspired by Static Single Assignment (SSA) form [22]. In SSA, each value is defined exactly once, establishing a direct correspondence between values and their defining operations. This property makes data dependencies explicit, eliminating the need to track mutable stack positions and enabling classical optimizations such as constant folding and dead-code elimination. By making data flow explicit and eliminating the implicit EVM stack, the SsaGraph serves as the executable format for the Traced Interpreter.

Path Indexing and Retrieval. Helios employs a multi-key scheme to locate and reuse SsaGraphs. A PathDigest is a 64-bit hash of a path’s opcode sequence acting as a deterministic identifier for the execution logic. A DataKey concatenates a contract’s code hash with the PathDigest to uniquely identify the constant table for a specific contract instance. This separation allows multiple contracts with identical bytecode, such as distinct ERC20 [46] tokens, to share a single SsaGraph while maintaining separate constant tables. Finally, a CallSig is a coarse-grained identifier used for predictive lookup in Online mode, defined as the concatenation of a contract’s code hash and the 4-byte function selector from calldata. A single CallSig may map to multiple PathDigests, corresponding to distinct control-flow branches of the same function, including both successful and revert paths.

Execution Metadata. Helios maintains additional metadata to coordinate cross-frame execution and reduce runtime overhead. A Transaction Plan (TxPlan) is an ordered sequence of PathDigests that records the path taken by each call frame within a transaction. TxPlans are produced during Online execution and indexed by block number and transaction index; in Replay mode, they provide a deterministic guide for fetching the correct SsaGraph for every frame. A GasChunk is a precomputed scalar capturing the cumulative static gas cost of the instructions lying between two consecutive gas-accounting opcodes. Attached to the corresponding SsaGraph, GasChunks allow the Traced Interpreter to replace per-instruction gas accounting with a single bulk deduction, thereby reducing overhead while preserving gas-semantic equivalence.

3.3 Component Design and Implementation

This section details the internal design and mechanisms of each of Helios’s four primary components. It describes how each component fulfills its role in the end-to-end transaction lifecycle, transforming its inputs into the data structures required by the next stage of the pipeline.

3.3.1 Path Tracer. A lightweight instrumentation component observes native EVM execution to produce the raw PathLog data structure, TxPlan, and GasChunk.

Instrumentation mechanism. The tracer attaches to the EVM hook interface and subscribes to six events, including step and step_end for opcode execution, call and call_end for external calls, and create and create_end for contract creation. This hook-based design decouples the tracer from the interpreter and enables passive observation without changing execution semantics.

To capture stack data dependencies, the tracer maintains a shadow stack mirroring the EVM operand stack but storing 32-bit Log Sequence Numbers or LSNs instead of 256-bit values. Each LSN identifies the operation producing the corresponding value. As detailed in Algorithm 1, the tracer pops the required input LSNs to form the dependency list D_{in} on each step_end, allocates a new LSN for the current opcode, and pushes it if the opcode produces a stack result. For stack-manipulation opcodes such as DUP and SWAP that only reorder values, the tracer applies the same permutation to the shadow stack without creating a new LSN. As a result, only opcodes that actually produce new values become nodes in the PathLog, effectively collapsing substantial stack traffic and yielding PathLog

Algorithm 1: Shadow Stack Tracing

Input: op : Current EVM opcode
Input: S_{evm} : EVM value stack (after opcode execution)
Input: S_ℓ : Shadow stack of LSNs tracking value provenance
Output: e : Trace log entry containing the opcode, current LSN, input dependencies, and output value
Output: Updated S_ℓ
// Extract input dependencies from shadow stack
 $D_{in} \leftarrow []$
 $k \leftarrow \text{GETINPUTCOUNT}(op)$
for $i \leftarrow 1$ **to** k **do**
 $\ell \leftarrow S_\ell.\text{POP}()$
 $D_{in}.\text{APPEND}(\ell)$
// Record output value and assign new LSN
if op produces stack output **then**
 $v_{out} \leftarrow S_{evm}.\text{TOP}()$
 $\ell_{curr} \leftarrow \text{NEXTLSN}()$
 $S_\ell.\text{PUSH}(\ell_{curr})$
else
 $v_{out} \leftarrow \perp$; // No output, e.g., POP, JUMP
 $\ell_{curr} \leftarrow \text{NEXTLSN}()$
// Handle stack manipulation instructions
if $op \in \{\text{DUP1}, \text{DUP2}, \dots, \text{DUP16}\}$ **then**
 $d \leftarrow op - \text{DUP1} + 1$
 $\ell_t \leftarrow S_\ell[d]$; // Peek without pop
 $S_\ell.\text{PUSH}(\ell_t)$; // Duplicate LSN
if $op \in \{\text{SWAP1}, \text{SWAP2}, \dots, \text{SWAP16}\}$ **then**
 $d \leftarrow op - \text{SWAP1} + 1$
 $S_\ell.\text{SWAP}(0, d)$; // Swap LSNs
// Create log entry
 $e \leftarrow \langle op, \ell_{curr}, D_{in}, v_{out} \rangle$
return e

entries that record each operation alongside the LSNs of its true data dependencies.

PathDigest Calculation. PathDigest is a rolling hash updated with each executed opcode using the lightweight FNV-1A algorithm [31, 32]. FNV-1A relies on simple multiplication and XOR operations, making it efficient for incremental updates. The resulting hash serves as a unique identifier for each execution path, enabling fast comparison and lookup in the PathCache.

Metadata generation. The tracer also constructs GasChunk and TxPlan metadata. For GasChunks, it treats GAS and terminating opcodes such as RETURN, STOP, REVERT, CREATE, and CREATE2 as gas delimiters. It accumulates the static gas cost of instructions between two delimiters and emits a GasChunk with the aggregate cost upon reaching a delimiter. If a path ends without an explicit delimiter, the system inserts a synthetic STOP to close the final chunk.

The TxPlan is built using placeholders. When a new frame is entered via the call or create hook, the tracer appends a placeholder entry. When the frame completes at call_end or create_end, it computes the frame’s PathDigest and replaces the placeholder. The resulting TxPlan records the final per-frame path sequence in transaction order.

Path Validation and Filtering. To restrict resource allocation to reusable paths, the tracer executes a health check during the call_end hook by inspecting the frame’s exit status. The system discards paths resulting from VM-level exceptions, particularly

out-of-gas errors, while retaining deterministic application-level terminations such as successful returns and REVERT operations. This distinction is critical because REVERT paths correspond to reproducible control-flow branches, including failed assertions or balance validations, which exhibit high reusability across transactions. Conversely, VM-level exceptions are non-deterministic and may manifest at any instruction depending on the gas limit. Tracking every potential out-of-gas point for a sequence of n opcodes would generate $O(n)$ distinct failure paths, leading to cache fragmentation without benefiting deterministic execution. Consequently, the tracer formats only deterministically terminated paths into PathLog entries for the SSA Optimizer.

3.3.2 SSA Optimizer. A pure-function component transforms a raw PathLog into an optimized, gas-annotated SsaGraph through a pipeline of graph construction, redundancy elimination, gas integration, and final compaction.

Graph construction. For each PathLog entry, the optimizer creates a node in the SsaGraph and connects it to its data-dependency predecessors using the D_{in} LSN list, yielding a graph representation of the linear trace.

Optimization passes. The graph then undergoes three side-effect-aware passes: constant folding, dead-code elimination, and common-subexpression elimination. First, PUSH nodes are converted into constant-table entries and their values are propagated through side-effect-free nodes; computations that become fully constant are removed and recorded as constants. Second, a backward scan from side-effecting nodes removes any node whose result is unused, iterating to a fixed point. Third, the optimizer merges redundant side-effect-free operations by assigning each one a fingerprint consisting of its opcode and input LSNs; nodes with identical fingerprints are unified and all consumers are redirected to the canonical node.

GasChunk Integration. Following the optimization pipeline, the optimizer integrates the GasChunk metadata collected by the Path Tracer. It retrieves the list of GasChunks from the PathLog and attaches each pre-computed gas cost to its corresponding delimiter node within the SsaGraph. This annotation embeds the gas accounting information directly into the executable graph structure.

Graph Compaction and Output. In the final stage, the optimizer physically deletes all nodes previously marked as REMOVED to produce a compact graph. It finalizes the constant table, containing all immediate values and folded constants from the optimization phase. The resulting SsaGraph, its constant table, and associated identifiers are then transmitted to the Path Cache for storage.

3.3.3 Path Cache. A two-tier architecture separates prediction logic from canonical storage to efficiently support both probabilistic Online lookups and deterministic Replay retrieval.

Tiered Architecture. The Path Mapping Layer (PML) operates as a frequency-based prediction index for Online mode. It maintains a dual-index structure for each CallSig comprising a frequency map M_{freq} for $O(1)$ access and a priority queue I_{sorted} for $O(\log k)$ maximum frequency retrieval. To minimize guard validation overhead, the PML prioritizes precision by returning a prediction only if a single PathDigest holds the unique maximum frequency. The Graph Mapping Layer (GML) acts as the deterministic backing

Algorithm 2: Online Mode: Path Lookup

Notation: S_σ denotes a PathStore for CallSig σ , maintaining M_{freq} (PathDigest \rightarrow frequency map) and I_{sorted} (frequency \rightarrow PathDigest set, sorted index).
Input: σ : CallSig (code hash || function selector)
Input: h_c : Contract code hash for DataKey construction
Input: \mathcal{P} : Path Cache with PML and GML layers
Output: (G, C, ℓ) : Cached graph, constant table, and PathDigest; or \perp if prediction fails
// Phase 1: Query Path Mapping Layer for hot path
if $\sigma \notin \mathcal{P}.PML$ **then**
 return \perp ; // Cold start: CallSig never observed
 $S_\sigma \leftarrow \mathcal{P}.PML[\sigma]$; // Retrieve PathStore
 $ACQUIREREADLOCK(S_\sigma)$
// Get unambiguous maximum frequency path
 $(f_{max}, P_{max}) \leftarrow I_{sorted}.LASTENTRY()$
if $|P_{max}| \neq 1$ **then**
 $RELEASEREADLOCK(S_\sigma)$
 return \perp ; // Ambiguous: multiple paths share max frequency
 $\ell \leftarrow P_{max}.FIRST()$; // Extract the unique hot path
 $RELEASEREADLOCK(S_\sigma)$
// Phase 2: Query Graph Mapping Layer for artifacts
if $\ell \notin \mathcal{P}.GML.graphs$ **then**
 return \perp ; // Path not yet optimized
 $k_{data} \leftarrow h_c || \ell$; // Construct DataKey
if $k_{data} \notin \mathcal{P}.GML.data$ **then**
 return \perp ; // Constant table missing
 $G \leftarrow \mathcal{P}.GML.graphs[\ell]$
 $C \leftarrow \mathcal{P}.GML.data[k_{data}]$
return (G, C, ℓ) ; // Successful prediction

store mapping PathDigests to reusable SsaGraphs and DataKeys to contract-specific constant tables.

Query and Update Protocols. Query logic adapts to the operational mode. In Online mode, as detailed in Algorithm 2, the engine requests a high-confidence prediction from the PML. A successful hit yields a PathDigest that combines with the contract code hash to retrieve execution artifacts from the GML. In contrast, Replay mode bypasses the PML to perform direct lookups in the GML using the TxPlan.

Cache updates occur through two mechanisms formalized in Algorithm 3. First, the SSA Optimizer populates the GML and initializes the PML entry upon generating a new graph. Second, successful online executions trigger a feedback loop where the engine signals the PML to increment the path’s access frequency. This mechanism adapts predictions to evolving traffic patterns. Fine-grained read-write locks manage concurrency by permitting parallel reads for hot path prediction while bounding write contention.

Persistence and Recovery. The system serializes cache state to disk via periodic checkpoints to ensure durability. A configurable pruning policy manages storage by evicting CallSigs below a frequency threshold. Upon node restart, indices are reconstructed from checkpoints in $O(N \log k)$ time to enable immediate high-accuracy prediction. The system handles paths absent from the checkpoint via lazy regeneration.

Algorithm 3: Path Frequency Update (Feedback Loop)

Notation: Symbols follow Algorithm 2. Additionally, k denotes the number of distinct frequencies in I_{sorted} .
Input: σ : CallSig corresponding to the executed path
Input: ℓ : PathDigest that was successfully executed
Input: \mathcal{P} : Path Cache with PML
Output: Updated frequency statistics in S_σ
// Retrieve or create PathStore for this CallSig
 $S_\sigma \leftarrow \mathcal{P}.PML.GETORCREATE(\sigma)$
 $ACQUIREWRITELOCK(S_\sigma)$; // Exclusive access for update
// Phase 1: Get current frequency
 $f_{old} \leftarrow M_{freq}.GET(\ell)$ **or** 0; // Default to 0 for new paths
 $f_{new} \leftarrow f_{old} + 1$; // Increment with saturation
// Phase 2: Update sorted index
if $f_{old} > 0$ **then**
 $P_{old} \leftarrow I_{sorted}[f_{old}]$; // Get old frequency bucket
 $P_{old}.REMOVE(\ell)$
 if $P_{old} = \emptyset$ **then**
 $I_{sorted}.REMOVE(f_{old})$; // Clean empty bucket
// Phase 3: Update sorted index
 $P_{new} \leftarrow I_{sorted}.ENTRY(f_{new}).ORINSERTEMPTY()$
 $P_{new}.INSERT(\ell)$
// Phase 4: Update frequency map
 $M_{freq}[\ell] \leftarrow f_{new}$
 $RELEASEWRITELOCK(S_\sigma)$

3.3.4 Helios Engine. A central orchestrator supports transaction execution in both Online and Replay mode.

It integrates with the host EVM client by replacing the per-frame execution loop while reusing the client’s state and memory management. In our Revm integration, Helios inherits arena-based memory allocation, cached and prewarmed storage access, and the transaction-local journal for atomic commits. This allows the engine to focus on optimizing intra-frame computation while leaving state handling unchanged. For each frame, Helios chooses between its Traced Interpreter and Native Interpreter based on the execution mode and the Path Cache output.

Transaction-scoped execution. Helios executes at transaction granularity. If a traced execution encounters a cache miss, guard violation, or out-of-gas condition, the engine discards all partial work and restarts the transaction on the Native Interpreter. This design avoids fine-grained checkpointing or rollback and relies on the EVM’s transaction-level atomicity for correctness.

Traced Interpreter. When the Path Cache returns a valid SsaGraph, the engine dispatches execution to the Traced Interpreter, whose loop is given in Algorithm 4. It differs from a standard EVM interpreter in three ways.

First, it replaces the EVM stack with a register-like array indexed by LSN. Each SsaGraph node writes its result to its assigned slot, and consumers read operands directly from this array, eliminating DUP/SWAP and other stack manipulation overhead.

Second, in Online mode, it enforces speculative control-flow guards. Before executing JUMP or JUMPI, the interpreter computes the runtime target and checks it against the cached target in the SsaGraph. Any mismatch triggers an immediate transaction-level

Algorithm 4: Traced Interpreter Execution

```
Input:  $\mathcal{G} = (V, E)$ : Optimized SSA graph
Input:  $C : \mathbb{N} \rightarrow \mathbb{U}_{256}$ : Constant value table
Input:  $\Gamma$ : Execution context (mutable)
Input:  $g_{lim}$ : Gas limit
Output:  $\langle \Gamma, g_{used} \rangle$  or  $\perp$  (fallback)
// Initialize virtual register file and gas counter
 $\mathcal{R} : \mathbb{N} \rightarrow \mathbb{U}_{256} \leftarrow \text{new Array}[|V|]$ 
 $g_{rem} \leftarrow g_{lim}$ ; // Remaining gas initialized to limit
// Execute vertices in topological order
foreach  $v \in V$  in topological order do
   $\vec{v} \leftarrow \langle \rangle$ ; // Operand vector
  foreach  $\ell \in \text{in}(v)$  do
    if  $\ell \in C$  then
       $\vec{v} \leftarrow \vec{v} \cdot \langle C[\ell] \rangle$ ; // Constant operand
    else
       $\vec{v} \leftarrow \vec{v} \cdot \langle \mathcal{R}[\ell] \rangle$ ; // Register operand
  // Control flow guard verification
  if  $op(v) \in \{\text{JUMP}, \text{JUMPI}\}$  then
     $pc \leftarrow \text{COMPUTETARGET}(op(v), \vec{v}, \Gamma)$ 
     $\hat{pc} \leftarrow \text{target}(v)$ ; // Cached target from PathLog
    if  $pc \neq \hat{pc}$  then
      return  $\perp$ ; // Guard violation - trigger fallback
  // Chunked gas accounting at delimiters
  if  $op(v) \in \{\text{GAS}, \text{RETURN}, \text{STOP}, \text{REVERT}, \text{CREATE}, \text{CREATE2}\}$  then
     $\delta_s \leftarrow \text{chunk}(v)$ ; // Accumulated static gas cost
    if  $g_{rem} < \delta_s$  then
      return  $\perp$ ; // Gas anomaly - verify natively
     $g_{rem} \leftarrow g_{rem} - \delta_s$ 
  // Execute opcode and update execution context
   $\rho \leftarrow \text{EXEC}(op(v), \vec{v}, \Gamma)$ 
  // Deduct dynamic gas costs
  if  $\text{ISDYNAMIC}(op(v))$  then
     $\delta_d \leftarrow \text{DYNAMICGAS}(op(v), \vec{v}, \Gamma)$ 
    if  $g_{rem} < \delta_d$  then
      return  $\perp$ ; // Out of gas
     $g_{rem} \leftarrow g_{rem} - \delta_d$ 
  // Store result in virtual register
  if  $\rho \neq \epsilon$  then
     $\mathcal{R}[\ell(v)] \leftarrow \rho$ ; // Map LSN to result value
  // Check for execution termination
  if  $op(v) \in \{\text{RETURN}, \text{STOP}, \text{REVERT}\}$  then
    return  $\langle \Gamma, g_{lim} - g_{rem} \rangle$ 
return  $\langle \Gamma, g_{lim} - g_{rem} \rangle$ 
```

fallback. In Replay mode, all control-flow targets are fixed by the TxPlan, so these guards are never violated by construction.

Third, it uses chunked gas accounting for static-cost instructions. Instructions accumulate static cost within their GasChunk, and the interpreter deducts the aggregated amount at delimiter nodes in a single operation. Instructions with dynamic gas cost perform individual gas calculations and deductions, preserving exact gas semantics while reducing the number of checks on the hot path.

3.4 Security Considerations

Beyond the JIT Bomb resistance established through the path-driven paradigm in §2, Helios’s design inherently mitigates path explosion attacks. An adversary might attempt to degrade system performance by constructing malicious contracts that generate millions of unique execution paths for a single function signature, potentially flooding the cache and consuming resources.

Helios’s architecture is designed to defend against this attack vector through three complementary mechanisms. The frequency-based Path Mapping Layer ensures that only paths with demonstrated reusability are predicted and accelerated. Attack-generated paths tend to remain classified as cold paths due to low execution counts, excluded from the prediction model. The checkpoint pruning mechanism evicts CallSigs with access frequencies below a configurable threshold, preventing malicious cold paths from consuming long-term storage while retaining legitimate hot paths. The transaction-scoped execution model ensures that cache misses simply trigger fallback to the Native Interpreter, maintaining correctness and baseline performance for unpredicted paths.

Consequently, path explosion attacks impose only bounded costs on asynchronous tracing and temporary cache occupancy without degrading performance for legitimate transactions. This robustness follows from the frequency-based filtering and bounded resource allocation inherent to Helios’s design.

4 EVALUATION

We evaluate Helios under microbenchmarks and Ethereum mainnet workloads to answer three questions: **RQ1** (Optimization Overhead): What are the time and space costs of Helios’s tracing and optimization? **RQ2** (Performance Gains): How much speedup does Helios achieve over modern EVM interpreters and existing optimizations? **RQ3** (System Applicability): How well do Replay and Online modes serve their respective deployment scenarios?

4.1 Experimental Setup

All experiments run on an AWS r7i.2xlarge instance with 8 vCPUs and 64 GB memory. We compare Helios against four baselines representing the state-of-the-art. Geth v1.9.9 [10] serves as the representative Go-based client, while Revm v22.0.1 [5] represents high-performance Rust interpreters. We also evaluate Forerunner [20], applying its full-context tracing to both Geth and Revm. Finally, we include Revmc v0.1.0 [5], a JIT compiler that translates EVM bytecode to Rust. Revmc bundles its own Revm version, which may differ from our standalone Revm baseline.


For microbenchmarks we use three DeFi workloads of increasing complexity: *ERC20-Transfer*, *Uniswap-V2-Swap-1hop*, and *Uniswap-V2-Swap-4hop*. Each transaction is executed 100 times with warm caches and we report medians. For mainnet evaluation we replay 5,000 consecutive Ethereum blocks (#19,476,587–#19,481,586), containing 921,786 transactions, of which 567,372 are contract invocations. Pure ETH transfers are excluded because they do not involve EVM execution.

4.2 Microbenchmark Performance

4.2.1 Optimization Overhead (RQ1). Table 2 summarizes tracing latency and artifact size compared to Forerunner. For ERC20-Transfer,

Table 2: Tracing Time and Artifact Storage Overhead

Benchmark	Forerunner		Helios	Reduction	
	Geth	Revm		vs Geth	vs Revm
<i>Tracing Time (μs)</i>					
ERC20-Transfer	291.6	26.3	23.2	12.5×	1.1×
Uniswap-Swap-1hop	742.6	381.5	309.9	2.4×	1.2×
Uniswap-Swap-4hop	1317.7	1119.2	943.2	1.4×	1.2×
<i>Artifact Size (KB)</i>					
ERC20-Transfer	393.4	44.7	4.8	82.7×	9.4×
Uniswap-Swap-1hop	910.4	647.5	70.2	13.0×	9.2×
Uniswap-Swap-4hop	1994.3	2017.5	122.9	16.2×	16.4×

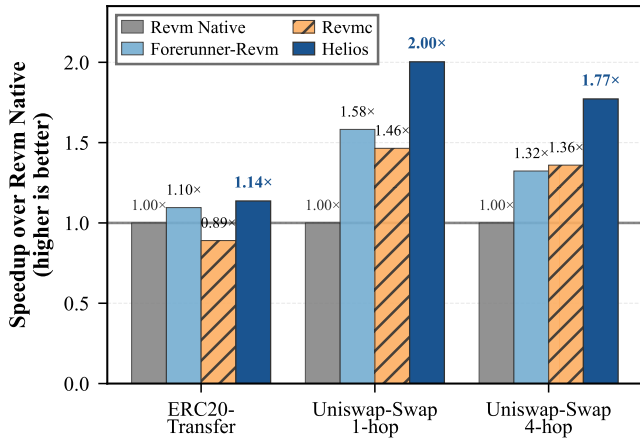
Figure 4: Execution speedup over Revm 22.0.1 baseline. Higher values indicate greater performance improvement.
Table 3: Execution Time: Geth-based vs. Revm-based Systems

System	ERC20 (μ s)	1hop (μ s)	4hop (μ s)
Geth Native	89.11	398.40	966.20
Forerunner-Geth	35.75	68.12	167.38
Revm Native	4.94	62.02	172.49

Helios records a path in 23.2 μ s, yielding a 12.5 \times reduction over Forerunner-Geth and comparable latency to our Forerunner-Revm reimplementation. As contract complexity increases, tracing cost becomes dominated by the number of executed instructions, and Helios still achieves 1.4–2.4 \times lower tracing time than Forerunner-Geth and about 1.2 \times lower than Forerunner-Revm.

The storage savings are more pronounced. For the three benchmarks, Helios reduces artifact size by 82.7 \times , 13.0 \times , and 16.2 \times compared to Forerunner-Geth, and by 9.4–16.4 \times compared to Forerunner-Revm. The resulting artifacts (4.8–122.9 KB) are small enough to be cached in memory, making online management practical.

Table 4: Opcode Reduction and Execution Speedup Across Benchmarks

Metric	ERC20	1hop	4hop
Native opcode count	492	5,667	18,063
<i>Opcodes Eliminated</i>			
CF	395	4,249	13,604
CSE	10	85	257
DCE	0	9	33
Total eliminated	405	4,343	13,894
Reduction rate	82.3%	76.6%	76.9%
Execution speedup	1.14×	2.00×	1.77×
<i>Predicted speedup</i>	5.66×	4.28×	4.33×

CF: Constant Folding; CSE: Common Subexpression Elimination; DCE: Dead Code Elimination.

4.2.2 Execution Speedup (RQ2). Table 3 compares Geth-based and Revm-based systems. Forerunner-Geth accelerates Geth Native by up to 5.8 \times but still remains substantially slower than unoptimized Revm on simple workloads, highlighting that optimization benefits are bounded by the efficiency of the underlying interpreter. We therefore focus on Revm-based systems when comparing optimization strategies.

Figure 4 reports speedups over Revm Native. Helios achieves 1.14 \times , 2.00 \times , and 1.77 \times speedup on ERC20-Transfer, Uniswap-1hop, and Uniswap-4hop respectively. Gains are largest on medium and complex swaps, where repetitive arithmetic and control-flow patterns allow the SSA optimizer to eliminate redundant work.

Against Forerunner-Revm, Helios improves performance by 4–34% across benchmarks. On Uniswap-1hop, Forerunner-Revm achieves 1.58 \times speedup, whereas Helios reaches 2.00 \times , reducing execution time from 39.2 μ s to 31.0 μ s. The advantage comes from lightweight artifacts that are faster to load and execute.

Revmc exhibits mixed performance. While it is 11% slower than Revm Native on ERC20-Transfer, it achieves speedups of 1.46 \times and 1.36 \times on the two Uniswap workloads, respectively. JIT compilation amortizes better on longer paths, but still underperforms Helios. Interpreter-level SSA specialization thus offers competitive speedups without the runtime costs of code generation.

4.2.3 Opcode Reduction vs. Speedup (RQ2). Table 4 indicates that SSA optimization eliminates 76% to 82% of dynamic opcodes across all benchmarks, where constant folding accounts for approximately 98% of the reduction. However, the resulting speedups of 1.14 \times to 2.00 \times do not scale linearly with this reduction in instruction count.

We analyze this discrepancy in Table 5 by decomposing the micro-architectural latency of a hash-intensive workload. The breakdown reveals that computationally expensive operations such as KECCAK256 [17] dominate execution and account for over 60% of the wall-clock latency. Since Helios delegates these operations to the native host to ensure safety, their fixed costs limit the theoretical maximum speedup. Within the optimizable scope, Helios reduces interpretation overhead including stack manipulation and gas metering by 30.5%, which decreases the per-iteration latency

Table 5: Micro-architectural latency breakdown of a hash-intensive workload (ns per iteration).

Component	Native EVM	Helios	Reduction
Heavy Ops (Keccak)	314.79	312.33	0.8%
Light Ops	46.49	45.96	1.1%
System Overhead	134.35	93.65	30.3%

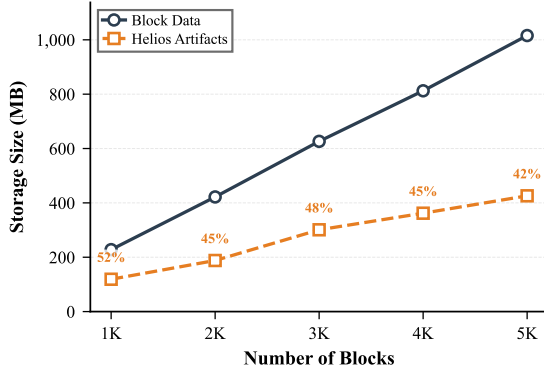


Figure 5: Storage growth for block data versus Helios optimization artifacts. Overhead decreases from 52.2% (1,000 blocks) to 41.9% (5,000 blocks) due to path convergence, where new blocks increasingly reuse existing cached artifacts.

Table 6: Storage-Coverage Tradeoff for Mainnet Blocks

Freq Threshold	Storage	Overhead	Exec Coverage	Top-1 Coverage
≥ 1 (all paths)	426 MB	42.0%	100.0%	62.2%
≥ 10	50 MB	4.9%	96.5%	58.0%
≥ 50	38 MB	3.7%	90.0%	52.2%
≥ 100	19 MB	1.9%	85.6%	48.6%
≥ 500	4 MB	0.3%	69.9%	38.4%

from 134ns to 93ns. Consequently, while the register-based model streamlines execution logic, the overall performance gains remain bounded by the inherent computational intensity of cryptographic.

4.3 Mainnet Workload Analysis

4.3.1 Storage Overhead and Coverage (RQ1). We next examine the cost of storing optimization artifacts on real workloads. Caching all unique paths observed in 5,000 blocks yields 426 MB of artifacts, corresponding to 41.9% overhead relative to raw block data (Figure 5). Overhead grows sub-linearly: the first 1,000 blocks incur 52.2% overhead, which drops as later blocks increasingly reuse existing paths.

To exploit path locality, we apply frequency-based filtering and keep only paths that execute at least f times during the warmup period (Table 6). A threshold of $f \geq 10$ reduces storage to 50 MB (4.9% overhead) while still covering 96.5% of contract executions and achieving a 58.0% Top-1 prediction hit rate. More aggressive

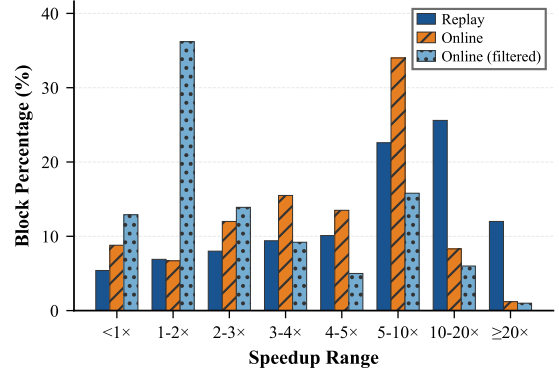


Figure 6: Block-level speedup distribution over Revm Native across three deployment modes. Replay assumes known transaction plans; Online predicts paths at runtime. Filtering ($f \geq 10$) trades median speedup for 8× storage reduction.

thresholds further shrink storage but lose coverage, so we use $f \geq 10$ for Online deployment.

4.3.2 End-to-End Speedup (RQ2 & RQ3). Figure 6 presents the block-level speedup distribution across all three deployment configurations. We summarize the key observations below.

Replay Mode. Replay mode assumes a precomputed transaction plan and represents the best-case scenario for archive nodes. It achieves a median speedup of 6.60× over Revm Native, with the 75th and 90th percentiles reaching 13.88× and 21.43×, respectively. Only 5.4% of blocks exhibit slowdown. The distribution skews toward high speedups (10–20× and ≥ 20 × bins account for 37.6% of blocks), confirming that deterministic path reuse enables substantial acceleration for historical block re-execution.

Online Mode (Full Cache). Without frequency filtering, Online mode must predict execution paths using only the current CallSig. It reaches a median speedup of 4.56×, with 75th and 90th percentiles at 7.12× and 9.85×. The distribution concentrates in the 3–10× range (63.0% of blocks), reflecting the overhead of runtime prediction and occasional mispredictions. Still, 8.8% of blocks are slower than baseline—higher than Replay mode due to cache lookup costs and fallback penalties.

Online Mode (Filtered, $f \geq 10$). Frequency-based filtering reduces storage to 50 MB but shifts the distribution leftward. The median speedup drops to 2.05×, and the 1–2× bin now dominates (36.2% of blocks). However, the 90th percentile remains high at 9.01×, indicating that hot paths still benefit substantially. This trade-off suits latency-sensitive validators who prioritize storage efficiency over median-case acceleration.

Cross-Mode Comparison. The three distributions reveal a clear hierarchy: Replay > Online (full) > Online (filtered). The gap between Replay and Online stems from three factors: (i) Top-1 prediction covers only 58.0% of executions under filtering; (ii) transaction-level rollback discards partially optimized work on mispredictions; and (iii) prediction overhead becomes visible when optimized paths execute in microseconds. We discuss potential extensions in §5.

5 DISCUSSION

This section interprets the performance results, analyzes the limitations of the current design, and outlines future research directions.

5.1 Interpreting the Speedup

Helios achieves a median speedup of 6.60× in Replay Mode. This performance improvement results from the execution of optimized SSA graphs, which eliminates redundant stack operations and simplifies gas accounting for static instructions.

However, the evaluation reveals a disparity between the opcode reduction rate and the actual execution speedup. While SSA optimization removes approximately 80% of instructions, the microbenchmark speedups range from 1.14× to 2.00×. This discrepancy indicates that the overhead of the Traced Interpreter currently constrains the potential performance gains. The management of execution metadata and the interpretation of the graph structure introduce costs that are comparable to the savings from instruction elimination. Furthermore, unoptimized heavy instructions continue to dominate the execution time in certain workloads.

A promising avenue for future work is implementing JIT or Ahead-Of-Time (AOT) compilation to eliminate interpretation overhead and fully leverage the instruction reduction achieved by our SSA optimizer. The register-based design of the SsaGraph maps naturally to modern CPU architectures, facilitating this transition. Furthermore, unlike traditional bytecode JITs that face "JIT bomb" risks, the acyclic and strictly bounded nature of the SsaGraph offers an opportunity for safe compilation, avoiding complexity explosion attacks.

5.2 Opportunities for Further Optimization

Online Mode achieves substantial speedups in common cases, and our analysis reveals additional optimization opportunities when frequency-based filtering is applied. The gap between Top-1 prediction coverage and actual execution coverage suggests that richer path-selection strategies could further improve performance.

We have begun exploring such strategies, including a race-parallel execution model that caches the Top-K paths and executes them concurrently. The system commits the result of the first successful path or falls back to native execution if all paths fail. Initial microbenchmarks show that coordination overhead currently limits the benefits of this approach, but lightweight synchronization primitives and speculative result caching offer promising directions to reduce this overhead.

A second opportunity lies in refining fallback granularity. The current transaction-scoped fallback reverts the entire transaction to native EVM upon a single frame prediction failure. A finer-grained, frame-level fallback would revert only the failed frame while continuing to use cached paths for subsequent frames, thereby increasing effective coverage. This design requires safeguards against adversarial inputs that deliberately induce frequent engine switching. Potential defenses include per-transaction fallback limits and chained predictions, where one optimized frame's output directly triggers speculative execution of the next. We plan to investigate these directions in future work.

5.3 System Scalability

Beyond execution logic, system scalability presents further optimization opportunities. While our initial exploration of instruction-level parallelism (ILP) [43] showed limited improvement due to synchronization overhead, parallel execution potential remains. The current dependency graph modeling could benefit from advanced ILP techniques in compiler theory. Future research could investigate sophisticated scheduling algorithms or hardware-assisted primitives to unlock the parallelism inherent in SsaGraph.

Finally, the current Path Cache implementation prioritizes low storage overhead with a simple persistence and pruning policy. As the system scales to handle larger state histories, more mature caching strategies may be required. Future work could explore tiered storage architectures that balance hit rate, retrieval latency, and storage cost, potentially leveraging external high-performance key-value stores for long-term artifact persistence.

6 RELATED WORK

This work focuses on accelerating Ethereum Virtual Machine (EVM) execution, specifically targeting modern, high-performance interpreters such as Revm. Research in this domain can be categorized into smart contract optimization toolchains, path-driven speculative execution systems, and concurrent execution architectures.

6.1 Smart Contract Optimization

Optimization in the smart contract landscape spans from static source analysis to bytecode rewriting and compilation.

Program Analysis and Optimization. Traditional Solidity toolchains provide static analysis capabilities that serve as a foundation for downstream optimization. Tools like Slither [29] generate intermediate representations (SlithIR) and control flow graphs (CFG) to detect vulnerabilities. Rattle [7] lifts EVM bytecode into a SSA form to recover high-level control flow. While Rattle and Helios both leverage SSA to eliminate redundant stack operations, their objectives differ fundamentally. Rattle employs SSA as an intermediate representation for static analysis and decompilation, prioritizing readability without propagating changes back to the executable bytecode. In contrast, Helios utilizes SSA as a dynamic, executable format (SsaGraph) specifically designed for the runtime engine. The Helios optimizer operates on frame-level execution paths rather than static bytecode, generating artifacts for immediate execution acceleration via a specialized interpreter rather than for analysis.

Superoptimization. Superoptimization frameworks [15, 16, 40] aim to identify the optimal instruction sequence functionally equivalent to a target sequence but with minimal gas cost. While theoretically capable of producing maximally efficient code, these approaches rely on SMT solvers [24] to verify equivalence. The operational semantics of the EVM—specifically the modeling of memory expansion, storage, and dynamic gas costs—require complex logic encodings that heavily tax SMT solvers. Consequently, the search space for equivalent programs explodes exponentially with instruction count, often necessitating strict timeouts or restricting optimization to basic blocks without memory side-effects. These constraints make superoptimization difficult to apply dynamically at runtime.

JIT and AOT Compilation. Just-In-Time (JIT) and Ahead-Of-Time (AOT) compilers attempt to translate EVM bytecode into native machine code. Projects like Revmc, Monad, and EVM-JIT[4, 9, 11, 13] generate native machine code from EVM bytecode to bypass the interpreter loop. However, for the microsecond-scale transactions typical of the EVM, the overhead of runtime code generation often outweighs the execution speedup. Helios mitigates this overhead by avoiding full native compilation. Instead, it transforms execution paths into an abstract graph representation replayed by a specialized Traced Interpreter. This approach maintains the micro-architectural optimizations of the underlying host interpreter while reducing the instruction dispatch count.

6.2 Path-driven Speculative Execution

As a path-driven execution engine, Helios is directly comparable to systems like Forerunner [20] and Seer [51].

Comparison with Existing Systems. Forerunner applies speculative execution with CD-Equiv constraints, generating “Accelerated Programs” (APs) from transaction history. Seer employs fine-grained branch prediction and snapshots to manage state dependencies. However, these systems face limitations on modern interpreters due to their tracing strategy. Forerunner relies on full-context tracing, capturing stack frames, memory snapshots, and contract state. On optimized engines like Revm, the I/O overhead of loading large artifacts often exceeds transaction execution time. Helios employs **lightweight asynchronous tracing** to address this bottleneck. By recording only stack operations, Helios achieves 9.4–16.4× compression over full-context approaches, making online artifact management practical.

Granularity and Gas Semantics. Existing systems typically utilize transaction-level caching, which limits reuse to identical transaction sequences. Helios introduces **frame-level caching**, exploiting the observation that individual contract call frames exhibit high path locality even when parent transactions differ. Furthermore, prior works do not explicitly address the preservation of gas semantics during optimization. Helios preserves gas equivalence by construction: it restricts SSA optimization to static-cost instructions while delegating all dynamic-cost operations (e.g., memory expansion, storage access) to the native EVM, ensuring the economic model remains undisturbed.

6.3 Concurrent and Parallel Execution

Various concurrent execution architectures address the sequential bottleneck of the EVM.

Operation-Level Concurrency. ParallelEVM [39] enables concurrent execution at the operation level by dynamically generating an SSA Operation Log to track data dependencies. This mechanism allows selective re-execution of conflicting operations rather than aborting entire transactions. While both ParallelEVM and Helios leverage SSA, their objectives differ fundamentally: ParallelEVM employs SSA for concurrency control and conflict resolution, whereas Helios utilizes it for single-thread execution path optimization. Furthermore, ParallelEVM relies on synchronous runtime tracing. Although the reported log generation overhead is approximately 4.5%, our experiments suggest that on high-performance

interpreters like Revm, any synchronous tracing on the critical path introduces non-negligible overhead, limiting net acceleration.

Parallel Architectures. Other approaches focus on architectural innovations. PaVM [28] supports both intra-contract and inter-contract parallelism through a specialized runtime system, though it does not explicitly address parallel determinism. Block-STM [33] implements optimistic concurrency control with a collaborative scheduler to execute transaction sets in parallel. Hardware-centric solutions such as MTPU [41] adopt algorithm-architecture co-design, utilizing spatial-temporal scheduling to exploit parallelism.

Orthogonality Analysis. Helios is orthogonal to these frameworks. Its core contribution is a lightweight, high-throughput path execution engine that optimizes the fundamental unit of computation—the sequential execution of a contract path. This baseline acceleration can be integrated into parallel frameworks such as ParallelEVM, Block-STM, or PaVM to further maximize system throughput.

7 CONCLUSION

We presented Helios, a path-driven execution engine designed to accelerate transaction processing on high-performance EVM clients. We identified an optimization dilemma in existing acceleration strategies. On modern, highly optimized interpreters, the overhead of detailed tracing and artifact management often negates the benefits of optimization. Helios addresses this challenge through a novel architecture that combines lightweight asynchronous tracing with frame-level caching. By restricting optimization to static-cost instructions, Helios preserves gas-semantic equivalence by construction and mitigates the economic risks associated with aggressive JIT compilation.

Our evaluation on Ethereum mainnet workloads demonstrates the efficacy of this approach. In Replay Mode, Helios achieves a median speedup of 6.60× over the baseline Revm interpreter, validating its potential for accelerating archive node synchronization and historical data analysis. In Online Mode, Helios effectively accelerates hot execution paths, leveraging the strong path locality inherent in smart contract execution.

Helios represents a new design point for blockchain execution engines, prioritizing safety, correctness, and architectural simplicity alongside raw performance. Future work will explore integrating JIT compilation to further reduce interpretation overhead for optimized paths and refining the speculative execution model with frame-level fallback mechanisms to maximize coverage. By decoupling optimization from the critical path, Helios offers a scalable foundation for the next generation of EVM infrastructure.

REFERENCES

- [1] 2020. *Binance Smart Chain: A Parallel Binance Chain to Enable Smart Contracts*. Whitepaper. BNB Chain Community. https://dex-bin.bnbstatic.com/static/Whitepaper_%20Binance%20Smart%20Chain.pdf Accessed: 2025-11-24.
- [2] 2020. Overview | Uniswap. <https://docs.uniswap.org/contracts/v2/overview>
- [3] 2021. *Polygon: Ethereum’s Internet of Blockchains*. Whitepaper. Polygon Labs. <https://polygon.technology/papers/pol-whitepaper> Accessed: 2025-11-24.
- [4] 2024. A Technical Deep-Dive on the JIT/AOT Compiler for revm of BNB Chain. <https://www.bnbchain.org/en/blog/a-technical-deep-dive-on-the-jit-aot-compiler-for-revm-of-bnb-chain>
- [5] 2025. bluealloy/revm: Rust implementation of the Ethereum Virtual Machine. <https://github.com/bluealloy/revm>
- [6] 2025. BNB Chain. <https://docs.bnbchain.org/>
- [7] 2025. crytic/rattle. <https://github.com/crytic/rattle> original-date: 2018-03-06T20:48:37Z.

- [8] 2025. DefiLlama - DeFi Dashboard. <https://defillama.com>
- [9] 2025. ethereum/evmjit. <https://github.com/ethereum/evmjit> original-date: 2014-12-01T16:55:51Z.
- [10] 2025. ethereum/go-ethereum. <https://github.com/ethereum/go-ethereum> original-date: 2013-12-26T13:05:46Z.
- [11] 2025. Introduction | Monad Developer Documentation. <https://monad-docs-lb3l7tky7-monad-xyz.vercel.app/>
- [12] 2025. ipsilon/evmone: Fast Ethereum Virtual Machine implementation. <https://github.com/ipsilon/evmone>
- [13] 2025. paradigmxyz/revmc. <https://github.com/paradigmxyz/revmc> original-date: 2024-03-10T16:27:36Z.
- [14] 2025. Polygon Knowledge Layer. <https://docs.polygon.technology/>
- [15] Elvira Albert, Pablo Gordillo, Alejandro Hernández-Cerezo, Albert Rubio, and Maria Anna Schett. 2022. Super-optimization of Smart Contracts. *ACM Transactions on Software Engineering and Methodology (TOSEM)* 31 (2022), 1 – 29. <https://api.semanticscholar.org/CorpusID:248325349>
- [16] Elvira Albert, Pablo Gordillo, Albert Rubio, and Maria Anna Schett. 2020. Synthesis of Super-Optimized Smart Contracts Using Max-SMT. *Computer Aided Verification* 12224 (2020), 177 – 200. <https://api.semanticscholar.org/CorpusID:219320104>
- [17] G. Bertoni, J. Daemen, M. Peeters, and G. Van Assche. 2011. The Keccak reference. <http://keccak.noekoon.org/>
- [18] Stefano Bistarelli, Gianmarco Mazzante, Matteo Micheletti, Leonardo Mostarda, and Francesco Tiezzi. 2020. Analysis of Ethereum Smart Contracts and Opcodes. In *Advanced Information Networking and Applications*, Leonard Barolli, Makoto Takizawa, Fatos Xhafa, and Tomoya Enokido (Eds.). Springer International Publishing, Cham, 546–558.
- [19] Vitalik Buterin. 2015. A NEXT GENERATION SMART CONTRACT & DE-CENTRALIZED APPLICATION PLATFORM. <https://api.semanticscholar.org/CorpusID:19568665>
- [20] Yang Chen, Zhongxin Guo, Runhui Li, Shuo Chen, Lidong Zhou, Yajin Zhou, and Xian Zhang. 2021. Forerunner: Constraint-based speculative transaction execution for ethereum. In *Proceedings of the ACM SIGOPS 28th Symposium on Operating Systems Principles*. 570–587.
- [21] Coinbase. 2023. Base: An Ethereum L2 Network. <https://docs.base.org/>. Accessed: 2025-11-24.
- [22] Ronald Gary Cytron, Jeanne Ferrante, Barry K. Rosen, Mark N. Wegman, and F. Kenneth Zadeck. 1991. Efficiently computing static single assignment form and the control dependence graph. *ACM Transactions on Programming Languages and Systems (TOPLAS)* 13 (1991), 451 – 490. <https://api.semanticscholar.org/CorpusID:13243943>
- [23] Xiaohai Dai, Bo Zhang, Hai Jin, and Ling Ren. 2023. ParBFT: Faster Asynchronous BFT Consensus with a Parallel Optimistic Path. *Proceedings of the 2023 ACM SIGSAC Conference on Computer and Communications Security* (2023). <https://api.semanticscholar.org/CorpusID:259092489>
- [24] Leonardo de Moura and Nikolaj Bjørner. 2009. Satisfiability Modulo Theories: An Appetizer. In *Formal Methods: Foundations and Applications (SBMF 2009) (Lecture Notes in Computer Science)*, Vol. 5902. 23–36.
- [25] Quinn DuPont. 2017. Experiments in algorithmic governance : A history and ethnography of “The DAO,” a failed decentralized autonomous organization. <https://api.semanticscholar.org/CorpusID:169783921>
- [26] Ethereum Foundation. 2025. Ethereum Archive Node. <https://ethereum.org/developers/docs/nodes-and-clients/archive-nodes/>. Page last updated: October 21, 2025.
- [27] Ethereum Foundation. 2025. Nodes and Clients. <https://ethereum.org/developers/docs/nodes-and-clients/>. Page last updated: October 22, 2025.
- [28] Yaozheng Fang, Zhiyuan Zhou, Surong Dai, Jinni Yang, Hui Zhang, and Ye Lu. 2024. PaVM: A Parallel Virtual Machine for Smart Contract Execution and Validation. *IEEE Transactions on Parallel and Distributed Systems* 35 (2024), 186–202. <https://api.semanticscholar.org/CorpusID:265341872>
- [29] Josselin Feist, Gustavo Grieco, and Alex Groce. 2019. Slither: A Static Analysis Framework for Smart Contracts. *2019 IEEE/ACM 2nd International Workshop on Emerging Trends in Software Engineering for Blockchain (WETSEB)* (2019), 8–15. <https://api.semanticscholar.org/CorpusID:85442214>
- [30] Hang Feng, Yufeng Hu, Yinghan Kou, Runhui Li, Jianfeng Zhu, Lei Wu, and Yajin Zhou. 2024. SlimArchive: A Lightweight Architecture for Ethereum Archive Nodes. In *Proceedings of the 2024 USENIX Annual Technical Conference (USENIX ATC 24)*. USENIX Association, Santa Clara, CA, USA, 1257–1271. <https://www.usenix.org/conference/atc24/presentation/feng-hang>
- [31] G. Fowler, L. C. Noll, and K.-P. Vo. 1991. Fowler-Noll-Vo Hash Algorithm. <http://www.ishe.com/chongo/tech/comp/fnv/> Unpublished reviewer comments.
- [32] G. Fowler, L. C. Noll, K.-P. Vo, and D. Eastlake. 2019. The FNV Non-Cryptographic Hash Algorithm. <https://www.ietf.org/archive/id/draft-eastlake-fnv-17.html> Internet Draft, IETF.
- [33] Rati Gelashvili, Alexander Spiegelman, Zhuolun Xiang, George Danezis, Zekun Li, Yu Xia, Runtian Zhou, and Dahlia Malkhi. 2022. Block-STM: Scaling Blockchain Execution by Turning Ordering Curse to a Performance Blessing. *Proceedings of the 28th ACM SIGPLAN Annual Symposium on Principles and Practice of Parallel Programming* (2022). <https://api.semanticscholar.org/CorpusID:247447566>
- [34] Go Ethereum Team. 2025. Sync Modes. <https://geth.ethereum.org/docs/fundamentals/sync-modes>. Last edited on February 18, 2025.
- [35] Xiaowen Hu, Bernd Burgstaller, and Bernhard Scholz. 2023. EVMTracer: dynamic analysis of the parallelization and redundancy potential in the ethereum virtual machine. *IEEE Access* 11 (2023), 47159–47178.
- [36] Harry Kalodner, Steven Goldfeder, Xiaoqi Chen, S. Matthew Weinberg, and Edward W. Felten. 2018. Arbitrum: Scalable, Private Smart Contracts. In *Proceedings of the 27th USENIX Security Symposium*. 1353–1370.
- [37] Minghang Li, Qianhong Wu, Zhipeng Wang, Bo Qin, Bohang Wei, Hang Ruan, Shihong Xiong, and Zhenyang Ding. 2025. TockOwl: Asynchronous Consensus with Fault and Network Adaptability. In *IACR Cryptology ePrint Archive*. <https://api.semanticscholar.org/CorpusID:276020896>
- [38] Minghang Li, Qianhong Wu, Yupeng Zhang, Zhipeng Wang, Bo Qin, Xuecheng Lin, and Willy Susilo. 2025. TockCuckoo: Two-phase BFT with Linearity and Responsiveness. *IEEE Transactions on Information Forensics and Security* (2025), 1–1. <https://doi.org/10.1109/TIFS.2025.3636059>
- [39] Haoran Lin, Hang Feng, Yajin Zhou, and Lei Wu. 2025. ParallelEVM: Operation-Level Concurrent Transaction Execution for EVM-Compatible Blockchains. In *Proceedings of the Twentieth European Conference on Computer Systems*. 211–225.
- [40] Julian Nagele and Maria Anna Schett. 2020. Blockchain Superoptimizer. *ArXiv abs/2005.05912* (2020). <https://api.semanticscholar.org/CorpusID:218596321>
- [41] Rui Pan, Chubo Liu, Guoqing Xiao, Mingxing Duan, Keqin Li, and Kenli Li. 2023. An Algorithm and Architecture Co-design for Accelerating Smart Contracts in Blockchain. *Proceedings of the 50th Annual International Symposium on Computer Architecture* (2023). <https://api.semanticscholar.org/CorpusID:259177676>
- [42] Lemayian Joel Poncha, Hachem Bensalem, Ghyslain Gagnon, Kaiwen Zhang, and Pascal Giard. 2025. EVMx: An FPGA-Based Smart Contract Processing Unit. *2025 IEEE 49th Annual Computers, Software, and Applications Conference (COMPSAC)* (2025), 1708–1713. <https://api.semanticscholar.org/CorpusID:280401852>
- [43] B. R. Rau. 1992. Data flow and dependence analysis for instruction level parallelism. In *Languages and Compilers for Parallel Computing*, Utpal Banerjee, David Gelernter, Alex Nicolau, and David Padua (Eds.). Springer Berlin Heidelberg, Berlin, Heidelberg, 236–250.
- [44] Ben L. Titzer. 2023. Whose Baseline Compiler is it Anyway? *2024 IEEE/ACM International Symposium on Code Generation and Optimization (CGO)* (2023), 207–220. <https://api.semanticscholar.org/CorpusID:258833052>
- [45] Palina Tolmach, Yi Li, Shang-Wei Lin, Yang Liu, and Zengxiang Li. 2020. A Survey of Smart Contract Formal Specification and Verification. *ACM Computing Surveys (CSUR)* 54 (2020), 1 – 38. <https://api.semanticscholar.org/CorpusID:221005956>
- [46] Fabian Vogelsteller and Vitalik Buterin. 2015. EIP-20: ERC-20 Token Standard. Ethereum Improvement Proposal 20. Ethereum Foundation. <https://eips.ethereum.org/EIPS/eip-20> Accessed: 2025-11-24.
- [47] Qin Wang, Rujia Li, Qi Wang, and Shiping Chen. 2021. Non-Fungible Token (NFT): Overview, Evaluation, Opportunities and Challenges. *ArXiv abs/2105.07447* (2021). <https://api.semanticscholar.org/CorpusID:234742206>
- [48] Sam M. Werner, Daniel Perez, Lewis Gudgeon, Arian Klages-Mundt, Dominik Harz, and William John Knottenbelt. 2021. SoK: Decentralized Finance (DeFi). *Proceedings of the 4th ACM Conference on Advances in Financial Technologies* (2021). <https://api.semanticscholar.org/CorpusID:231662215>
- [49] Daniel Davis Wood. 2014. ETHEREUM: A SECURE DECENTRALISED GENERALISED TRANSACTION LEDGER. <https://api.semanticscholar.org/CorpusID:4836820>
- [50] Maofan Yin, Dahlia Malkhi, Michael K. Reiter, Guy Golan-Gueta, and Ittai Abraham. 2019. HotStuff: BFT Consensus with Linearity and Responsiveness. *Proceedings of the 2019 ACM Symposium on Principles of Distributed Computing* (2019). <https://api.semanticscholar.org/CorpusID:197644531>
- [51] Shijie Zhang, Ru Cheng, Xinpeng Liu, Jiang Xiao, Hai Jin, and Bo Li. 2024. Seer: Accelerating Blockchain Transaction Execution by Fine-Grained Branch Prediction. *Proceedings of the VLDB Endowment* 18, 3 (2024), 822–835.
- [52] Shijie Zhang, Jiang Xiao, Enping Wu, Feng Cheng, Bo Li, Wei Wang, and Hai Jin. 2024. MorphDAG: A Workload-Aware Elastic DAG-Based Blockchain. *IEEE Transactions on Knowledge and Data Engineering* 36 (2024), 5249–5264. <https://api.semanticscholar.org/CorpusID:268831985>
- [53] Zibin Zheng, Shaoan Xie, Hongning Dai, Weili Chen, Xiangping Chen, Jian Weng, and Muhammad Ali Imran. 2019. An Overview on Smart Contracts: Challenges, Advances and Platforms. *Future Gener. Comput. Syst.* 105 (2019), 475–491. <https://api.semanticscholar.org/CorpusID:209444308>
- [54] Weiqin Zou, David Lo, Pavneet Singh Kochhar, Xuan-Bach Dinh Le, Xin Xia, Yang Feng, Zhenyu Chen, and Baowen Xu. 2021. Smart Contract Development: Challenges and Opportunities. *IEEE Transactions on Software Engineering* 47 (2021), 2084–2106. <https://api.semanticscholar.org/CorpusID:204087135>