

# A Little Book of R for Bioinformatics 2.0

Avirl Coghlan, with contributions by Nathan L. Brouwer

2021-07-11



# Contents

<b>Preface to version 2.0</b>	<b>7</b>
<b>1 Downloading R</b>	<b>9</b>
1.1 Preface . . . . .	9
1.2 Introduction to R . . . . .	9
1.3 Installing R . . . . .	9
1.4 Starting <i>R</i> . . . . .	11
<b>2 Installing the RStudio IDE</b>	<b>13</b>
2.1 Getting to know RStudio . . . . .	13
2.2 RStudio versus RStudio Cloud . . . . .	13
<b>3 Installing <i>R</i> packages</b>	<b>15</b>
3.1 Downloading packages with the RStudio IDE . . . . .	15
3.2 Downloading packages with the function <code>install.packages()</code> .	16
3.3 Using packages after they are downloaded . . . . .	16
<b>4 Installing Bioconductor</b>	<b>17</b>
4.1 Bioconductor . . . . .	17
4.2 Installing BiocManager . . . . .	18
4.3 The ins and outs of package installation . . . . .	18
4.4 Actually loading a package . . . . .	21
<b>5 A Brief introduction to R</b>	<b>25</b>
5.1 Vocabulary . . . . .	25
5.2 R functions . . . . .	25
5.3 Interacting with R . . . . .	26
5.4 Variables in R . . . . .	27
5.5 Arguments . . . . .	30
5.6 Help files with <code>help()</code> and <code>?</code> . . . . .	31
5.7 Searching for functions with <code>help.search()</code> and <code>RSiteSearch()</code>	31
5.8 More on functions . . . . .	32
5.9 Quitting R . . . . .	33
5.10 Links and Further Reading . . . . .	33

<b>6</b>	<b>DNA descriptive statics - Part 1</b>	<b>35</b>
6.1	Preface . . . . .	35
6.2	Writing TODO: . . . . .	35
6.3	Introduction . . . . .	35
6.4	Vocabulary . . . . .	35
6.5	Functions . . . . .	36
6.6	Preliminaries . . . . .	36
6.7	Converting DNA from FASTA format . . . . .	36
6.8	Length of a DNA sequence . . . . .	37
6.9	Acknowledgements . . . . .	42
<b>7</b>	<b>Programming in R: for loops</b>	<b>45</b>
7.1	Preface . . . . .	45
7.2	Vocab . . . . .	45
7.3	Functions . . . . .	45
7.4	Basic for loops in in R . . . . .	45
7.5	Challenge: complicated vectors of values . . . . .	47
<b>8</b>	<b>Programming in R: for functions</b>	<b>49</b>
8.1	Preface . . . . .	49
8.2	Vocab . . . . .	49
8.3	Functions . . . . .	49
8.4	Functions in R . . . . .	49
8.5	Comments in R . . . . .	50
<b>9</b>	<b>Mini tutorial: Vectors in R</b>	<b>51</b>
9.1	Preface . . . . .	51
9.2	Vocab . . . . .	51
<b>10</b>	<b>Functions</b>	<b>53</b>
10.1	Vectors in R . . . . .	53
10.2	Math on vectors . . . . .	54
10.3	Functions on vectors . . . . .	55
10.4	Operations with two vectors . . . . .	56
10.5	Subsetting vectors . . . . .	56
10.6	Sequences of numbers . . . . .	57
10.7	Vectors can hold numeric or character data . . . . .	58
10.8	Regular expressions can modify character data . . . . .	58
<b>11</b>	<b>Plotting vectors in base R</b>	<b>61</b>
11.1	Preface . . . . .	61
11.2	Plotting numeric data . . . . .	61
11.3	Other plotting packages . . . . .	65

<i>CONTENTS</i>	5
<b>I Appendices</b>	<b>67</b>
<b>Appendix 01: Getting access to R</b>	<b>71</b>
11.4 Getting Started With R and RStudio . . . . .	71
<b>Getting started with R itself (or not)</b>	<b>73</b>
Vocabulary . . . . .	73
R commands . . . . .	73
11.5 Help! . . . . .	76
11.6 Other features of RStudio . . . . .	77
11.7 Practice (OPTIONAL) . . . . .	78



# Preface to version 2.0

Welcome to *A Little Book of R for Bioinformatics 2.0!*.

This book is based on the original *A Little Book of R for Bioinformatics* by Dr. Avril Coghlan (Hereafter “ALBRB 1.0”). Dr. Coghlan’s book was one of the first and most thorough introductions to using R for bioinformatics, and was generously published under the Creative Commons 3.0 Attribution License (CC BY 3.0). In addition to describing how to do bioinformatics in R, Coghlan provided numerous functions to facilitate important tasks, practice questions, and references to further reading.

ALBRB 1.0 was extremely useful to me when I was learning bioinformatics and computational biology. In this version of the book, which I’ll refer to as ALBRB 2.0, I have adapted Dr. Coghlan’s original book to suit my own teaching needs.

Below I’ve outlined the general types of changes I’ve made to the original book. I have tried to link back to the original content that these updates are derived from and note how changes were made. Any errors or inconsistencies should be ascribed to me, not Dr. Coghlan. If you have any feedback, please email me at [brouwer@gmail.com](mailto:brouwer@gmail.com)

Nathan Brouwer, June 2021

## Changes implemented in ALBRB 2.0 by Nathan Brouwer

1. Converted the entire book to RMarkdown and published it via bookdown.
2. Added instructions for using RStudio and RStudio Cloud.
3. Updated instructions to reflect any changes in software, including changes to how the bioinformatics repository Bioconductor now works.
4. Split up chapters into smaller units.
5. Reorganized the order of some material.
6. Added links to the book I am developing, *Computational Biology for All*.
7. Moved most functions and datasets to my teaching package `compbio4all`.
8. Changed some plotting to `ggplot2` or `ggpubr`.
9. Added additional subheadings
10. Added vocab and function lists to the beginning of many chapters
11. At times replaced non-biological examples with biological ones.
12. Change from British to American English (Sorry! Couldn’t help myself.)

13. Provided additional links to external resources.
14. Added use of **rentrez** for querying NCBI databases



# Chapter 1

## Downloading R

**By:** Avril Coghlan

**Adapted, edited and expanded:** Nathan Brouwer (brouwern@gmail.com)  
under the Creative Commons 3.0 Attribution License (CC BY 3.0).

### 1.1 Preface

The following introduction to *R* is based on the first part of “How to install *R* and a Brief Introduction to R” by Avril Coghlan, which was released under the Creative Commons 3.0 Attribution License (CC BY 3.0). For additional information see the Appendices and “Getting *R* onto your computer”.

### 1.2 Introduction to R

*R* ([www.r-project.org](http://www.r-project.org)) is a commonly used free statistics software. *R* allows you to carry out statistical analyses in an interactive mode, as well as allowing programming.

### 1.3 Installing R

To use R, you first need to install the *R* program on your computer.

#### 1.3.1 Installing *R* on a Windows PC

These instructions will focus on installing *R* on a Windows PC. However, I will also briefly mention how to install *R* on a Macintosh or Linux computer (see below).

These steps have not been checked as of 8/13/2019 so there may be small variations in what the prompts are. Installing R, however, is basically that same as any other program. Clicking “Yes” etc on everything should work.

**PROTIP:** Even if you have used *R* before its good to regularly update it to avoid conflicts with recently produced software.

Minor updates of *R* are made very regularly (approximately every 6 months), as *R* is actively being improved all the time. It is worthwhile installing new versions of *R* a couple times a year, to make sure that you have a recent version of *R* (to ensure compatibility with all the latest versions of the *R* packages that you have downloaded).

To install *R* on your **Windows** computer, follow these steps:

1. Go to <https://cran.r-project.org/>
2. Under “Download and Install R”, click on the “Windows” link.
3. Under “Subdirectories”, click on the “**base**” link.
4. On the next page, you should see a link saying something like “Download *R* 4.1.0 for Windows” (or *R* X.X.X, where X.X.X gives the version of the program). Click on this link.
5. You may be asked if you want to save or run a file “R-x.x.x-win32.exe”. Choose “Save” and save the file. Then double-click on the icon for the file to run it.
6. You will be asked what language to install it in.
7. The *R* Setup Wizard will appear in a window. Click “Next” at the bottom of the *R* Setup wizard window.
8. The next page says “Information” at the top. Click “Next” again.
9. The next page says “Select Destination Location” at the top. By default, it will suggest to install *R* on the C drive in the “Program Files” directory on your computer.
10. Click “Next” at the bottom of the *R* Setup wizard window.
11. The next page says “Select components” at the top. Click “Next” again.
12. The next page says “Startup options” at the top. Click “Next” again.
13. The next page says “Select start menu folder” at the top. Click “Next” again.
14. The next page says “Select additional tasks” at the top. Click “Next” again.
15. *R* should now be installing. This will take about a minute. When *R* has finished, you will see “Completing the *R* for Windows Setup Wizard” appear. Click “Finish”.
16. To start R, you can do one of the following steps:
17. Check if there is an “R” icon on the desktop of the computer that you are using. If so, double-click on the “R” icon to start R. If you cannot find an “R” icon, try the next step instead.
18. Click on the “Start” button at the bottom left of your computer screen, and then choose “All programs”, and start *R* by selecting “R” (or *R* X.X.X,

where X.X.X gives the version of R) from the menu of programs.

19. The *R* console (a rectangle) should pop up:

### 1.3.2 How to install *R* on non-Windows computers (eg. Macintosh or Linux computers)

These steps have not been checked as of 8/13/2019 so there may be small variations in what the prompts are. Installing *R*, however, is basically that same as any other program. Clicking “Yes” etc on everything should work.

The instructions above are for installing *R* on a Windows PC. If you want to install *R* on a computer that has a non-Windows operating system (for example, a Macintosh or computer running Linux, you should download the appropriate *R* installer for that operating system at <https://cran.r-project.org/> and follow the *R* installation instructions for the appropriate operating system at [https://cran.r-project.org/doc/FAQ/R-FAQ.html#How-can-R-be-installed\\_003f](https://cran.r-project.org/doc/FAQ/R-FAQ.html#How-can-R-be-installed_003f).

## 1.4 Starting *R*

To start *R*, Check if there is an *R* icon on the desktop of the computer that you are using. If so, double-click on the *R* icon to start *R*. If you cannot find an *R* icon, try the next step instead.

You can also start *R* from the Start menu in Windows. Click on the “Start” button at the bottom left of your computer screen, and then choose “All programs”, and start *R* by selecting “R” (or *R* X.X.X, where X.X.X gives the version of *R*, e.g.. *R* 2.10.0) from the menu of programs.

Say “Hi” to *R* and take a quick look at how it looks. Now say “Goodbye”, because we will never actually do any work in this version of *R*; instead, we’ll use the **RStudio IDE (integrated development environment)**.



## Chapter 2

# Installing the RStudio IDE

**By:** Nathan Brouwer

The name “R” refers both to the programming language and the program that runs that language. When you download *itR*\* there is also a basic **GUI** (graphical user interface) that you can access via the *R* icon.

Other GUIs are available, and the most popular currently is **RStudio**. RStudio a for-profit company that is a main driver of development of R. Much of what they produce has free basic versions or is entirely free. They produce software (RStudio), cloud-based applications (**RStudio Cloud**), and web server infrastructure for business applications of R.

A brief overview of installing RStudio can be found here “Getting RStudio on to your computer”

## 2.1 Getting to know RStudio

For a brief overview of RStudio see “Getting started with RStudio”

A good overview of what the different parts of RStudio can be seen in the image in this tweet: <https://twitter.com/RLadiesNCL/status/1138812826917724160?s=20>

## 2.2 RStudio versus RStudio Cloud

RStudio and RStudio cloud work almost identically, so anything you read about RStudio will apply to RStudio Cloud. RStudio is easy to download and use, but RStudio Cloud eliminates even the minor hiccups that occur. Free accounts with RStudio Cloud allow up to 15 hours per month, which is enough for you to get a taste for using R.



## Chapter 3

# Installing *R* packages

**By:** Avril Coghlan.

**Adapted, edited and expanded:** Nathan Brouwer under the Creative Commons 3.0 Attribution License (CC BY 3.0).

*R* is a programming language, and **packages** (aka **libraries**) are bundles of software built using *R*. Most sessions using *R* involve using additional *R* packages. This is especially true for bioinformatics and computational biology.

**NOTE:** If you are working in an RStudio Cloud environment organized by someone else (e.g. a course instructor), they likely are taking care of many of the package management issues. The following information is still useful to be familiar with.

### 3.1 Downloading packages with the RStudio IDE

There is a point-and-click interface for installing *R* packages in RStudio. There is a brief introduction to downloading packages on this site: <http://web.cs.ucla.edu/~gulzar/rstudio/>

I've summarized it here:

1. “Click on the”Packages” tab in the bottom-right section and then click on “Install”. The following dialog box will appear.
2. In the “Install Packages” dialog, write the package name you want to install under the Packages field and then click install. This will install the package you searched for or give you a list of matching package based on your package text.

## 3.2 Downloading packages with the function `install.packages()`

The easiest way to install a package if you know its name is to use the *R* function `install.packages()`<sup>1</sup>. Note that it might be better to call this “download.packages” since after you install it, you also have to load it!

Frequently I will include `install.packages(...)` at the beginning of a chapter the first time we use a package to make sure the package is downloaded. Note, however, that if you already have downloaded the package, running `install.packages(...)` will download a new copy. While packages do get updated from time to time, but its best to re-run `install.packages(...)` only occasionally.

We’ll download a package used for plotting called `ggplot2`, which stands for “Grammar of Graphics.” `ggplot2` was developed by Dr. Hadley Wickham, who is now the Chief Scientists for RStudio.

To download `ggplot2`, run the following command:

```
install.packages("ggplot2") # note the " "
```

Often when you download a package you’ll see a fair bit of angry-looking red text, and sometime other things will pop up. Usually there’s nothing of interest here, but sometimes you need to read things carefully over it for hints about why something didn’t work.

## 3.3 Using packages after they are downloaded

To actually make the functions in package accessible you need to use the `library()` command. Note that this is *not* in quotes.

```
library(ggplot2) # note: NO " "
```



## Chapter 4

# Installing Bioconductor

**By:** Avril Coghlan.

**Adapted, edited and expanded:** Nathan Brouwer under the Creative Commons 3.0 Attribution License (CC BY 3.0), including details on install Bioconductor and common prompts and error messages that appear during installation.

### 4.1 Bioconductor

*R* **packages** (aka “libraries”) can live in many places. Most are accessed via **CRAN**, the **Comprehensive R Archive Network**. The bioinformatics and computational biology community also has its own package hosting system called Bioconductor. *R* has played an important part in the development and application of bioinformatics techniques in the 21th century. Bioconductor 1.0 was released in 2002 with 15 packages. As of winter 2021, there are almost 2000 packages in the current release!

**NOTE:** If you are working in an RStudio Cloud environment organized by someone else (eg a course instructor), they likely are taking care of most of package management issues, including setting up Bioconductor. The following information is still useful to be familiar with.

To interface with Bioconductor you need the BiocManager package. The Bioconductor people have put BiocManager on CRAN to allow you to set up interactions with Bioconductor. See the BiocManager documentation for more information (<https://cran.r-project.org/web/packages/BiocManager/vignettes/BiocManager.html>).

Note that if you have an old version of R you will need to update it to interact with Bioconductor.

## 4.2 Installing BiocManager

BiocManager can be installed using the `install.packages()` packages command.

```
install.packages("BiocManager") # Remember the " "; don't worry about the red text
```

Once downloaded, BioManager needs to be explicitly loaded into your active R session using `library()`

```
library(BiocManager) # no quotes; again, ignore the red text
```

Individual Bioconductor packages can then be downloaded using the `install()` command. An essential packages is `Biostrings`. To do this ,

```
BiocManager::install("Biostrings")
```

## 4.3 The ins and outs of package installation

**IMPORTANT** Bioconductor has many **dependencies** - other packages which it relies on. When you install Bioconductor packages you may need to update these packages. If something seems to not be working during this process, restart R and begin the Bioconductor installation process until things seem to work.

Below I discuss the series of prompts I had to deal with while re-installing `Biostrings` while editing this chapter.

### 4.3.1 Updating other packages when downloading a package

When I re-installed `Biostrings` while writing this I was given a HUGE blog of red text that contained this:

```
'getOption("repos")' replaces Bioconductor standard repositories, see '?repositories' for details
```

```
replacement repositories:
  CRAN: https://cran.rstudio.com/
```

```
Bioconductor version 3.11 (BiocManager 1.30.16), R 4.0.5 (2021-03-31)
```

```
Old packages: 'ade4', 'ape', 'aster', 'bayestestR', 'bio3d', 'bitops', 'blogdown',
'bookdown', 'brio', 'broom', 'broom.mixed', 'broomExtra', 'bslib', 'cachem', 'callr',
'car', 'circlize', 'class', 'cli', 'cluster', 'colorspace', 'corrplot', 'cpp11', 'cun',
'devtools', 'DHARMA', 'doBy', 'dplyr', 'DT', 'e1071', 'ellipsis', 'emmeans', 'emojif',
'extRemes', 'fansi', 'flextable', 'forecast', 'formatR', 'gap', 'gargle', 'gert', 'G',
'ggfortify', 'ggplot2', 'ggsignif', 'ggVennDiagram', 'gh', 'glmmTMB', 'googledrive',
'gttools', 'haven', 'highr', 'hms', 'htmlTable', 'httpuv', 'huxtable', 'jquerylib',
'KernSmooth', 'knitr', 'later', 'lattice', 'lme4', 'magick', 'manipulateWidget', 'MA'
```

```
'Matrix', 'matrixcalc', 'matrixStats', 'mgcv', 'mime', 'multcomp', 'mvtnorm', 'nnet',  
'openssl', 'openxlsx', 'parameters', 'pBrackets', 'pdftools', 'phangorn', 'phytools',  
'pillar', 'plotly', 'processx', 'proxy', 'qgam', 'quantreg', 'ragg', 'Rcpp',  
'RcppArmadillo', 'remotes', 'rgl', 'rio', 'rJava', 'rlang', 'rmarkdown', 'robustbase',  
'rsconnect', 'rversions', 'sandwich', 'sass', 'segmented', 'seqinr', 'seqmagick', 'servr',  
'sf', 'shape', 'spatial', 'statmod', 'stringi', 'systemfonts', 'testthat', 'textshaping',  
'tibble', 'tidyselect', 'tidytree', 'tinytex', 'tufte', 'UniprotR', 'units', 'vctrs',  
'viridis', 'viridisLite', 'withr', 'xfun', 'zip'
```

Hidden at the bottom was a prompt: “Update all/some/none? [a/s/n]:”

Its a little vague, but what it wants me to do is type in a, s or n and press enter to tell it what to do. I almost always chose “a”, though this may take a while to update everything.

### 4.3.2 Packages “from source”

You are likely to get lots of random-looking feedback from R when doing Bioconductor-related installations. Look carefully for any prompts as the very last line. While updating `Biostings` I was told: “*There are binary versions available but the source versions are later:*” and given a table of packages. I was then asked “*Do you want to install from sources the packages which need compilation? (Yes/no/cancel)*”

I almost always chose “no”.

### 4.3.3 More on angry red text

After the prompt about packages from source, R proceeded to download a lot of updates to packages, which took a few minutes. Lots of red text scrolled by, but this is normal.

```
Console Terminal x R Markdown x Jobs x
~/google_backup_sync_nlb24/lbrb/ ↗
trying URL 'https://cran.rstudio.com/bin/macosx/contrib/4.0/t
Content type 'application/x-gzip' length 198800 bytes (194 KB)
=====
downloaded 194 KB

trying URL 'https://cran.rstudio.com/bin/macosx/contrib/4.0/t
Content type 'application/x-gzip' length 220977 bytes (215 KB)
=====
downloaded 215 KB

trying URL 'https://cran.rstudio.com/bin/macosx/contrib/4.0/t
Content type 'application/x-gzip' length 121221 bytes (118 KB)
=====
downloaded 118 KB

trying URL 'https://cran.rstudio.com/bin/macosx/contrib/4.0/t
Content type 'application/x-gzip' length 269000 bytes (262 KB)
=====
downloaded 262 KB

trying URL 'https://cran.rstudio.com/bin/macosx/contrib/4.0/U
Content type 'application/x-gzip' length 236776 bytes (231 KB)
=====
downloaded 231 KB


trying URL 'https://cran.rstudio.com/bin/macosx/contrib/4.0/u
Content type 'application/x-gzip' length 1260870 bytes (1.2 M)
=====
```

## 4.4 Actually loading a package

Again, to actually load the `Biostings` package into your active R sessions requires the `library()` command:

```
library(Biostings)
```

As you might expect, there's more red text scrolling up my screen!

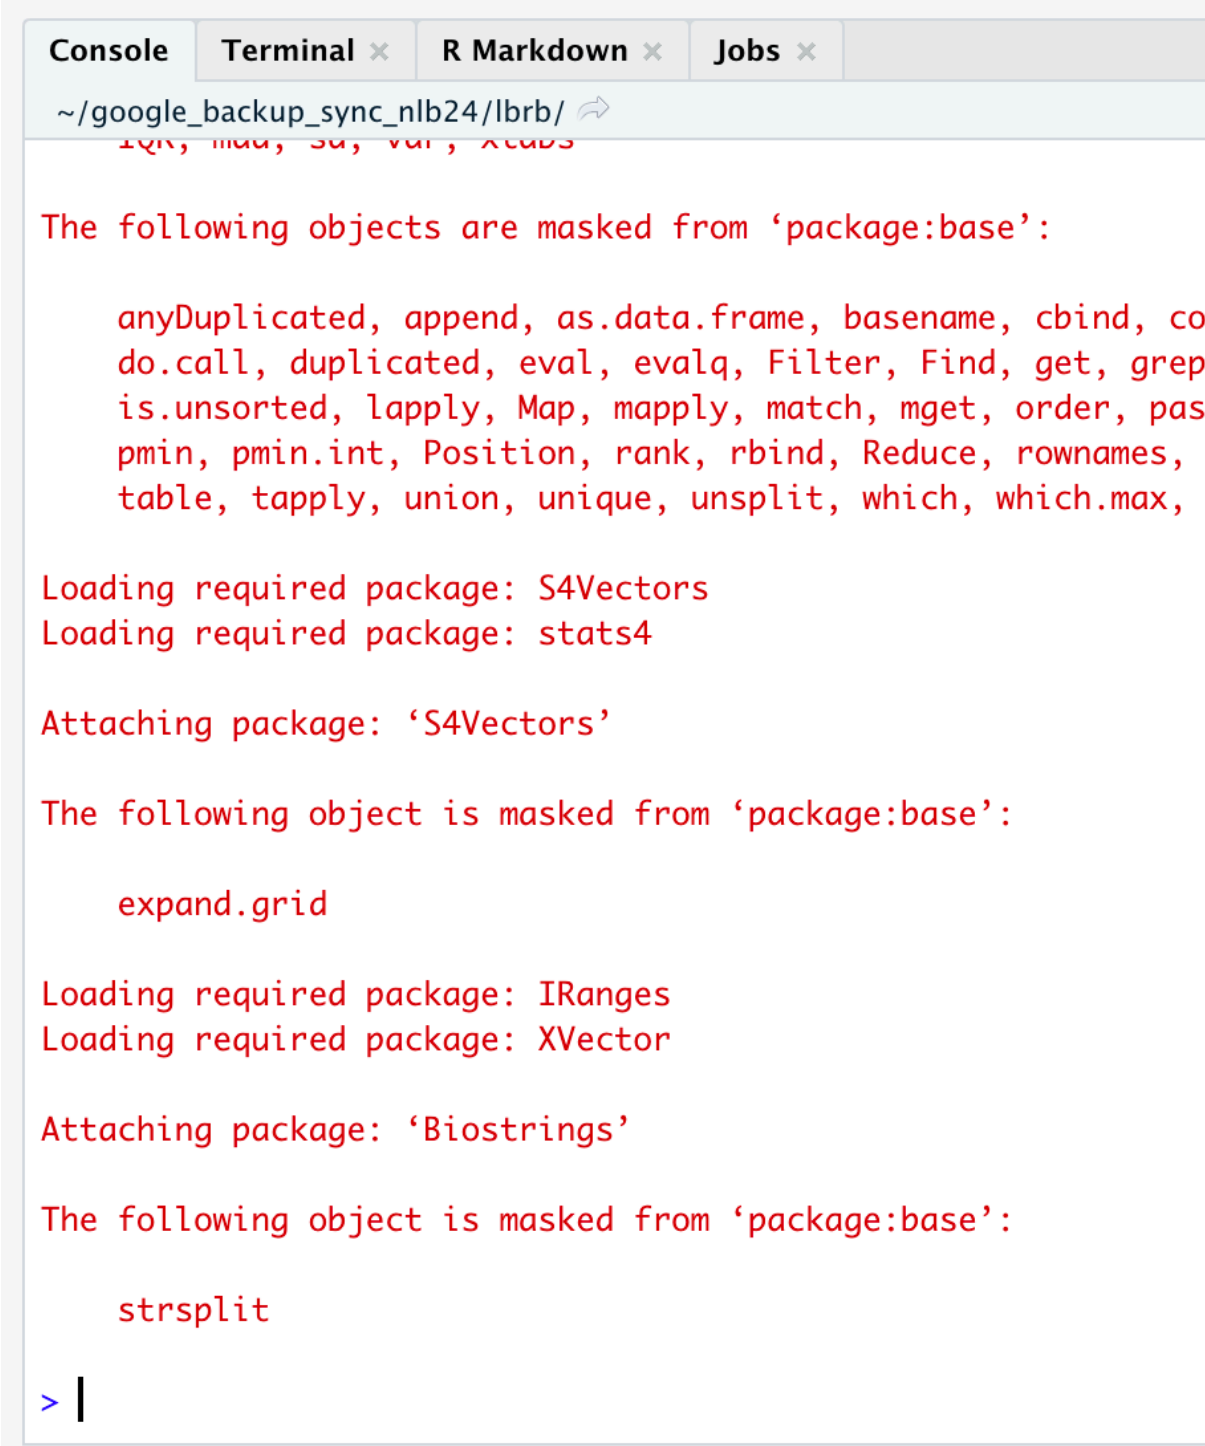

The screenshot shows an R console window with tabs for 'Console', 'Terminal', 'R Markdown', and 'Jobs'. The console output is as follows:

```
~/google_backup_sync_nlb24/lbrb/ ↵  
lqr, mda, sa, var, xabs  
  
The following objects are masked from 'package:base':  
  
    anyDuplicated, append, as.data.frame, basename, cbind, co  
do.call, duplicated, eval, evalq, Filter, Find, get, grep  
is.unsorted, lapply, Map, mapply, match, mget, order, pas  
pmin, pmin.int, Position, rank, rbind, Reduce, rownames,  
table, tapply, union, unique, unsplit, which, which.max,  
  
Loading required package: S4Vectors  
Loading required package: stats4  
  
Attaching package: 'S4Vectors'  
  
The following object is masked from 'package:base':  
  
    expand.grid  
  
Loading required package: IRanges  
Loading required package: XVector  
  
Attaching package: 'Biostrings'  
  
The following object is masked from 'package:base':  
  
    strsplit  
  
> |
```

I can tell that is actually worked because at the end of all the red stuff is the R prompt of “>” and my cursor.







## Chapter 5

# A Brief introduction to R

**By:** Avril Coghlan.

**Adapted, edited and expanded:** Nathan Brouwer under the Creative Commons 3.0 Attribution License (CC BY 3.0).

This chapter provides a brief introduction to R. At the end of are links to additional resources for getting started with R.

### 5.1 Vocabulary

- scalar
- vector
- list
- class
- numeric
- character
- assignment
- elements of an object
- indices
- attributes of an object
- argument of a function

### 5.2 R functions

- `<-`
- `[]`
- `$`
- `table()`
- function

- `c()`
- `log10()`
- `help()`, `?`
- `help.search()`
- `RSiteSearch()`
- `mean()`
- `return()`
- `q()`

### 5.3 Interacting with R

You will type *R* commands into the RStudio **console** in order to carry out analyses in *R*. In the RStudio console you will see the *R* prompt starting with the symbol “>”. “>” will always be there at the beginning of each new command - don’t try to delete it! Moreover, you never need to type it.



We type the **commands** needed for a particular task after this prompt. The command is carried out by *R* after you hit the Return key.

Once you have started *R*, you can start typing commands into the RStudio console, and the results will be calculated immediately, for example:

```
2*3
```

```
## [1] 6
```

Note that prior to the output of “6” it shows “[1]”.

Now subtraction:

```
10-3
```

```
## [1] 7
```

Again, prior to the output of “7” it shows “[1]”.

*R* can act like a basic calculator that you type commands in to. You can also use it like a more advanced scientific calculator and create **variables** that store information. All variables created by *R* are called **objects**. In *R*, we assign values to variables using an arrow-looking function `<-` the **assignment operator**. For example, we can **assign** the value `2*3` to the variable `x` using the command:

```
x <- 2*3
```

To view the contents of any *R* object, just type its name, press enter, and the contents of that *R* object will be displayed:

```
x  
## [1] 6
```

## 5.4 Variables in R

There are several different types of objects in R with fancy math names, including **scalars**, **vectors**, **matrices** (singular: **matrix**), arrays, dataframes, tables, **and** lists. The scalar\*\* variable `x` above is one example of an R object. While a scalar variable such as `x` has just one element, a **vector** consists of several elements. The elements in a vector are all of the same **type** (e.g., numbers or alphabetic characters), while **lists** may include elements such as characters as well as numeric quantities. Vectors and dataframes are the most common variables you'll use. You'll also encounter matrices often, and lists are ubiquitous in R but beginning users often don't encounter them because they remain behind the scenes.

### 5.4.1 Vectors

To create a vector, we can use the `c()` (combine) function. For example, to create a vector called `myvector` that has elements with values 8, 6, 9, 10, and 5, we type:

```
myvector <- c(8, 6, 9, 10, 5) # note: commas between each number!
```

To see the contents of the variable `myvector`, we can just type its name and press enter:

```
myvector  
## [1] 8 6 9 10 5
```

### 5.4.2 Vector indexing

The `[1]` is the **index** of the first **element** in the vector. We can **extract** any element of the vector by typing the vector name with the index of that element given in **square brackets** `[...]`.

For example, to get the value of the 4th element in the vector `myvector`, we type:

```
myvector[4]  
## [1] 10
```

### 5.4.3 Character vectors

Vectors can contain letters, such as those designating nucleic acids

```
my.seq <- c("A","T","C","G")
```

They can also contain multi-letter **strings**:

```
my.oligos <- c("ATCGC","TTTCGC","CCCGCG","GGGCGC")
```

#### 5.4.4 Lists

**NOTE:** *below is a discussion of lists in R. This is excellent information, but not necessary if this is your very very first time using R.*

In contrast to a vector, a **list** can contain elements of different types, for example, both numbers and letters. A list can even include other variables such as a vector. The `list()` function is used to create a list. For example, we could create a list `mylist` by typing:

```
mylist <- list(name="Charles Darwin",
               wife="Emma Darwin",
               myvector)
```

We can then print out the contents of the list `mylist` by typing its name:

```
mylist

## $name
## [1] "Charles Darwin"
##
## $wife
## [1] "Emma Darwin"
##
## [[3]]
## [1] 8 6 9 10 5
```

The **elements** in a list are numbered, and can be referred to using **indices**. We can extract an element of a list by typing the list name with the index of the element given in double **square brackets** (in contrast to a vector, where we only use single square brackets).

We can extract the second element from `mylist` by typing:

```
mylist[[2]] # note the double square brackets [[...]]

## [1] "Emma Darwin"
```

As a baby step towards our next task, we can wrap index values as in the `c()` command like this:

```
mylist[[c(2)]] # note the double square brackets [[...]]

## [1] "Emma Darwin"
```

The number 2 and `c(2)` mean the same thing.

Now, we can extract the second AND third elements from `mylist`. First, we put the indices 2 and 3 into a vector `c(2,3)`, then wrap that vector in double square brackets: `[c(2,3)]`. All together it looks like this.

```
mylist[c(2,3)] # note the double brackets
```

```
## $wife
## [1] "Emma Darwin"
##
## [[2]]
## [1] 8 6 9 10 5
```

Elements of lists may also be named, resulting in a **named lists**. The elements may then be referred to by giving the list name, followed by “\$”, followed by the element name. For example, `mylist$name` is the same as `mylist[[1]]` and `mylist$wife` is the same as `mylist[[2]]`:

```
mylist$wife
```

```
## [1] "Emma Darwin"
```

We can find out the names of the named elements in a list by using the `attributes()` function, for example:

```
attributes(mylist)
```

```
## $names
## [1] "name" "wife" ""
```

When you use the `attributes()` function to find the named elements of a list variable, the named elements are always listed under a heading “\$names”. Therefore, we see that the named elements of the list variable `mylist` are called “name” and “wife”, and we can retrieve their values by typing `mylist$name` and `mylist$wife`, respectively.

### 5.4.5 Tables

Another type of object that you will encounter in R is a **table**. The `table()` function allows you to total up or tabulate the number of times a value occurs within a vector. Tables are typically used on vectors containing **character data**, such as letters, words, or names, but can work on numeric data data.

#### 5.4.5.1 Tables - The basics

If we made a vector variable “nucleotides” containing the of a DNA molecule, we can use the `table()` function to produce a **table variable** that contains the number of bases with each possible nucleotides:

```
bases <- c("A", "T", "A", "A", "T", "C", "G", "C", "G")
```

Now make the table

```
table(bases)
```

```
## bases
## A C G T
## 3 2 2 2
```

We can store the table variable produced by the function `table()`, and call the stored table “bases.table”, by typing:

```
bases.table <- table(bases)
```

Tables also work on vectors containing numbers. First, a vector of numbers.

```
numeric.vector <- c(1,1,1,1,3,4,4,4,4)
```

Second, a table, showing how many times each number occurs.

```
table(numeric.vector)
```

```
## numeric.vector
## 1 3 4
## 4 1 4
```

#### 5.4.5.2 Tables - further details

To access elements in a table variable, you need to use double square brackets, just like accessing elements in a list. For example, to access the fourth element in the table `bases.table` (the number of Ts in the sequence), we type:

```
bases.table[[4]] # double brackets!
```

```
## [1] 2
```

Alternatively, you can use the name of the fourth element in the table (“John”) to find the value of that table element:

```
bases.table[["T"]]
```

```
## [1] 2
```

## 5.5 Arguments

Functions in R usually require **arguments**, which are input variables (i.e.. objects) that are **passed** to them, which they then carry out some operation on. For example, the `log10()` function is passed a number, and it then calculates the log to the base 10 of that number:

```
log10(100)
```

```
## [1] 2
```

There's a more generic function, `log()`, where we pass it not only a number to take the log of, but also the specific **base** of the logarithm. To take the log base 10 with the `log()` function we do this

```
log(100, base = 10)
```

```
## [1] 2
```

We can also take logs with other bases, such as 2:

```
log(100, base = 2)
```

```
## [1] 6.643856
```

## 5.6 Help files with `help()` and `?`

In *R*, you can get help about a particular function by using the `help()` function. For example, if you want help about the `log10()` function, you can type:

```
help("log10")
```

When you use the `help()` function, a box or web page will show up in one of the panes of RStudio with information about the function that you asked for help with. You can also use the `?` next to the function like this

```
?log10
```

Help files are a mixed bag in *R*, and it can take some getting used to them. An excellent overview of this is Kieran Healy's "How to read an *R* help page."

## 5.7 Searching for functions with `help.search()` and `RSiteSearch()`

If you are not sure of the name of a function, but think you know part of its name, you can search for the function name using the `help.search()` and `RSiteSearch()` functions. The `help.search()` function searches to see if you already have a function installed (from one of the *R* packages that you have installed) that may be related to some topic you're interested in. `RSiteSearch()` searches *all* *R* functions (including those in packages that you haven't yet installed) for functions related to the topic you are interested in.

For example, if you want to know if there is a function to calculate the standard deviation (SD) of a set of numbers, you can search for the names of all installed functions containing the word "deviation" in their description by typing:

```
help.search("deviation")
```

Among the functions that were found, is the function `sd()` in the `stats` package (an R package that comes with the base R installation), which is used for calculating the standard deviation.

Now, instead of searching just the packages we've have on our computer let's search all R packages on CRAN. Let's look for things related to DNA. Note that `RSiteSearch()` doesn't provide output within RStudio, but rather opens up your web browser for you to display the results.

```
RSiteSearch("DNA")
```

The results of the `RSiteSearch()` function will be hits to descriptions of R functions, as well as to R mailing list discussions of those functions.

## 5.8 More on functions

We can perform computations with R using objects such as scalars and vectors. For example, to calculate the average of the values in the vector `myvector` (i.e., the average of 8, 6, 9, 10 and 5), we can use the `mean()` function:

```
mean(myvector) # note: no " "
```

```
## [1] 7.6
```

We have been using built-in R functions such as `mean()`, `length()`, `print()`, `plot()`, etc.

### 5.8.1 Writing your own functions

**NOTE:** \*Writing your own functions is an advanced skills. New users can skip this section.

We can also create our own functions in R to do calculations that you want to carry out very often on different input data sets. For example, we can create a function to calculate the value of 20 plus square of some input number:

```
myfunction <- function(x) { return(20 + (x*x)) }
```

This function will calculate the square of a number (`x`), and then add 20 to that value. The `return()` statement returns the calculated value. Once you have typed in this function, the function is then available for use. For example, we can use the function for different input numbers (e.g., 10, 25):

```
myfunction(10)
```

```
## [1] 120
```



## 5.9 Quitting R

To quit R either close the program, or type:

```
q()
```

## 5.10 Links and Further Reading

Some links are included here for further reading.

For a more in-depth introduction to R, a good online tutorial is available on the “Kickstarting R” website, [cran.r-project.org/doc/contrib/Lemon-kickstart](http://cran.r-project.org/doc/contrib/Lemon-kickstart).

There is another nice (slightly more in-depth) tutorial to R available on the “Introduction to R” website, [cran.r-project.org/doc/manuals/R-intro.html](http://cran.r-project.org/doc/manuals/R-intro.html).

Chapter 3 of Danielle Navarro’s book is an excellent intro to the basics of R.



## Chapter 6

# DNA descriptive statics - Part 1

**By:** Avril Coghlan

**Adapted, edited and expanded:** Nathan Brouwer (brouwern@gmail.com)  
under the Creative Commons 3.0 Attribution License (CC BY 3.0).

### 6.1 Preface

This is a modification of “DNA Sequence Statistics (1)” from Avril Coghlan’s *A little book of R for bioinformatics..* The text and code were originally written by Dr. Coghlan and distributed under the Creative Commons 3.0 license.

### 6.2 Writing TODO:

- Add biology introduction
- Work on flow
- organize intial sections (intro, vocab, preliminaries)

### 6.3 Introduction

### 6.4 Vocabulary

- GC content
- DNA words
- scatterplots, histograms, piecharts, and boxplots

## 6.5 Functions

- `seqinr::GC()`
- `seqinr::count()`

## 6.6 Preliminaries

```
library(compbio4all)
library(seqinr)
```

## 6.7 Converting DNA from FASTA format

In a previous exercise we downloaded and examined DNA sequence in the FASTA format. The sequence we worked with is also stored as a data file within the `compbio4all` package and can be brought into memory using the `data()` command.

```
data("dengueseq_fasta")
```

We can look at this data object with the `str()` command

```
str(dengueseq_fasta)
```

```
## chr ">NC_001477.1 Dengue virus 1, complete genome\nAGTTGTTAGTCTACGTGGACCGACAAGAACA"
```

This isn't in a format we can work with directly so we'll use the function `fasta_cleaner()` to set it up.

```
header. <- ">NC_001477.1 Dengue virus 1, complete genome"
dengueseq_vector <- compbio4all::fasta_cleaner(dengueseq_fasta)
```

Now check it out.

```
str(dengueseq_vector)
```

```
## chr [1:10735] "A" "G" "T" "T" "G" "T" "T" "A" "G" "T" "C" "T" "A" "C" "G" ...
```

What we have here is each base of the sequence in a separate slot of our vector.

The first four bases are "AGTT"

We can see the first one like this

```
dengueseq_vector[1]
```

```
## [1] "A"
```

The second one like this

```
dengueseq_vector[2]
```

```
## [1] "G"
```

The first and second like this

```
dengueseq_vector[1:2]
```

```
## [1] "A" "G"
```

and all four like this

```
dengueseq_vector[1:4]
```

```
## [1] "A" "G" "T" "T"
```

## 6.8 Length of a DNA sequence

Once you have retrieved a DNA sequence, we can obtain some simple statistics to describe that sequence, such as the sequence's total length in nucleotides. In the above example, we retrieved the DEN-1 Dengue virus genome sequence, and stored it in the vector variable `dengueseq_vector`. To obtain the length of the genome sequence, we would use the `length()` function, typing:

```
length(dengueseq_vector)
```

```
## [1] 10735
```

The `length()` function will give you back the length of the sequence stored in variable `dengueseq_vector`, in nucleotides. The `length()` function actually gives the number of **elements** (slots) in the input vector that you passed to it, which in this case is the number of elements in the vector `dengueseq_vector`. Since each element of the vector `dengueseq_vector` contains one nucleotide of the DEN-1 Dengue virus sequence, the result for the DEN-1 Dengue virus genome tells us the length of its genome sequence (ie. 10735 nucleotides long).

### 6.8.1 Base composition of a DNA sequence

An obvious first analysis of any DNA sequence is to count the number of occurrences of the four different nucleotides ("A", "C", "G", and "T") in the sequence. This can be done using the `table()` function. For example, to find the number of As, Cs, Gs, and Ts in the DEN-1 Dengue virus sequence (which you have put into vector variable `dengueseq_vector`, using the commands above), you would type:

```
table(dengueseq_vector)
```

```
## dengueseq_vector
```

```
##      A      C      G      T
```

```
## 3426 2240 2770 2299
```

This means that the DEN-1 Dengue virus genome sequence has 3426 As occurring throughout the genome, 2240 Cs, and so forth.

### 6.8.2 GC Content of DNA

One of the most fundamental properties of a genome sequence is its **GC content**, the fraction of the sequence that consists of Gs and Cs, ie. the  $\%(G+C)$ .

The GC content can be calculated as the percentage of the bases in the genome that are Gs or Cs. That is,  $GC\ content = (\text{number of Gs} + \text{number of Cs}) / (\text{genome length})$ . For example, if the genome is 100 bp, and 20 bases are Gs and 21 bases are Cs, then the GC content is  $(20 + 21) / 100 = 41\%$ .

You can easily calculate the GC content based on the number of As, Gs, Cs, and Ts in the genome sequence. For example, for the DEN-1 Dengue virus genome sequence, we know from using the `table()` function above that the genome contains 3426 As, 2240 Cs, 2770 Gs and 2299 Ts. Therefore, we can calculate the GC content using the command:

```
(2240+2770)*100/(3426+2240+2770+2299)
```

```
## [1] 46.66977
```

Alternatively, if you are feeling lazy, you can use the `GC()` function in the `SeqinR` package, which gives the fraction of bases in the sequence that are Gs or Cs.

```
seqinr::GC(dengueseq_vector)
```

```
## [1] 0.4666977
```

The result above means that the fraction of bases in the DEN-1 Dengue virus genome that are Gs or Cs is 0.4666977. To convert the fraction to a percentage, we have to multiply by 100, so the GC content as a percentage is 46.66977%.

### 6.8.3 DNA words

As well as the frequency of each of the individual nucleotides (“A”, “G”, “T”, “C”) in a DNA sequence, it is also interesting to know the frequency of longer **DNA words**, also referred to as **genomic words**. The individual nucleotides are DNA words that are 1 nucleotide long, but we may also want to find out the frequency of DNA words that are 2 nucleotides long (ie. “AA”, “AG”, “AC”, “AT”, “CA”, “CG”, “CC”, “CT”, “GA”, “GG”, “GC”, “GT”, “TA”, “TG”, “TC”, and “TT”), 3 nucleotides long (eg. “AAA”, “AAT”, “ACG”, etc.), 4 nucleotides long, etc.

To find the number of occurrences of DNA words of a particular length, we can use the `count()` function from the `R SeqinR` package.

The `count()` function only works with lower-case letters, so first we have to use the `tolower()` function to convert our upper class genome to lower case

```
dengueseq_vector <- tolower(dengueseq_vector)
```

Now we can look for words. For example, to find the number of occurrences of DNA words that are 1 nucleotide long in the sequence `dengueseq_vector`, we type:

```
seqinr::count(dengueseq_vector, 1)
```

```
##
##      a      c      g      t
## 3426 2240 2770 2299
```

As expected, this gives us the number of occurrences of the individual nucleotides. To find the number of occurrences of DNA words that are 2 nucleotides long, we type:

```
seqinr::count(dengueseq_vector, 2)
```

```
##
##   aa   ac   ag   at   ca   cc   cg   ct   ga   gc   gg   gt   ta   tc   tg   tt
## 1108  720  890  708  901  523  261  555  976  500  787  507  440  497  832  529
```

Note that by default the `count()` function includes all overlapping DNA words in a sequence. Therefore, for example, the sequence “ATG” is considered to contain two words that are two nucleotides long: “AT” and “TG”.

If you type `help('count')`, you will see that the result (output) of the function `count()` is a table object. This means that you can use double square brackets to extract the values of elements from the table. For example, to extract the value of the third element (the number of Gs in the DEN-1 Dengue virus sequence), you can type:

```
denguetable_2 <- seqinr::count(dengueseq_vector, 2)
denguetable_2[[3]]
```

```
## [1] 890
```

The command above extracts the third element of the table produced by `count(dengueseq_vector, 1)`, which we have stored in the table variable `denguetable`.


Alternatively, you can find the value of the element of the table in column “g” by typing:

```
denguetable_2[["aa"]]
```

```
## [1] 1108
```

Once you have table you can make a basic plot

```
barplot(denguetable_2)
```

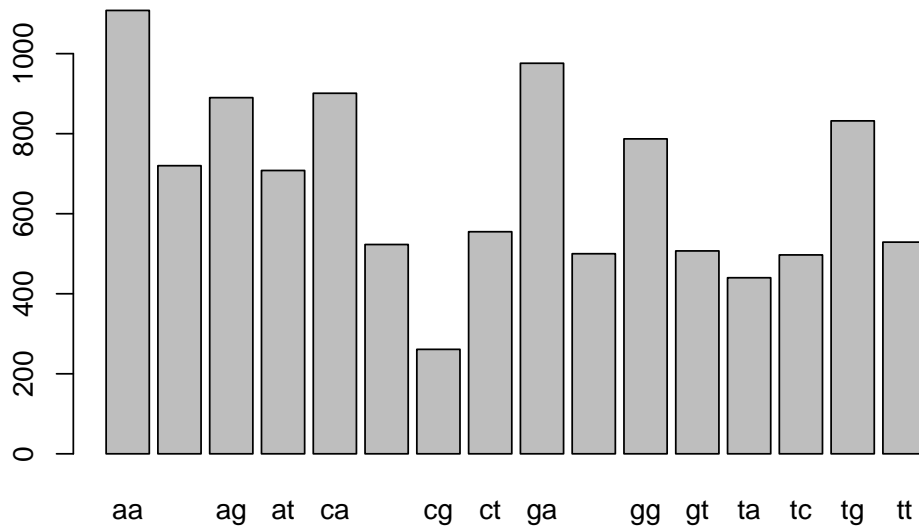

We can sort by the number of words using the `sort()` command

```
sort(denguetable_2)
```


```
##
##  cg  ta  tc  gc  gt  cc  tt  ct  at  ac  gg  tg  ag  ca  ga  aa
## 261 440 497 500 507 523 529 555 708 720 787 832 890 901 976 1108
```

Let's save over the original object

```
denguetable_2 <- sort(denguetable_2)
```

```
barplot(denguetable_2)
```



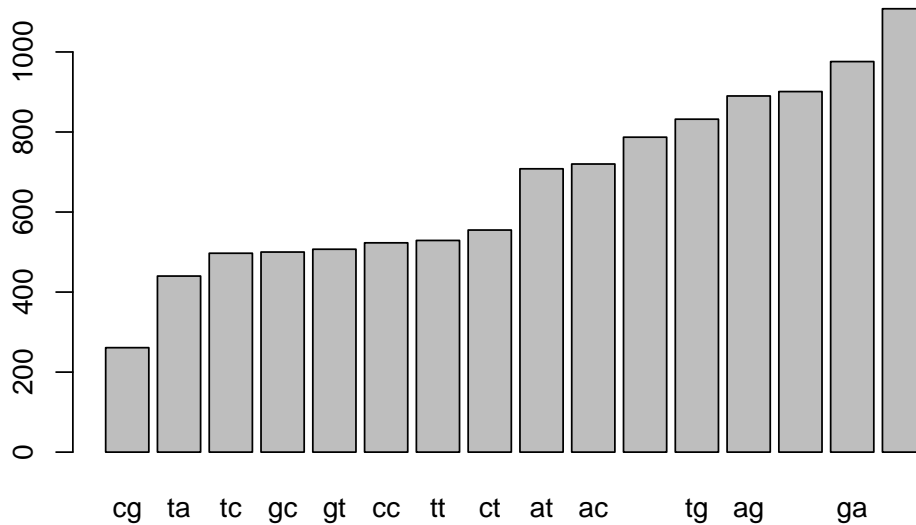


R will automatically try to optimize the appearance of the labels on the graph so you may not see all of them; no worries.

R can also make pie charts. Piecharts only really work when there are a few items being plots, like the four bases.

```
denguetable_1 <- seqinr::count(dengueseq_vector,1)
```

Make a piechart with pie()

```
pie(denguetable_1)
```

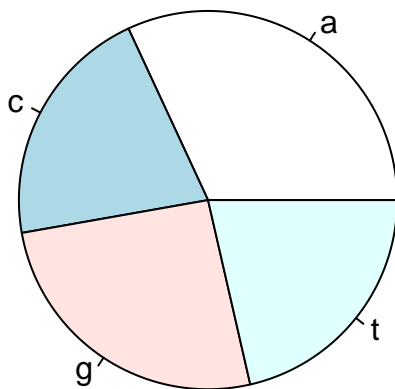

#### 6.8.4 Summary

In this practical, have learned to use the following R functions:

length() for finding the length of a vector or list table() for printing out a table of the number of occurrences of each type of item in a vector or list. These

functions belong to the standard installation of R.

You have also learnt the following R functions that belong to the SeqinR package:

GC() for calculating the GC content for a DNA sequence  
 count() for calculating the number of occurrences of DNA words of a particular length in a DNA sequence

## 6.9 Acknowledgements

This is a modification of “DNA Sequence Statistics (1)” from Avril Coghlan’s *A little book of R for bioinformatics*. Almost all of text and code was originally written by Dr. Coghlan and distributed under the Creative Commons 3.0 license.

In “A little book...” Coghlan noted: “Many of the ideas for the examples and exercises for this chapter were inspired by the Matlab case studies on *Haemophilus influenzae* ([www.computational-genomics.net/case\\_studies/haemophilus\\_demo.html](http://www.computational-genomics.net/case_studies/haemophilus_demo.html)) and Bacteriophage lambda ([http://www.computational-genomics.net/case\\_studies/lambdaphage\\_demo.html](http://www.computational-genomics.net/case_studies/lambdaphage_demo.html)) from the website that accompanies the book *Introduction to Computational Genomics: a case studies approach* by Cristianini and Hahn (Cambridge University Press; [www.computational-genomics.net/book/](http://www.computational-genomics.net/book/)).”

### 6.9.1 License

The content in this book is licensed under a Creative Commons Attribution 3.0 License.

<https://creativecommons.org/licenses/by/3.0/us/>

### 6.9.2 Exercises

Answer the following questions, using the R package. For each question, please record your answer, and what you typed into R to get this answer.

Model answers to the exercises are given in *Answers to the exercises on DNA Sequence Statistics (1)*.

1. What are the last twenty nucleotides of the Dengue virus genome sequence?
2. What is the length in nucleotides of the genome sequence for the bacterium *Mycobacterium leprae* strain TN (accession NC\_002677)? Note: *Mycobacterium leprae* is a bacterium that is responsible for causing leprosy, which is classified by the WHO as a neglected tropical disease. As the genome sequence is a DNA sequence, if you are retrieving its sequence via the NCBI website, you will need to look for it in the NCBI Nucleotide database.

3. How many of each of the four nucleotides A, C, T and G, and any other symbols, are there in the *Mycobacterium leprae* TN genome sequence? Note: other symbols apart from the four nucleotides A/C/T/G may appear in a sequence. They correspond to positions in the sequence that are not clearly one base or another and they are due, for example, to sequencing uncertainties. For example, the symbol 'N' means 'any base', while 'R' means 'A or G' (puRine). There is a table of symbols at [www.bioinformatics.org/sms/iupac.html](http://www.bioinformatics.org/sms/iupac.html).
4. What is the GC content of the *Mycobacterium leprae* TN genome sequence, when (i) all non-A/C/T/G nucleotides are included, (ii) non-A/C/T/G nucleotides are discarded? Hint: look at the help page for the GC() function to find out how it deals with non-A/C/T/G nucleotides.
5. How many of each of the four nucleotides A, C, T and G are there in the complement of the *Mycobacterium leprae* TN genome sequence? *Hint*: you will first need to search for a function to calculate the complement of a sequence. Once you have found out what function to use, remember to use the help() function to find out what are the arguments (inputs) and results (outputs) of that function. How does the function deal with symbols other than the four nucleotides A, C, T and G? Are the numbers of As, Cs, Ts, and Gs in the complementary sequence what you would expect?
6. How many occurrences of the DNA words CC, CG and GC occur in the *Mycobacterium leprae* TN genome sequence?
7. How many occurrences of the DNA words CC, CG and GC occur in the (i) first 1000 and (ii) last 1000 nucleotides of the *Mycobacterium leprae* TN genome sequence? 1. How can you check that the subsequence that you have looked at is 1000 nucleotides long?



## Chapter 7

# Programming in R: for loops

**By:** Avril Coghlan

**Adapted, edited and expanded:** Nathan Brouwer (brouwern@gmail.com)  
under the Creative Commons 3.0 Attribution License (CC BY 3.0).

### 7.1 Preface

This is a modification of “DNA Sequence Statistics (1)” from Avril Coghlan’s *A little book of R for bioinformatics*. The text and code was originally written by Dr. Coghlan and distributed under the Creative Commons 3.0 license.

### 7.2 Vocab

- for loop
- curly brackets

### 7.3 Functions

- `for()`
- `print()`

### 7.4 Basic for loops in in R

In *R*, just as in programming languages such as **Python**, it is possible to write a **for loop** to carry out the same command several times. For example, say we

have a pressing need to calculate the square the square of each number between 1 and 4. We could write for lines of code like this to do it:

```
1^2
```

```
## [1] 1
```

```
2^2
```

```
## [1] 4
```

```
3^2
```

```
## [1] 9
```

```
4^2
```

```
## [1] 16
```

If we know how to write a for loop, we could do the same think like this:

```
for (i in 1:4) {  
  print (i*i)  
}
```

```
## [1] 1
```

```
## [1] 4
```

```
## [1] 9
```

```
## [1] 16
```

In the for loop above, the variable `i` is a counter or **index** for the number of cycles through the loop. In the first cycle through the loop, the value of `i` is 1, and so `i * i = 1` is printed out. In the second cycle through the loop, the value of `i` is 2, and so `i * i = 4` is printed out. In the third cycle through the loop, the value of `i` is 3, and so `i * i = 9` is printed out. The loop continues until the value of `i` is 4.

Note that the commands that are to be carried out at each cycle of the for loop must be enclosed within **curly brackets** (“{” and “}”).

You may be thinking “*ok, so it took four lines of code to do  $1^2$  through  $4^2$  each on their own, and three lines to do it wit the loop; what’s the big deal?*”. What if you need to do 1 through 100 squared for some reason? Now the for loop is a lot less work.

You can also give a for loop a vector of numbers containing the values that you want the counter `i` to take in subsequent cycles. For example, you can make a vector containing the numbers 1, 2, 3, and 4, and write a for loop to print out the square of each number in vector avector:

```
## [1] 1
```

```
## [1] 4
```

```
## [1] 9
```

```
## [1] 16
```

The results should be the same as before.

## 7.5 Challenge: complicated vectors of values

Here's a more complex example. If you don't understand it don't worry, its not something you'd probably do in practice.

Challenge: How can we use a for loop to print out the square of every second number between, say, 1 and 10? The answer is to use the `seq()` function with "by = 2" to tell the for loop to take every second number between 1 and 10:

```
for (i in seq(1, 10, by = 2)) {  
  print (i*i)  
}
```

```
## [1] 1  
## [1] 9  
## [1] 25  
## [1] 49  
## [1] 81
```

In the first cycle of this loop, the value of `i` is 1, and so `i * i = 1` is printed out. In the second cycle through the loop, the value of `i` is 3, and so `i * i = 9` is printed out. The loop continues until the value of `i` is 9. In the fifth cycle through the loop, the value of `i` is 9, and so `i * i = 81` is printed out.





## Chapter 8

# Programming in R: for functions

**By:** Avril Coghlan

**Adapted, edited and expanded:** Nathan Brouwer (brouwern@gmail.com) under the Creative Commons 3.0 Attribution License (CC BY 3.0).

### 8.1 Preface

This is a modification of “DNA Sequence Statistics (1)” from Avril Coghlan’s *A little book of R for bioinformatics*. The text and code was originally written by Dr. Coghlan and distributed under the Creative Commons 3.0 license.

### 8.2 Vocab

- function
- curly brackets

### 8.3 Functions

- `function()`

### 8.4 Functions in R

We have been using **built-in functions** such as `mean()`, `length()`, `print()`, `plot()`, etc. We can also create our own functions in R to do calculations that you want

to carry out very often on different input data sets. For example, we can create a function to calculate the value of 20 plus the square of some input number:

```
myfunction <- function(x) {  
  output <- (20 + (x*x))  
  return(output)  
}
```

This function will calculate the square of a number (x), and then add 20 to that value. It stores this in a temporary object called output. The return() statement returns the calculated value. Once you have typed in this function, the function is then available for use. For example, we can use the function for different input numbers (e.g.. 10, 25):

```
myfunction(10)
```

```
## [1] 120
```

```
myfunction(25)
```

```
## [1] 645
```

You can view the code that makes up a function by typing its name (without any parentheses). For example, we can try this by typing “myfunction”:

```
myfunction
```

```
## function(x) {  
##   output <- (20 + (x*x))  
##   return(output)  
## }  
## <bytecode: 0x7fd8337a2060>
```

## 8.5 Comments in R

When you are typing R, if you want to, you can write comments by writing the comment text after the “#” sign. This can be useful if you want to write some R commands that other people need to read and understand. R will ignore the comments when it is executing the commands. For example, you may want to write a comment to explain what the function log10() does:

```
x <- 100  
log10(x) # Finds the log to the base 10 of variable x.
```

```
## [1] 2
```

## Chapter 9

# Mini tutorial: Vectors in R

**By:** Avril Coghlan

**Adapted, edited and expanded:** Nathan Brouwer (brouwern@gmail.com)  
under the Creative Commons 3.0 Attribution License (CC BY 3.0).

### 9.1 Preface

This is a modification of part of “DNA Sequence Statistics (2)” from Avril Coghlan’s *A little book of R for bioinformatics*.. Most of text and code was originally written by Dr. Coghlan and distributed under the Creative Commons 3.0 license.

### 9.2 Vocab

- base R
- scalar, vector, matrix
- regular expressions



# Chapter 10

## Functions

- `seq()`
- `is()`, `is.vector()`, `is.matrix()`
- `gsub()`

### 10.1 Vectors in R

**Variables** in R include **scalars**, **vectors**, and **lists**. **Functions** in R carry out operations on variables, for example, using the `log10()` function to calculate the log to the base 10 of a scalar variable `x`, or using the `mean()` function to calculate the average of the values in a vector variable `myvector`. For example, we can use `log10()` on a scalar object like this:

```
# store value in object
x <- 100

# take log base 10 of object
log10(x)
```

```
## [1] 2
```

Note that while mathematically `x` is a single number, or a scalar, R considers it to be a vector:

```
is.vector(x)
```

```
## [1] TRUE
```

There are many “is” commands. What is returned when you run `is.matrix()` on a vector?

```
is.matrix(x)
```

```
## [1] FALSE
```

Mathematically this is a bit odd, since often a vector is defined as a one-dimensional matrix, e.g., a single column or single row of a matrix. But in *R* land, a vector is a vector, and matrix is a matrix, and there are no explicit scalars.

## 10.2 Math on vectors

Vectors can serve as the input for mathematical operations. When this is done *R* does the mathematical operation separately on each element of the vector. This is a unique feature of *R* that can be hard to get used to even for people with previous programming experience.

Let's make a vector of numbers:

```
myvector <- c(30,16,303,99,11,111)
```

What happens when we multiply `myvector` by 10?

```
myvector*10
```

```
## [1] 300 160 3030 990 110 1110
```

*R* has taken each of the 6 values, 30 through 111, of `myvector` and multiplied each one by 10, giving us 6 results. That is, what *R* did was

```
## 30*10    # first value of myvector
## 16*10    # second value of myvector
## 303*10   # ....
## 99*10
## 111*10   # last value of myvector
```

The normal order of operations rules apply to vectors as they do to operations we're more used to. So multiplying `myvector` by 10 is the same whether you put the 10 before or after vector. That is `myvector*10` is the same as `10*myvector`.

```
myvector*10
```

```
## [1] 300 160 3030 990 110 1110
```

```
10*myvector
```

```
## [1] 300 160 3030 990 110 1110
```

What happen when you subtract 30 from `myvector`? Write the code below.

```
myvector-30
```

```
## [1] 0 -14 273 69 -19 81
```

So, what *R* did was

```
## 30-30    # first value of myvector
## 16-30    # second value of myvector
## 303-30   # ....
## 99-30
## 111-30   # last value of myvector
```

You can also square a vector

```
myvector^2
```

```
## [1] 900 256 91809 9801 121 12321
```

Which is the same as

```
## 30^2    # first value of myvector
## 16^2    # second value of myvector
## 303^2   # ....
## 99^2
## 111^2   # last value of myvector
```

Also you can take the square root of a vector...

```
sqrt(myvector)
```

```
## [1] 5.477226 4.000000 17.406895 9.949874 3.316625 10.535654
```

...and take the log of a vector...

```
log(myvector)
```

```
## [1] 3.401197 2.772589 5.713733 4.595120 2.397895 4.709530
```

...and just about any other mathematical operation. Here we are working on a separate vector object; all of these rules apply to a column in a matrix or a dataframe. This attribution of R is called **vectorization**.

## 10.3 Functions on vectors

We can use functions on vectors. Typically these use the vectors as an input and all the numbers are processed into an output. Call the `mean()` function on the vector we made called `myvector`.

```
mean(myvector)
```

```
## [1] 95
```

Note how we get a single value back - the mean of all the values in the vector. R saw that we had a vector of multiple and knew that the mean is a function that doesn't get applied to single number, but sets of numbers.

The function `sd()` calculates the standard deviation. Apply the `sd()` to `myvector`:

```
sd(myvector)
```

```
## [1] 110.5061
```

## 10.4 Operations with two vectors

You can also subtract one vector from another vector. This can be a little weird when you first see it. Make another vector with the numbers 5, 10, 15, 20, 25, 30. Call this `myvector2`:

```
myvector2 <- c(5, 10, 15, 20, 25, 30)
```

Now subtract `myvector2` from `myvector`. What happens?

```
myvector-myvector2
```

```
## [1] 25 6 288 79 -14 81
```

## 10.5 Subsetting vectors

You can extract an **element** of a vector by typing the vector name with the index of that element given in **square brackets**. For example, to get the value of the 3rd element in the vector `myvector`, we type:

```
myvector[3]
```

```
## [1] 303
```

Extract the 4th element of the vector:

```
myvector[4]
```

```
## [1] 99
```

You can extract more than one element by using a vector in the brackets:

First, say I want to extract the 3rd and the 4th element. I can make a vector with 3 and 4 in it:

```
nums <- c(3,4)
```

Then put that vector in the brackets:

```
myvector[nums]
```

```
## [1] 303 99
```

We can also do it directly like this, skipping the vector-creation step:



```
myvector[c(3,4)]
```

```
## [1] 303 99
```

In the chunk below extract the 1st and 2nd elements:

```
myvector[c(1,2)]
```

```
## [1] 30 16
```

## 10.6 Sequences of numbers

Often we want a vector of numbers in **sequential order**. That is, a vector with the numbers 1, 2, 3, 4, ... or 5, 10, 15, 20, ... The easiest way to do this is using a colon

```
1:10
```

```
## [1] 1 2 3 4 5 6 7 8 9 10
```

Note that in R 1:10 is equivalent to c(1:10)

```
c(1:10)
```

```
## [1] 1 2 3 4 5 6 7 8 9 10
```

Usually to emphasize that a vector is being created I will use c(1:10)

We can do any number to any numbers

```
c(20:30)
```

```
## [1] 20 21 22 23 24 25 26 27 28 29 30
```

We can also do it in *reverse*. In the code below put 30 before 20:

```
c(30:20)
```

```
## [1] 30 29 28 27 26 25 24 23 22 21 20
```

A useful function in *R* is the `seq()` function, which is an explicit function that can be used to create a vector containing a sequence of numbers that run from a particular number to another particular number.

```
seq(1, 10)
```

```
## [1] 1 2 3 4 5 6 7 8 9 10
```

Using `seq()` instead of a `:` can be useful for readability to make it explicit what is going on. More importantly, `seq` has an argument `by = ...` so you can make a sequence of number with any interval between. For example, if we want to create the sequence of numbers from 1 to 10 in steps of 1 (i.e.. 1, 2, 3, 4, ... 10), we can type:

```
seq(1, 10,
    by = 1)
```

```
## [1] 1 2 3 4 5 6 7 8 9 10
```

We can change the **step size** by altering the value of the **by** argument given to the function `seq()`. For example, if we want to create a sequence of numbers from 1-100 in steps of 20 (i.e.. 1, 21, 41, ... 101), we can type:

```
seq(1, 101,
    by = 20)
```

```
## [1] 1 21 41 61 81 101
```

## 10.7 Vectors can hold numeric or character data

The vector we created above holds numeric data, as indicated by `class()`

```
class(myvector)
```

```
## [1] "numeric"
```

Vectors can also hold character data, like the genetic code:

```
# vector of character data
myvector <- c("A", "T", "G")
```

```
# how it looks
myvector
```

```
## [1] "A" "T" "G"
```

```
# what is "is"
class(myvector)
```

```
## [1] "character"
```

## 10.8 Regular expressions can modify character data

We can use **regular expressions** to modify character data. For example, change the Ts to Us

```
myvector <- gsub("T", "U", myvector)
```

Now check it out

```
myvector
```

```
## [1] "A" "U" "G"
```

Regular expressions are a deep subject in computing. You can find some more information about them [here](#).



# Chapter 11

## Plotting vectors in base R

**By:** Avril Coghlan

**Adapted, edited and expanded:** Nathan Brouwer (brouwer@gmail.com) under the Creative Commons 3.0 Attribution License (CC BY 3.0).

### 11.1 Preface

This is a modification of part of “DNA Sequence Statistics (2)” from Avril Coghlan’s *A little book of R for bioinformatics*. Most of text and code was originally written by Dr. Coghlan and distributed under the Creative Commons 3.0 license.

### 11.2 Plotting numeric data

R allows the production of a variety of plots, including **scatterplots**, **histograms**, **piecharts**, and **boxplots**. Usually we make plots from dataframes with 2 or more columns, but we can also make them from two separate vectors. This flexibility is useful, but also can cause some confusion.


For example, if you have two equal-length vectors of numbers `numeric.vect1` and `numeric.vect2`, you can plot a scatterplot of the values in `myvector1` against the values in `myvector2` using the **base R** `plot()` function.

First, let’s make up some data in put it in vectors:

```
numeric.vect1 <- c(10, 15, 22, 35, 43)
numeric.vect2 <- c(3, 3.2, 3.9, 4.1, 5.2)
```

Not plot with the base R `plot()` function:

```
plot(numeric.vect1, numeric.vect2)
```

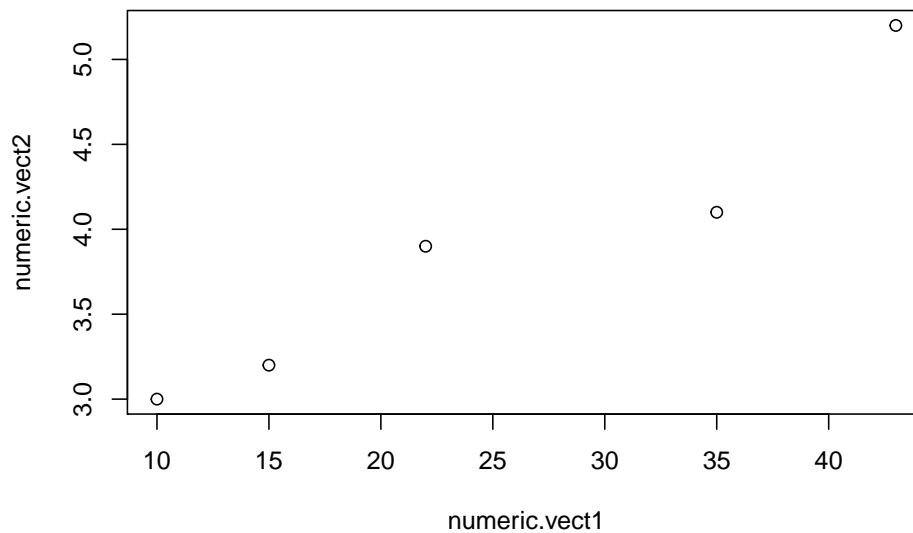


Note that there is a comma between the two vector names. When building plots from dataframes you usually see a tilde ( $\sim$ ), but when you have two vectors you can use just a comma.

Also note the order of the vectors within the `plot()` command and which axes they appear on. The first vector is `numeric.vect1` and it appears on the horizontal x-axis.

If you want to label the axes on the plot, you can do this by giving the `plot()` function values for its optional arguments `xlab =` and `ylab =`:

```
plot(numeric.vect1,    # note again the comma, not a ~
     numeric.vect2,
     xlab="vector1",
     ylab="vector2")
```

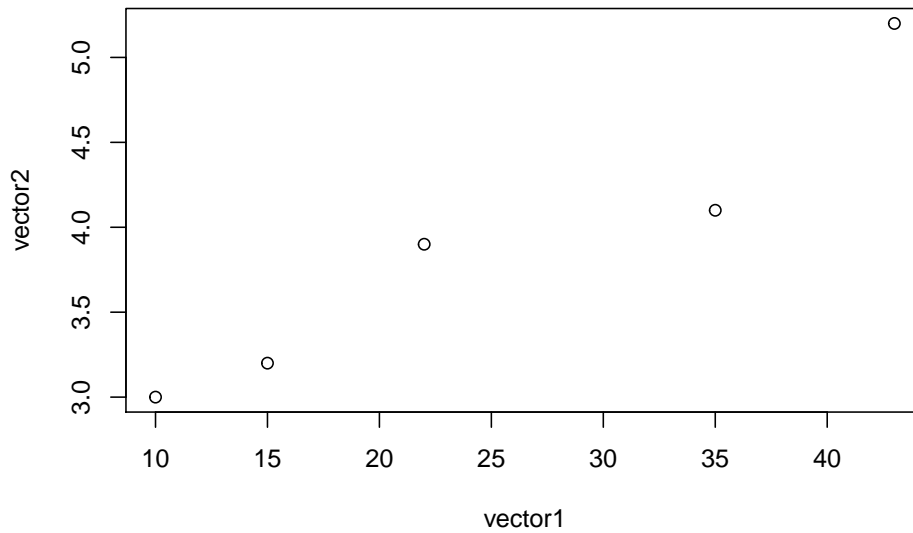


We can store character data in vectors so if we want we could do this to set up our labels:

```
mylabels <- c("numeric.vect1", "numeric.vect2")
```


Then use bracket notation to call the labels from the vector

```
plot(numeric.vect1,  
     numeric.vect2,  
     xlab=mylabels[1],  
     ylab=mylabels[2])
```

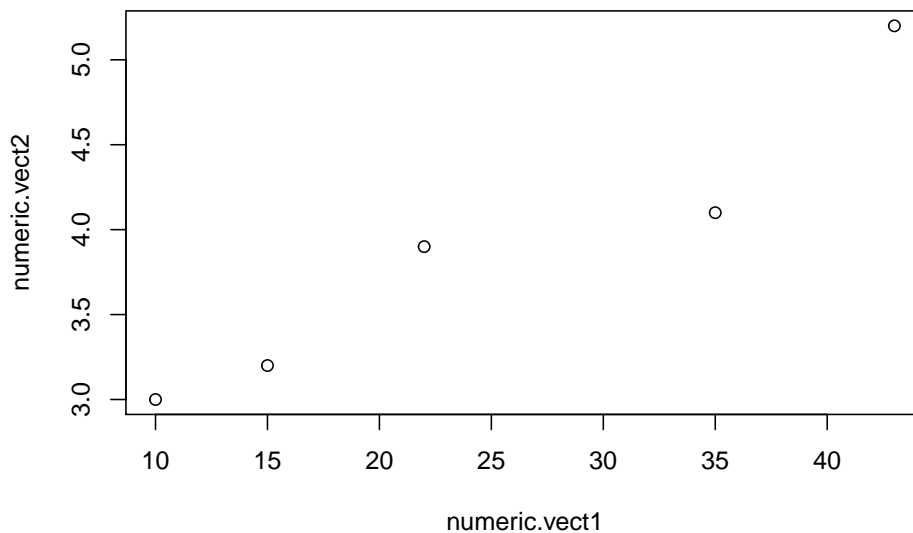

If we want we can use a tilde to make our plot like this:

```
plot(numeric.vect2 ~ numeric.vect1)
```

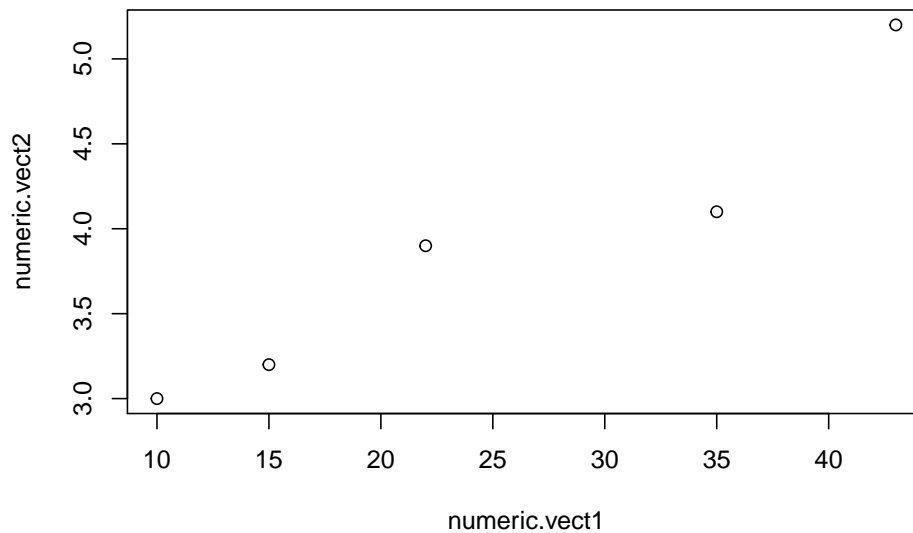

Note that now, `numeric.vect2` is on the left and `numeric.vect1` is on the right. This flexibility can be tricky to keep track of.


We can also combine these vectors into a dataframe and plot the data by referencing the data frame. First, we combine the two separate vectors into a dataframe using the `cbind()` command.

```
df <- cbind(numeric.vect1, numeric.vect2)
```

Then we plot it like this, referencing the dataframe `df` via the `data = ...` argument.

```
plot(numeric.vect2 ~ numeric.vect1, data = df)
```



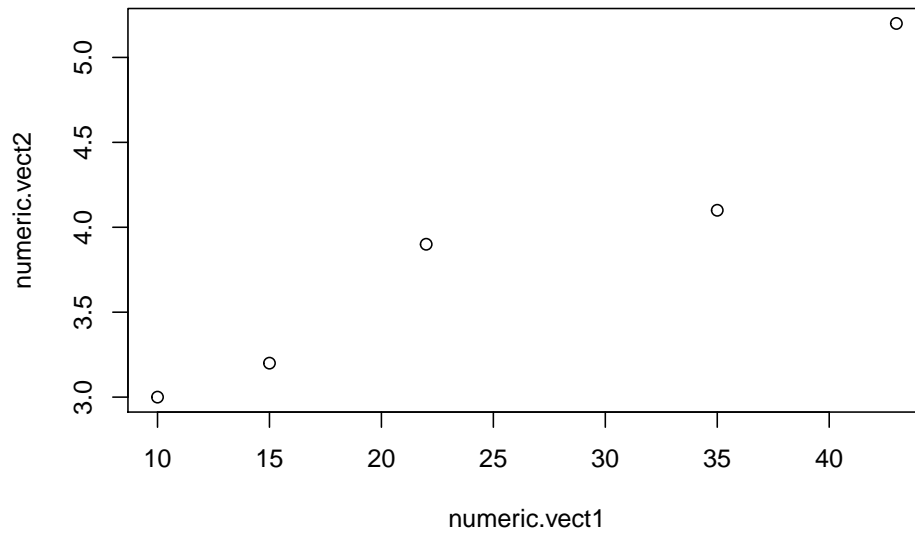

### 11.3 Other plotting packages

Base R has lots of plotting functions; additionally, people have written packages to implement new plotting capabilities. The package `ggplot2` is currently the most popular plotting package, and `ggpubr` is a package which makes `ggplot2` easier to use. For quick plots we'll use base R functions, and when we get to more important things we'll use `ggplot2` and `ggpubr`.



## Part I

# Appendices







# Appendix 01: Getting access to R

## 11.4 Getting Started With R and RStudio

- R is a piece of software that does calculations and makes graphs.
- RStudio is a GUI (graphical user interface) that acts as a front-end to R
- You can use R directly, but most people use a GUI of some kind
- RStudio has become the most popular GUI

The following instructions will lead you click by click through downloading R and RStudio and starting an initial session. If you have trouble with downloading either program go to YouTube and search for something like “Downloading R” or “Installing RStudio” and you should be able to find something helpful, such as “How to Download R for Windows”.

### 11.4.1 RStudio Cloud

TODO: Add RStudio cloud

### 11.4.2 Getting R onto your own computer

To get R on to your computer first go to the CRAN website at <https://cran.r-project.org/> (CRAN stands for “comprehensive R Archive Network”). At the top of the screen are three bullet points; select the appropriate one (or click the link below)

- Download R for Linux
- Download R for (Mac) OS X
- Download R for Windows

Each page is formatted slightly differently. For a current Mac, click on the top link, which as of 8/16/2018 was “R-3.5.1.pkg” or click this link. If you have an older Mac you might have to scroll down to find your operating system under “Binaries for legacy OS X systems.”

For PC select “base” or click this link.

When its downloaded, run the installer and accept the defaults.

### 11.4.3 Getting RStudio onto your computer

RStudio is an R interface developed by a company of the same name. RStudio has a number of commercial products, but much of their portfolio is free-ware. You can download RStudio from their website [www.rstudio.com/](http://www.rstudio.com/) . The download page ([www.rstudio.com/products/rstudio/download/](http://www.rstudio.com/products/rstudio/download/)) is a bit busy because it shows all of their commercial products; the free version is on the far left side of the table of products. Click on the big green DOWNLOAD button under the column on the left that says “RStudio Desktop Open Source License” (or click on this link ).

This will scroll you down to a list of downloads titled “Installers for Supported Platforms.” Windows users can select the top option RStudio 1.1.456 - Windows Vista/7/8/10 and Mac the second option RStudio 1.1.456 - Mac OS X 10.6+ (64-bit). (Versions names are current of 8/16/2018).

Run the installer after it downloads and accept the default. RStudio will automatically link up with the most current version of R you have on your computer. Find the RStudio icon on your desktop or search for “RStudio” from your task bar and you’ll be read to go.

### 11.4.4 Keep R and RStudio current

Both R and RStudio undergo regular updates and you will occasionally have to re-download and install one or both of them. In practice I probably do this about every 6 months.



# Getting started with R itself (or not)

## Vocabulary

- console
- script editor / source viewer
- interactive programming
- scripts / script files
- .R files
- text files / plain text files
- command execution / execute a command from script editor
- comments / code comments
- commenting out / commenting out code
- [stackoverflow.com](https://stackoverflow.com)
- the `rstats` hashtag

## R commands

- `c(...)`
- `mean(...)`
- `sd(...)`
- `?`
- `read.csv(...)`

This is a walk-through of a very basic R session. It assumes you have successfully installed R and RStudio onto your computer, and nothing else.

Most people who use R do not actually use the program itself - they use a GUI (graphical user interface) “front end” that make R a bit easier to use. However, you will probably run into the icon for the underlying R program on your desktop or elsewhere on your computer. It usually looks like this:

ADD IMAGE HERE

The long string of numbers have to do with the version and whether is 32 or 64 bit (not important for what we do).

If you are curious you can open it up and take a look - it actually looks a lot like RStudio, where we will do all our work (or rather, RStudio looks like R). Sometimes when people are getting started with R they will accidentally open R instead of RStudio; if things don't seem to look or be working the way you think they should, you might be in R, not RStudio

#### 11.4.4.1 R's console as a scientific calculator

You can interact with R's console similar to a scientific calculator. For example, you can use parentheses to set up mathematical statements like

```
5*(1+1)
```

```
## [1] 10
```

Note however that you have to be explicit about multiplication. If you try the following it won't work.

```
5(1+1)
```

R also has built-in functions that work similar to what you might have used in Excel. For example, in Excel you can calculate the average of a set of numbers by typing “=average(1,2,3)” into a cell. R can do the same thing except

- The command is “mean”
- You don't start with “=”
- You have to package up the numbers like what is shown below using “c(…)”

```
mean(c(1,2,3))
```

```
## [1] 2
```

Where “c(…)” packages up the numbers the way the mean() function wants to see them.

If you just do the following R will give you an answer, but its the wrong one

```
mean(1,2,3)
```

**This is a common issue with R – and many programs, really – it won't always tell you when somethind didn't go as planned. This is because it doesn't know something didn't go as planned; you have to learn the rules R plays by.**

#### 11.4.4.2 Practice: math in the console

See if you can reproduce the following results

**Division**

```
10/3
```

```
## [1] 3.333333
```

**The standard deviation**

```
sd(c(5,10,15)) # note the use of "c(...)"
```

```
## [1] 5
```

#### 11.4.4.3 The script editor

While you can interact with R directly within the console, the standard way to work in R is to write what are known as **scripts**. These are computer code instructions written to R in a **script file**. These are save with the extension **.R** but are really just a form of **plain text file**.

To work with scripts, what you do is type commands in the script editor, then tell R to **execute** the command. This can be done several ways.

First, you tell RStudio the line of code you want to run by either \* Placing the cursor at the end a line of code, OR \* Clicking and dragging over the code you want to run in order highlight it.

Second, you tell RStudio to run the code by \* Clicking the “Run” icon in the upper right hand side of the script editor (a grey box with a green error emerging from it) \* pressing the control key (“ctrl”) and then then enter key on the keyboard

The code you’ve chosen to run will be sent by RStudio from the script editor over to the console. The console will show you both the code and then the output.

You can run several lines of code if you want; the console will run a line, print the output, and then run the next line. First I’ll use the command `mean()`, and then the command `sd()` for the standard deviation:

```
mean(c(1,2,3))
```

```
## [1] 2
```

```
sd(c(1,2,3))
```

```
## [1] 1
```

#### 11.4.4.4 Comments

One of the reasons we use script files is that we can combine R code with **comments** that tell us what the R code is doing. Comments are preceded by the hashtag symbol `#`. Frequently we’ll write code like this:

```
#The mean of 3 numbers
mean(c(1,2,3))
```

If you highlight all of this code (including the comment) and then click on “run”, you’ll see that RStudio sends all of the code over console.

```
## [1] 2
```

Comments can also be placed at the *end* of a line of code

```
mean(c(1,2,3)) #Note the use of c(...)
```

Sometimes we write code and then don’t want R to run it. We can prevent R from executing the code even if its sent to the console by putting a “#” *in front* of the code.

If I run this code, I will get just the mean but not the sd.

```
mean(c(1,2,3))
#sd(c(1,2,3))
```

Doing this is called **commenting out** a line of code.

## 11.5 Help!

There are many resource for figuring out R and RStudio, including

- R’s built in “help” function
- Q&A websites like **stackoverflow.com**
- twitter, using the hashtag #rstats
- blogs
- online books and course materials

### 11.5.1 Getting “help” from R

If you are using a function in R you can get info about how it works like this

```
?mean
```

In RStudio the help screen should appear, probably above your console. If you start reading this help file, though, you don’t have to go far until you start seeing lots of R lingo, like “S3 method”, “na.rm”, “vectors”. Unfortunately, the R help files are usually not written for beginners, and reading help files is a skill you have to acquire.

For example, when we load data into R in subsequent lessons we will use a function called “read.csv”

Access the help file by typing “?read.csv” into the console and pressing enter. Surprisingly, the function that R give you the help file isn’t what you asked for,

but is `read.table()`. This is a related function to `read.csv`, but when you're a beginner thing like this can really throw you off.

Kieran Healy has produced a great cheatsheet for reading R's help pages as part of his forthcoming book. It should be available online at <http://socviz.co/appendix.html#a-little-more-about-r>

### 11.5.2 Getting help from the internet

The best way to get help for any topic is to just do an internet search like this: "R read.csv". Usually the first thing on the results list will be the R help file, but the second or third will be a blog post or something else where a usually helpful person has discussed how that function works.

Sometimes for very basic R commands like this might not always be productive but its always work a try. For but things related to stats, plotting, and programming there is frequently lots of information. Also try searching YouTube.

### 11.5.3 Getting help from online forums

Often when you do an internet search for an R topic you'll see results from the website [www.stackoverflow.com](http://www.stackoverflow.com), or maybe [www.crossvalidated.com](http://www.crossvalidated.com) if its a statistics topic. These are excellent resources and many questions that you may have already have answers on them. Stackoverflow has an internal search function and also suggests potentially relevant posts.

Before posting to one of these sites yourself, however, do some research; there is a particular type and format of question that is most likely to get a useful response. Sadly, people new to the site often get "flamed" by impatient pros.

### 11.5.4 Getting help from twitter

Twitter is a surprisingly good place to get information or to find other people knew to R. Its often most useful to ask people for learning resources or general reference, but you can also post direct questions and see if anyone responds, though usually its more advanced users who engage in twitter-based code discussion.

A standard tweet might be "Hey #rstats twitter, am knew to #rstats and really stuck on some of the basics. Any suggestions for good resources for someone starting from scratch?"

## 11.6 Other features of RStudio

### 11.6.1 Adjusting pane the layout

You can adjust the location of each of RStudio 4 window panes, as well as their size.

To set the pane layout go to 1. "Tools" on the top menu 1. "Global options" 1. "Pane Layout"

Use the drop-down menus to set things up. I recommend 1. Lower left: "Console" 1. Top right: "Source" 1. Top left: "Plot, Packages, Help Viewer" 1. This will leave the "Environment..." panel in the lower right.

## 11.6.2 Adjusting size of windows

You can click on the edge of a pane and adjust its size. For most R work we want the console to be big. For beginners, the "Environment, history, files" panel can be made really small.

## 11.7 Practice (OPTIONAL)

Practice the following operations. Type the directly into the console and execute them. Also write them in a script in the script editor and run them.

### Square roots

```
sqrt(42)
```

```
## [1] 6.480741
```

**The date** Some functions in R can be executed within nothing in the parentheses.

```
date()
```

```
## [1] "Sun Jul 11 12:01:10 2021"
```

**Exponents** The  $\wedge$  is used for exponents

```
42^2
```

```
## [1] 1764
```

**A series of numbers** A colon between two numbers creates a series of numbers.

```
1:42
```

```
## [1] 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
## [26] 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42
```

**logs** The default for the `log()` function is the natural log.

```
log(42)
```

```
## [1] 3.73767
```

`log10()` gives the base-10 log.

```
log10(42)
```

```
## [1] 1.623249
```

**exp()** raises e to a power

```
exp(3.73767)
```

```
## [1] 42.00002
```

**Multiple commands can be nested**

```
sqrt(42)^2
```

```
log(sqrt(42)^2)
```

```
exp(log(sqrt(42)^2))
```