

Modelling the effects of domestication in Wheat through novel computer vision techniques

Author: Nathan Hughes (nah26@aber.ac.uk)
Supervisor: Dr. Wayne Aubrey (waa2@aber.ac.uk)
Degree Scheme G401 (Computer Science)

Date: April 12, 2018
Revision: 0.1
Status: Draft

This report was submitted as partial fulfilment
of a BSc degree in Computer Science (G401)

Declaration of originality

I confirm that:

- This submission is my own work, except where clearly indicated.
- I understand that there are severe penalties for Unacceptable Academic Practice, which can lead to loss of marks or even the withholding of a degree.
- I have read the regulations on Unacceptable Academic Practice from the University's Academic Quality and Records Office (AQRO) and the relevant sections of the current Student Handbook of the Department of Computer Science.
- In submitting this work I understand and agree to abide by the University's regulations governing these issues.

Name

Date

Consent to share this work

By including my name below, I hereby agree to this dissertation being made available to other students and academic staff of the Aberystwyth Computer Science Department.

Name

Date

Contents

1	Introduction, Analysis and Objectives	8
1.1	Background	8
1.2	Biological Question and Materials	8
1.3	Significance to Current Research	9
1.4	Aim and Objectives	10
1.5	Hypothesis	12
1.6	Challenges Overview	12
1.6.1	Biological Challenges	12
1.6.2	Computational Challenges	12
1.7	Deliverables	13
2	Software Design, Implementation and Testing	14
2.1	Software Development Methodology	14
2.2	Functional Requirements	14
2.2.1	Requirements for CT Analysing Library	14
2.2.2	Requirements for CT GUI Application	14
2.3	Version control	14
2.4	Designing Process	14
2.5	Documentation	15
2.6	Language Choice	15
2.7	Software Library Choices	15
2.8	Implementation	15
2.9	Testing	15
2.9.1	Feedback Forms	15
2.9.2	Unit Testing CT Analysing Library	15
2.9.3	Unit Testing CT GUI Application	15
3	Methods and Solutions	22
3.1	Data Pipeline	22
3.2	Image Analysis Methods	22
3.2.1	New Watershed Algorithm	22
3.3	CT Analysing Library Methods	23
3.4	CT GUI Application Methods	23
3.5	Data Analysis Methods	23
4	Results	25
5	Discussion	26
5.1	Similar Research	26
5.2	Alternate Solutions	26
6	Critical Evaluation	27
6.1	Organisational Methods	27
6.2	Relevance to Degree	27

6.3	Time Management	27
6.4	Collaborative Work	27
6.5	Other Issues	27
7	Appendix	28
7.1	<i>Software Packages Used</i>	28
7.1.1	Libraries	28
7.1.2	Tools	28
7.2	<i>Glossary</i>	28
7.3	Wheat Varieties	29
7.4	<i>Code Segments and Examples</i>	29
7.4.1	MATLAB Watershedding	29
7.4.2	Custom Documentation Generator	29
7.4.3	Self-Documenting Code Example	32

List of Tables

2.2	Output of <i>pytest</i> Unit Tests and results for CT GUI Application	15
2.1	Output of <i>pytest</i> Unit Tests and results for CT Analysing Library	21
7.1	Software libraries used	28
7.2	Software tools used	28
7.3	Dictionary for Terms and acronyms	28
7.4	Dictionary for Wheat names used	29

List of Figures

1.1	Wheat grain labelled (<i>left</i>), wheat grain cut in half (<i>right</i>)	9
1.2	Phylogeny of wheat genotypes (Provided by Dr. Hugo Oliveira)	10
1.3	Two μ -CT scans of wheat spikes, showing diversity in Population, Compactum (6N) left, Durum right (4N)	11
3.1	Image Processing Pipeline	22
3.2	<i>A</i> showing the chessboard method, <i>B</i> improved quasi-euclidean method	23
3.3	How data is integrated with the CT Analysing Library	24

List of Listings

1	MATLAB Watershedding function	30
2	Custom lisp code for generating easy to read documentation	31
3	Example of code documentation and readability from <i>data_transforms.py</i>	32

Chapter 1

Introduction, Analysis and Objectives

This project aims to answer a biological research question through the use of computer science, whilst also creating a software suite which will enable further studies to be carried out with ease.

Primarily the focus has been on the data science elements of my degree, creating, cleaning and discerning meaning in it.

Using a population of genetically diverse wheat, several hypothesis and questions are explored in the hopes of contributing to the scientific understanding of domestication. A mixture of image analysis through three-dimensional micro-computed tomography and computational analysis are used to provide these much needed solutions.

Additionally, as this is very much multi-disciplinary research, specific terms and definitions have been outlined in the *glossary* (table:7.3).

Background

Western society and agriculture has been dominated by the ability to create successful crops for the past 10,000 years [1]. Of these crops wheat is considered to be one of the most vital and is estimated to contribute to 20% of the total calories and proteins consumed worldwide, and accounts for roughly 53% of total harvested area (in China and Central Asia) [2].

During domestication, the main traits selected for breeding were most likely plant height and yield. This meant that important non-expressed traits such as disease resistance and drought tolerance were often neglected and lost overtime.

Whilst the choices made for selective breeding were successful, effects are now being felt as it is estimated that as much as a 5% dip is observed yearly on wheat production [2]. This decrease in efficiency is attributed to climate change bringing in more hostile conditions, which these elite and thoroughly domesticated genotypes are unprepared for.

Modern breeding programs have had some success in selecting primitive undomesticated genotypes and using them to breed back in useful alleles which would have been lost during domestication [3].

As such, there are questions still left open about how best to make selections for crop breeding. There is also a lack of formalised modelling of information which could be of use to these areas of research.

Biological Question and Materials

The driving question for this research asks "Can μ -CT data be used to model domestication in wheat?". Using an already grown and harvested range of genetically diverse wheat this project has generated

a collection of 3D images, processed these images into raw phenotypic data and produced biologically significant information. The biological data used in this solution are as follows:

The population of wheat used contains samples from the following genotypes:

- Wild Monococcum (2N)
- Domesticated Monococcum (2N)
- Tauschii (2N)
- Durum (4N)
- Dicoccoides (4N)
- Dicoccum (4N)
- Ispahanicum (4N)
- Timopheevii (4N)
- Spelta(6N)
- Aestivum (6N)
- Compactum (6N)

/Full species names are found in table:7.4.

These samples come from over 70 plants and provided in excess of 2000 seeds for analysis which data was created based on. The traits recorded are labelled in figure:1.1 and are as follows:

- Length
- Width
- Depth
- Volume
- Surface Area
- Crease Depth / Volume

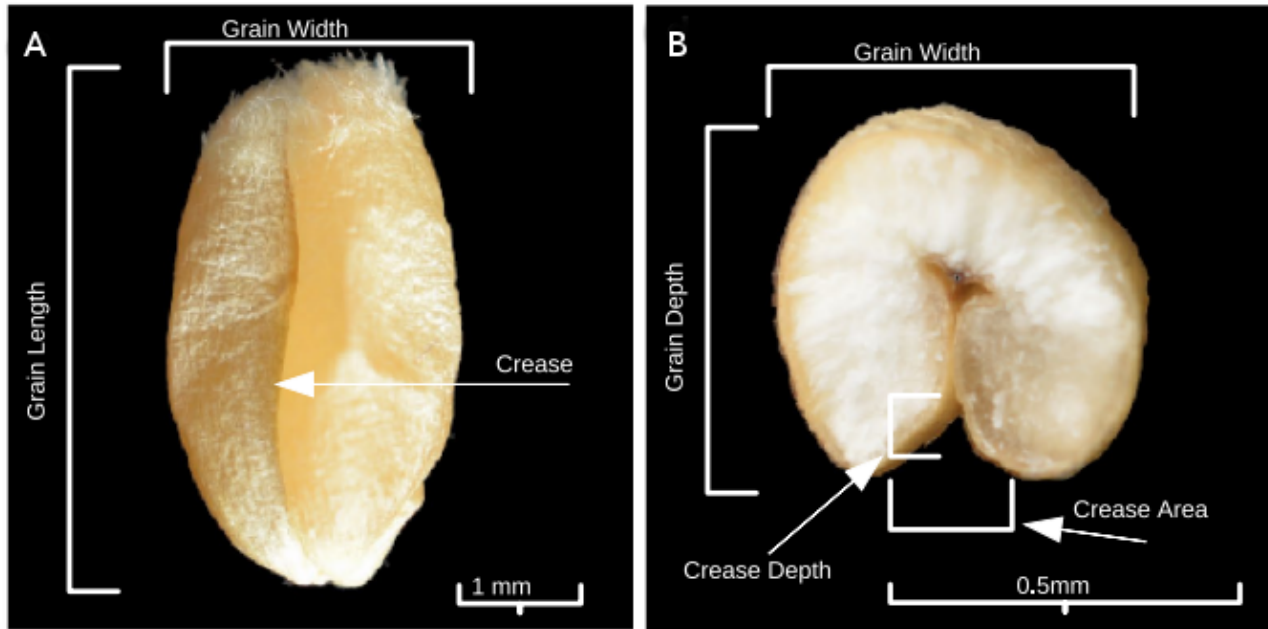


Figure 1.1: Wheat grain labelled (*left*), wheat grain cut in half (*right*)

Significance to Current Research

The biological interest in this area has been expressed in several areas of research [4], it is proposed that the key to unlocking diversity in the wheat genus lies in these ancestor, undomesticated species [5].

This research has the potential to be useful in several areas including: crop breeding; disease resistance; environmental stress.

The individual images in figure:1.2 show, at a glance, the diversity and also the difference in the wild and cultivated (domesticated) species. This work allows for these differences to be quantified and evaluated into useful metrics for answering research based questions.

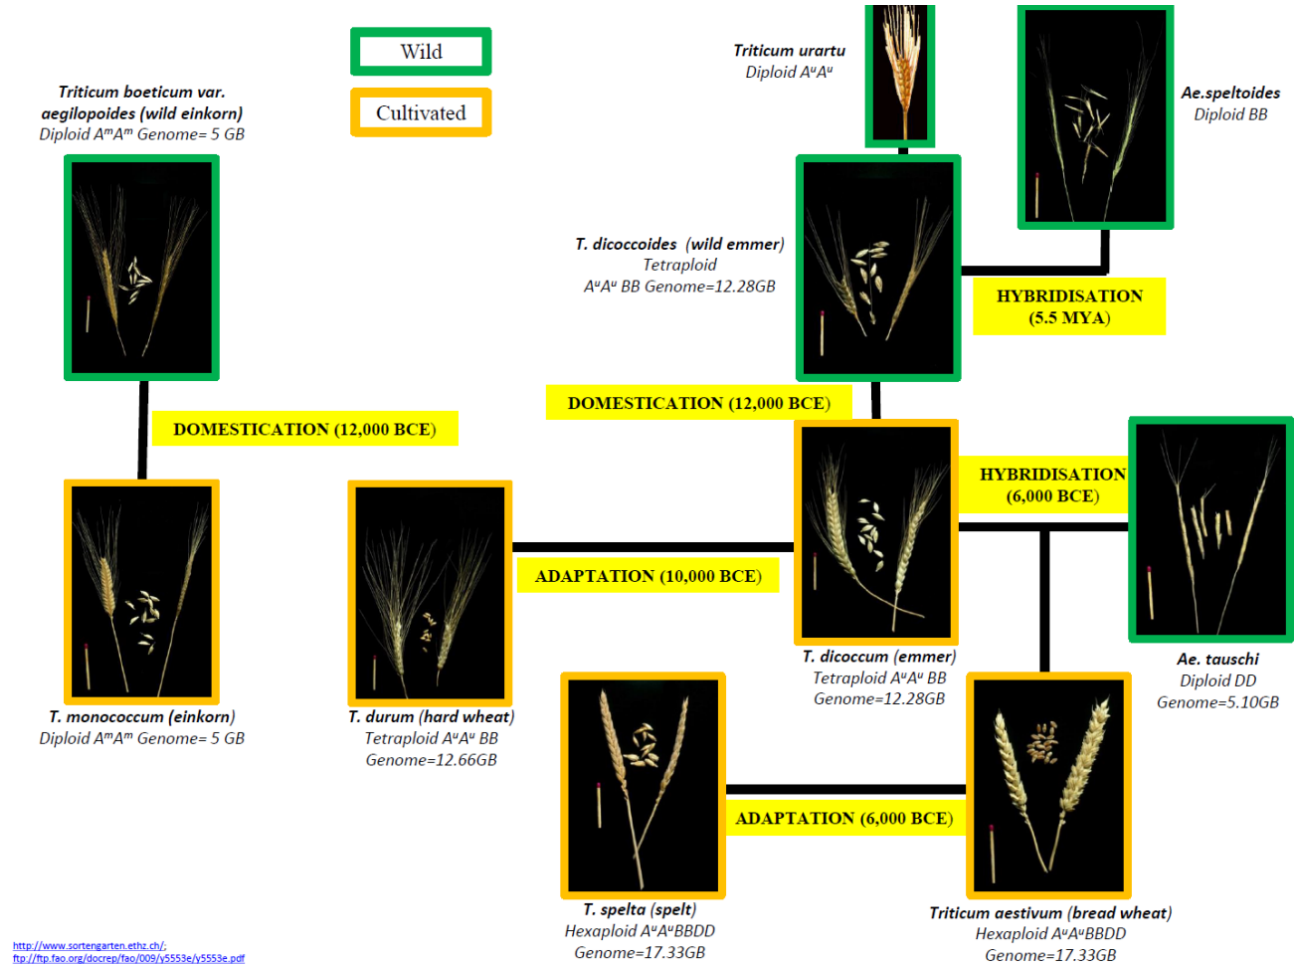


Figure 1.2: Phylogeny of wheat genotypes (Provided by Dr. Hugo Oliveira)

Aim and Objectives

The overarching aim of this project has been to create several pieces of software which aid in answering the biologically significant questions outlined. As well as to prove/disprove the hypothesis stated below.

The software created is robust in order to duplicate results and is flexible as to allow for further studies to be carried out and to use the same method.

Novel additions have been made to existing image analysis libraries in order to make them more flexible for this project. Figure:1.3 illustrates the range of diversity

Furthermore, the library written allows for easy data organisation and automation of otherwise difficult tasks such as concatenating data from multiple sources and graphing of information. Full documentation



Figure 1.3: Two μ -CT scans of wheat spikes, showing diversity in Population, Compactum (6N) left, Durum right (4N)

and integrated testing allows for a suite of tools which can be built upon in future and reduce the amount of effort required for similar studies to be carried out and analysed.

These aims have a focus on the phenotypic attributes generated from customised image analysis software [6] and can be seen in figure:1.1.

Hypothesis

To provide a full spectrum of analysis the null-hypothesis of this work is presented as investigating if there are morphometric differences in the seeds of several wheat varieties outlined in figure:1.2.

The comparison pairs are as follows:

1. Monococcum Wild and Monococcum Domesticate
2. Dicoccoides and Dicoccum
3. Spelta and Aestivum
4. Dicoccum and Durum
5. Monococcum Wild and Dicoccoides

Challenges Overview

The challenges which this project tackles come in two flavours: Computational and Biological. As such keen awareness of these is needed to appreciate the novelty of this work.

Biological Challenges

Previous studies have been able to demonstrate that variation in wheat grain morphology can be partially explained, in 2010 Gegas et al. demonstrated this through a 99.4% 2 component PCA [7]. However there is much left to do in terms of formal classifications and descriptions of these differences. This project deals with this problem through computational analysis.

Two effects run parallel in this study which requires acute biological knowledge of in order to make correct decisions:

1. The effects of ploidy in wheat.
2. The effects of domestication in wheat.

Hypothesis are required to take into account, both of these effects so as not to misidentify results.

Computational Challenges

Using μ -CT data in plant sciences is becoming more and more common [8, 9, 6, 10] and whilst a lot of studies focus on the traits of grains specifically no formal model has been created, no accepted data format. This is a data engineering problem and the methods described in this project address this.

Further to data organisation, proposals are made for the statistical analysis which should be used. This allows for studies to become more robust and repeatable, thus strengthening the studies overall.

The biological material used in this research is much more diverse a population than has been previously studied with μ -CT image analysis, this requires current computer vision methods to be adapted in order to be accurate.

Deliverables

This project provides three final deliverables:

1. A flexible software suite written in *Python* that provides a standardised method for analysing and interpreting μ -CT data output.
2. A Graphical User Interface (GUI) which offers a point and click method for data gathering, graphing and manipulating μ -CT data, using the library from deliverable 1 as a backend.
3. Answers to the proposed questions (hypothesis), the *Results* and *Discussion* sections of this report provides this.

Chapter 2

Software Design, Implementation and Testing

This project made use of formal design methods and strict organisation whilst being flexible to change. Overall the design took a hybridised form in order to best suit the scientific environment which this domain specific software is built for.

Software Development Methodology

Data analysis drove the direction of the project, as a result an agile methodology was adopted. Weekly sprints were implemented as a list of "todo's", these were written on a Monday morning based off of the previous week's list.

Critical self-evaluation was performed by means of a "one-man SCRUM" meeting, this is a technique which requires self-discipline in order to accurately find faults and areas for improvement.

Functional Requirements

Requirements for this project are split between software requirements for both the CT Analysing Library and the CT GUI Application and the research requirements (i.e. the answers to the proposed hypothesis).

Requirements for CT Analysing Library

These are the functional requirements for the Python library produced:

- Require 1
- Require 2

Requirements for CT GUI Application

- Useable by *anyone*

Version control

Designing Process

To make the most fit for purpose software weekly meetings were had with researchers at the National Plant Phenomics Centre, through discussions prototype demonstrations many design decision were made.

This expanded on the agile principles of communication over-comprehensive documentation. Where conversations were decidedly much more beneficial than complex planing prior to developing a product.

Documentation

The provided CT Analysing Library comes with "human-readable" format. Where most documentation generators (Doxygen, Pydocs, Javadocs etc.) implement very well structured and comprehensive documentation, the output is generally not very friendly and easy to read. Particularly for non-career-programmers. A core feature of these provided software implementations are that they are well suited for a biologist, researcher or statistician to use.

This documentation generator was purpose created, implemented in LISP and provided in listing:2.

Beyond this, inline commenting is provided for supplied software. Keeping in line with the agile development ethos the software is self-documented and self-evident. A brief example of this is shown in listing:3

Similarly, the documentation for using the CT GUI Application is based on feedback provided via user testing and Google form feedback data.

Language Choice

Software Library Choices

Implementation

Testing

Feedback Forms

Feedback and constructive suggestions were made by researchers at the National Plant Phenomics Centre, these were submitted via the Google forms service. . .

Unit Testing CT Analysing Library

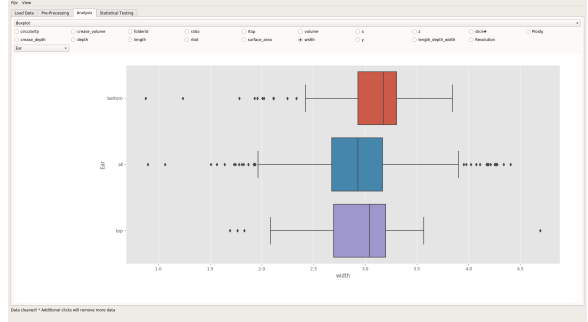
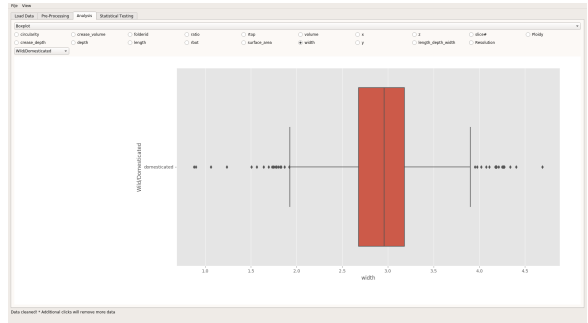
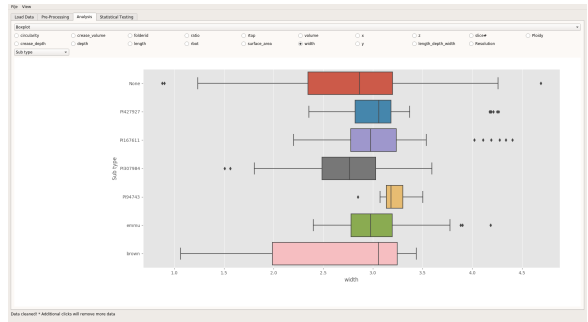

Unit Testing CT GUI Application

Table 2.2: Output of *pytest* Unit Tests and results for CT GUI Application

Result	Test	Image
--------	------	-------

Continued on next page

Continued from previous page

Result	Test	Image
Passed	analysis.py:: box_groupby_1_rb_1	
Passed	analysis.py:: box_groupby_2_rb_2	
Passed	analysis.py:: box_rb_1	
Passed	analysis.py:: box_rb_2	


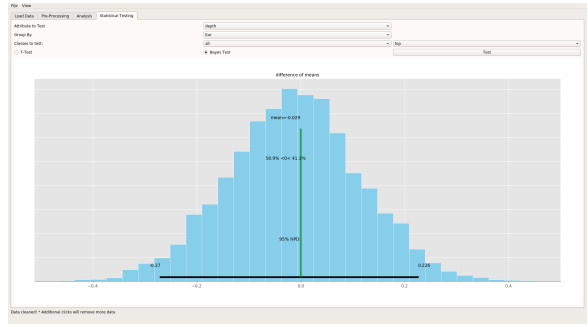
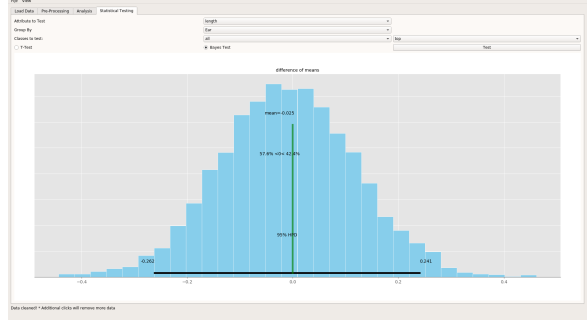
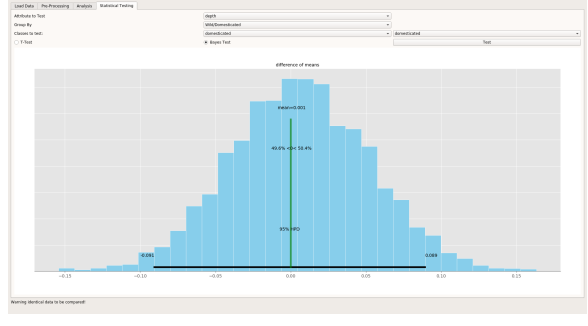
Continued on next page

Continued from previous page

Result	Test	Image
Passed	analysis.py:: hist_groupby_1_rb_1	
Passed	analysis.py:: hist_groupby_1_rb_2	
Passed	analysis.py:: hist_rb_1	
Passed	analysis.py:: hist_rb_2	





Continued on next page

Continued from previous page

Result	Test	Image
Passed	analysis.py:: loads	 A histogram showing the distribution of circularity values. The x-axis is labeled 'circularity' and ranges from 0.5 to 1.2. The y-axis ranges from 0 to 100. The distribution is unimodal and slightly right-skewed, peaking around 0.9.
Passed	hypothesis_tests.py:: bayesg1_att_1	 A histogram showing the distribution of the difference of means for bayesg1_att_1. The x-axis ranges from -0.4 to 0.4. The y-axis ranges from 0 to 100. The distribution is unimodal and symmetric, centered around 0.0. A vertical green line is drawn at 0.0. The plot is titled 'difference of means'.
Passed	hypothesis_tests.py:: bayesg1_att_2	 A histogram showing the distribution of the difference of means for bayesg1_att_2. The x-axis ranges from -0.4 to 0.4. The y-axis ranges from 0 to 100. The distribution is unimodal and symmetric, centered around 0.0. A vertical green line is drawn at 0.0. The plot is titled 'difference of means'.
Passed	hypothesis_tests.py:: bayesg2_att_1	 A histogram showing the distribution of the difference of means for bayesg2_att_1. The x-axis ranges from -0.25 to 0.25. The y-axis ranges from 0 to 100. The distribution is unimodal and symmetric, centered around 0.0. A vertical green line is drawn at 0.0. The plot is titled 'difference of means'.

Continued on next page

Continued from previous page

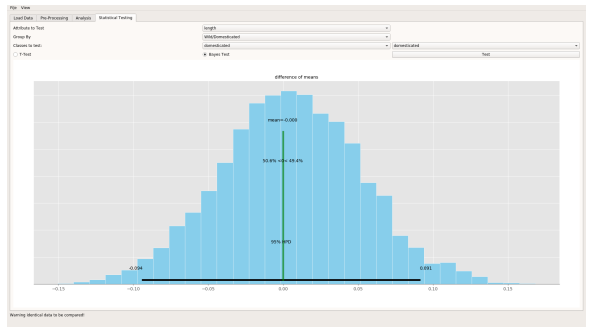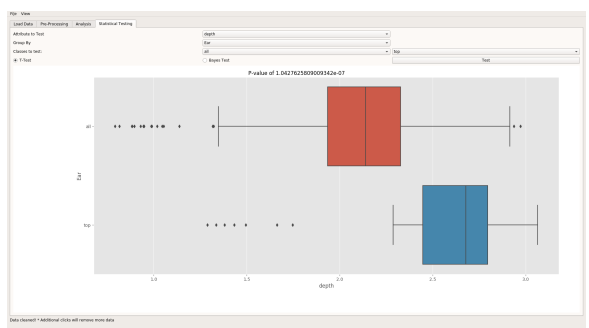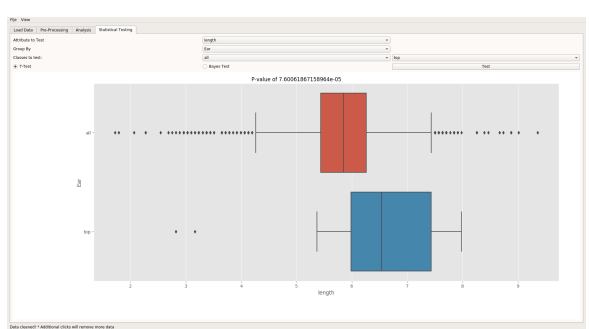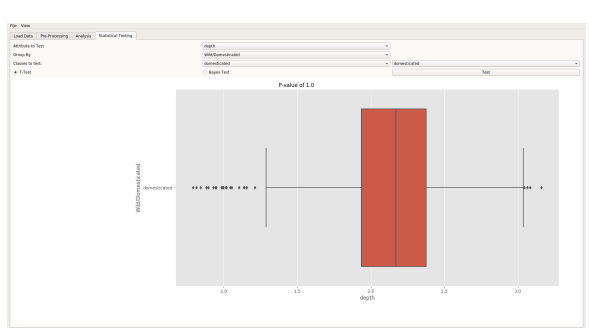Result	Test	Image
Passed	hypothesis_tests.py:: bayesg2_att_2	 A histogram showing the distribution of the difference of means. The x-axis ranges from -15.0 to 15.0, and the y-axis ranges from 0.000 to 0.004. The distribution is centered around 0.000, with a mean of 0.000 and a standard deviation of 10.000. The histogram is blue, and the area under the curve is shaded light blue.
Passed	hypothesis_tests.py:: tg1_att_1	 A box plot showing the distribution of length. The x-axis is labeled 'length' and ranges from 0.0 to 10.0. The y-axis is labeled 'depth' and ranges from 0.0 to 10.0. The plot shows two groups: 'top' (red) and 'bot' (blue). The 'top' group has a median around 5.5, and the 'bot' group has a median around 3.5. The p-value is 1.0421625000000000e-07.
Passed	hypothesis_tests.py:: tg1_att_2	 A box plot showing the distribution of length. The x-axis is labeled 'length' and ranges from 0.0 to 10.0. The y-axis is labeled 'depth' and ranges from 0.0 to 10.0. The plot shows two groups: 'top' (red) and 'bot' (blue). The 'top' group has a median around 5.5, and the 'bot' group has a median around 3.5. The p-value is 7.6008188715986e-05.
Passed	hypothesis_tests.py:: tg2_att_1	 A box plot showing the distribution of length. The x-axis is labeled 'length' and ranges from 0.0 to 10.0. The y-axis is labeled 'depth' and ranges from 0.0 to 10.0. The plot shows two groups: 'top' (red) and 'bot' (blue). The 'top' group has a median around 5.5, and the 'bot' group has a median around 3.5. The p-value is 1.0.

Continued on next page

Continued from previous page

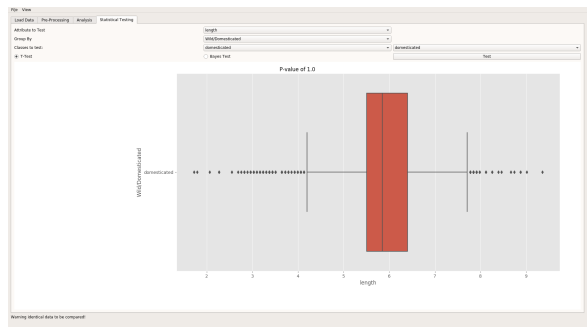
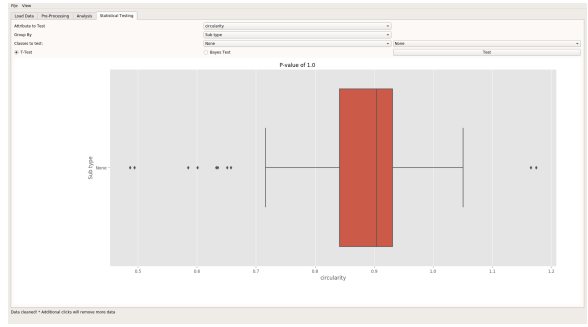
Result	Test	Image
Passed	hypothesis_tests.py:: tg2_att_2	
Passed	hypothesis_tests.py:: loads	
Passed	GUI.py:: startup	N/A
Passed	load_data.py:: load_data_with_rachis	N/A
Passed	load_data.py:: load_data_without_rachis	N/A
Passed	preprocessing.py:: clean_data_remove_large	N/A
Passed	preprocessing.py:: clean_data_remove_none	N/A
Passed	preprocessing.py:: clean_data_remove_small	N/A
Passed	preprocessing.py:: clean_data_remove_small_and_large	N/A
Passed	preprocessing.py:: load_additional_data	N/A
Passed	preprocessing.py:: load_additional_data_expected_fail	N/A

Table 2.1: Output of *pytest* Unit Tests and results for CT Analysing Library

Result	Test
Passed	CTData.py::test_aggregate_spike_averages
Passed	CTData.py::test_clean_data_maximum_removed
Passed	CTData.py::test_clean_data_minimum_removed
Passed	CTData.py::test_load_additional_data
Passed	CTData.py::test_load_additional_data_no_data
Passed	CTData.py::test_load_data
Passed	CTData.py::test_NoDataFoundException
Passed	Data_transforms.py::test_box_cox_data
Passed	Data_transforms.py::test_pca_to_table
Passed	Data_transforms.py::test_perform_pca
Passed	Data_transforms.py::test_standardise_data
Passed	Graphing.py::test_plot_boxplot_as_dataframe
Passed	Graphing.py::test_plot_boxplot_as_object
Passed	Graphing.py::test_plot_difference_of_means
Passed	Graphing.py::test_plot_histogram_as_dataframe
Passed	Graphing.py::test_plot_histogram_as_object
Passed	Graphing.py::test_plot_pca
Passed	Graphing.py::test_plot_qqplot
Passed	Statistical_tests.py::test_baysian_hypothesis_test
Passed	Statistical_tests.py::test_t_test
Passed	Statistical_tests.py::test_test_normality

Chapter 3

Methods and Solutions

Data Pipeline

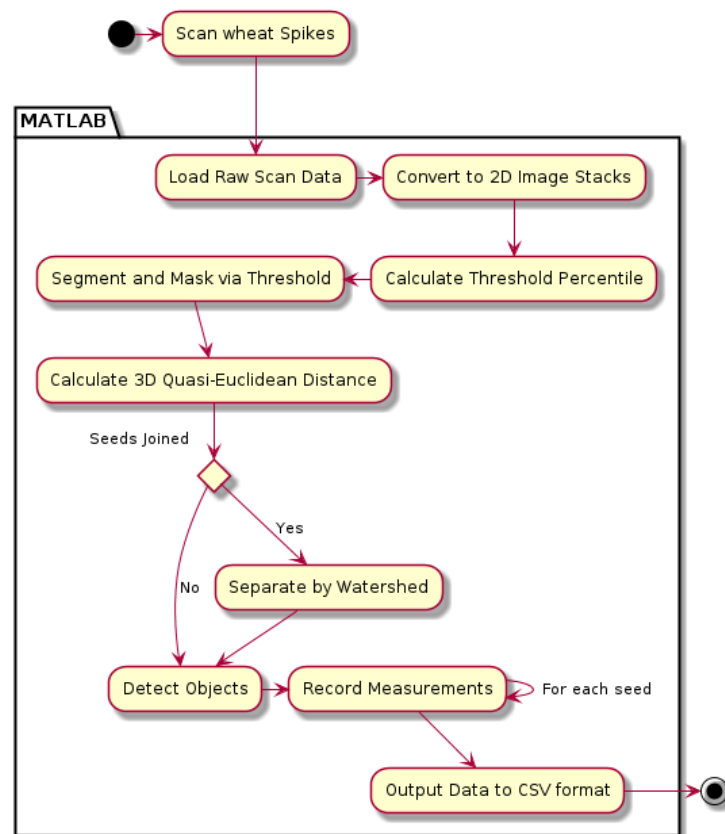


Figure 3.1: Image Processing Pipeline

Image Analysis Methods

New Watershed Algorithm

In order to solve the problem of misidentified and joint seeds, from the primitive collection, a *quasi-euclidean* distance transform was implemented into the analysis pipeline (figure:). This provided much better results than the previous *chessboard* transform which had been successful on more uniform data in previous studies [6].

Quasi-Euclidean algorithm

This algorithm measures the total euclidean distance along a set of horizontal, vertical and diagonal line segments [11].

$$|x_1 - x_2| + (\sqrt{2} - 1)|y_1 - y_2|, |x_1 - x_2| > |y_1 - y_2|, \text{ otherwise} \quad (3.1)$$

In order to apply this to a 3D space Kleinberg's method is used [12]. This allows for nearest neighbour pixels to be sorted by k -dimensional trees and enabling fast distance transforms via Rosenfeld and Pfaltz's *quasi-euclidean* method stated in equation:3.1.

Effect of Enhanced Watershed algorithm

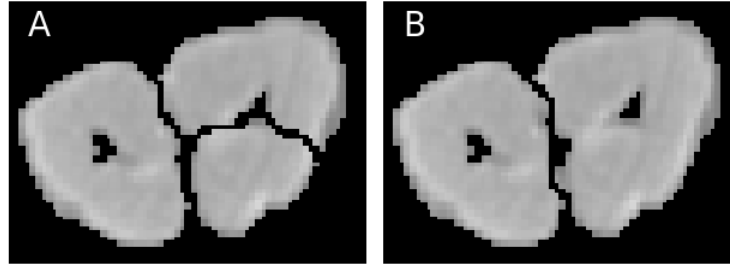


Figure 3.2: *A* showing the chessboard method, *B* improved quasi-euclidean method

CT Analysing Library Methods

CT GUI Application Methods

Data Analysis Methods

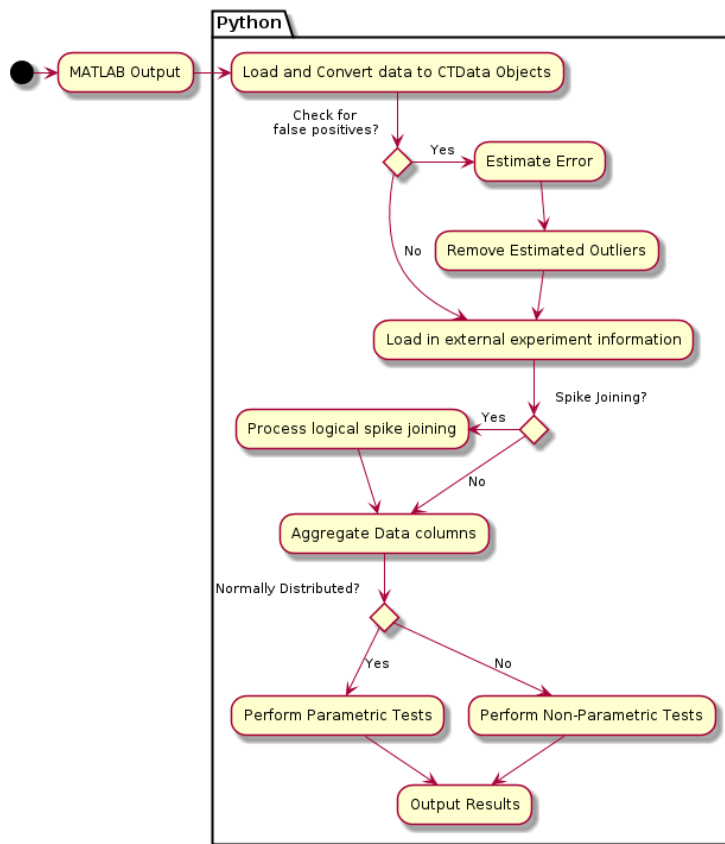


Figure 3.3: How data is integrated with the CT Analysing Library

Chapter 4

Results

Chapter 5

Discussion

Similar Research

Alternate Solutions

Chapter 6

Critical Evaluation

Organisational Methods

Relevance to Degree

Time Management

Collaborative Work

Other Issues

Chapter 7

Appendix

Software Packages Used

Libraries

Table 7.1: Software libraries used

MATLAB Image Processing Toolbox	Numpy	Matplotlib
Seaborn	Scipy	Sklearn
Statsmodels	Pymc3	Xlrd
PyQt5	gcc	

Tools

Table 7.2: Software tools used

MATLAB	Python Debugger (PDB)	IPython
Emacs	git	org-mode
Tomviz	ImageJ	

Glossary

Table 7.3: Dictionary for Terms and acronyms

Term	Definition
μ -CT	Micro Computed Tomography
Genotype	A genetically distinct individual or group
Phenotype	A physical/measurable trait
Alleles	A variant of a gene
Genus	Classification ranking, below the <i>family</i> grouping
Genome	The complete genetic make up of an organism, which defines its individuality
Morphometric	The shape and form of an organism
GUI	Graphical User Interface
PCA	Principal Component Analysis

Wheat Varieties

Table 7.4: Dictionary for Wheat names used

Used name	Species name
Monococcum	<i>Triticum monococcum</i>
Monococcum Wild	Triticum Boeoticum
Tauschii	Aegilops tauschii
Durum	Triticum Durum
Dicoccoides	Triticum Dicoccoides
Dicoccum	Triticum Dicoccum
Ispahanicum	Triticum Ispahanicum
Timopheevii	Triticum Timopheevii
Spelta	Triticum Spelta
Aestivum	Triticum Aestivum
Compactum	Triticum Compactum

Code Segments and Examples

MATLAB Watershedding

Custom Documentation Generator

```

function [W] = watershedSplit3D(A)
    % Takes image stack A and splits it into stack W
    % Convert to BW
    bw = logical(A);
    % Create variable for opening and closing
    se = strel('disk', 5);
    % Minimise object missshapen-ness
    bw = imerode(bw, se);
    bw = imdilate(bw, se);
    % Fill in any left over holes
    bw = imfill(bw,4,'holes');
    % Use chessboard for distance calculation for more refined splitting
    chessboard = -bwdist(~bw, 'quasi-euclidean');
    % Modify the intensity of our bwdist to produce chessboard2
    mask = imextendedmin(chessboard, 2);
    chessboard2 = imimposemin(chessboard, mask);
    % Calculate watershed based on the modified chessboard
    Ld2 = watershed(chessboard2);
    % Take original image and add on the lines calculated for splitting
    W = A;
    W(Ld2 == 0) = 0;
end

```

Listing 1: MATLAB Watershedding function

```

(defun populate-org-buffer (buffer filename root)
  (goto-char (point-min))
  (let ((to-insert (concat "*" (replace-regexp-in-string root "" filename) "\n") ))
    (while (re-search-forward
             (rx (group (or "def" "class"))
                  space
                  (group (+ (not (any "()")))))
             (? "(" (* nonl) "):" (+ "\n") (+ space)
                (= 3 "\n")
                (group (+? anything))
                (= 3 "\n"))
            nil 'noerror)
      (setq to-insert
            (concat
              to-insert
              (if (string= "class" (match-string 1))
                  "** "
                  "*** ")
              (match-string 2)
              "\n"
              (and (match-string 3)
                   (concat (match-string 3) "\n")))))
    (with-current-buffer buffer
      (insert to-insert))))

(defun org-documentation-from-dir (&optional dir)
  (interactive)
  (let* ((dir (or dir (read-directory-name "Choose base directory: ")))
         (files (directory-files-recursively dir "\py$"))
         (doc-buf (get-buffer-create "org-docs")))
    (dolist (file files)
      (with-temp-buffer
        (insert-file-contents file)
        (populate-org-buffer doc-buf file dir)))
    (with-current-buffer doc-buf
      (org-mode))))

```

Listing 2: Custom lisp code for generating easy to read documentation

Self-Documenting Code Example

```

def get_spike_info(self, excel_file, join_column='Folder#'):
    """
    This function should do something akin to adding additional
    information to the data frame

    @note there is some confusion in the NPPC about whether to use
    folder name or file name as the unique id when this is made into
    end-user software, a toggle should be added to allow this

    @param excel_file a file to attach and read data from
    @param join_column if the column for joining data is
    different then it should be stated
    """
    try:
        # Grab the linking excel file
        info = pd.read_excel(excel_file,
                             index_col='Folder#')

        features = list(info.columns)
        # Lambda to look up the feature in excel spreadsheet
        def look_up(x, y): return info.loc[x['folderid']][y]

        # Lambda form a series (data row) and apply it to dataframe
        def gather_data(x): return pd.Series(
            [look_up(x, y) for y in features])

        self.df[features] = self.df.apply(gather_data, axis=1)
    except KeyError as e:
        print('Error matching data')
        print(e)
        raise NoDataFoundException
    except AttributeError as e:
        print(e)
        raise NoDataFoundException

```

Listing 3: Example of code documentation and readability from *data_transforms.py*

References

- [1] H. Özkan, A. Brandolini, R. Schäfer-Pregl, and F. Salamini, “AFLP Analysis of a Collection of Tetraploid Wheats Indicates the Origin of Emmer and Hard Wheat Domestication in Southeast Turkey,” *Molecular biology and evolution*, vol. 19, no. 10, pp. 1797–1801, oct 2002. [Online]. Available: <http://academic.oup.com/mbe/article/19/10/1797/1259152>
- This paper discusses the origin of wheat domestication and provides evidence for it’s origin in society
- [2] B. Shiferaw, M. Smale, H.-J. Braun, E. Duveiller, M. Reynolds, and G. Muricho, “Crops that feed the world 10. Past successes and future challenges to the role played by wheat in global food security,” *Food Security*, vol. 5, no. 3, pp. 291–317, jun 2013. [Online]. Available: <http://link.springer.com/10.1007/s12571-013-0263-y>
- [3] G. Charmet, “Wheat domestication: Lessons for the future,” *Comptes Rendus - Biologies*, vol. 334, no. 3, pp. 212–220, 2011. [Online]. Available: <http://dx.doi.org/10.1016/j.crvi.2010.12.013>
- [4] F. J. Leigh, I. Mackay, H. R. Oliveira, N. E. Gosman, R. A. Horsnell, H. Jones, J. White, W. Powell, and T. A. Brown, “Using diversity of the chloroplast genome to examine evolutionary history of wheat species,” *Genetic Resources and Crop Evolution*, vol. 60, no. 6, pp. 1831–1842, 2013.
- [5] J. Cockram, H. Jones, F. J. Leigh, D. O’Sullivan, W. Powell, D. A. Laurie, and A. J. Greenland, “Control of flowering time in temperate cereals: Genes, domestication, and sustainable productivity,” *Journal of Experimental Botany*, vol. 58, no. 6, pp. 1231–1244, 2007.
- [6] N. Hughes, K. Askew, C. P. Scotson, K. Williams, C. Sauze, F. Corke, J. H. Doonan, and C. Nibau, “Non-destructive, high-content analysis of wheat grain traits using X-ray micro computed tomography,” *Plant Methods*, vol. 13, 2017.
- [7] V. C. Gegas, A. Nazari, S. Griffiths, J. Simmonds, L. Fish, S. Orford, L. Sayers, J. H. Doonan, and J. W. Snape, “A Genetic Framework for Grain Size and Shape Variation in Wheat,” *The Plant Cell*, vol. 22, no. 4, pp. 1046–1056, 2010. [Online]. Available: <http://www.plantcell.org/lookup/doi/10.1105/tpc.110.074153>
- [8] S. R. Tracy, J. F. Gómez, C. J. Sturrock, Z. A. Wilson, and A. C. Ferguson, “Non-destructive determination of floral staging in cereals using X-ray micro computed tomography (μ CT),” *Plant Methods*, vol. 13, no. 1, pp. 1–12, 2017.
- [9] V. M. Jhala and V. S. Thaker, “X-ray computed tomography to study rice (*Oryza sativa* L.) panicle development,” *Journal of Experimental Botany*, vol. 66, no. 21, pp. 6819–6825, 2015.
- [10] R. Metzner, A. Eggert, D. van Dusschoten, D. Pflugfelder, S. Gerth, U. Schurr, N. Uhlmann, and S. Jahnke, “Direct comparison of MRI and X-ray CT technologies for 3D imaging of root systems in soil: Potential and challenges for root trait quantification,” *Plant Methods*, vol. 11, no. 1, pp. 1–11, 2015.
- [11] J. L. Pfaltz, “Sequential Operations in Digital Picture Processing,” *Journal of the ACM*, vol. 13, no. 4, pp. 471–494, oct 1966. [Online]. Available: <http://portal.acm.org/citation.cfm?doid=321356.321357>
- [12] J. M. Kleinberg, “Two algorithms for nearest-neighbor search in high dimensions,” in *Proceedings of the twenty-ninth annual ACM symposium on Theory of computing - STOC*

'97. New York, New York, USA: ACM Press, 1997, pp. 599–608. [Online]. Available: <http://dl.acm.org/citation.cfm?id=258533.258653>