


Protected Route RBAC

6 — Authentication RBAC (3.3-3.7)

1: Token

GET /api/v1/auth/me | Header Authorization | : 401 (NO_TOKEN)

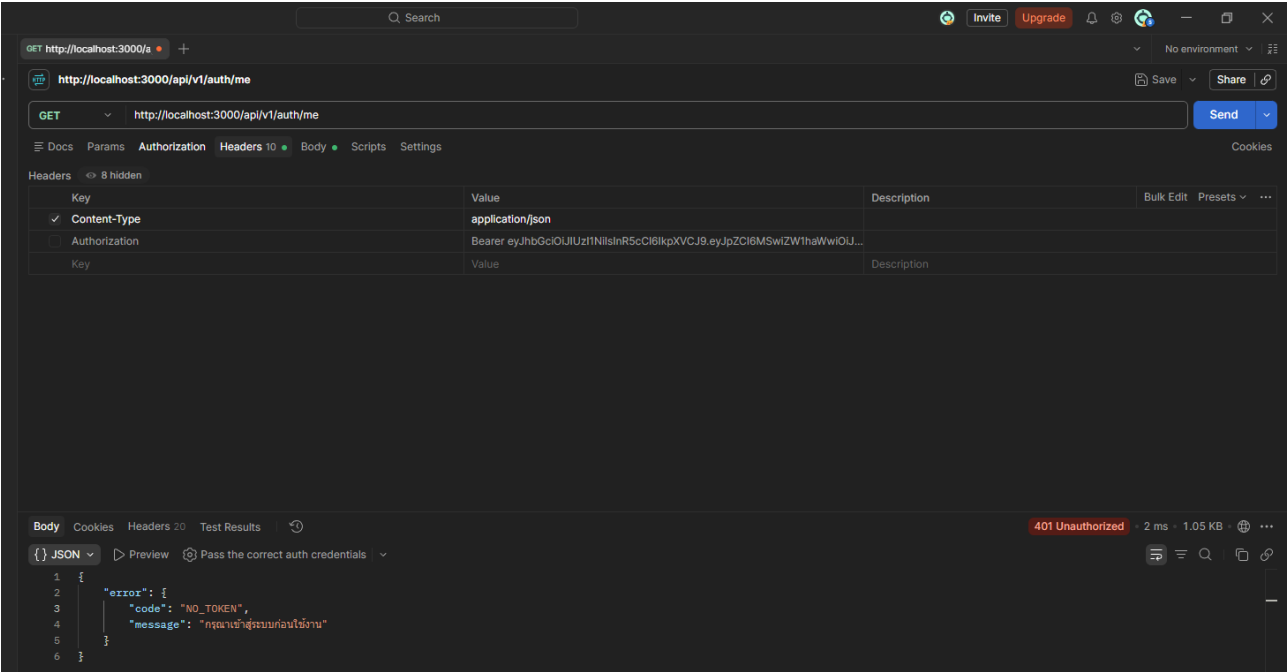

2: Token ()

GET /api/v1/auth/me | Authorization: Bearer | : 200

GET http://localhost:3000/a

http://localhost:3000/api/v1/auth/me

GET http://localhost:3000/api/v1/auth/me

Docs Params Authorization Headers 10 Body Scripts Settings

Headers 8 hidden

Key	Value	Description	Bulk Edit	Presets	...
Content-Type	application/json				
Authorization	Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpZi6MSWZlbnR5bW91Zi...				
Key	Value	Description			

Body Cookies Headers 20 Test Results

200 OK 2 ms 1.05 KB


JSON

Preview Visualize

```
1 {
2   "message": "shiq",
3   "data": {
4     "id": 1,
5     "email": "student1@example.com",
6     "role": "student",
7     "iat": 1788166026,
8     "exp": 1788169626
9   }
10 }
```


3: student

DELETE /api/v1/students/1 | Authorization: Bearer | : 403 (FORBIDDEN)

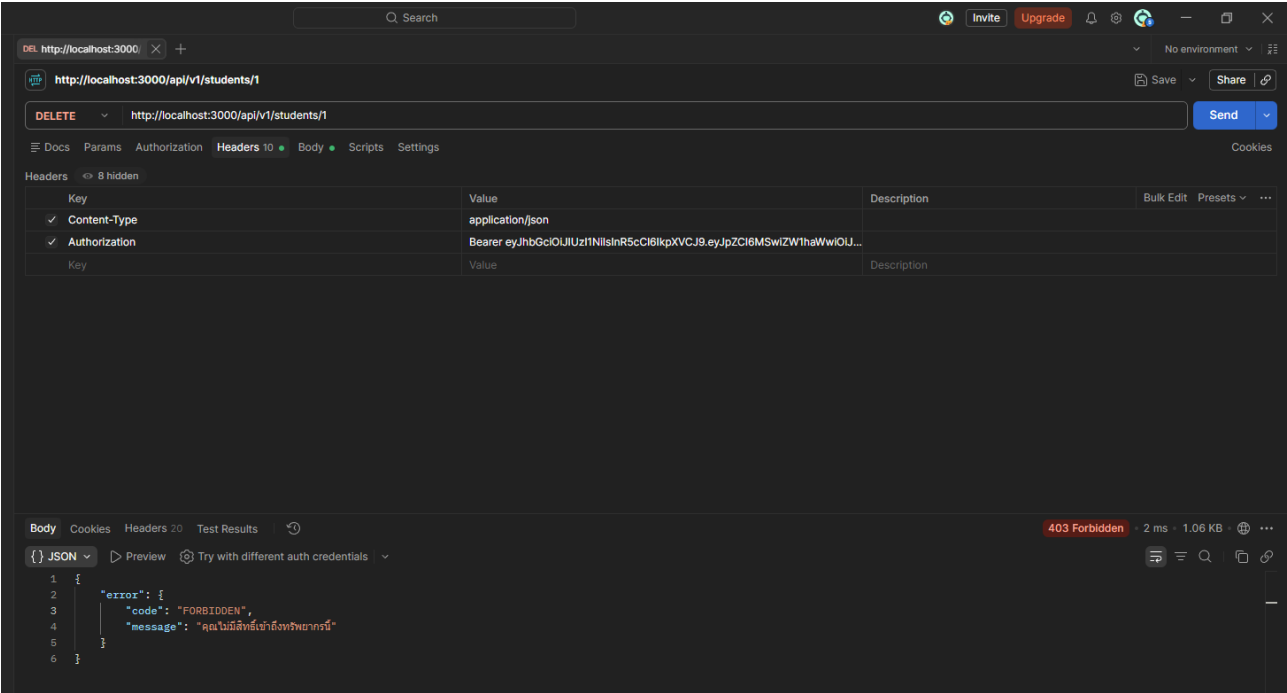

4: admin

DELETE /api/v1/students/1 | Authorization: Bearer | : 200 (: 204 No Content —)

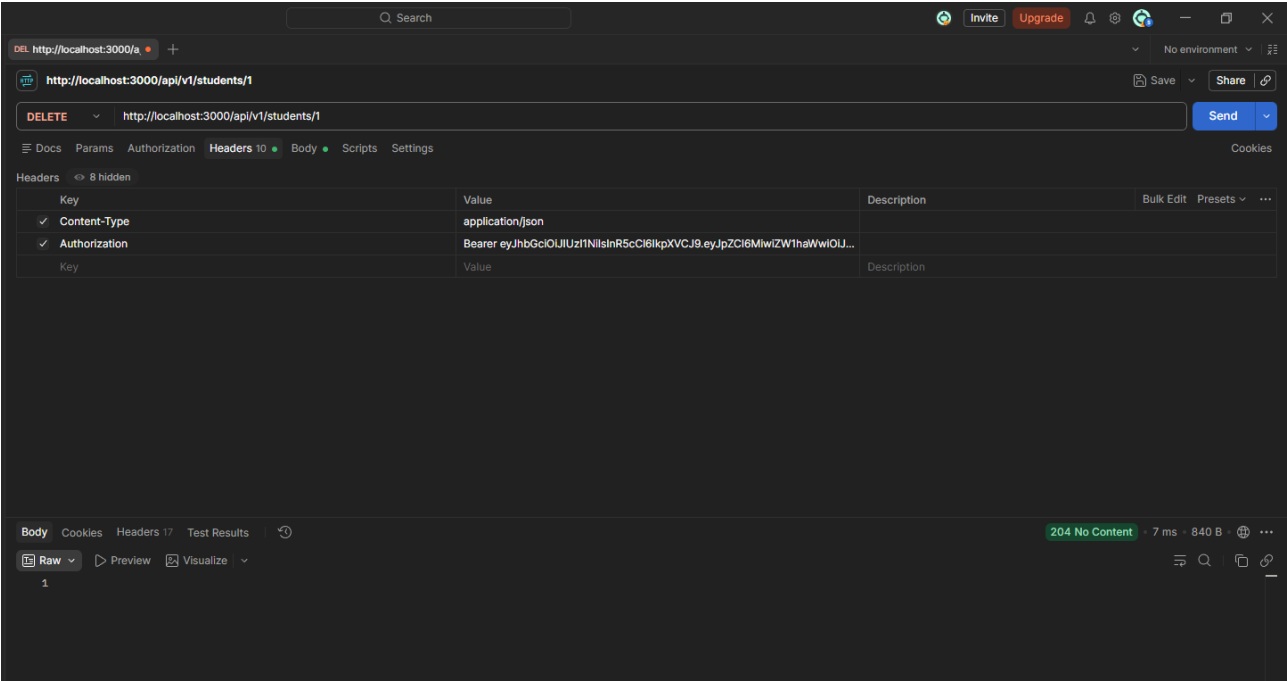

5: Token

GET /api/v1/auth/me | Authorization: Bearer | : 401 (INVALID_TOKEN)

