

```

* Project folder globals
* -----

global dataWorkFolder      "$projectfolder/DataWork"

*iefolder*1*FolderGlobals*master*****
*iefolder will not work properly if the line above is edited

global mastData            "$dataWorkFolder/MasterData"

*iefolder*1*FolderGlobals*rawData*****
*iefolder will not work properly if the line above is edited


global encryptFolder       "$dataWorkFolder/EncryptedData"
global masterIdDataSets    "$encryptFolder/IDMasterKey"

*iefolder*1*RoundGlobals*rounds*baseline*****
*iefolder will not work properly if the line above is edited

*baseline| folder globals
global baseline            "$dataWorkFolder/baseline"
global baseline_dt        "$baseline/DataSets"
global baseline_do        "$baseline/Dofiles"
global baseline_out       "$baseline/Output"

```

(a) Master do-file

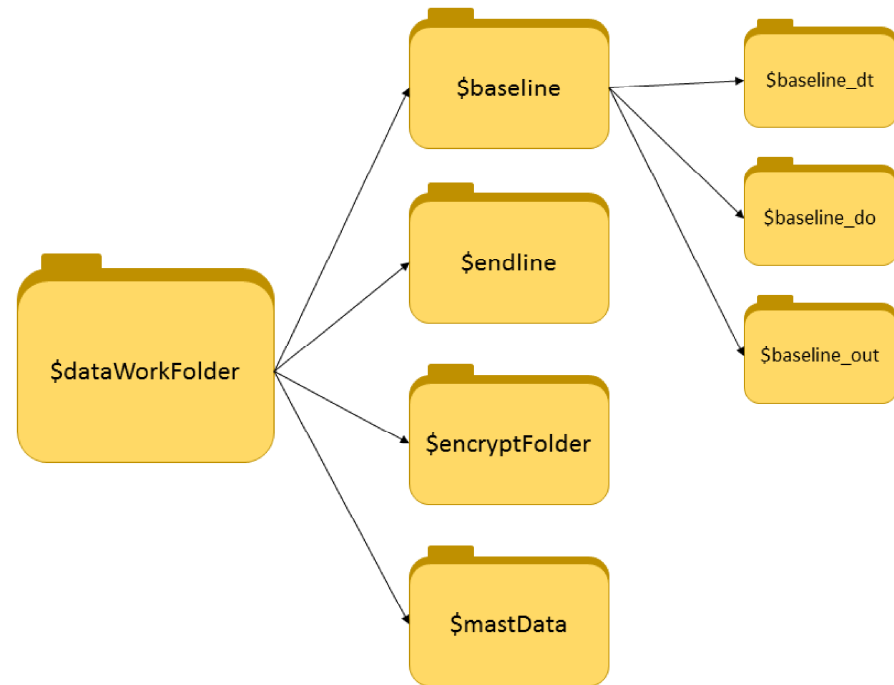

(b) Folder structure