

LAPORAN PRAKTIKUM VIDEO 2

PEMOGRAMAN MOBILE



Nama : Siti Mutmainah

NIM : 244107020143

Kelas : TI-2D

PROGRAM STUDI D-IV TEKNIK INFORMATIKA

JURUSAN TEKNOLOGI INFORMASI

POLITEKNIK NEGERI MALANG

2026

Setelah itu buat project menggunakan create dart.

```
PS D:\Semester 5\Pemograman Mobile> dart create praktikum1
Creating praktikum1 using template console...


.gitignore
analysis_options.yaml
CHANGELOG.md
pubspec.yaml
README.md
bin\praktikum1.dart
lib\praktikum1.dart
test\praktikum1_test.dart

Running pub get...
Resolving dependencies...
Downloading packages...
Changed 48 dependencies!

Created project praktikum1 in praktikum1! In order to get started, run the following
commands:

cd praktikum1
dart run
```

Tampilan di VSCode seperti ini. Terbentuk struktur project.

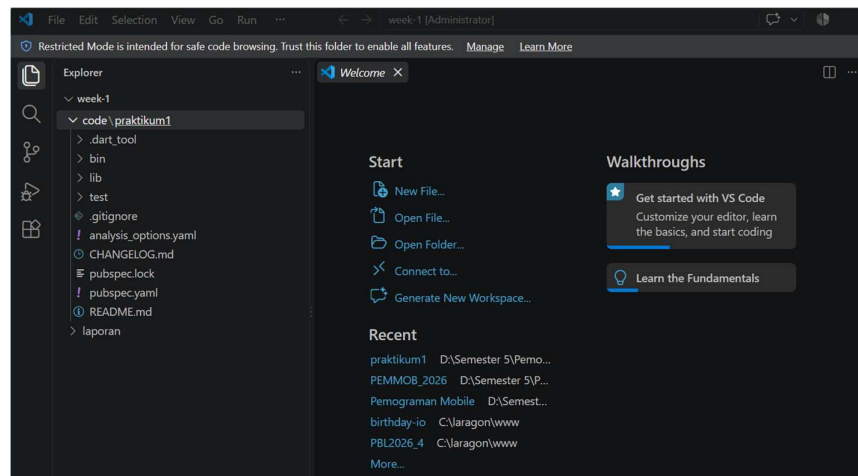

Menjalankan dart dengan (dart run).

```
praktikum1.dart ...\bin X praktikum1.dart ...\lib X
code > praktikum1 > bin > praktikum1.dart > ...
1  import 'package:praktikum1/praktikum1.dart' as praktikum1;
2
   Run | Debug
3  void main(List<String> arguments) {
4    | print('Hello world: ${praktikum1.calculate()}!');
5  }
6

Problems  Output  Debug Console  Terminal  Ports
● PS D:\Semester 5\Pemograman Mobile\week-1\code\praktikum1> dart run
Building package executable...
Built praktikum1:praktikum1.
Hello world: 42!
○ PS D:\Semester 5\Pemograman Mobile\week-1\code\praktikum1> 
```

Var bersifat umum jadi tipe data apapun bisa masuk ke dalam var tanpa membedakan. Jika tidak dideklarasikan maka akan error (var).

```
week-1 > video 2 > praktikum > bin > praktikum1.dart > ...
1  import 'package:praktikum1/praktikum1.dart' as praktikum1;
2
   Run | Debug
3  void main(List<String> arguments) {
4      //print('Hello world: ${praktikum1.calculate()}!');
5      var nama = "iin";
6      var umur = 20;
7      var alamat = "Villa Bukit Tidar";
8      print("Nama: $nama");
9      print("Nama: $umur");
10     print("Nama: $alamat");
11 }
12
```

Hasil run.


```
● PS D:\Semester 5\Pemograman Mobile\week-1\video 2\praktikum> dart run
Building package executable...
Built praktikum1:praktikum1.
Nama: iin
Nama: 20
Nama: Villa Bukit Tidar
○ PS D:\Semester 5\Pemograman Mobile\week-1\video 2\praktikum> █
```

Lalu dicoba lagi memasukkan angka tinggi tetapi dengan tanda “..” sehingga terbaca string walaupun tidak ada abjad. Untuk yang umur itu terbaca int karena tidak ada tanda “..”. Jika ingin digabung menjadi satu maka harus dikonversi ke int sukses.

```
Run | Debug
void main(List<String> arguments) {
    //print('Hello world: ${praktikum1.calculate()}!');
    var nama = "iin";
    var umur = 20;
    var tinggi = "170"; //ini ditambahkan umur dengan angka tetap terbaca string
    var alamat = "Villa Bukit Tidar";

    //var iseng = umur+tinggi; error karena berbeda yang satu string satu int
    var iseng = umur + int.parse(tinggi);
    print("Nama: $nama");
    print("Nama: $umur");
    print("Nama: $alamat");
    print("Hasil iseng: $iseng");
}
```

Hasil run.

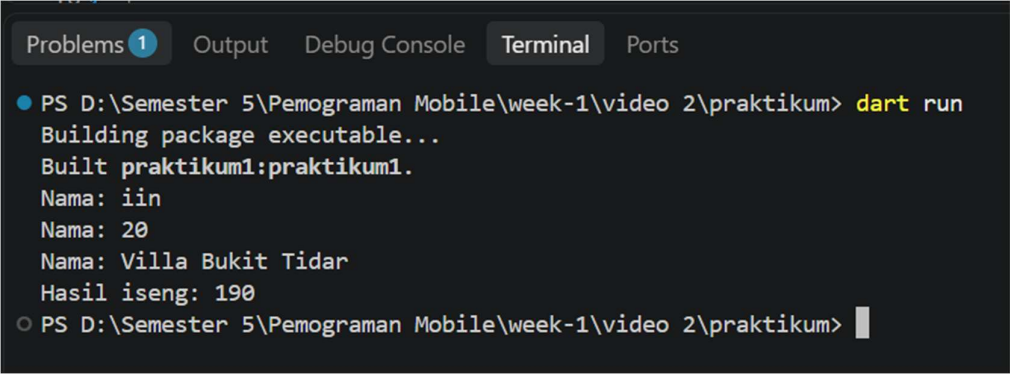

The image shows a screenshot of a terminal window within an IDE. The terminal has tabs for 'Problems' (with a count of 1), 'Output', 'Debug Console', 'Terminal' (which is active), and 'Ports'. The terminal output shows the execution of a Dart program. It starts with a command prompt 'PS D:\Semester 5\Pemograman Mobile\week-1\video 2\praktikum>' followed by the command 'dart run'. The output indicates that the package was built successfully and then prints the following text: 'Nama: iin', 'Nama: 20', 'Nama: Villa Bukit Tidar', and 'Hasil iseng: 190'. The terminal ends with another command prompt 'PS D:\Semester 5\Pemograman Mobile\week-1\video 2\praktikum>' and a cursor.

```
PS D:\Semester 5\Pemograman Mobile\week-1\video 2\praktikum> dart run
Building package executable...
Built praktikum1:praktikum1.
Nama: iin
Nama: 20
Nama: Villa Bukit Tidar
Hasil iseng: 190
PS D:\Semester 5\Pemograman Mobile\week-1\video 2\praktikum> 
```