


Install it. Make it yours. Publish it.

A practical guide to setting up, running,
editing, and deploying your portfolio.

Windows · macOS · Linux

Node.js 22.12+ · npm · Vercel

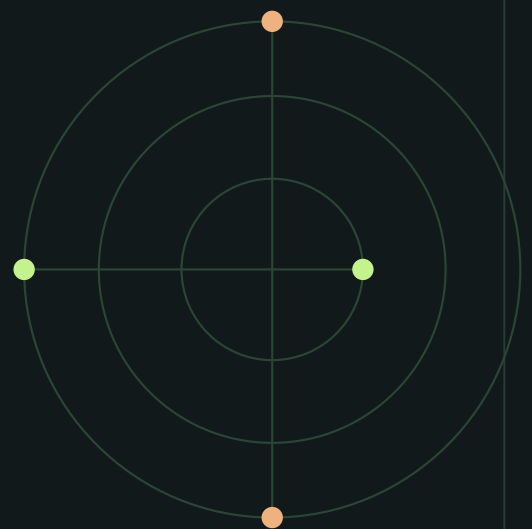

01 / FIRST RUN

Install & preview

The site is a local HTML/CSS/JavaScript project. Install Node once, then use npm from the project root.

You need

Node.js **22.12 or newer** and npm. Download Node.js LTS from nodejs.org. npm is included with Node.

1. Extract the downloaded ZIP

Extract the whole folder first; do not run the project from inside the ZIP preview. In VS Code, choose **File → Open Folder** and select the folder containing `package.json`, `index.html`, and `README.md`.

2. Install the project tools

Open **Terminal → New Terminal** in VS Code. Replace the sample folder path with your real extracted location.

WINDOWS POWERSHELL

```
Set-Location "$HOME\Downloads\Portfolio-Site"
node --version
npm --version
npm ci
```

MACOS / LINUX

```
cd ~/Downloads/Portfolio-Site
node --version
npm --version
npm ci
```

3. Start the local preview

START THE WEBSITE

```
npm run dev
```

Open **`http://localhost:4173`** in your browser. Leave the terminal running while you browse. Stop the server with `Ctrl+C`.

No API credentials needed for the website preview

The homepage, case studies, and local demos run without a `.env` file. The contact form and private inbox intentionally report “not configured” until Supabase and Resend are connected.

Commands & workflow

Run commands from the project root—the folder containing `package.json`.

COMMAND	WHAT IT DOES
<code>npm ci</code>	First install after downloading; restores exact locked packages.
<code>npm run dev</code>	Run the local website/API preview at port 4173.
<code>npm run lint</code>	Check JavaScript for common errors and style issues.
<code>npm test</code>	Run automated validation, API, inbox, and demo tests.
<code>npm run build</code>	Create production static files in <code>dist/</code> .

To run it again later

Open a terminal in the project root and run `npm run dev`. You do not need `npm ci` again unless dependencies change.

A safe edit cycle

- Edit the source file listed in section 3 and save it.
- Refresh the browser at `http://localhost:4173`. The dev server serves the source files.
- Before publishing, run `npm run lint`, `npm test`, and `npm run build`.
- Do not edit `dist/` directly. The build recreates it.

If port 4173 is busy

Choose a different port for just that terminal session:

ALTERNATE PORT

```
$env:PORT = "4174"; npm run dev    # Windows PowerShell
PORT=4174 npm run dev            # macOS / Linux
```

Use the dev server

Opening `index.html` directly is not the same as running the site. Root-relative asset links, project routes, and API behavior expect a local server.

03 / MAKE IT YOURS

Where your information lives

Use VS Code workspace search (Ctrl+Shift+F / ⌘+Shift+F) to find repeated values.

DETAIL	SOURCE FILE / SEARCH FOR
Name, role, short bio, page title/SEO	index.html — <head>, #hero-title, .hero-intro, #about, header/footer.
Education, experience, credentials, skills	index.html — #experience, credentials block, #about / #skills.
Recruiter Mode content	index.html — search id="recruiter-dialog" or RECRUITER MODE.
Homepage project cards and links	index.html — search id="systems".
Technical case-study text	projects/revertpay.html, algoviz.html, voyager.html, edu2job.html.
Contact email and social URLs	index.html, projects/*.html, assets/site.js (search current values; footers repeat).
Canonical domain / crawl URLs	index.html, projects/*.html, robots.txt, sitemap.xml.

Useful files

FILE	PURPOSE
assets/site.css	Colors, typography, responsive layout, Recruiter Mode styles (.recruiter-*).
assets/site.js	Navigation, command palette, resume visibility, contact behavior and fallback.
assets/project.js	User interface and local behavior for case-study demos.
assets/algorithms.js	Bounded algorithm-frame generators.
assets/favicon.svg	Small vector icon shown in browser tabs.

Search before replacing

Some values appear in more than one place. After changing email, a social URL, footer year, or project name, search the workspace for the old value and update every intended occurrence.

04 / PROFILE PHOTO

Replace the SC mark with a portrait

The current SC mark is a monogram, not a hidden or stock portrait. Add your own real, optimized photo only if you want one.

1. Add the image file

Save a square, compressed WebP or JPEG portrait as `assets/profile-photo.webp`. Use your own real photo; do not use a generated stand-in.

2. Replace the monogram in Recruiter Mode

In `index.html`, inside `#recruiter-dialog`, replace the SC span with:

HTML – ACCESSIBLE IMAGE

```

```

3. Add its size and crop style

Add beside the other Recruiter Mode styles in `assets/site.css`:

CSS – RESPONSIVE CROP

```
.recruiter-photo {
  display: block; width: 62px; height: 62px;
  border: 1px solid var(--line);
  border-radius: 50%; object-fit: cover;
}
@media (max-width: 700px) {
  .recruiter-photo { width: 54px; height: 54px; }
}
```

Optional: use the photo in the header/footer too

Search for `class="wordmark-mark">SC` in `index.html` and `projects/*.html`. Replace only the marks you want and add a separate 30×30px `.wordmark-photo` CSS rule (28×28px on mobile). Use `alt=""` because the nearby wordmark already names the link. Keep the favicon simple; portraits are not legible at tab-icon size.

Refresh and verify

If the image is missing, check the exact path and capitalization. The local server supports WebP, JPEG, PNG, AVIF, and SVG image types.

Projects, facts & resume

Update the homepage overview and the project detail together.

Update an existing project

- Change the homepage card in `index.html` and its detailed story in the matching `projects/*.html` file.
- For a demo change, edit `assets/project.js`; algorithm traces live in `assets/algorithms.js`.
- Keep simulations clearly marked as illustrative. Describe only verified project features and completed tests.

Add a project

- Create a dedicated page under `projects/` and a first-class card in `index.html`.
- Add its command-palette entry in `assets/site.js` and public URL in `sitemap.xml`.
- Check keyboard focus, mobile layout, source links, and run lint, tests, and build.

Add your actual resume

Place the real supplied PDF at `public/resume.pdf`. The build copies it to the site root as `/resume.pdf`; the download link stays hidden until that file exists. This checkout contains no resume PDF, so it uses an email request instead. Do not fabricate a replacement.

Edit safely

- Update facts only from a source you can verify; search for duplicate copies.
- Use actual social accounts and approved personal images only.
- Never put passwords, API keys, service-role keys, or private inbox content in HTML or browser JavaScript.
- After changes, run `npm run lint`, `npm test`, and `npm run build`.

Be precise about completion

Do not present unverified model accuracy, planned tests, or unsupported algorithm modules as completed achievements.

Contact form & private inbox

These server features are real, but they are not pre-configured with private service credentials.

What works without setup

The homepage, case studies, and educational demos work locally with only Node and npm. Without Supabase and Resend, the contact API and /admin/inbox report that the service is not configured; they do not show fake success or sample messages.

To enable persistence, sign-in, and email

- Create a Supabase project and run sql/schema.sql in its SQL editor.
- Create a private Supabase Auth admin account and add only its user ID to public.admin_users as described in README.md.
- Configure a Resend sender address verified for your domain.
- Set the variables below in a private local .env file or Vercel environment settings.

PURPOSE	PRIVATE SERVER VARIABLES
Supabase	SUPABASE_URL, SUPABASE_ANON_KEY, SUPABASE_SERVICE_ROLE_KEY
Rate limit	CONTACT_RATE_LIMIT_SECRET (random, 32+ characters)
Email	RESEND_API_KEY, CONTACT_TO_EMAIL, CONTACT_FROM_EMAIL
Origin	ALLOWED_ORIGIN (exact production HTTPS origin)

Keep secrets private

Never commit .env or put keys in index.html/assets/site.js. .env.example is only a variable-name template; its values are placeholders. README.md has the full security/database procedure.

Optional local .env copy

ONLY WHEN CONFIGURING THE BACKEND

Copy-Item .env.example .env # Windows PowerShell
cp .env.example .env # macOS / Linux

Build, deploy & troubleshoot

Use Vercel for the static site and serverless API routes.

Vercel checklist

- Import the project into your own Vercel setup. `vercel.json` sets `npm run build` and output directory `dist`.
- For `contact/admin`, configure server variables, run the Supabase schema, and provision the admin account before testing.
- Set `ALLOWED_ORIGIN` to your exact HTTPS domain—not a wildcard. Update canonical URLs, `robots.txt`, and `sitemap.xml` if the domain changes.
- Deploy, then verify the homepage, all four projects, contact behavior, and `/admin/inbox`.

Common problems

SYMPTOM	FIX
npm not found	Install Node.js 22.12+, restart terminal, and check <code>node --version</code> .
package.json not found	Change directory to the extracted project root, not its parent or <code>dist/</code> .
Contact says not configured	Expected until private Supabase/Resend values and SQL setup are supplied.
Photo/style looks stale	Refresh, check the exact asset name/path, and confirm you edited source.
Change disappears after build	You probably edited <code>dist/</code> . Edit the source and rebuild.

Source file map

LOCATION	CONTENTS
<code>index.html</code>	Homepage facts, navigation, contact form, Recruiter Mode.
<code>assets/site.css</code> / <code>site.js</code>	Responsive styles / browser behavior.
<code>projects/*.html</code>	Four technical case studies.
<code>api/</code> + <code>lib/</code> + <code>sql/</code>	Server handlers, private helpers, database schema.
<code>docs/PORTFOLIO-OWNER-GUIDE.md</code>	Editable source for this PDF.

Full technical reference

In the same project folder, open `README.md` for API endpoints, admin authorization, rate limits, database setup, and deployment details.