

More on File class

More on Java's File Class - Common Methods

The File class in Java provides many useful methods to work with files and directories. Let's explore some of the most commonly used methods with examples.

File Class Methods

1. createNewFile()

- Creates a new, empty file if it doesn't already exist
- Returns true if the file was created, false if it already exists

2. getPath()

- Returns the path string used to create the File object
- Useful for verifying what path you're working with

3. isDirectory()

- Checks if the File object represents a directory
- Returns true if it's a directory, false otherwise

4. isFile()

- Checks if the File object represents a regular file
- Returns true if it's a file, false otherwise

5. list()

- Returns an array of strings naming the files and directories in a directory
- Only works if the File object represents a directory

Example:

```
import java.io.File;

public class LaunchIO2 {
    public static void main(String[] args) {
        // Store file and directory paths in variables for easy access
        String filePath = "D:\\telusko\\InputOutput\\java.txt";
        String dirPath = "D:\\telusko\\InputOutput\\Directory";

        try {
            // Create a File object for a file
            File file1 = new File(filePath);

            // Get and print the path of the file
            // This shows the path string used to create this File object
            System.out.println("File path: " + file1.getPath());

            // Check if file1 is a directory (should be false for a file)
            System.out.println("Is file1 a directory? " + file1.isDirectory());

            // Check if file1 is a file (should be true for a file)
            System.out.println("Is file1 a file? " + file1.isFile());

            // Create a File object for a parent directory
            File file3 = new File("D:\\telusko\\InputOutput");

            // List all files and directories in the parent directory
            String[] filesList = file3.list();

            // Print all files and directories found in the parent directory
            System.out.println("\nContents of the parent directory:");
            for (String name : filesList) {
                System.out.println(name);
            }


            // Create a File object for a directory
            File dir = new File(dirPath);

            // Check if dir is a directory (should be true for a directory)
            System.out.println("\nIs dir a directory? " + dir.isDirectory());

            // Check if dir is a file (should be false for a directory)
            System.out.println("Is dir a file? " + dir.isFile());

        } catch (Exception e) {
            System.out.println("Some problem occurred: " + e.getMessage());
        }
    }
}
```

Output:

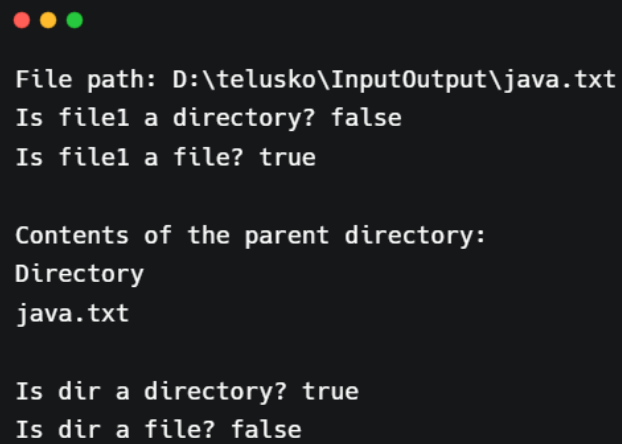

```
File path: D:\telusko\InputOutput\java.txt
Is file1 a directory? false
Is file1 a file? true

Contents of the parent directory:
Directory
java.txt

Is dir a directory? true
Is dir a file? false
```