

BSSF Balance Management REST Interface 2.12

INTERFACE DESCRIPTION

Copyright

© Ericsson AB 2025. All Rights Reserved. No part of this document may be reproduced in any form without the written permission of the copyright owner.

Disclaimer

The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. Ericsson shall have no liability for any error or damage of any kind resulting from the use of this document.

This information is intended exclusively for demonstration purposes when used in the development of client-side integrations. It may not include definitions for various elements or behaviors that could arise from client-server interactions involving any third-party products, providers, or deployment platforms, whether external or internal to the delivered product.

Trademark List

Ericsson and the Ericsson logotype are the trademarks or registered trademarks of Telefonaktiebolaget LM Ericsson. All other product or service names mentioned in a document on this server are trademarks of their respective companies.



Contents

1	Introduction	1
1.1	Transfer Mechanism	1
1.2	Authentication and Authorization	1
1.3	Compatibility Mechanism	1
1.3.1	HTTP Content Negotiation	1
1.3.2	Product Customization	1
1.3.3	Backward Compatibility	2
2	Syntax Notation	3
2.1	Resource Identifier	3
2.2	HTTP Headers	3
2.3	Resource Representation Profile	4
3	Service	5
3.1	BSSF Balance Management	5
3.1.1	Description	5
3.2	Service Registry	5
4	Resources	7
4.1	Balance Top Up	7
4.1.1	Execute Balance Top Up	7
4.1.2	Reset Balance TopUp Fraud Counter	25
4.2	Billing Account Bucket Adjustment	35
4.2.1	Execute Billing Account Bucket Adjustment	35
4.3	Bucket Adjustment	50
4.3.1	Execute Bucket Adjustment	50
4.4	Product Bucket Adjustment	71
4.4.1	Execute Product Bucket Adjustment	71
4.5	Settlement Account Bucket Adjustment	86
4.5.1	Execute Settlement Account Bucket Adjustment	86
5	Generic Interface Parameters	101
5.1	Generic Interface Parameters Request	101
5.1.1	bss.genericInterfaceParameters Request Version 4	101
5.2	Generic Interface Parameters Response	106
5.2.1	bss.genericInterfaceParameters Response Version 4	106
6	Result Representation	109
6.1	bss.errorMessage Response Version 1	109



6.1.1	bss.cmn.ErrorMessage (version 1)	109
6.2	bss.errorMessage Response Version 2	110
6.2.1	bss.cmn.SupplementaryError (version 2)	111
6.3	Result Codes	112
7	Interface Version Changes	113
7.1	Interface Version 2.0	113
7.2	Interface Version 2.1	113
7.3	Interface Version 2.2	114
7.4	Interface Version 2.3	114
7.5	Interface Version 2.4	114
7.6	Interface Version 2.5	114
7.7	Interface Version 2.6	115
7.8	Interface Version 2.7	115
7.9	Interface Version 2.8	115
7.10	Interface Version 2.9	115
7.11	Interface Version 2.10	116
7.12	Interface Version 2.11	116
7.13	Interface Version 2.12	117
	Reference List	119



1 Introduction

Target Groups

The target group for this document is:

— Solution Integrators

1.1 Transfer Mechanism

The transfer mechanism used is HTTPS. Both requests and responses use headers to send information about the message.

The access port is configurable. Clients that use this interface should support a configurable port.

1.2 Authentication and Authorization

Authentication is controlled by the inclusion of a Java Web Token (JWT) in the authorization header of the HTTP message.

1.3 Compatibility Mechanism

The following version mechanisms are used:

1.3.1 HTTP Content Negotiation

HTTP content negotiation uses the profile parameter in the HTTP Accept header to request a certain version of the resource representation. The profile value indicates the JSON schema and version used for the resource representation. If the profile parameter is not passed in the HTTP Accept header, the server returns the latest version of the resource representation.

For operations supporting error response version 1, if error response version is not specified it is assumed to be error response version 1.

1.3.2 Product Customization

Elements and data types that are specific for product customization are marked with PC in the section describing the element or data type. Functions and characteristics of a product customization is not part of the standard delivery. Contact your local Ericsson office for more information regarding ordering and compatibility.



All elements of a PC message are also product customizations when inside such a message. If an element or data type is marked PC within an otherwise standard record, is noted as such in the relevant chapters.

In order to improve readability the following applies in the rest of the document:

- The following applies to functions marked with (PC). The PC-tag is placed in the description.

1.3.3 Backward Compatibility

Json objects name and/or their respective content stated in this document may be changed without any further notice.

Backward compatibility within a major version is only kept for the messages sent over the network.



2 Syntax Notation

This interface uses a generic syntax that is described in the following sections. For a description of the actual values, refer to Resources.

2.1 Resource Identifier

The resource identifier is expressed by a URI with the following format:

```
{serverRoot}/{api}/{resourcePath}
```

```
{scheme:}://{host}[:{port}]/[{deploymentComponent}]{apiName}/{apiVersion}/{resourcePath}
```

Table 1 Server root parameter

Parameter	Description
serverRoot	Is implementation specific
api	Is the name and version of the API.

Table 2 API and resource path parameters

Parameter	Description
scheme	The Application protocol, for example HTTPS.
host	The network address to access the interface and its connected service.
port	The TCP/IP port used for access. If not specified, default ports for the applications are assumed.
deploymentComponent	The name of the deployment component providing the resource.
apiName	The name of the interface.
apiVersion	The version to use
resourcePath	The resource name and a unique ID.

The full URI must be encoded according to RFC3986 before usage.

2.2 HTTP Headers

The interface uses standard HTTP headers. In addition, custom HTTP headers are used with the following syntax:



ERICSSON.<name>:<value>

Accept Header Profile Value

The server accepts the following formats for profile values:

Accept: application/json; application/merge-patch+json;
profile=<profile-URI> <profile-URI>

If no Accept header field is present, then it is assumed that the client accepts all media types.

2.3 Resource Representation Profile

The profile link relation type indicates that a resource representation follows one or more profiles. For more information, refer to [RFC 6906](#).

The profile is identified by a URI with the following syntax:

profile="http://ericsson.com/<domain>.<interface>.<resource>.<operationAndDirection>.<version>.json#"

Table 3 REST Resource Representation Parameters

Parameter	Description
domain	Fixed value: bss
interface	Is the interface name.
resource	Is the resource name.
operationAndDirection	Is the CRUD operation with its direction request and response.
version	Major version of the resource representation.



3 Service

3.1 BSSF Balance Management

Please read the service documentation available to understand how to use this interface in connection with the service.

3.1.1 Description

The Balance Management applications are responsible for activities related to the creation and maintenance of the balances of a customer and/or a subscriber. Balances may be shared e.g. between subscribers in a hierarchy. Balance can be managed at most granule level, for example at the level of subscription. These processes will be required to support both batch and real-time processing.

3.2 Service Registry

The Service Registry is a central repository of available services. Their locations are used by clients to dynamically find the service providers it needs. A service provider registers its services in the registry. Service consumers look up services and service locations.

The services accessed through the interface are the following:

Table 4 Services Exposed in the Service Registry

Service Name	Service Type	Version	Environment	Available Capabilities	Optional Data
BSSF_Balance_Management	REST	2	Prod		
BSSF_Balance_Management	REST	2	Prod		secured=true

Note: This chapter is only applicable for Virtualized deployments.





4 Resources

The interface offers access to different resources. Each resource has its own access path and parameters which are described in the following sections.

The referenced representations are available in a ZIP file at the following location:

edw:/alex?FN=BSSFBalanceManagement_v2_12_schemaFile.zip

4.1 Balance Top Up

Responsible to refill account balances for different payment types (voucher based or voucherless refill).

4.1.1 Execute Balance Top Up

Execute top up.

4.1.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

— POST {scheme:}://{host}[:{port}]/[{deploymentComponent}]/bssfBalanceManagement/v1/balanceTopUp

4.1.1.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 5 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.balanceTopup.createResponse.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.balanceTopup.createResponse.2.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Content-Type		Optional
	One of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.balanceTopup.createRequest.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.balanceTopup.createRequest.2.json#" • application/json;charset=utf-8 • application/json	-



Header Field Name	Header Field Value	Mandatory/Optional
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 6 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 7 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory
	For Status-Code: 201, one of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.balanceTopup.createResponse.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.balanceTopup.createResponse.2.json#" For Status-Code: 4XX,5XX, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-
WWW-Authenticate		Optional Status Code: 401
	<challenge>	-

STANDARD HEADER



Table 8 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID HEADER CUSTOM HEADER

4.1.1.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.1.1.3.1 bss.bssfBalanceManagement.balanceTopup Create Request Version 2

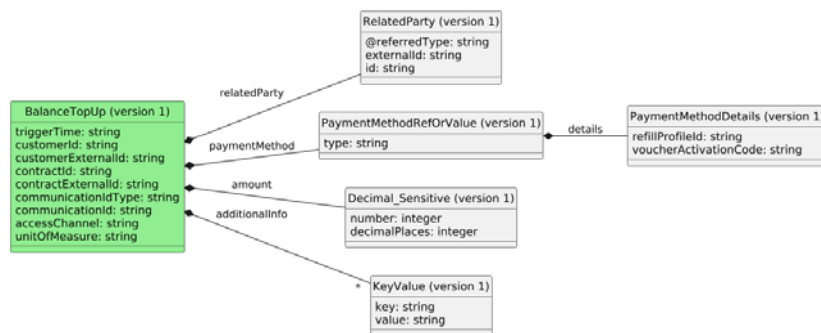


Figure 1 bss.bssfBalanceManagement.balanceTopup.createRequest.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfBalanceManagement.balanceTopup.createRequest.2.json#>

The representation is provided as JSON objects with the following attributes:

Table 9 BalanceTopUp (version 1)

Name	Type	Description
BalanceTopUp (version 1)	object	Perform balance top up.



Name		Type	Description
	triggerTime	string	The timestamp indicating the time of balance top up. DateTime according to W3. yyyy-MM-ddThh:MM:ss(.SS)TZD, where TZD = Z or +hh:mm or -hh:mm (eg 1997-07-16T19:20:30.45+01:00). Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01]))((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	customerId	string	A unique customer ID for the customer for which balance top up is done. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256 Deprecated
	customerExternalId	string	A customer ID provided by an external system for the customer for which balance top up is done. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256 Deprecated
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role
	contractId	string	A unique contract ID for the contract on which balance top up is done. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	contractExternalId	string	A contract ID provided by an external system for the contract on which balance top up is done. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	communicationIdType	string	Value of Communication type, for example E.164.



RelatedParty (version 1)

Table 10 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

PaymentMethodRefOrValue (version 1)

Table 11 PaymentMethodRefOrValue (version 1)

Name		Type	Description
PaymentMethodRefOrValue (version 1)		object	Payment method control information.
	type	string	Type of payment method. Max length: 128
	details	PaymentMethodDetails (version 1)	Balance topup details.

PaymentMethodDetails (version 1)

Table 12 PaymentMethodDetails (version 1)

Name		Type	Description
PaymentMethodDetails (version 1)		object	Balance Topup detail information.



Name		Type	Description
	refillProfileId	string	Refill Profile Id. Max length: 128
	voucherActivationCode	string	Voucher Activation Code. Max length: 128

bss.cmn.Decimal_Sensitive (version 1)

Table 13 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.

bss.cmn.KeyValue (version 1)

Table 14 bss.cmn.KeyValue (version 1)

Name		Type	Description
bss.cmn.KeyValue (version 1)		object	Key value.
	key	string	Represents the data key. Max length: 256
	value	string	Represents the data value. Max length: 256

4.1.1.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.1.4.1 bss.bssfBalanceManagement.balanceTopup Create Response Version 2

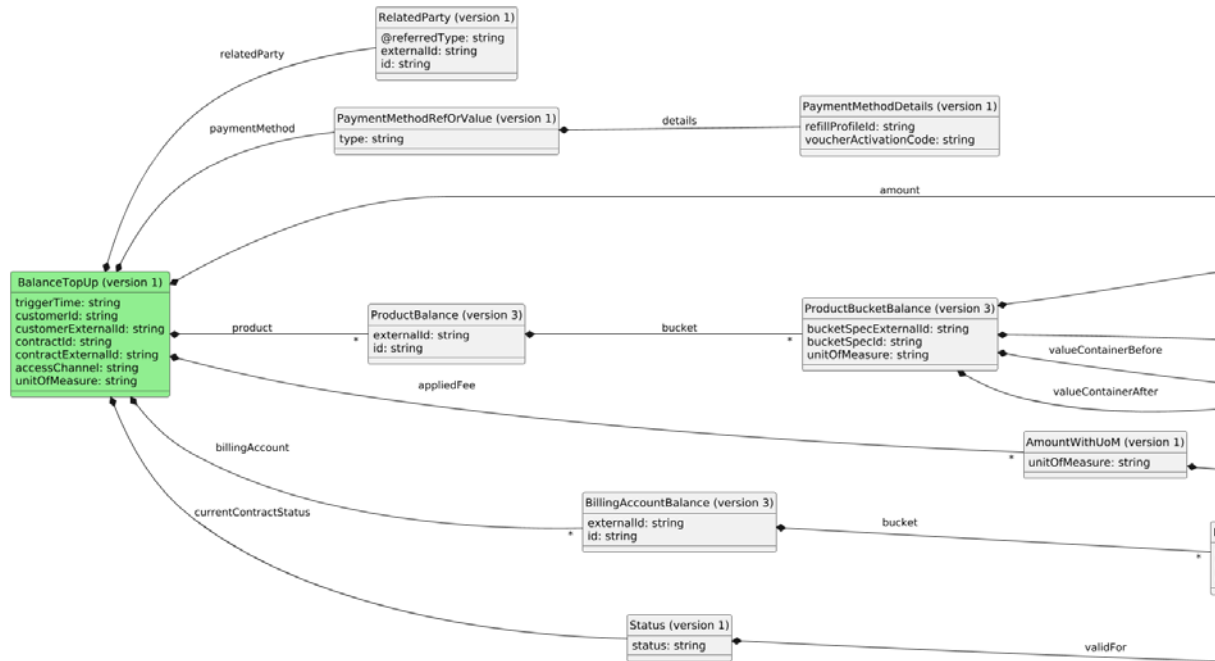


Figure 2 bss.bssfBalanceManagement.balanceTopup.createResponse.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfBalanceManagement.balanceTopup.createResponse.2.json#>

The representation is provided as JSON objects with the following attributes:

Table 15 BalanceTopUp (version 1)

Name	Type	Description
BalanceTopUp (version 1)	object	Perform balance top up.



Name		Type	Description
	triggerTime	string	The timestamp indicating the time of balance top up. DateTime according to W3. yyyy-MM-ddThh:MM:ss(.SS)TZD, where TZD = Z or +hh:mm or -hh:mm (eg 1997-07-16T19:20:30.45+01:00). Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01]))((02-(0[1-9] 12)[0-9])) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+ -(0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	customerId	string	A unique customer ID for the customer for which balance top up is done. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256 Deprecated
	customerExternalId	string	A customer ID provided by an external system for the customer for which balance top up is done. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256 Deprecated
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role
	contractId	string	A unique contract ID for the contract on which balance top up is done. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	contractExternalId	string	A contract ID provided by an external system for the contract on which balance top up is done. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	accessChannel	string	The access channel used for the balance top up.



RelatedParty (version 1)

Table 16 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

PaymentMethodRefOrValue (version 1)

Table 17 PaymentMethodRefOrValue (version 1)

Name		Type	Description
PaymentMethodRefOrValue (version 1)		object	Payment method control information.
	type	string	Type of payment method. Max length: 128
	details	PaymentMethodDetails (version 1)	Balance topup details.

PaymentMethodDetails (version 1)

Table 18 PaymentMethodDetails (version 1)

Name		Type	Description
PaymentMethodDetails (version 1)		object	Balance Topup detail information.



Name		Type	Description
	refillProfileId	string	Refill Profile Id. Max length: 128
	voucherActivationCode	string	Voucher Activation Code. Max length: 128

bss.cmn.Decimal_Sensitive (version 1)

Table 19 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.

bss.cmn.AmountWithUoM (version 1)

Table 20 bss.cmn.AmountWithUoM (version 1)

Name		Type	Description
bss.cmn.AmountWithUoM (version 1)		object	The versions of the value.
	value	bss.cmn.Decimal_Sensitive (version 1)	The value.
	unitOfMeasure	string	The unit of measure of the value. Max length: 32



BillingAccountBalance (version 3)

Table 21 BillingAccountBalance (version 3)

Name		Type	Description
BillingAccountBalance (version 3)		object	A billing account balance structure.
	externalId	string	Unique identifier of the billing account populated by external system. Pattern: $^(?=\s*\S).*\$$ Max length: 256
	id	string	Unique identifier of the billing account. Pattern: $^(?=\s*\S).*\$$ Max length: 256
	bucket	array of BillingAccountBucketBalance (version 3)	Buckets.

BillingAccountBucketBalance (version 3)

Table 22 BillingAccountBucketBalance (version 3)

Name	Type	Description
BillingAccountBucketBalance (version 3)	object	Billing account bucket balance.



Name		Type	Description
	bucketSpecExternalId	string	Uniquely identifying the bucket using the external specification id. Pattern: ^(?=\s*\S).* Max length: 256
	bucketSpecId	string	Uniquely identifying the bucket using the specification id. Pattern: ^(?=\s*\S).* Max length: 256
	amountBefore	bss.cmn.Decimal_Sensitive (version 1)	The amount before deduction.
	amountAfter	bss.cmn.Decimal_Sensitive (version 1)	The amount after deduction.
	recoveredAmount	bss.cmn.Decimal_Sensitive (version 1)	The recovered amount on the Billing Account Bucket.
	validForBefore	bss.cmn.TimePeriod (version 1)	Validity of the bucket prior to top up.
	validForAfter	bss.cmn.TimePeriod (version 1)	Validity of the bucket after top up.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32

bss.cmn.TimePeriod (version 1)

Table 23 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

ProductBalance (version 3)

Table 24 ProductBalance (version 3)

Name	Type	Description
ProductBalance (version 3)	object	Product Balance.



Name		Type	Description
	externalId	string	Unique identifier of the product populated by external system. Pattern: ^(?=\s*\S).* Max length: 256
	id	string	Unique identifier of the product. Pattern: ^(?=\s*\S).* Max length: 256
	bucket	array of ProductBucketBalance (version 3)	The product buckets.

ProductBucketBalance (version 3)

Table 25 ProductBucketBalance (version 3)

Name	Type	Description
ProductBucketBalance (version 3)	object	Product Bucket balance.



Name		Type	Description
	bucketSpecExternalId	string	Uniquely identifying the bucket using the external specification id. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	bucketSpecId	string	Uniquely identifying the bucket using the specification id. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	amountBefore	bss.cmn.Decimal_Sensitive (version 1)	The amount of the bucket before deduction.
	amountAfter	bss.cmn.Decimal_Sensitive (version 1)	The amount of the bucket after deduction.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	valueContainerBefore	array of ValueContainer (version 1)	Value containers before deduction.
	valueContainerAfter	array of ValueContainer (version 1)	Value containers after deduction.

ValueContainer (version 1)

Table 26 ValueContainer (version 1)

Name		Type	Description
ValueContainer (version 1)		object	Value Container.
	amount	bss.cmn.Decimal_Sensitive (version 1)	The amount of this value container.
	validFor	bss.cmn.TimePeriod (version 1)	The validity period of the value container.

bss.cmn.Status (version 1)

Table 27 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.



Name		Type	Description
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

4.1.2 Reset Balance TopUp Fraud Counter

Reset the balance top up fraud counters for a given customer and contract.

4.1.2.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

— POST {scheme:}://{host}[:{port}]/{deploymentComponent}/bssfBalanceManagement/v1/resetBalanceTopUpFraudCounter

4.1.2.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 28 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.resetBalanceTopupFraudCounter.createResponse.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.resetBalanceTopupFraudCounter.createResponse.2.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Content-Type		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	One of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.resetBalanceTopupFraudCounter.createRequest.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.resetBalanceTopupFraudCounter.createRequest.2.json#" • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 29 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 30 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory
	For Status-Code: 201, one of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.resetBalanceTopupFraudCounter.createResponse.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.resetBalanceTopupFraudCounter.createResponse.2.json#" For Status-Code: 4XX,5XX, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-
WWW-Authenticate		Optional Status Code: 401
	<challenge>	-

STANDARD HEADER



Table 31 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID HEADER CUSTOM HEADER

4.1.2.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.1.2.3.1 bss.bssfBalanceManagement.resetBalanceTopupFraudCounter Create Request Version 2




Figure 3 bss.bssfBalanceManagement.resetBalanceTopupFraudCounter.createRequest.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfBalanceManagement.resetBalanceTopupFraudCounter.createRequest.2.json#>

The representation is provided as JSON objects with the following attributes:

Table 32 BalanceTopUpFraudCounter (version 1)

Name	Type	Description
BalanceTopUpFraudCounter (version 1)	object	Information on balance top up fraud.



Name		Type	Description
	customerId	string	A unique customer ID. Pattern: ^(?=\s*\S).*\$ Max length: 256 Deprecated
	customerExternalId	string	A customer ID provided by an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256 Deprecated
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role
	contractId	string	A unique contract ID. Pattern: ^(?=\s*\S).*\$ Max length: 256
	contractExternalId	string	A contract ID provided by an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	communicationIdType	string	Value of Communication ID type. Max length: 32
	communicationId	string	Communication ID value. Max length: 512
	resourceFacingServiceSpecId	string	A unique Id for a Resource Facing Service Specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	resourceFacingServiceSpecExternalId	string	An ID provided by an external system for a Resource Facing Service Specification. Pattern: ^(?=\s*\S).*\$ Max length: 256

RelatedParty (version 1)

Table 33 RelatedParty (version 1)

Name	Type	Description
RelatedParty (version 1)	object	Related Party or Party Role
@referredType	string	Referred Type. Max length: 128
externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).* Max length: 256
id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).* Max length: 256

4.1.2.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.2.4.1 bss.bssfBalanceManagement.resetBalanceTopupFraudCounter Create Response Version 2

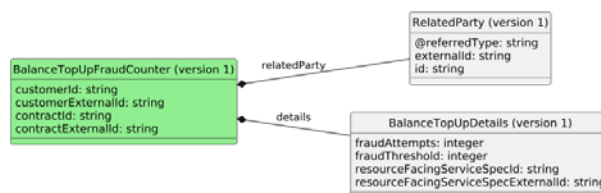


Figure 4 bss.bssfBalanceManagement.resetBalanceTopupFraudCounter.create Response.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfBalanceManagement.resetBalanceTopupFraudCounter.createResponse.2.json#>

The representation is provided as JSON objects with the following attributes:



Table 34 BalanceTopUpFraudCounter (version 1)

Name		Type	Description
BalanceTopUpFraudCounter (version 1)		object	Information on balance top up fraud.
	customerId	string	A unique customer ID. Pattern: ^(?=\s*\S).*\$ Max length: 256 Deprecated
	customerExternalId	string	A customer ID provided by an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256 Deprecated
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role
	contractId	string	A unique contract ID. Pattern: ^(?=\s*\S).*\$ Max length: 256
	contractExternalId	string	A contract ID provided by an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	details	BalanceTopUpDetails (version 1)	Balance top up details.

RelatedParty (version 1)

Table 35 RelatedParty (version 1)

Name	Type	Description
RelatedParty (version 1)	object	Related Party or Party Role



Name		Type	Description
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

BalanceTopUpDetails (version 1)

Table 36 BalanceTopUpDetails (version 1)

Name	Type	Description
BalanceTopUpDetails (version 1)	object	Balance topup details.



Name		Type	Description
	fraudAttempts	integer	Number of detected fraud attempts. The numeric value must be at least -2147483648. The numeric value must not exceed 2147483647.
	fraudThreshold	integer	Fraud attempts Threshold. The numeric value must be at least -2147483648. The numeric value must not exceed 2147483647.
	resourceFacingServiceSpecId	string	A unique reference to the Resource Facing Service Specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	resourceFacingServiceSpecExternalId	string	An external reference to the Resource Facing Service Specification. Pattern: ^(?=\s*\S).*\$ Max length: 256

4.2 Billing Account Bucket Adjustment

Note: Deprecated

4.2.1 Execute Billing Account Bucket Adjustment

Note: Deprecated

Update on Billing Account Bucket.

4.2.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- POST {scheme:}://{host}[:{port}]/[{deploymentComponent}]/bssfBalanceManagement/v1/billingAccountBucketAdjustment/adjust



4.2.1.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 37 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.billingAccountBucketAdjustment.createResponse.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.billingAccountBucketAdjustment.createResponse.2.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Content-Type		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	One of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.billingAccountBucketAdjustment.createRequest.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.billingAccountBucketAdjustment.createRequest.2.json#" • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 38 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 39 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory
	For Status-Code: 201, one of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.billingAccountBucketAdjustment.createResponse.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.billingAccountBucketAdjustment.createResponse.2.json#" For Status-Code: 4XX,5XX, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-
WWW-Authenticate		Optional Status Code: 401
	<challenge>	-

STANDARD HEADER



Table 40 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID HEADER CUSTOM HEADER

4.2.1.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.2.1.3.1 bss.bssfBalanceManagement.billingAccountBucketAdjustment Create Request Version 2

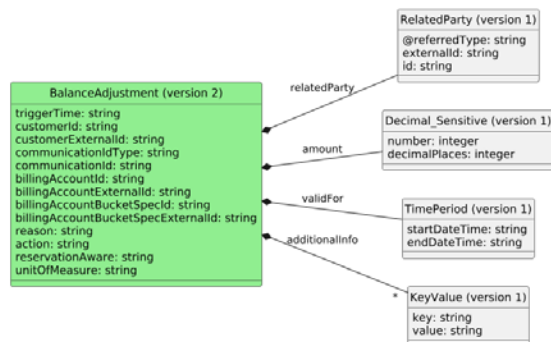


Figure 5 bss.bssfBalanceManagement.billingAccountBucketAdjustment.createRequest.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfBalanceManagement.billingAccountBucketAdjustment.createRequest.2.json#>

The representation is provided as JSON objects with the following attributes:

Table 41 BalanceAdjustment (version 2)

Name	Type	Description
BalanceAdjustment (version 2)	object	Perform balance adjustment.



Name		Type	Description
	triggerTime	string	The timestamp indicating the time of balance adjustment. DateTime according to W3. yyyy-MM-ddThh:MM:ss(.SS)TZD, where TZD = Z or +hh:mm or -hh:mm (eg 1997-07-16T19:20:30.45+01:00). Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+ -(0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	customerId	string	Represents the customer ID for the customer for which balance adjustment is done. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256 Deprecated
	customerExternalId	string	Represents the external customer ID for the customer for which balance adjustment is done. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256 Deprecated
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role
	communicationIdType	string	Communication ID type. Max length: 32
	communicationId	string	Communication ID value. Max length: 512
	billingAccountId	string	Represents Billing account instance id on which adjustment is to be applied. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	billingAccountExternalId	string	Represents Billing account external instance id on which adjustment is to be applied. Pattern: <code>^(?=\s*\S).*\$</code>



RelatedParty (version 1)

Table 42 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

bss.cmn.Decimal_Sensitive (version 1)

Table 43 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.



bss.cmn.TimePeriod (version 1)

Table 44 bss.cmn.TimePeriod (version 1)

Name		Type	Description
bss.cmn.TimePeriod (version 1)		object	StartDateTime must be earlier than EndDateTime.
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.KeyValue (version 1)

Table 45 bss.cmn.KeyValue (version 1)

Name	Type	Description
bss.cmn.KeyValue (version 1)	object	Key value.
key	string	Represents the data key. Max length: 256
value	string	Represents the data value. Max length: 256

4.2.1.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.2.1.4.1 bss.bssfBalanceManagement.billingAccountBucketAdjustment Create Response Version 2

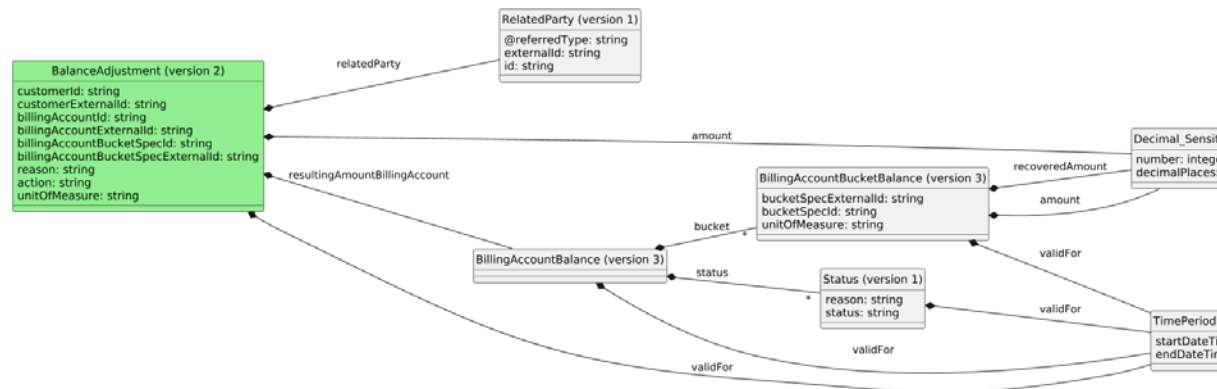


Figure 6 bss.bssfBalanceManagement.billingAccountBucketAdjustment.createResponse.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfBalanceManagement.billingAccountBucketAdjustment.createResponse.2.json#>

The representation is provided as JSON objects with the following attributes:

Table 46 BalanceAdjustment (version 2)

Name	Type	Description
BalanceAdjustment (version 2)	object	Perform balance adjustment.



Name		Type	Description
	customerId	string	Represents the customer ID for the customer for which balance adjustment is done. Pattern: ^(?=\s*\S).*\$ Max length: 256 Deprecated
	customerExternalId	string	Represents the external customer ID for the customer for which balance adjustment is done. Pattern: ^(?=\s*\S).*\$ Max length: 256 Deprecated
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role
	billingAccountId	string	Represents Billing account instance id on which adjustment is to be applied. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billingAccountExternalId	string	Represents Billing account external instance id on which adjustment is to be applied. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billingAccountBucketSpecId	string	Represents Billing account bucket specification internal id on which adjustment is to be applied. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billingAccountBucketSpecExternalId	string	Represents Billing account bucket specification external id on which adjustment is to be applied. Pattern: ^(?=\s*\S).*\$ Max length: 256
	reason	string	This is free text that is passed by the caller of OCS API. And is a passthrough for OCS. Max length: 32
	amount	bss.cmn.Decimal_Sensitive (version 1)	A number represent the adjustment of a bucket.



RelatedParty (version 1)

Table 47 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

bss.cmn.Decimal_Sensitive (version 1)

Table 48 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.



BillingAccountBalance (version 3)

Table 49 BillingAccountBalance (version 3)

Name		Type	Description
BillingAccountBalance (version 3)		object	A billing account balance structure.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the billing account is valid for.
	status	array of bss.cmn.Status (version 1)	The status of the billing account, for example active.
	bucket	array of BillingAccountBucketBalance (version 3)	Buckets.

bss.cmn.TimePeriod (version 1)

Table 50 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.Status (version 1)

Table 51 bss.cmn.Status (version 1)

Name	Type	Description
bss.cmn.Status (version 1)	object	Structure of one status version element.



Name		Type	Description
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillingAccountBucketBalance (version 3)

Table 52 BillingAccountBucketBalance (version 3)

Name		Type	Description
BillingAccountBucketBalance (version 3)		object	Billing account bucket balance.
	bucketSpecExternalId	string	Uniquely identifying the bucket using the external specification id. Pattern: ^(?=\s*\S).* Max length: 256
	bucketSpecId	string	Uniquely identifying the bucket using the specification id. Pattern: ^(?=\s*\S).* Max length: 256
	amount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Billing Account Bucket.
	recoveredAmount	bss.cmn.Decimal_Sensitive (version 1)	The recovered amount on the Billing Account Bucket.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32



4.3 Bucket Adjustment

4.3.1 Execute Bucket Adjustment

Balance adjustments update on bucket.

4.3.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- POST {scheme:}://{host}[:{port}]/{deploymentComponent}/bssfBalanceManagement/v1/bucketAdjustment/adjust

4.3.1.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 53 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.bucketAdjustment.createResponse.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.bucketAdjustment.createResponse.2.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Content-Type		Optional
	One of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.bucketAdjustment.createRequest.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.bucketAdjustment.createRequest.2.json#" • application/json;charset=utf-8 • application/json	-



Header Field Name	Header Field Value	Mandatory/Optional
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 54 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 55 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory
	For Status-Code: 201, one of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.bucketAdjustment.createResponse.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.bucketAdjustment.createResponse.2.json#" For Status-Code: 4XX,5XX, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-
WWW-Authenticate		Optional Status Code: 401
	<challenge>	-

STANDARD HEADER



Table 56 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID HEADER CUSTOM HEADER

4.3.1.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.3.1.3.1 bss.bssfBalanceManagement.bucketAdjustment Create Request Version 2

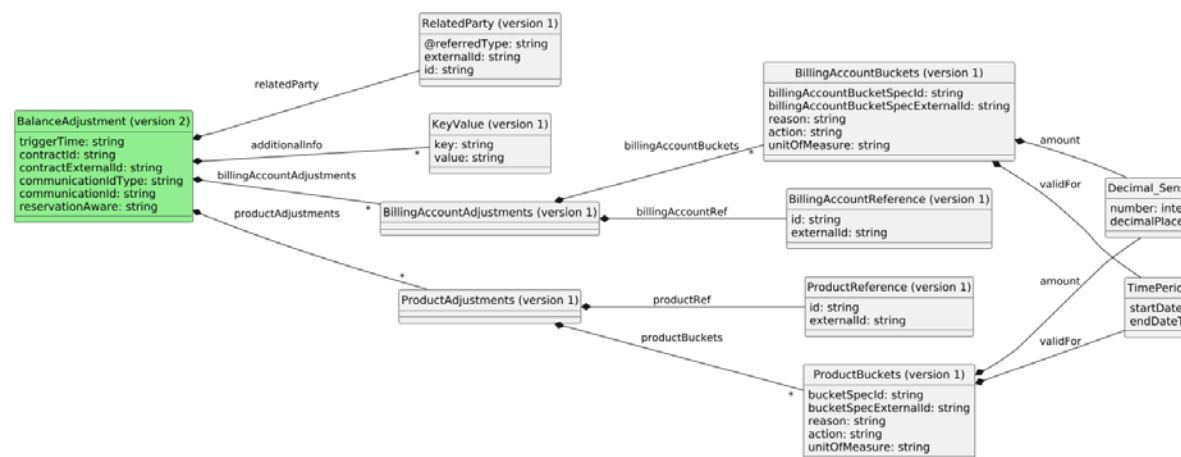


Figure 7 bss.bssfBalanceManagement.bucketAdjustment.createRequest.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfBalanceManagement.bucketAdjustment.createRequest.2.json#>

The representation is provided as JSON objects with the following attributes:

Table 57 BalanceAdjustment (version 2)

Name	Type	Description
BalanceAdjustment (version 2)	object	Perform balance adjustment.



Name		Type	Description
	triggerTime	string	The timestamp indicating the time of balance adjustment. DateTime according to W3. yyyy-MM-ddThh:MM:ss(.SS)TZD, where TZD = Z or +hh:mm or -hh:mm (eg 1997-07-16T19:20:30.45+01:00). Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 1[12][0-9] 3[01])) (02-(0[1-9] 1[12][0-9])) ((0[469] 11)-(0[1-9] 1[12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role
	contractId	string	Represents contract ID for the contract on which product bucket is adjusted. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	contractExternalId	string	Represents external contract id for the contract on which product bucket is adjusted. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	communicationIdType	string	Communication ID type. Max length: 32
	communicationId	string	Communication ID value. Max length: 512
	reservationAware	string	Indicates how to handle reserved amount while adjusting the Bucket. Possible values: IGNORE CONSIDER KEEP
	additionalInfo	array of bss.cmn.KeyValue (version 1)	Additional information associated with the balance adjustment activity.
	billingAccountAdjustments	array of BillingAccountAdjustments	Billing account bucket adjustments.



RelatedParty (version 1)

Table 58 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

bss.cmn.KeyValue (version 1)

Table 59 bss.cmn.KeyValue (version 1)

Name		Type	Description
bss.cmn.KeyValue (version 1)		object	Key value.
	key	string	Represents the data key. Max length: 256
	value	string	Represents the data value. Max length: 256

BillingAccountAdjustments (version 1)

Table 60 BillingAccountAdjustments (version 1)

Name		Type	Description
BillingAccountAdjustments (version 1)		object	Perform billing account balance adjustments.



Name		Type	Description
	billingAccountRef	BillingAccountReference (version 1)	Represent the Billing Account for balance adjustments.
	billingAccountBuckets	array of BillingAccountBuckets (version 1)	Represent the Billing Account for balance adjustments.

BillingAccountReference (version 1)

Table 61 BillingAccountReference (version 1)

Name		Type	Description
BillingAccountReference (version 1)		object	Billing Account Reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256

BillingAccountBuckets (version 1)

Table 62 BillingAccountBuckets (version 1)

Name		Type	Description
BillingAccountBuckets (version 1)		object	Billing account buckets.



Name		Type	Description
	billingAccountBucketSpecId	string	Represents Billing account bucket specification internal id on which adjustment is to be applied. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billingAccountBucketSpecExternalId	string	Represents Billing account bucket specification external id on which adjustment is to be applied. Pattern: ^(?=\s*\S).*\$ Max length: 256
	reason	string	This is free text that is passed by the caller of OCS API. And is a passthrough for OCS. Max length: 32
	amount	bss.cmn.Decimal_Sensitive (version 1)	A number represent the adjustment of a bucket.
	validFor	bss.cmn.TimePeriod (version 1)	Validity period of adjusted bucket.
	action	string	Set means to set the value of the Bucket as mentioned in the amount field. Relative means to calculate the value of the Bucket with respect to the existing/current value. Possible values: Relative Set
	unitOfMeasure	string	Unit of measure for adjustment value. Max length: 32



bss.cmn.Decimal_Sensitive (version 1)

Table 63 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.

bss.cmn.TimePeriod (version 1)

Table 64 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0])))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0])))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

ProductAdjustments (version 1)

Table 65 ProductAdjustments (version 1)

Name	Type	Description
ProductAdjustments (version 1)	object	Perform balance adjustment.



Name		Type	Description
	productRef	ProductReference (version 1)	Represents product for the product bucket is adjustment.
	productBuckets	array of ProductBuckets (version 1)	Represents adjusted product bucket.

ProductReference (version 1)

Table 66 ProductReference (version 1)

Name		Type	Description
ProductReference (version 1)		object	Product Reference.
	id	string	ID of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256

ProductBuckets (version 1)

Table 67 ProductBuckets (version 1)

Name		Type	Description
ProductBuckets (version 1)		object	Perform balance adjustment.



Name		Type	Description
	bucketSpecId	string	Represents Spec id for the bucket, it is representing the instance but since called would not know about it and can't set their own. And we can't have two bucket instances of same bucket spec, so this it is not for the instance rather for the spec (to identify the instance on a contract). Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	bucketSpecExternalId	string	Represents Spec id for the bucket, it is representing the instance but since called would not know about it and can't set their own. And we can't have two bucket instances of same bucket spec, so this it is not for the instance rather for the spec (to identify the instance on a contract). Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	reason	string	This is free text that is passed by the caller of OCS API. And is a passthrough for OCS. Max length: 32
	amount	bss.cmn.Decimal_Sensitive (version 1)	A number represent the adjustment of a bucket.
	validFor	bss.cmn.TimePeriod (version 1)	Validity period of adjusted bucket.
	action	string	Set means to set the value of the Bucket as mentioned in the amount field. Relative means to calculate the value of the Bucket with respect to the existing/current value. Possible values: Relative Set
	unitOfMeasure	string	Unit of measure for adjustment value. Max length: 32

4.3.1.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.3.1.4.1 bss.bssfBalanceManagement.bucketAdjustment Create Response Version 2

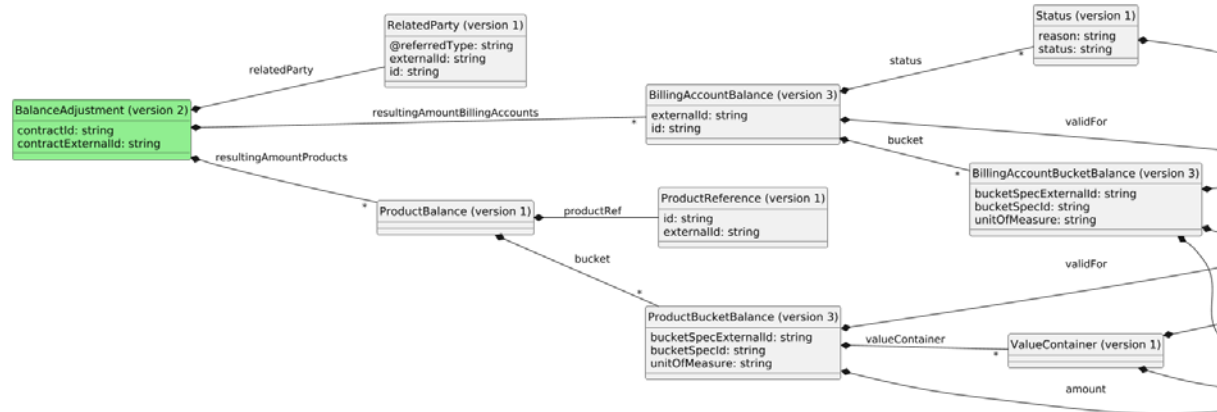


Figure 8 bss.bssfBalanceManagement.bucketAdjustment.createResponse.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfBalanceManagement.bucketAdjustment.createResponse.2.json#>

The representation is provided as JSON objects with the following attributes:

Table 68 BalanceAdjustment (version 2)

Name	Type	Description
BalanceAdjustment (version 2)	object	Perform balance adjustment.



Name		Type	Description
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role
	contractId	string	Represents contract ID for the contract on which product bucket is adjusted. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	contractExternalId	string	Represents external contract id for the contract on which product bucket is adjusted. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	resultingAmountBillingAccounts	array of Billing AccountBalance (version 3)	The resulting billing account amount after adjustment.
	resultingAmountProducts	array of ProductBalance (version 1)	The resulting product amount after adjustment.

RelatedParty (version 1)

Table 69 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256



BillingAccountBalance (version 3)

Table 70 BillingAccountBalance (version 3)

Name		Type	Description
BillingAccountBalance (version 3)		object	A billing account balance structure.
	externalId	string	Unique identifier of the billing account populated by external system. Pattern: ^(?=\s*\S).* Max length: 256
	id	string	Unique identifier of the billing account. Pattern: ^(?=\s*\S).* Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the billing account is valid for.
	status	array of bss.cmn.Status (version 1)	The status of the billing account, for example active.
	bucket	array of BillingAccountBucketBalance (version 3)	Buckets.

bss.cmn.TimePeriod (version 1)

Table 71 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.Status (version 1)

Table 72 bss.cmn.Status (version 1)

Name	Type	Description
bss.cmn.Status (version 1)	object	Structure of one status version element.



Name		Type	Description
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillingAccountBucketBalance (version 3)

Table 73 BillingAccountBucketBalance (version 3)

Name		Type	Description
BillingAccountBucketBalance (version 3)		object	Billing account bucket balance.
	bucketSpecExternalId	string	Uniquely identifying the bucket using the external specification id. Pattern: ^(?=\s*\S).* Max length: 256
	bucketSpecId	string	Uniquely identifying the bucket using the specification id. Pattern: ^(?=\s*\S).* Max length: 256
	amount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Billing Account Bucket.
	recoveredAmount	bss.cmn.Decimal_Sensitive (version 1)	The recovered amount on the Billing Account Bucket.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32



bss.cmn.Decimal_Sensitive (version 1)

Table 74 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.

ProductBalance (version 1)

Table 75 ProductBalance (version 1)

Name		Type	Description
ProductBalance (version 1)		object	A Product balance structure.
	productRef	ProductReference (version 1)	Represents product for the product bucket is adjustment.
	bucket	array of ProductBucketBalance (version 3)	Represents product bucket.

ProductReference (version 1)

Table 76 ProductReference (version 1)

Name	Type	Description
ProductReference (version 1)	object	Product Reference.



Name		Type	Description
	id	string	ID of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256

ProductBucketBalance (version 3)

Table 77 ProductBucketBalance (version 3)

Name		Type	Description
ProductBucketBalance (version 3)		object	Product Bucket balance.
	bucketSpecExternalId	string	Uniquely identifying the bucket using the external specification id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	bucketSpecId	string	Uniquely identifying the bucket using the specification id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	amount	bss.cmn.Decimal_Sensitive (version 1)	The amount of the bucket.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	valueContainer	array of ValueContainer (version 1)	Value containers.



ValueContainer (version 1)

Table 78 ValueContainer (version 1)

Name		Type	Description
ValueContainer (version 1)		object	Value Container.
	amount	bss.cmn.Decimal_Sensitive (version 1)	The amount of this value container.
	validFor	bss.cmn.TimePeriod (version 1)	The validity period of the value container.

4.4 Product Bucket Adjustment

Note: Deprecated

4.4.1 Execute Product Bucket Adjustment

Note: Deprecated

This task performs a balance adjustment for a given bucket on a product (or commercial id reference to a product instance consuming the credit held in a bucket for a specific service).

4.4.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

— POST {scheme:}://{host}[:{port}]/[{deploymentComponent}]/bssfBalanceManagement/v1/productBucketAdjustment/adjust

4.4.1.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 79 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.productBucketAdjustment.createResponse.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.productBucketAdjustment.createResponse.2.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Content-Type		Optional
	One of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.productBucketAdjustment.createRequest.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.productBucketAdjustment.createRequest.2.json#" • application/json;charset=utf-8 • application/json	-



Header Field Name	Header Field Value	Mandatory/Optional
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 80 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 81 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory
	For Status-Code: 201, one of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.productBucketAdjustment.createResponse.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.productBucketAdjustment.createResponse.2.json#" For Status-Code: 4XX,5XX, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-



Header Field Name	Header Field Value	Mandatory/Optional
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: ^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2} GMT))\$
WWW-Authenticate		Optional Status Code: 401
	<challenge>	-
STANDARD HEADER		



Table 82 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID HEADER CUSTOM HEADER

4.4.1.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.4.1.3.1 bss.bssfBalanceManagement.productBucketAdjustment Create Request Version 2

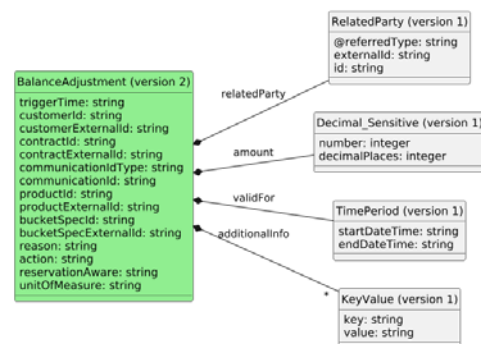


Figure 9 bss.bssfBalanceManagement.productBucketAdjustment.createRequest.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfBalanceManagement.productBucketAdjustment.createRequest.2.json#>

The representation is provided as JSON objects with the following attributes:

Table 83 BalanceAdjustment (version 2)

Name	Type	Description
BalanceAdjustment (version 2)	object	Perform balance adjustment.



Name		Type	Description
	triggerTime	string	The timestamp indicating the time of balance adjustment. DateTime according to W3. yyyy-MM-ddThh:MM:ss(.SS)TZD, where TZD = Z or +hh:mm or -hh:mm (eg 1997-07-16T19:20:30.45+01:00). Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01]) (02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	customerId	string	Represents the customer ID for the customer for which balance adjustment is done. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256 Deprecated
	customerExternalId	string	Represents the external customer ID for the customer for which balance adjustment is done. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256 Deprecated
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role
	contractId	string	Represents contract ID for the contract on which product bucket is adjusted. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	contractExternalId	string	Represents external contract id for the contract on which product bucket is adjusted. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	communicationIdType	string	Communication ID type. Max length: 32
	communicationId	string	Communication ID value.



RelatedParty (version 1)

Table 84 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

bss.cmn.Decimal_Sensitive (version 1)

Table 85 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.



bss.cmn.TimePeriod (version 1)

Table 86 bss.cmn.TimePeriod (version 1)

Name		Type	Description
bss.cmn.TimePeriod (version 1)		object	StartDateTime must be earlier than EndDateTime.
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T(((01[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T(((01[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>



bss.cmn.KeyValue (version 1)

Table 87 bss.cmn.KeyValue (version 1)

Name		Type	Description
bss.cmn.KeyValue (version 1)		object	Key value.
	key	string	Represents the data key. Max length: 256
	value	string	Represents the data value. Max length: 256

4.4.1.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.4.1.4.1 bss.bssfBalanceManagement.productBucketAdjustment Create Response Version 2

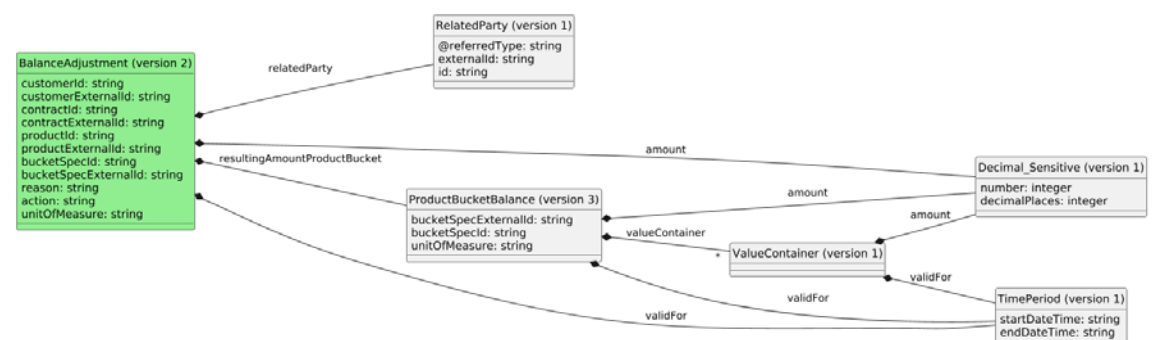


Figure 10 bss.bssfBalanceManagement.productBucketAdjustment.createResponse.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfBalanceManagement.productBucketAdjustment.createResponse.2.json#>

The representation is provided as JSON objects with the following attributes:

Table 88 BalanceAdjustment (version 2)

Name	Type	Description
BalanceAdjustment (version 2)	object	Perform balance adjustment.



Name		Type	Description
	customerId	string	Represents the customer ID for the customer for which balance adjustment is done. Pattern: ^(?=\s*\S).*\$ Max length: 256 Deprecated
	customerExternalId	string	Represents the external customer ID for the customer for which balance adjustment is done. Pattern: ^(?=\s*\S).*\$ Max length: 256 Deprecated
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role
	contractId	string	Represents contract ID for the contract on which product bucket is adjusted. Pattern: ^(?=\s*\S).*\$ Max length: 256
	contractExternalId	string	Represents external contract id for the contract on which product bucket is adjusted. Pattern: ^(?=\s*\S).*\$ Max length: 256
	productId	string	Represents product id for the product bucket is adjusted. Pattern: ^(?=\s*\S).*\$ Max length: 256
	productExternalId	string	Represents external product id for the adjusted product bucket. Pattern: ^(?=\s*\S).*\$ Max length: 256
	bucketSpecId	string	Represents Spec id for the bucket, it is representing the instance but since called would not know about it and can't set their own. And we can't have two bucket instances of same bucket spec, so this it is not for the instance rather for the spec (to identify the instance on a contract).



RelatedParty (version 1)

Table 89 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

bss.cmn.Decimal_Sensitive (version 1)

Table 90 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.



ProductBucketBalance (version 3)

Table 91 ProductBucketBalance (version 3)

Name		Type	Description
ProductBucketBalance (version 3)		object	Product Bucket balance.
	bucketSpecExternalId	string	Uniquely identifying the bucket using the external specification id. Pattern: ^(?=\s*\S).* Max length: 256
	bucketSpecId	string	Uniquely identifying the bucket using the specification id. Pattern: ^(?=\s*\S).* Max length: 256
	amount	bss.cmn.Decimal_Sensitive (version 1)	The amount of the bucket.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	valueContainer	array of ValueContainer (version 1)	Value containers.

bss.cmn.TimePeriod (version 1)

Table 92 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

ValueContainer (version 1)

Table 93 ValueContainer (version 1)

Name	Type	Description
ValueContainer (version 1)	object	Value Container.



Name		Type	Description
	amount	bss.cmn.Decimal_Sensitive (version 1)	The amount of this value container.
	validFor	bss.cmn.TimePeriod (version 1)	The validity period of the value container.

4.5 Settlement Account Bucket Adjustment

4.5.1 Execute Settlement Account Bucket Adjustment

Update on Settlement Account Bucket.

4.5.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

— POST {scheme:}://{host}[:{port}]/{deploymentComponent}/bssfBalanceManagement/v1/settlementAccountBucketAdjustment/adjust

4.5.1.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 94 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.settlementAccountBucketAdjustment.createResponse.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.settlementAccountBucketAdjustment.createResponse.2.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Content-Type		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	One of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.settlementAccountBucketAdjustment.createRequest.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.settlementAccountBucketAdjustment.createRequest.2.json#" • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 95 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 96 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory
	For Status-Code: 201, one of the following: • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.settlementAccountBucketAdjustment.createResponse.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfBalanceManagement.settlementAccountBucketAdjustment.createResponse.2.json#" For Status-Code: 4XX,5XX, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-
WWW-Authenticate		Optional Status Code: 401
	<challenge>	-

STANDARD HEADER



Table 97 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID HEADER CUSTOM HEADER

4.5.1.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.5.1.3.1 bss.bssfBalanceManagement.settlementAccountBucketAdjustment Create Request Version 2

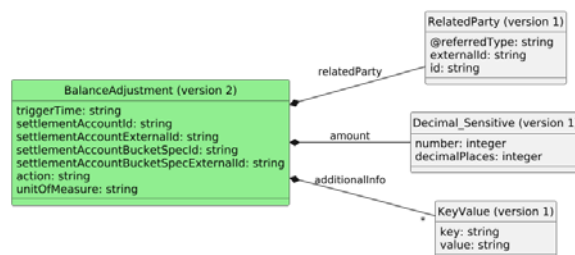


Figure 11 bss.bssfBalanceManagement.settlementAccountBucketAdjustment.createRequest.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfBalanceManagement.settlementAccountBucketAdjustment.createRequest.2.json#>

The representation is provided as JSON objects with the following attributes:

Table 98 BalanceAdjustment (version 2)

Name	Type	Description
BalanceAdjustment (version 2)	object	Perform balance adjustment.



Name		Type	Description
	triggerTime	string	The timestamp indicating the time of balance adjustment. DateTime according to W3. yyyy-MM-ddThh:MM:ss(.SS)TZD, where TZD = Z or +hh:mm or -hh:mm (eg 1997-07-16T19:20:30.45+01:00). Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 1[12][0-9] 3[01])) (02-(0[1-9] 1[12][0-9])) ((0[469] 11)-(0[1-9] 1[12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role
	settlementAccount Id	string	Represents Settlement account internal id, on which the adjustment is to be applied. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	settlementAccount ExternalId	string	Represents Settlement account external id, on which the adjustment is to be applied. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	settlementAccount BucketSpecId	string	Represents Settlement account bucket specification internal id, on which the adjustment is to be applied. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	settlementAccount BucketSpecExternalId	string	Represents Settlement account bucket specification external id, on which the adjustment is to be applied. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	amount	bss.cmn.Decimal_Sensitive (version 1)	A number represent the adjustment of a bucket.
	action	string	Set means to set the value of the Bucket as mentioned in the amount field. Relative means to calculate the value of



RelatedParty (version 1)

Table 99 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

bss.cmn.Decimal_Sensitive (version 1)

Table 100 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.

bss.cmn.KeyValue (version 1)

Table 101 bss.cmn.KeyValue (version 1)

Name	Type	Description
bss.cmn.KeyValue (version 1)	object	Key value.
key	string	Represents the data key. Max length: 256
value	string	Represents the data value. Max length: 256

4.5.1.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.5.1.4.1 bss.bssfBalanceManagement.settlementAccountBucketAdjustment Create Response Version 2

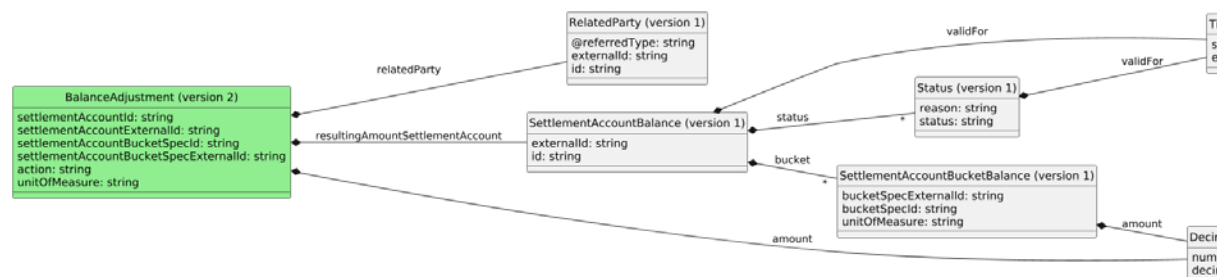


Figure 12 bss.bssfBalanceManagement.settlementAccountBucketAdjustment.createResponse.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfBalanceManagement.settlementAccountBucketAdjustment.createResponse.2.json#>

The representation is provided as JSON objects with the following attributes:

Table 102 BalanceAdjustment (version 2)

Name	Type	Description
BalanceAdjustment (version 2)	object	Perform balance adjustment.



Name		Type	Description
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role
	settlementAccount Id	string	Represents Settlement account internal id, on which the adjustment is to be applied. Pattern: ^(?=\s*\S).*\$ Max length: 256
	settlementAccount ExternalId	string	Represents Settlement account external id, on which the adjustment is to be applied. Pattern: ^(?=\s*\S).*\$ Max length: 256
	settlementAccount BucketSpecId	string	Represents Settlement account bucket specification internal id, on which the adjustment is to be applied. Pattern: ^(?=\s*\S).*\$ Max length: 256
	settlementAccount BucketSpecExternalId	string	Represents Settlement account bucket specification external id, on which the adjustment is to be applied. Pattern: ^(?=\s*\S).*\$ Max length: 256
	resultingAmountSettlementAccount	SettlementAccount Balance (version 1)	The resulting settlement account amount after adjustment.
	amount	bss.cmn.Decimal_Sensitive (version 1)	A number represent the adjustment of a bucket.
	action	string	Set means to set the value of the Bucket as mentioned in the amount field. Relative means to calculate the value of the Bucket with respect to the existing/current value. Possible values: Relative Set
	unitOfMeasure	string	Unit of measure for adjustment value. Max length: 32



RelatedParty (version 1)

Table 103 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).* Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).* Max length: 256

SettlementAccountBalance (version 1)

Table 104 SettlementAccountBalance (version 1)

Name	Type	Description
SettlementAccountBalance (version 1)	object	A settlement account balance structure.



Name		Type	Description
	externalId	string	Unique identifier of the settlement account populated by external system. Pattern: ^(?=\s*\S).* Max length: 256
	id	string	Unique identifier of the settlement account. Pattern: ^(?=\s*\S).* Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the settlement account is valid for.
	status	array of bss.cmn.Status (version 1)	The status of the settlement account, for example active.
	bucket	array of SettlementAccountBucketBalance (version 1)	Buckets.

bss.cmn.TimePeriod (version 1)

Table 105 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.Status (version 1)

Table 106 bss.cmn.Status (version 1)

Name	Type	Description
bss.cmn.Status (version 1)	object	Structure of one status version element.



Name		Type	Description
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

SettlementAccountBucketBalance (version 1)

Table 107 SettlementAccountBucketBalance (version 1)

Name		Type	Description
SettlementAccountBucketBalance (version 1)		object	Settlement account bucket balance.
	bucketSpecExternalId	string	Uniquely identifying the bucket using the external specification id. Pattern: ^(?=\s*\S).* Max length: 256
	bucketSpecId	string	Uniquely identifying the bucket using the specification id. Pattern: ^(?=\s*\S).* Max length: 256
	amount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Settlement Account Bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32

bss.cmn.Decimal_Sensitive (version 1)

Table 108 bss.cmn.Decimal_Sensitive (version 1)

Name	Type	Description
bss.cmn.Decimal_Sensitive (version 1)	object	Amount representation.



Name		Type	Description
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.



5 Generic Interface Parameters

The following sub-sections describe the elements and their structure in the request and response for Generic Interface Parameters.

5.1 Generic Interface Parameters Request

5.1.1 bss.genericInterfaceParameters Request Version 4

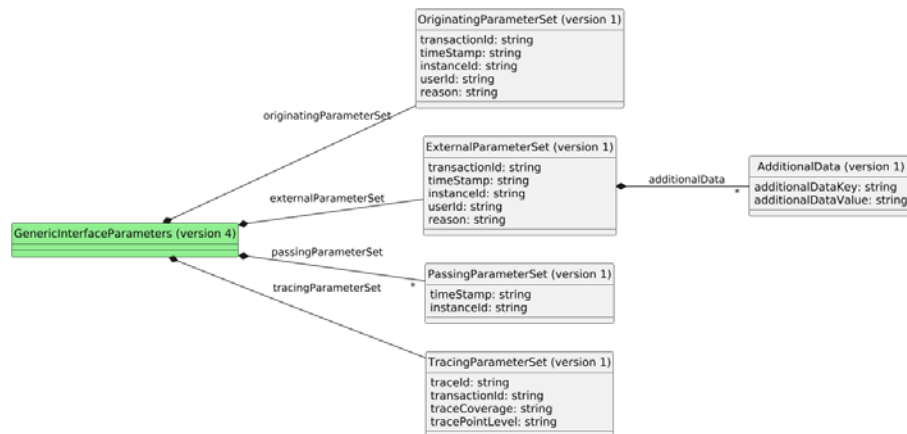


Figure 13 bss.genericInterfaceParameters.request.4 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.genericInterfaceParameters.request.4.json#>

The representation is provided as JSON objects with the following attributes:

Table 109 bss.cmn.GenericInterfaceParameters (version 4)

Name	Type	Description
bss.cmn.GenericInterfaceParameters (version 4)	object	The Generic Interface Parameters (GIP) is used for transaction traceability.



Name		Type	Description
	originatingParameterSet	bss.cmn.OriginatingParameterSet (version 1)	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.
	externalParameterSet	bss.cmn.ExternalParameterSet (version 1)	Information received from the external system that initiated the transaction.
	passingParameterSet	array of bss.cmn.PassingParameterSet (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	bss.cmn.TracingParameterSet (version 1)	Tracing Parameter Set.

5.1.1.1

bss.cmn.OriginatingParameterSet (version 1)

Table 110 bss.cmn.OriginatingParameterSet (version 1)

Name	Type	Description
bss.cmn.OriginatingParameterSet (version 1)	object	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.



Name		Type	Description
	transactionId	string	Unique transaction identifier. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
	timeStamp	string	The time stamp when the ops was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that created the ops. Max length: 256
	userId	string	User Identification. Provided at login to the instance creating the ops. Max length: 256
	reason	string	Reason for the transaction. Max length: 256

5.1.1.2

bss.cmn.ExternalParameterSet (version 1)

Table 111 bss.cmn.ExternalParameterSet (version 1)

Name	Type	Description
bss.cmn.ExternalParameterSet (version 1)	object	Information received from the external system that initiated the transaction.



Name		Type	Description
	transactionId	string	Transaction Identifier received from external system. Max length: 256
	timeStamp	string	Transaction time stamp received from external system. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) (02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that sent the transactionId. Max length: 256
	userId	string	User identifier received from external system. Max length: 256
	reason	string	Reason received from external system. Max length: 256
	additionalData	array of bss.cmn.AdditionalData (version 1)	Array of additional data Items from external system.

5.1.1.3

bss.cmn.AdditionalData (version 1)

Table 112 bss.cmn.AdditionalData (version 1)

Name	Type	Description
bss.cmn.AdditionalData (version 1)	object	A key-value structure data received from external system.



Name		Type	Description
	additionalDataKey	string	key of the additional data from external system. Max length: 256
	additionalDataValue	string	value correspond to the key. Max length: 256

5.1.1.4

bss.cmn.PassingParameterSet (version 1)

Table 113 bss.cmn.PassingParameterSet (version 1)

Name		Type	Description
bss.cmn.PassingParameterSet (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the ppsItem was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0])))T(((01[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the entity that created the ppsItem. Max length: 256

5.1.1.5

bss.cmn.TracingParameterSet (version 1)

Table 114 bss.cmn.TracingParameterSet (version 1)

Name		Type	Description
bss.cmn.TracingParameterSet (version 1)		object	Tracing Parameter Set.

Name	Type	Description
traceId	string	The unique id for the trace job. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
transactionId	string	The unique id for the transaction. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

5.2 Generic Interface Parameters Response

5.2.1 bss.genericInterfaceParameters Response Version 4

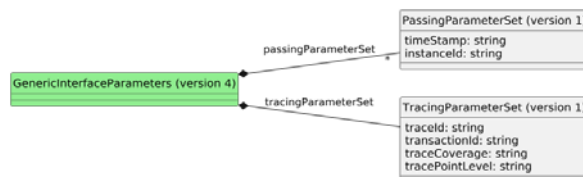


Figure 14 bss.genericInterfaceParameters.response.4 UML representation

Applicable profile URI for the representation:

`http://ericsson.com/bss.genericInterfaceParameters.response.4.json#`

The representation is provided as JSON objects with the following attributes:



Table 115 bss.cmn.GenericInterfaceParameters (version 4)

Name		Type	Description
bss.cmn.GenericInterfaceParameters (version 4)		object	The Generic Interface Parameters (GIP) is used for transaction traceability.
	passingParameterSet	array of bss.cmn.PassingParameterSet (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	bss.cmn.TracingParameterSet (version 1)	Tracing Parameter Set.

5.2.1.1

bss.cmn.PassingParameterSet (version 1)

Table 116 bss.cmn.PassingParameterSet (version 1)

Name		Type	Description
bss.cmn.PassingParameterSet (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the ppsItem was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T(((01[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	instanceId	string	Identification of the entity that created the ppsItem. Max length: 256



5.2.1.2 bss.cmn.TracingParameterSet (version 1)

Table 117 bss.cmn.TracingParameterSet (version 1)

Name		Type	Description
bss.cmn.TracingParameterSet (version 1)		object	Tracing Parameter Set.
	traceId	string	The unique id for the trace job. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
	transactionId	string	The unique id for the transaction. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
	traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
	tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

6Result Representation

Results are reported through HTTP status codes. JSON objects are provided for requests that reaches the application component. The following tables describe the elements and their structure contained in the result representation.

6.1bss.errorMessage Response Version 1



Figure 15 bss.errorMessage.response.1 UML representation

Applicable profile URI for the representation:

`http://ericsson.com/bss.errorMessage.response.1.json#`

The representation is provided as JSON objects with the following attributes:

Table 118 bss.cmn.ErrorMessageExtended (version 1)

Name		Type	Description
bss.cmn.ErrorMessageExtended (version 1)		object	Error message.
	messages	array of bss.cmn.ErrorMessage (version 1)	Error messages.

6.1.1bss.cmn.ErrorMessage (version 1)

Table 119 bss.cmn.ErrorMessage (version 1)

Name	Type	Description
bss.cmn.ErrorMessage (version 1)	object	Error message.



Name		Type	Description
	action	string	The action. Max length: 256
	code	string	The code. Max length: 256
	details	string	The details. Max length: 256
	message	string	The message. Max length: 256
	source	string	The source. Max length: 256

6.2 bss.errorMessage Response Version 2




Figure 16 bss.errorMessage.response.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.errorMessage.response.2.json#>

The representation is provided as JSON objects with the following attributes:

Table 120 bss.cmn.ErrorMessageExtended (version 2)

Name	Type	Description
bss.cmn.ErrorMessageExtended (version 2)	object	Extended error message structure.



Name		Type	Description
	supplementaryError	array of bss.cmn.SupplementaryError (version 2)	Supplementary Error.
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	httpStatusCode	integer	HTTP status code.

6.2.1

bss.cmn.SupplementaryError (version 2)

Table 121 bss.cmn.SupplementaryError (version 2)

Name	Type	Description
bss.cmn.SupplementaryError (version 2)	object	Supplementary error message structure. In case of partial error scenarios, this structure may also include successful responses to show what parts went ok.



Name		Type	Description
	source	string	Source of error. Max length: 256
	action	string	Action causing error. Max length: 256
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	statusCode	integer	HTTP status code.

6.3 Result Codes

The supported Error Codes could be found in the 'Error Codes' document.

7 Interface Version Changes

The following sections describe the changes between the interface versions.

7.1 Interface Version 2.0

Table 122 Changes

Resources	Type of Change	Description
N/A	JSON file name have been updated.	Interface named and domain added.
triggerTime	Attribute name added	added in productBucket Adjustment and billingB ucketAdjustment.
reservationAware	Attribute name added	added in productBucket Adjustment and billingB ucketAdjustment.
externalId	Change of attribute name	replaced by externalSpecId.
id	Change of attribute name	Replaced by specId.
	Updated the chapter "Result Representation"	Removed Status Codes.

7.2 Interface Version 2.1

Table 123 Changes

Resources	Type of Change	Description
ProductBucketAdjustment	Change of attribute name	Corrected productBuc ketSpecExternalId to bucketSpecExternalId.
ProductBucketAdjustment	Change of attribute name	Corrected productBucket SpecId to bucketSpecId.
errorMessage	Added Supplementary structure	Added Supplement aryError structure in errorMessage json.



7.3 Interface Version 2.2

Table 124 Changes

Resources	Type of Change	Description
BillingAccountBucketAdjustment	Added attributes	Attributes billingAccountBucketSpecId and billingAccountBucketSpecExternalId have been added.

7.4 Interface Version 2.3

Table 125 Changes

Resources	Type of Change	Description
ProductBucketAdjustment, BillingAccountBucketAdjustment	Added CommunicationId	Attribute CommunicationId have been added.
ProductBucketAdjustment, BillingAccountBucketAdjustment	Added CommunicationIdType	Attribute CommunicationIdType have been added.

7.5 Interface Version 2.4

Table 126 Changes

Resources	Type of Change	Description
BalanceTopUp	New resource	

7.6 Interface Version 2.5

Table 127 Changes

Resources	Type of Change	Description
Error message structure version 1.	Deprecated	Attributes deprecated: httpStatusCodeDescription, errorMessage, errorDetails.
Error message structure version 2.	New	New attributes: code, reason, message.



7.7 Interface Version 2.6

Table 128 Changes

Resources	Type of Change	Description
appliedFee	added	Attribute appliedFee have been added.
additionalInfo	Removed in document	
blockedUntil	Removed in document	

7.8 Interface Version 2.7

Table 129 Changes

Resources	Type of Change	Description
recoveredAmount	added	Attribute recoveredAmount have been added.
validForBefore	added	Attribute validForBefore have been added.
validForAfter	added	Attribute validForAfter have been added.

7.9 Interface Version 2.8

Table 130 Changes

Resources	Type of Change	Description
communicationId	Extend string length	Extend to max length of 512 characters.

7.10 Interface Version 2.9

Table 131 Changes

Resources	Type of Change	Description
bss.cmn.Status	Data type extended	Data type for status increased from 32 to 256 characters.



7.11 Interface Version 2.10

Table 132 Changes

Resources	Type of Change	Description
Customer	Customer is deprecated with RelatedParty.	Customer is deprecated with RelatedParty. RelatedParty.@referred Type identifies whether the requested resource belongs to a CUSTOMER or a PARTY_ROLE. When no value is provided for @referredTyoe, 'CUSTOMER' is adopted as a default referred type for the related party.
Settlement Account	Introduced Settlement Account balance adjustment	Added the possibility to adjust settlement account bucket balance. Settlement account is associated with a party role Partner.

7.12 Interface Version 2.11

Table 133 Changes

Resources	Type of Change	Description
All	Added	Added Retry-After header for http status code 503 response. Added ERICSSON.Global-Unique-Request-Id header for all responses. Added http status code 503 for all responses.



7.13 Interface Version 2.12

Table 134 Changes

Resources	Type of Change	Description
Deprecated and added new operation	Updated	Deprecated billingAccountBucketAdjustment and productBucketAdjustment, added - bucketAdjustment.
All	Updated	Change handling of content-type for request/responses operations.





Reference List

- [1] [RFC 7231 - Hypertext Transfer Protocol \(HTTP/1.1\): Semantics and Content](#)
- [2] [RFC 7230 - Hypertext Transfer Protocol \(HTTP/1.1\): Message Syntax and Routing](#)
- [3] [RFC 6906 - The 'profile' Link Relation Type](#)
- [4] [RFC 4122 - A Universally Unique Identifier \(UUID\) URN Namespace](#)
- [5] [RFC 3986 - Uniform Resource Identifier \(URI\): Generic Syntax](#)
- [6] [RFC 2818 - HTTP Over TLS](#)
- [7] [RFC 2616 - Hypertext Transfer Protocol -- HTTP/1.1](#)