

BSS TMF669 Party Role Management REST Interface 1.1

INTERFACE DESCRIPTION

Copyright

© Ericsson AB 2025. All Rights Reserved. No part of this document may be reproduced in any form without the written permission of the copyright owner.

Disclaimer

The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. Ericsson shall have no liability for any error or damage of any kind resulting from the use of this document.

This information is intended exclusively for demonstration purposes when used in the development of client-side integrations. It may not include definitions for various elements or behaviors that could arise from client-server interactions involving any third-party products, providers, or deployment platforms, whether external or internal to the delivered product.

Trademark List

Ericsson and the Ericsson logotype are the trademarks or registered trademarks of Telefonaktiebolaget LM Ericsson. All other product or service names mentioned in a document on this server are trademarks of their respective companies.



Contents

1	Introduction	1
1.1	Transfer Mechanism	1
1.2	Authentication and Authorization	1
1.3	Compatibility Mechanism	1
1.3.1	HTTP Content Negotiation	1
1.3.2	Product Customization	1
1.3.3	Backward Compatibility	2
2	Syntax Notation	3
2.1	Resource Identifier	3
2.2	HTTP Headers	3
2.3	Resource Schema and Version	4
3	Service	5
3.1	BSS TMF669 Party Role Management	5
3.1.1	Description	5
3.2	Service Registry	5
4	Resources	7
4.1	Party Role	7
4.1.1	Create Party Role	7
4.1.2	Delete Party Role	33
4.1.3	Read Party Role	38
4.1.4	Update Party Role	57
5	Generic Interface Parameters	85
5.1	Generic Interface Parameters Request	85
5.1.1	bss.genericInterfaceParameters Request Version 4	85
5.2	Generic Interface Parameters Response	90
5.2.1	bss.genericInterfaceParameters Response Version 4	90
6	Result Representation	93
6.1	bss.errorMessage Response Version 2	93
6.1.1	bss.cmn.SupplementaryError (version 2)	94
6.2	Result Codes	94
7	Interface Version Changes	95
7.1	Interface Version 1.0	95
7.2	Interface Version 1.1	95



Reference List

97



1 Introduction

Target Groups

The target group for this document is:

— Solution Integrators

1.1 Transfer Mechanism

The transfer mechanism used is HTTPS. Both requests and responses use headers to send information about the message.

The access port is configurable. Clients that use this interface should support a configurable port.

1.2 Authentication and Authorization

Authentication is controlled by the inclusion of a Java Web Token (JWT) in the authorization header of the HTTP message.

1.3 Compatibility Mechanism

The following version mechanisms are used:

1.3.1 HTTP Content Negotiation

HTTP content negotiation uses the media type in the HTTP Accept header to request a certain version of the resource representation. If the version is not passed in the HTTP Accept header, the server returns the latest version of the resource representation.

For operations supporting error response version 1, if error response version is not specified it is assumed to be error response version 1.

1.3.2 Product Customization

Elements and data types that are specific for product customization are marked with PC in the section describing the element or data type. Functions and characteristics of a product customization is not part of the standard delivery. Contact your local Ericsson office for more information regarding ordering and compatibility.



All elements of a PC message are also product customizations when inside such a message. If an element or data type is marked PC within an otherwise standard record, is noted as such in the relevant chapters.

In order to improve readability the following applies in the rest of the document:

- The following applies to functions marked with (PC). The PC-tag is placed in the description.

1.3.3 Backward Compatibility

Json objects name and/or their respective content stated in this document may be changed without any further notice.

Backward compatibility within a major version is only kept for the messages sent over the network.



2 Syntax Notation

This interface uses a generic syntax that is described in the following sections. For a description of the actual values, refer to Resources.

2.1 Resource Identifier

The resource identifier is expressed by a URI with the following format:

```
{serverRoot}/{api}/{resourcePath}
```

```
{scheme:}://{host}[:{port}]/[{deploymentComponent}]{apiName}/{apiVersion}/{resourcePath}
```

Table 1 Server root parameter

Parameter	Description
serverRoot	Is implementation specific
api	Is the name and version of the API.

Table 2 API and resource path parameters

Parameter	Description
scheme	The Application protocol, for example HTTPS.
host	The network address to access the interface and its connected service.
port	The TCP/IP port used for access. If not specified, default ports for the applications are assumed.
deploymentComponent	The name of the deployment component providing the resource.
apiName	The name of the interface.
apiVersion	The version to use
resourcePath	The resource name and a unique ID.

The full URI must be encoded according to RFC3986 before usage.

2.2 HTTP Headers

The interface uses standard HTTP headers. In addition, custom HTTP headers are used with the following syntax:



ERICSSON.<name>:<value>

If no Accept header field is present, then it is assumed that the client accepts all media types.

2.3 Resource Schema and Version

The resource schema and version indicates that a resource representation follows one or more schemas.

The resource schema and version is identified by a subtype with the following syntax:

application/x.<domain>.<interface>.<resource>.<operationAndDirection>+json;version=<version> or application/x.<domain>.<interface>.<resource>.<operationAndDirection>+merge-patch+json;version=<version> depending on operation.

Table 3 REST Resource Representation Parameters

Parameter	Description
domain	Fixed value: bss
interface	Is the interface name.
resource	Is the resource name.
operationAndDirection	Is the CRUD operation with its direction request and response.
version	Major version of the resource representation.

3 Service

3.1 BSS TMF669 Party Role Management

Please read the service documentation available to understand how to use this interface in connection with the service.

3.1.1 Description

The Party Role API provides standardized mechanism for the management of party roles.

3.2 Service Registry

The Service Registry is a central repository of available services. Their locations are used by clients to dynamically find the service providers it needs. A service provider registers its services in the registry. Service consumers look up services and service locations.

The services accessed through the interface are the following:

Table 4 Services Exposed in the Service Registry

Service Name	Service Type	Version	Environment	Available Capabilities	Optional Data
BSS_TMF669_Party_Role_Management	REST	1	Prod		
BSS_TMF669_Party_Role_Management	REST	1	Prod		secured=true

Note: This chapter is only applicable for Virtualized deployments.





4 Resources

The interface offers access to different resources. Each resource has its own access path and parameters which are described in the following sections.

The referenced representations are available in a ZIP file at the following location:

edw:/alex?FN=BSSTMF669PartyRoleManagement_v1_1_schemaFile.zip

4.1 Party Role

The part played by a party in a given context.

4.1.1 Create Party Role

Creates a Party Role.

4.1.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

— POST {scheme:}://{host}[:{port}]/[{deploymentComponent}]/bssTmf669PartyRoleManagement/v1/partyRole

4.1.1.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 5 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf669PartyRoleManagement.partyRole.createResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf669PartyRoleManagement.partyRole.createResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Content-Type		Mandatory
	One of the following: • application/x.bss.Tmf669PartyRoleManagement.partyRole.createRequest+json;version=1;charset=utf-8 • application/x.bss.Tmf669PartyRoleManagement.partyRole.createRequest+json;version=1 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 6 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 7 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 201, one of the following: • application/x.bss.Tmf669PartyRoleManagement.partyRole.createResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf669PartyRoleManagement.partyRole.createResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3]([0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01]([0-9] 2[0-3])(:[0-5][0-9]){2} GMT)))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 8 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.1.1.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.1.1.3.1

bss.Tmf669PartyRoleManagement.partyRole Create Request Version 1

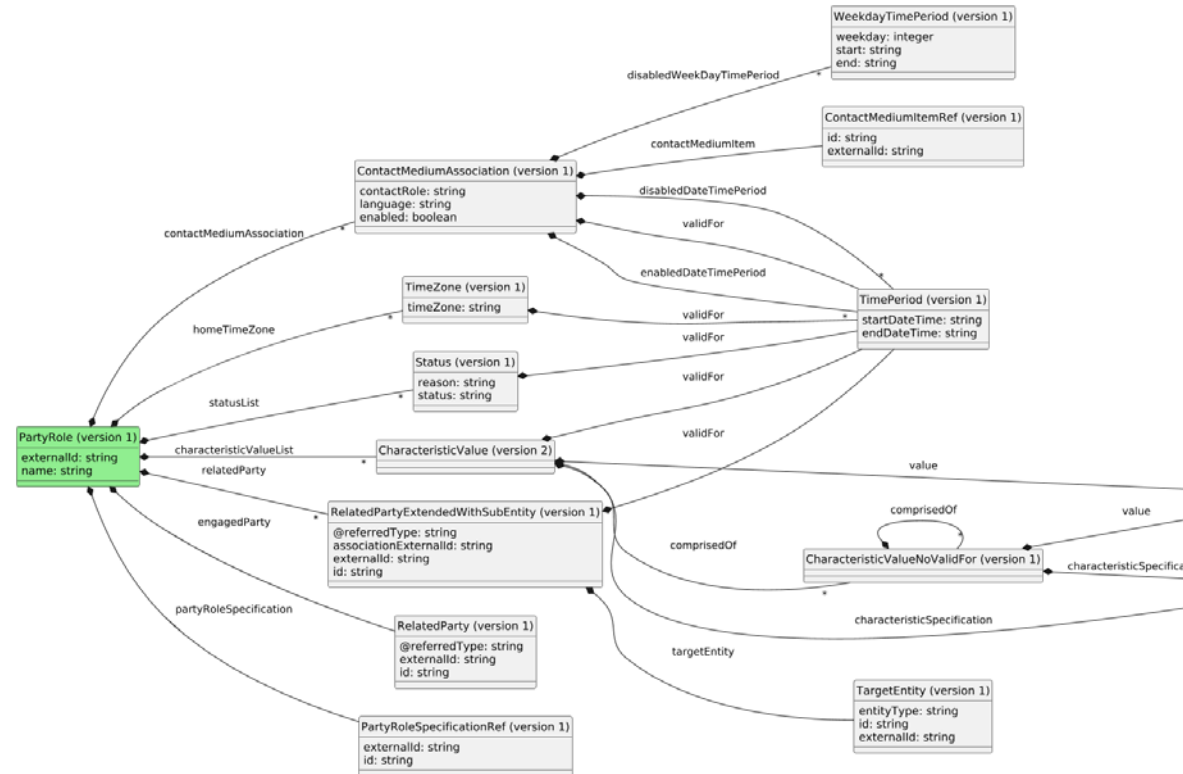


Figure 1 bss.Tmf669PartyRoleManagement.partyRole.createRequest.1 UML representation

The representation is provided as JSON objects with the following attributes:

Table 9 PartyRole (version 1)

Name	Type	Description
PartyRole (version 1)	object	Represents a Party Role, e.g. Contract Owner, Payment Responsible, Invoice Receiver.



Name		Type	Description
	externalId	string	External identifier for the party role. Pattern: ^(?=\s*\S).* Max length: 256
	name	string	Party role name. A word, term, or phrase by which the PartyRole is known and distinguished from other PartyRoles. Max length: 128
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	The contact medium association for this party.
	homeTimeZone	array of bss.cmn.TimeZone (version 1)	The list of all versions related to the homeTimeZone attribute.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of party characteristic values.
	statusList	array of bss.cmn.Status (version 1)	Array of party role statuses. Used to track the lifecycle status.
	relatedParty	array of RelatedPartyExtendedWithSubEntity (version 1)	Array of party roles that are related with this partyRole
	engagedParty	RelatedParty (version 1)	Party that is owning this party role.
	partyRoleSpecification	PartyRoleSpecificationRef (version 1)	Party Role Specification Reference.

ContactMediumAssociation (version 1)

Table 10 ContactMediumAssociation (version 1)

Name	Type	Description
ContactMediumAssociation (version 1)	object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).* Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekDayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.TimePeriod (version 1)

Table 11 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.WeekdayTimePeriod (version 1)

Table 12 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00)-((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00)-((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>

ContactMediumItemRef (version 1)

Table 13 ContactMediumItemRef (version 1)

Name		Type	Description
ContactMediumItemRef (version 1)		object	Reference to a ContactMediumItem.
	id	string	The contact medium item id. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	externalId	string	The contact medium item external id. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256



bss.cmn.TimeZone (version 1)

Table 14 bss.cmn.TimeZone (version 1)

Name		Type	Description
bss.cmn.TimeZone (version 1)		object	Data structure containing time-zone and validity period.
	timeZone	string	The name of the time zone according to IANA Time Zone Database, for example Europe/Paris. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period the time zone is valid for.

CharacteristicValue (version 2)

Table 15 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 16 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 17 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 18 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256



bss.cmn.Status (version 1)

Table 19 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

RelatedPartyExtendedWithSubEntity (version 1)

Table 20 RelatedPartyExtendedWithSubEntity (version 1)

Name	Type	Description
RelatedPartyExtendedWithSubEntity (version 1)	object	Related Party Extended with Sub Entity.



Name		Type	Description
	targetEntity	TargetEntity (version 1)	Target entity
	@referredType	string	Referred Type. Max length: 128
	associationExternalId	string	Association External identifier for the related party. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the Related Party is valid for
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

TargetEntity (version 1)

Table 21 TargetEntity (version 1)

Name		Type	Description
TargetEntity (version 1)		object	Target entity.
	entityType	string	The type of the entity. Max length: 128
	id	string	Identifier of the target entity. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the target entity. Pattern: ^(?=\s*\S).*\$ Max length: 256



RelatedParty (version 1)

Table 22 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

PartyRoleSpecificationRef (version 1)

Table 23 PartyRoleSpecificationRef (version 1)

Name		Type	Description
PartyRoleSpecificationRef (version 1)		object	Party Role Specification Reference.
	externalId	string	External identifier for the party role specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier for the party role specification. Pattern: ^(?=\s*\S).*\$ Max length: 256

4.1.1.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.1.4.1 bss.Tmf669PartyRoleManagement.partyRole Create Response Version 1

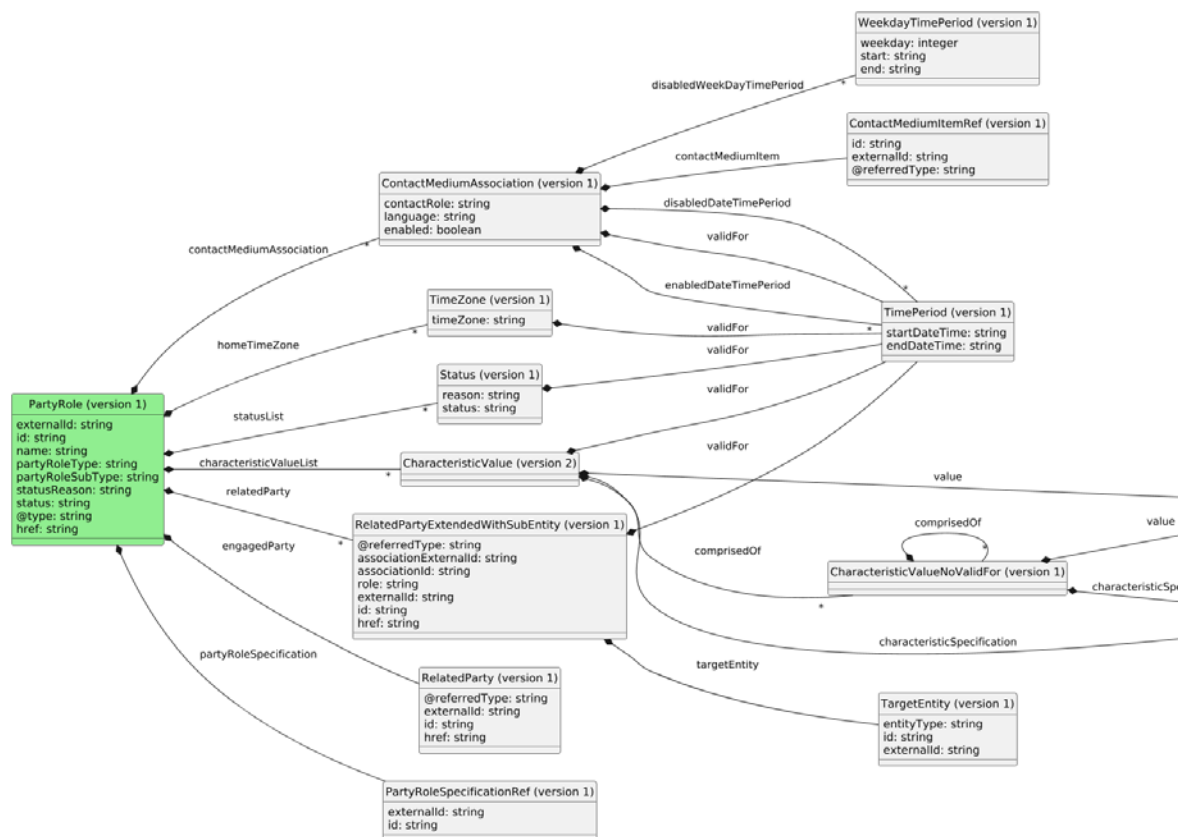


Figure 2 bss.Tmf669PartyRoleManagement.partyRole.createResponse.1 UML representation

The representation is provided as JSON objects with the following attributes:

Table 24 PartyRole (version 1)

Name	Type	Description
PartyRole (version 1)	object	Represents a Party Role, e.g. Contract Owner, Payment Responsible, Invoice Receiver.



Name		Type	Description
	externalId	string	External identifier for the party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier for the party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	Party role name. A word, term, or phrase by which the PartyRole is known and distinguished from other PartyRoles. Max length: 128
	partyRoleType	string	Party role type. Max length: 128
	partyRoleSubType	string	Party role sub type. Max length: 128
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	The contact medium association for this party.
	homeTimeZone	array of bss.cmn.TimeZone (version 1)	The list of all versions related to the homeTimeZone attribute.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of party characteristic values.
	statusReason	string	Reason for current status. Max length: 256
	statusList	array of bss.cmn.Status (version 1)	Array of party role statuses. Used to track the lifecycle status.
	status	string	Current status. Max length: 256
	relatedParty	array of RelatedPartyExtendedWithSubEntity (version 1)	Array of party roles that are related with this partyRole
	engagedParty	RelatedParty (version 1)	Party that is owning this party role.
	partyRoleSpecification	PartyRoleSpecificationRef (version 1)	Party Role Specification Reference.
	@type	string	When sub-classing, this defines the sub-class entity name Max length: 128



ContactMediumAssociation (version 1)

Table 25 ContactMediumAssociation (version 1)

Name		Type	Description
ContactMediumAssociation (version 1)		object	Represents an assignment of a contact medium to an entity.
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).* Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekDayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.TimePeriod (version 1)

Table 26 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.WeekdayTimePeriod (version 1)

Table 27 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$

ContactMediumItemRef (version 1)

Table 28 ContactMediumItemRef (version 1)

Name	Type	Description
ContactMediumItemRef (version 1)	object	Reference to a ContactMediumItem.



Name		Type	Description
	id	string	The contact medium item id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.TimeZone (version 1)

Table 29 bss.cmn.TimeZone (version 1)

Name		Type	Description
bss.cmn.TimeZone (version 1)		object	Data structure containing time-zone and validity period.
	timeZone	string	The name of the time zone according to IANA Time Zone Database, for example Europe/Paris. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period the time zone is valid for.

CharacteristicValue (version 2)

Table 30 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 31 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 32 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.



SpecCharacteristicRef (version 1)

Table 33 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.Status (version 1)

Table 34 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



RelatedPartyExtendedWithSubEntity (version 1)

Table 35 RelatedPartyExtendedWithSubEntity (version 1)

Name		Type	Description
RelatedPartyExtendedWithSubEntity (version 1)		object	Related Party Extended with Sub Entity.
	targetEntity	TargetEntity (version 1)	Target entity
	@referredType	string	Referred Type. Max length: 128
	associationExternalId	string	Association External identifier for the related party. Pattern: ^(?=\s*\S).*\$ Max length: 256
	associationId	string	Association Unique identifier for the related party. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the Related Party is valid for
	role	string	Role of the related party. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512



TargetEntity (version 1)

Table 36 TargetEntity (version 1)

Name		Type	Description
TargetEntity (version 1)		object	Target entity.
	entityType	string	The type of the entity. Max length: 128
	id	string	Identifier of the target entity. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the target entity. Pattern: ^(?=\s*\S).*\$ Max length: 256

RelatedParty (version 1)

Table 37 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512



PartyRoleSpecificationRef (version 1)

Table 38 PartyRoleSpecificationRef (version 1)

Name		Type	Description
PartyRoleSpecificationRef (version 1)		object	Party Role Specification Reference.
	externalId	string	External identifier for the party role specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	id	string	Unique identifier for the party role specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256

4.1.2 Delete Party Role

Deletes a Party Role.

4.1.2.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- DELETE `{scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf669PartyRoleManagement/v1/partyRole/{id}`
- DELETE `{scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf669PartyRoleManagement/v1/partyRoleExternalId/{externalId}`

Path Parameters

The following table describes the path parameters for the operation:



Table 39 Path Parameters

Name	Type	Description
id	string	Party Role Identifier. Additional Description: Unique identifier for the party role. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
externalId	string	Party Role External Identifier. Additional Description: External identifier for the party role. Maxlength: 256 Pattern: ^(?=\s*\S).*\$

4.1.2.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 40 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional
	A non-empty subset of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-



Header Field Name	Header Field Value	Mandatory/Optional
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 41 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 42 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Optional
	For Status-Code: 204, Content-type header field is not applicable For Status-Code: 4XX,5XX,503, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
X-Content-Type-Options		Optional
	no-sniff	Optional
RESPONSE		



Table 43 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

4.1.3

Read Party Role

Retrieves Party Role information.



4.1.3.1

Operations

The following HTTP methods and URIs are applicable to perform the operation:

- GET {scheme:}://{host}[:{port}]/bssTmf669PartyRoleManagement/v1/partyRole/{id}
- GET {scheme:}://{host}[:{port}]/bssTmf669PartyRoleManagement/v1/partyRoleExternalId/{externalId}

Query Parameters

The following table describes the query parameters for the operation:

Table 44 Query Parameters

Name	Type	Description
offset	integer	Requested index for start of resources to be provided in response requested by client. Additional Description: Offset Minimum: 0 Maximum: 9223372036854775806 Min/Max: 0 / 9223372036854775806
limit	integer	Requested number of resources to be provided in response requested by client. Additional Description: The size of the page. Minimum: 1 Maximum: 500 Min/Max: 1 / 500



Name	Type	Description
after	string	The Id prior to the next page of resources to be provided in response requested by client. Additional Description: Cursor. Maxlength: 256
fields	string	Attribute selection fields. Additional Description: This parameter filters the properties that are returned, based on specific criteria. Return one or more fields specified as a comma-delimited list. Pattern: ^((@[a-zA-Z][a-zA-Z][a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)\\.(@[a-zA-Z][a-zA-Z][a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)*)*((@[a-zA-Z][a-zA-Z][a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)\\.(@[a-zA-Z][a-zA-Z][a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)*)*)*\$ Maxlength: 512

Path Parameters

The following table describes the path parameters for the operation:



Table 45 Path Parameters

Name	Type	Description
id	string	Party Role Identifier. Additional Description: Unique identifier for the party role. Maxlength: 256 Pattern: ^(?=\s*\S).*
externalId	string	Party Role External Identifier. Additional Description: External identifier for the party role. Maxlength: 256 Pattern: ^(?=\s*\S).*

4.1.3.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 46 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf669PartyRoleManagement.partyRole.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf669PartyRoleManagement.partyRole.readResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.

Table 47 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 48 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200,206, one of the following: • application/x.bss.Tmf669PartyRoleManagement.partyRole.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf669PartyRoleManagement.partyRole.readResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: ^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun),([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2 } GMT))\$



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 49 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.1.3.3

Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.3.3.1

bss.Tmf669PartyRoleManagement.partyRole Read Response Version 1

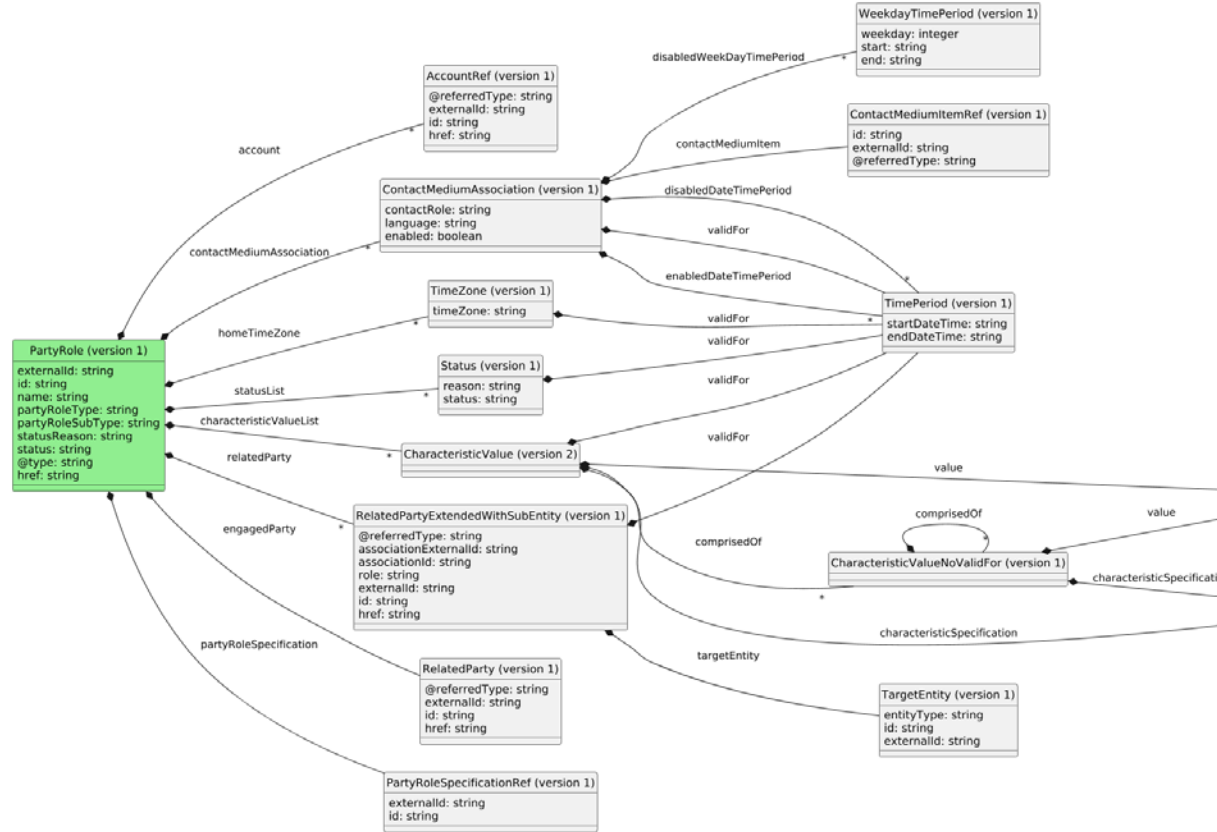


Figure 3 bss.Tmf669PartyRoleManagement.partyRole.readResponse.1 UML representation

The representation is provided as JSON objects with the following attributes:

Table 50 PartyRole (version 1)

Name	Type	Description
PartyRole (version 1)	object	Represents a Party Role, e.g. Contract Owner, Payment Responsible, Invoice Receiver.



Name		Type	Description
	externalId	string	External identifier for the party role. Pattern: ^(?=\s*\S).* Max length: 256
	id	string	Unique identifier for the party role. Pattern: ^(?=\s*\S).* Max length: 256
	name	string	Party role name. A word, term, or phrase by which the PartyRole is known and distinguished from other PartyRoles. Max length: 128
	partyRoleType	string	Party role type. Max length: 128
	partyRoleSubType	string	Party role sub type. Max length: 128
	account	array of AccountRef (version 1)	References to Accounts associated with this party role.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	The contact medium association for this party.
	homeTimeZone	array of bss.cmn.TimeZone (version 1)	The list of all versions related to the homeTimeZone attribute.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of party characteristic values.
	statusReason	string	Reason for current status. Max length: 256
	statusList	array of bss.cmn.Status (version 1)	Array of party role statuses. Used to track the lifecycle status.
	status	string	Current status. Max length: 256
	relatedParty	array of RelatedPartyExtendedWithSubEntity (version 1)	Array of party roles that are related with this partyRole
	engagedParty	RelatedParty (version 1)	Party that is owning this party role.
	partyRoleSpecification	PartyRoleSpecificationRef (version 1)	Party Role Specification Reference.
	@type	string	When sub-classing, this defines the sub-class entity name



AccountRef (version 1)

Table 51 AccountRef (version 1)

Name		Type	Description
AccountRef (version 1)		object	Account Reference.
	@referredType	string	Referred Account Type. Possible values: SETTLEMENT_ACCOUNT
	externalId	string	External identifier of the account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512

ContactMediumAssociation (version 1)

Table 52 ContactMediumAssociation (version 1)

Name	Type	Description
ContactMediumAssociation (version 1)	object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).* Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekDayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.TimePeriod (version 1)

Table 53 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.WeekdayTimePeriod (version 1)

Table 54 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>

ContactMediumItemRef (version 1)

Table 55 ContactMediumItemRef (version 1)

Name	Type	Description
ContactMediumItemRef (version 1)	object	Reference to a ContactMediumItem.



Name		Type	Description
	id	string	The contact medium item id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.TimeZone (version 1)

Table 56 bss.cmn.TimeZone (version 1)

Name		Type	Description
bss.cmn.TimeZone (version 1)		object	Data structure containing time-zone and validity period.
	timeZone	string	The name of the time zone according to IANA Time Zone Database, for example Europe/Paris. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period the time zone is valid for.

CharacteristicValue (version 2)

Table 57 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 58 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 59 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.



SpecCharacteristicRef (version 1)

Table 60 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.Status (version 1)

Table 61 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



RelatedPartyExtendedWithSubEntity (version 1)

Table 62 RelatedPartyExtendedWithSubEntity (version 1)

Name		Type	Description
RelatedPartyExtendedWithSubEntity (version 1)		object	Related Party Extended with Sub Entity.
	targetEntity	TargetEntity (version 1)	Target entity
	@referredType	string	Referred Type. Max length: 128
	associationExternalId	string	Association External identifier for the related party. Pattern: ^(?=\s*\S).*\$ Max length: 256
	associationId	string	Association Unique identifier for the related party. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the Related Party is valid for
	role	string	Role of the related party. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512



TargetEntity (version 1)

Table 63 TargetEntity (version 1)

Name		Type	Description
TargetEntity (version 1)		object	Target entity.
	entityType	string	The type of the entity. Max length: 128
	id	string	Identifier of the target entity. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the target entity. Pattern: ^(?=\s*\S).*\$ Max length: 256

RelatedParty (version 1)

Table 64 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512



PartyRoleSpecificationRef (version 1)

Table 65 PartyRoleSpecificationRef (version 1)

Name		Type	Description
PartyRoleSpecificationRef (version 1)		object	Party Role Specification Reference.
	externalId	string	External identifier for the party role specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	id	string	Unique identifier for the party role specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256

4.1.4 Update Party Role

Updates a Party Role.

4.1.4.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- PATCH `{scheme:}/{host}[:{port}]/{deploymentComponent}/bssTmf669PartyRoleManagement/v1/partyRole/{id}`
- PATCH `{scheme:}/{host}[:{port}]/{deploymentComponent}/bssTmf669PartyRoleManagement/v1/partyRoleExternalId/{externalId}`

Path Parameters

The following table describes the path parameters for the operation:



Table 66 Path Parameters

Name	Type	Description
id	string	Party Role Identifier. Additional Description: Unique identifier for the party role. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
externalId	string	Party Role External Identifier. Additional Description: External identifier for the party role. Maxlength: 256 Pattern: ^(?=\s*\S).*\$

4.1.4.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 67 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf669PartyRoleManagement.partyRole.updateResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf669PartyRoleManagement.partyRole.updateResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Content-Type		Mandatory
	One of the following: • application/x.bss.Tmf669PartyRoleManagement.partyRole.updateRequest+merge-patch+json;version=1;charset=utf-8 • application/x.bss.Tmf669PartyRoleManagement.partyRole.updateRequest+merge-patch+json;version=1 • application/merge-patch+json;charset=utf-8 • application/merge-patch+json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 68 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: <code>^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$</code>
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 69 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf669PartyRoleManagement.partyRole.updateResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf669PartyRoleManagement.partyRole.updateResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: ^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2 } GMT))\$



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 70 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.1.4.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.1.4.3.1 bss.Tmf669PartyRoleManagement.partyRole Update Request Version 1

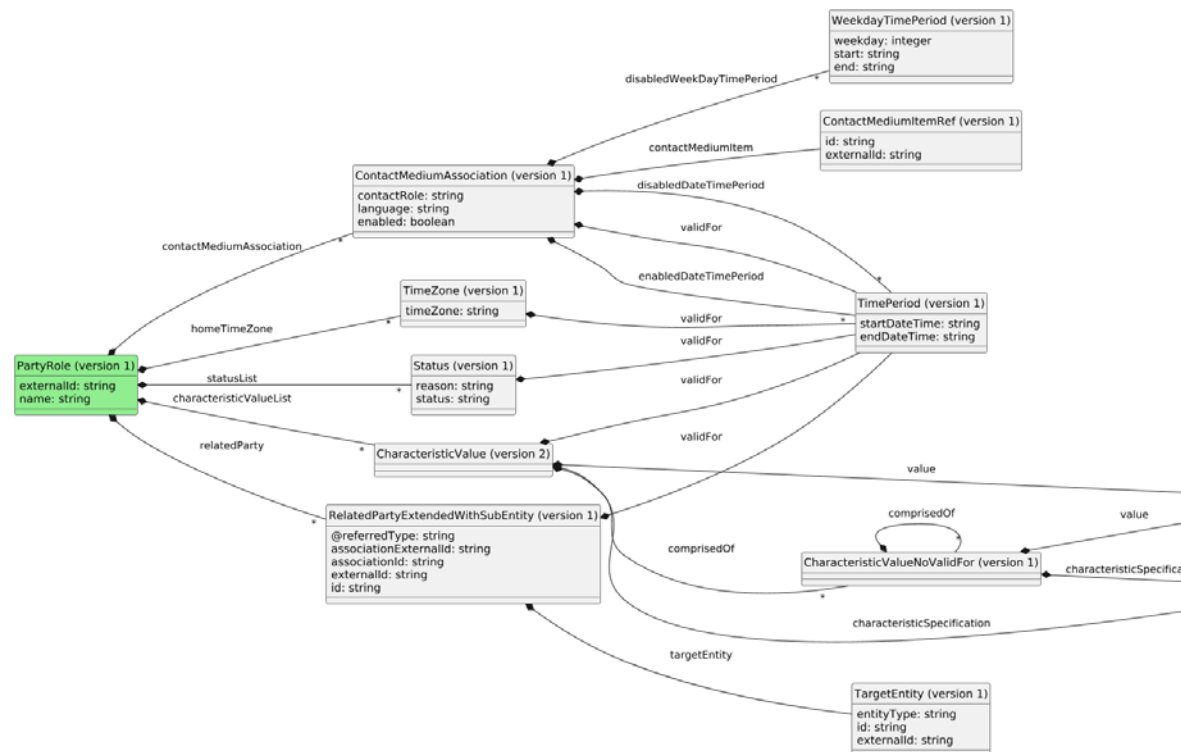


Figure 4 bss.Tmf669PartyRoleManagement.partyRole.updateRequest.1 UML representation



The representation is provided as JSON objects with the following attributes:

Table 71 PartyRole (version 1)

Name		Type	Description
PartyRole (version 1)		object	Represents a Party Role, e.g. Contract Owner, Payment Responsible, Invoice Receiver.
	externalId	string	External identifier for the party role. Pattern: ^(?=\s*\S).*\$\br/> Max length: 256
	name	string	Party role name. A word, term, or phrase by which the PartyRole is known and distinguished from other PartyRoles. Max length: 128
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	The contact medium association for this party.
	homeTimeZone	array of bss.cmn.TimeZone (version 1)	The list of all versions related to the homeTimeZone attribute.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of party characteristic values.
	statusList	array of bss.cmn.Status (version 1)	Array of party role statuses. Used to track the lifecycle status.
	relatedParty	array of RelatedPartyExtendedWithSubEntity (version 1)	Array of party roles that are related with this partyRole

ContactMediumAssociation (version 1)

Table 72 ContactMediumAssociation (version 1)

Name	Type	Description
ContactMediumAssociation (version 1)	object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).* Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekDayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.TimePeriod (version 1)

Table 73 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.WeekdayTimePeriod (version 1)

Table 74 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00)-((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00)-((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>

ContactMediumItemRef (version 1)

Table 75 ContactMediumItemRef (version 1)

Name		Type	Description
ContactMediumItemRef (version 1)		object	Reference to a ContactMediumItem.
	id	string	The contact medium item id. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	externalId	string	The contact medium item external id. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256



bss.cmn.TimeZone (version 1)

Table 76 bss.cmn.TimeZone (version 1)

Name		Type	Description
bss.cmn.TimeZone (version 1)		object	Data structure containing time-zone and validity period.
	timeZone	string	The name of the time zone according to IANA Time Zone Database, for example Europe/Paris. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period the time zone is valid for.

CharacteristicValue (version 2)

Table 77 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 78 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 79 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 80 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256



bss.cmn.Status (version 1)

Table 81 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

RelatedPartyExtendedWithSubEntity (version 1)

Table 82 RelatedPartyExtendedWithSubEntity (version 1)

Name	Type	Description
RelatedPartyExtendedWithSubEntity (version 1)	object	Related Party Extended with Sub Entity.



Name		Type	Description
	targetEntity	TargetEntity (version 1)	Target entity
	@referredType	string	Referred Type. Max length: 128
	associationExternalId	string	Association External identifier for the related party. Pattern: ^(?=\s*\S).*\$ Max length: 256
	associationId	string	Association Unique identifier for the related party. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the Related Party is valid for
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

TargetEntity (version 1)

Table 83 TargetEntity (version 1)

Name	Type	Description
TargetEntity (version 1)	object	Target entity.



Name		Type	Description
	entityType	string	The type of the entity. Max length: 128
	id	string	Identifier of the target entity. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the target entity. Pattern: ^(?=\s*\S).*\$ Max length: 256

4.1.4.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.4.4.1

bss.Tmf669PartyRoleManagement.partyRole Update Response Version 1

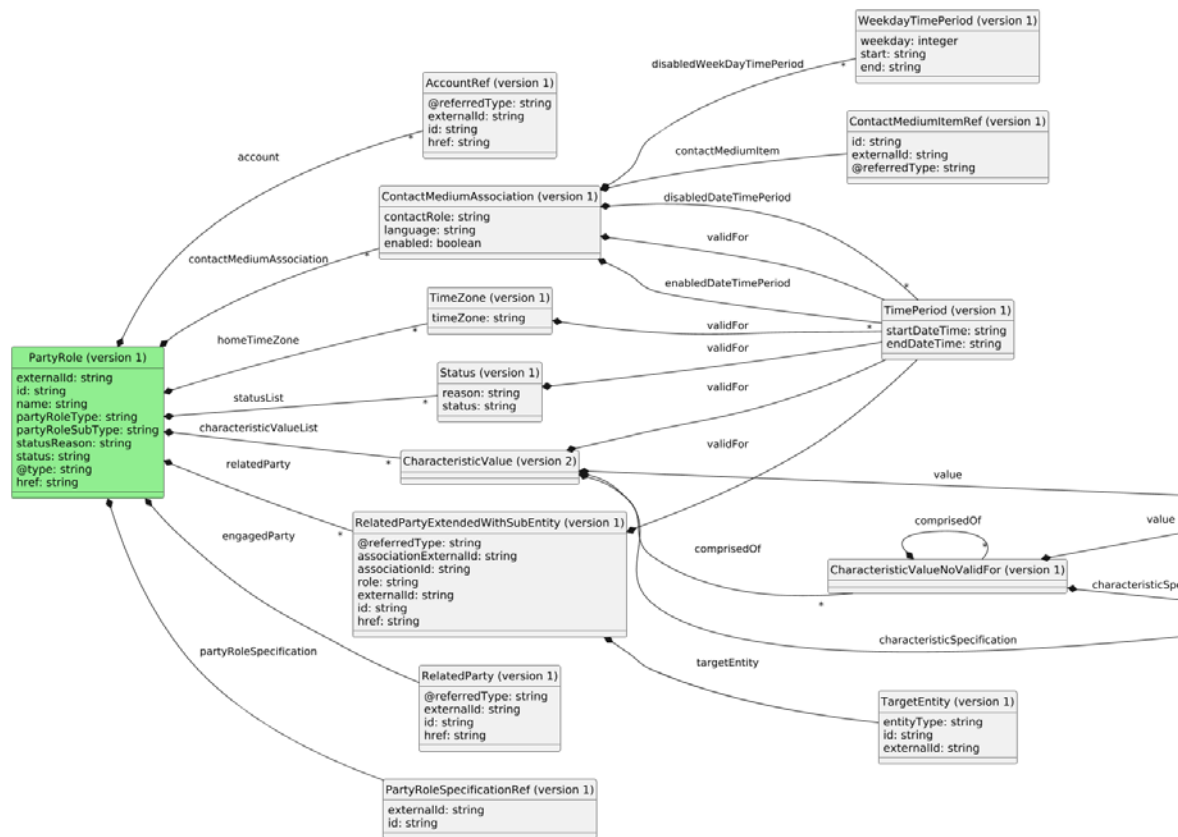


Figure 5 bss.Tmf669PartyRoleManagement.partyRole.updateResponse.1 UML representation

The representation is provided as JSON objects with the following attributes:

Table 84 PartyRole (version 1)

Name	Type	Description
PartyRole (version 1)	object	Represents a Party Role, e.g. Contract Owner, Payment Responsible, Invoice Receiver.



Name		Type	Description
	externalId	string	External identifier for the party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier for the party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	Party role name. A word, term, or phrase by which the PartyRole is known and distinguished from other PartyRoles. Max length: 128
	partyRoleType	string	Party role type. Max length: 128
	partyRoleSubType	string	Party role sub type. Max length: 128
	account	array of AccountRef (version 1)	References to Accounts associated with this party role.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	The contact medium association for this party.
	homeTimeZone	array of bss.cmn.TimeZone (version 1)	The list of all versions related to the homeTimeZone attribute.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of party characteristic values.
	statusReason	string	Reason for current status. Max length: 256
	statusList	array of bss.cmn.Status (version 1)	Array of party role statuses. Used to track the lifecycle status.
	status	string	Current status. Max length: 256
	relatedParty	array of RelatedPartyExtendedWithSubEntity (version 1)	Array of party roles that are related with this partyRole
	engagedParty	RelatedParty (version 1)	Party that is owning this party role.
	partyRoleSpecification	PartyRoleSpecificationRef (version 1)	Party Role Specification Reference.
	@type	string	When sub-classing, this defines the sub-class entity name



AccountRef (version 1)

Table 85 AccountRef (version 1)

Name		Type	Description
AccountRef (version 1)		object	Account Reference.
	@referredType	string	Referred Account Type. Possible values: SETTLEMENT_ACCOUNT
	externalId	string	External identifier of the account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512

ContactMediumAssociation (version 1)

Table 86 ContactMediumAssociation (version 1)

Name		Type	Description
ContactMediumAssociation (version 1)		object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).*\$ Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekDayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.TimePeriod (version 1)

Table 87 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.WeekdayTimePeriod (version 1)

Table 88 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$

ContactMediumItemRef (version 1)

Table 89 ContactMediumItemRef (version 1)

Name	Type	Description
ContactMediumItemRef (version 1)	object	Reference to a ContactMediumItem.



Name		Type	Description
	id	string	The contact medium item id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.TimeZone (version 1)

Table 90 bss.cmn.TimeZone (version 1)

Name		Type	Description
bss.cmn.TimeZone (version 1)		object	Data structure containing time-zone and validity period.
	timeZone	string	The name of the time zone according to IANA Time Zone Database, for example Europe/Paris. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period the time zone is valid for.

CharacteristicValue (version 2)

Table 91 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 92 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 93 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.



SpecCharacteristicRef (version 1)

Table 94 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.Status (version 1)

Table 95 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



RelatedPartyExtendedWithSubEntity (version 1)

Table 96 RelatedPartyExtendedWithSubEntity (version 1)

Name		Type	Description
RelatedPartyExtendedWithSubEntity (version 1)		object	Related Party Extended with Sub Entity.
	targetEntity	TargetEntity (version 1)	Target entity
	@referredType	string	Referred Type. Max length: 128
	associationExternalId	string	Association External identifier for the related party. Pattern: ^(?=\s*\S).*\$ Max length: 256
	associationId	string	Association Unique identifier for the related party. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the Related Party is valid for
	role	string	Role of the related party. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512



TargetEntity (version 1)

Table 97 TargetEntity (version 1)

Name		Type	Description
TargetEntity (version 1)		object	Target entity.
	entityType	string	The type of the entity. Max length: 128
	id	string	Identifier of the target entity. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the target entity. Pattern: ^(?=\s*\S).*\$ Max length: 256

RelatedParty (version 1)

Table 98 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512



PartyRoleSpecificationRef (version 1)

Table 99 PartyRoleSpecificationRef (version 1)

Name		Type	Description
PartyRoleSpecificationRef (version 1)		object	Party Role Specification Reference.
	externalId	string	External identifier for the party role specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier for the party role specification. Pattern: ^(?=\s*\S).*\$ Max length: 256

5

Generic Interface Parameters

The following sub-sections describe the elements and their structure in the request and response for Generic Interface Parameters.

5.1

Generic Interface Parameters Request

5.1.1

bss.genericInterfaceParameters Request Version 4

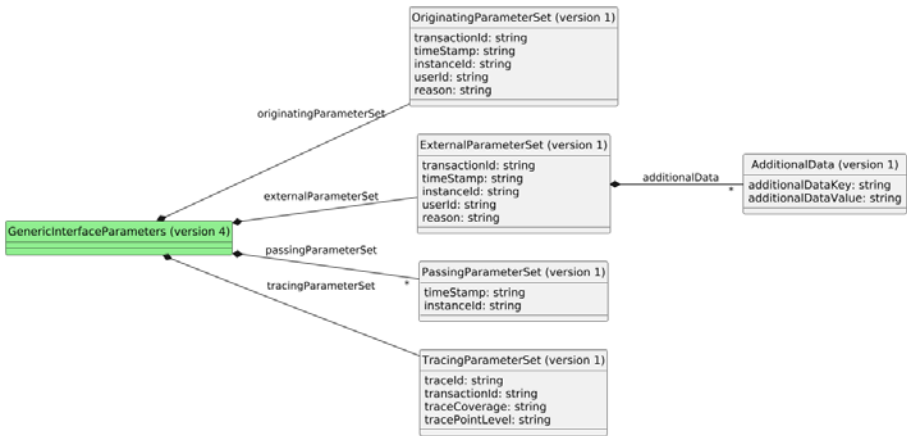


Figure 6 bss.genericInterfaceParameters.request.4 UML representation

The representation is provided as JSON objects with the following attributes:

Table 100 bss.cmn.GenericInterfaceParameters (version 4)

Name	Type	Description
bss.cmn.GenericInterfac eParameters (version 4)	object	The Generic Interface Parameters (GIP) is used for transaction traceability.



Name		Type	Description
	originatingParameterSet	bss.cmn.OriginatingParameterSet (version 1)	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.
	externalParameterSet	bss.cmn.ExternalParameterSet (version 1)	Information received from the external system that initiated the transaction.
	passingParameterSet	array of bss.cmn.PassingParameterSet (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	bss.cmn.TracingParameterSet (version 1)	Tracing Parameter Set.

5.1.1.1

bss.cmn.OriginatingParameterSet (version 1)

Table 101 bss.cmn.OriginatingParameterSet (version 1)

Name	Type	Description
bss.cmn.OriginatingParameterSet (version 1)	object	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.



Name		Type	Description
	transactionId	string	Unique transaction identifier. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	timeStamp	string	The time stamp when the ops was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that created the ops. Max length: 256
	userId	string	User Identification. Provided at login to the instance creating the ops. Max length: 256
	reason	string	Reason for the transaction. Max length: 256

5.1.1.2

bss.cmn.ExternalParameterSet (version 1)

Table 102 bss.cmn.ExternalParameterSet (version 1)

Name	Type	Description
bss.cmn.ExternalParameterSet (version 1)	object	Information received from the external system that initiated the transaction.



Name		Type	Description
	transactionId	string	Transaction Identifier received from external system. Max length: 256
	timeStamp	string	Transaction time stamp received from external system. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that sent the transactionId. Max length: 256
	userId	string	User identifier received from external system. Max length: 256
	reason	string	Reason received from external system. Max length: 256
	additionalData	array of <code>bss.cmn.AdditionalData (version 1)</code>	Array of additional data Items from external system.

5.1.1.3

`bss.cmn.AdditionalData (version 1)`

Table 103 `bss.cmn.AdditionalData (version 1)`

Name	Type	Description
<code>bss.cmn.AdditionalData (version 1)</code>	object	A key-value structure data received from external system.



Name		Type	Description
	additionalDataKey	string	key of the additional data from external system. Max length: 256
	additionalDataValue	string	value correspond to the key. Max length: 256

5.1.1.4

bss.cmn.PassingParameterSet (version 1)

Table 104 bss.cmn.PassingParameterSet (version 1)

Name		Type	Description
bss.cmn.PassingParameterSet (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the ppsItem was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02]))-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the entity that created the ppsItem. Max length: 256

5.1.1.5

bss.cmn.TracingParameterSet (version 1)

Table 105 bss.cmn.TracingParameterSet (version 1)

Name		Type	Description
bss.cmn.TracingParameterSet (version 1)		object	Tracing Parameter Set.



Name		Type	Description
	traceId	string	The unique id for the trace job. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	transactionId	string	The unique id for the transaction. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
	tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

5.2 Generic Interface Parameters Response

5.2.1 bss.genericInterfaceParameters Response Version 4

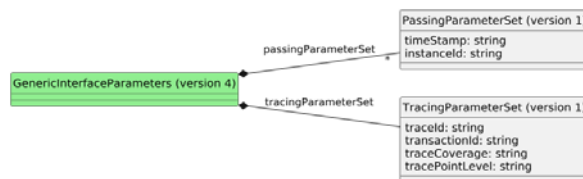


Figure 7 bss.genericInterfaceParameters.response.4 UML representation

The representation is provided as JSON objects with the following attributes:

Table 106 bss.cmn.GenericInterfaceParameters (version 4)

Name	Type	Description
bss.cmn.GenericInterfaceParameters (version 4)	object	The Generic Interface Parameters (GIP) is used for transaction traceability.



Name		Type	Description
	passingParameterSet	array of <code>bss.cmn.PassingParameterSet</code> (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	<code>bss.cmn.TracingParameterSet</code> (version 1)	Tracing Parameter Set.

5.2.1.1

`bss.cmn.PassingParameterSet` (version 1)

Table 107 `bss.cmn.PassingParameterSet` (version 1)

Name		Type	Description
<code>bss.cmn.PassingParameterSet</code> (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the <code>ppsItem</code> was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T(((01[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the entity that created the <code>ppsItem</code> . Max length: 256

5.2.1.2

`bss.cmn.TracingParameterSet` (version 1)

Table 108 `bss.cmn.TracingParameterSet` (version 1)

Name		Type	Description
<code>bss.cmn.TracingParameterSet</code> (version 1)		object	Tracing Parameter Set.



Name		Type	Description
	traceId	string	The unique id for the trace job. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	transactionId	string	The unique id for the transaction. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
	tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

6Result Representation

Results are reported through HTTP status codes. JSON objects are provided for requests that reaches the application component. The following tables describe the elements and their structure contained in the result representation.

6.1bss.errorMessage Response Version 2




Figure 8 bss.errorMessage.response.2 UML representation

The representation is provided as JSON objects with the following attributes:

Table 109 bss.cmn.ErrorMessageExtended (version 2)

Name		Type	Description
bss.cmn.ErrorMessageExtended (version 2)		object	Extended error message structure.
	supplementaryError	array of bss.cmn.SupplementaryError (version 2)	Supplementary Error.
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	httpStatusCode	integer	HTTP status code.



6.1.1 **bss.cmn.SupplementaryError (version 2)**

Table 110 **bss.cmn.SupplementaryError (version 2)**

Name		Type	Description
bss.cmn.Supplementary Error (version 2)		object	Supplementary error message structure. In case of partial error scenarios, this structure may also include successful responses to show what parts went ok.
	source	string	Source of error. Max length: 256
	action	string	Action causing error. Max length: 256
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	httpStatusCode	integer	HTTP status code.

6.2 Result Codes

The supported Error Codes could be found in the 'Error Codes' document.



7 Interface Version Changes

The following sections describe the changes between the interface versions.

7.1 Interface Version 1.0

Table 111 Changes

Resources	Type of Change	Description
N/A	N/A	First version.

7.2 Interface Version 1.1

Table 112 Changes

Resources	Type of Change	Description
All	Updated	Change handling of content-type for request/responses operations.





Reference List

- [1] [RFC 7231 - Hypertext Transfer Protocol \(HTTP/1.1\): Semantics and Content](#)
- [2] [RFC 7230 - Hypertext Transfer Protocol \(HTTP/1.1\): Message Syntax and Routing](#)
- [3] [RFC 6906 - The 'profile' Link Relation Type](#)
- [4] [RFC 4122 - A Universally Unique Identifier \(UUID\) URN Namespace](#)
- [5] [RFC 3986 - Uniform Resource Identifier \(URI\): Generic Syntax](#)
- [6] [RFC 2818 - HTTP Over TLS](#)
- [7] [RFC 2616 - Hypertext Transfer Protocol -- HTTP/1.1](#)