

BSSF Account Management REST Interface 1.3

INTERFACE DESCRIPTION

Copyright

© Ericsson AB 2025. All Rights Reserved. No part of this document may be reproduced in any form without the written permission of the copyright owner.

Disclaimer

The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. Ericsson shall have no liability for any error or damage of any kind resulting from the use of this document.

This information is intended exclusively for demonstration purposes when used in the development of client-side integrations. It may not include definitions for various elements or behaviors that could arise from client-server interactions involving any third-party products, providers, or deployment platforms, whether external or internal to the delivered product.

Trademark List

Ericsson and the Ericsson logotype are the trademarks or registered trademarks of Telefonaktiebolaget LM Ericsson. All other product or service names mentioned in a document on this server are trademarks of their respective companies.



Contents

1	Introduction	1
1.1	Transfer Mechanism	1
1.2	Authentication and Authorization	1
1.3	Compatibility Mechanism	1
1.3.1	HTTP Content Negotiation	1
1.3.2	Product Customization	1
1.3.3	Backward Compatibility	2
2	Syntax Notation	3
2.1	Resource Identifier	3
2.2	HTTP Headers	3
2.3	Resource Representation Profile	4
3	Service	5
3.1	BSSF Account Management	5
3.1.1	Description	5
3.2	Service Registry	5
4	Resources	7
4.1	Settlement Account	7
4.1.1	Create Settlement Account	7
4.1.2	Update Settlement Account	41
5	Generic Interface Parameters	77
5.1	Generic Interface Parameters Request	77
5.1.1	bss.genericInterfaceParameters Request Version 4	77
5.2	Generic Interface Parameters Response	82
5.2.1	bss.genericInterfaceParameters Response Version 4	82
6	Result Representation	85
6.1	bss.errorMessage Response Version 2	85
6.1.1	bss.cmn.SupplementaryError (version 2)	86
6.2	Result Codes	86
7	Interface Version Changes	87
7.1	Interface Version 1.0	87
7.2	Interface Version 1.1	87
7.3	Interface Version 1.2	87
7.4	Interface Version 1.3	88



Reference List

89



1 Introduction

Target Groups

The target group for this document is:

— Solution Integrators

1.1 Transfer Mechanism

The transfer mechanism used is HTTPS. Both requests and responses use headers to send information about the message.

The access port is configurable. Clients that use this interface should support a configurable port.

1.2 Authentication and Authorization

Authentication is controlled by the inclusion of a Java Web Token (JWT) in the authorization header of the HTTP message.

1.3 Compatibility Mechanism

The following version mechanisms are used:

1.3.1 HTTP Content Negotiation

HTTP content negotiation uses the profile parameter in the HTTP Accept header to request a certain version of the resource representation. The profile value indicates the JSON schema and version used for the resource representation. If the profile parameter is not passed in the HTTP Accept header, the server returns the latest version of the resource representation.

For operations supporting error response version 1, if error response version is not specified it is assumed to be error response version 1.

1.3.2 Product Customization

Elements and data types that are specific for product customization are marked with PC in the section describing the element or data type. Functions and characteristics of a product customization is not part of the standard delivery. Contact your local Ericsson office for more information regarding ordering and compatibility.



All elements of a PC message are also product customizations when inside such a message. If an element or data type is marked PC within an otherwise standard record, is noted as such in the relevant chapters.

In order to improve readability the following applies in the rest of the document:

- The following applies to functions marked with (PC). The PC-tag is placed in the description.

1.3.3 **Backward Compatibility**

Json objects name and/or their respective content stated in this document may be changed without any further notice.

Backward compatibility within a major version is only kept for the messages sent over the network.



2 Syntax Notation

This interface uses a generic syntax that is described in the following sections. For a description of the actual values, refer to Resources.

2.1 Resource Identifier

The resource identifier is expressed by a URI with the following format:

```
{serverRoot}/{api}/{resourcePath}
```

```
{scheme:}://{host}[:{port}]/[{deploymentComponent}]{apiName}/{apiVersion}/{resourcePath}
```

Table 1 Server root parameter

Parameter	Description
serverRoot	Is implementation specific
api	Is the name and version of the API.

Table 2 API and resource path parameters

Parameter	Description
scheme	The Application protocol, for example HTTPS.
host	The network address to access the interface and its connected service.
port	The TCP/IP port used for access. If not specified, default ports for the applications are assumed.
deploymentComponent	The name of the deployment component providing the resource.
apiName	The name of the interface.
apiVersion	The version to use
resourcePath	The resource name and a unique ID.

The full URI must be encoded according to RFC3986 before usage.

2.2 HTTP Headers

The interface uses standard HTTP headers. In addition, custom HTTP headers are used with the following syntax:



ERICSSON.<name>:<value>

Accept Header Profile Value

The server accepts the following formats for profile values:

Accept: application/json; application/merge-patch+json;
profile=<profile-URI> <profile-URI>

If no Accept header field is present, then it is assumed that the client accepts all media types.

2.3 Resource Representation Profile

The profile link relation type indicates that a resource representation follows one or more profiles. For more information, refer to [RFC 6906](#).

The profile is identified by a URI with the following syntax:

profile="http://ericsson.com/<domain>.<interface>.<resource>.<operationAndDirection>.<version>.json#"

Table 3 REST Resource Representation Parameters

Parameter	Description
domain	Fixed value: bss
interface	Is the interface name.
resource	Is the resource name.
operationAndDirection	Is the CRUD operation with its direction request and response.
version	Major version of the resource representation.



3 Service

3.1 BSSF Account Management

Please read the service documentation available to understand how to use this interface in connection with the service.

3.1.1 Description

Account Management provides the ability necessary to store and maintain information about an account. This account could be a settlement account associated with a party role.

3.2 Service Registry

The Service Registry is a central repository of available services. Their locations are used by clients to dynamically find the service providers it needs. A service provider registers its services in the registry. Service consumers look up services and service locations.

The services accessed through the interface are the following:

Table 4 Services Exposed in the Service Registry

Service Name	Service Type	Version	Environment	Available Capabilities	Optional Data
BSSF_Account_Management	REST	1	Prod		
BSSF_Account_Management	REST	1	Prod		secured=true

Note: This chapter is only applicable for Virtualized deployments.





4 Resources

The interface offers access to different resources. Each resource has its own access path and parameters which are described in the following sections.

The referenced representations are available in a ZIP file at the following location:

edw:/alex?FN=BSSFAccountManagement_v1_3_schemaFile.zip

4.1 Settlement Account

A settlement account is used for settlement purposes, like creation of a Settlement Statement, creation of a document for the Partner to do reconciliation, or the creation of a report for reconciliation against an incoming invoice.

4.1.1 Create Settlement Account

Creates a Settlement Account with specified related party. Also creates an account reference to corresponding related party.

4.1.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

— POST {scheme:}/{host}[:{port}]/[deploymentComponent]/bssfAccountManagement/v1/settlementAccount

4.1.1.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 5 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.bssfAccountManagement.settlementAccount.createResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfAccountManagement.settlementAccount.createResponse.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Content-Type		Optional
	One of the following: • application/json;profile="http://ericsson.com/bss.bssfAccountManagement.settlementAccount.createRequest.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfAccountManagement.settlementAccount.createRequest.1.json#" • application/json;charset=utf-8 • application/json	-



Header Field Name	Header Field Value	Mandatory/Optional
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 6 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 7 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory
	For Status-Code: 201, one of the following: • application/json;profile="http://ericsson.com/bss.bssfAccountManagement.settlementAccount.createResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfAccountManagement.settlementAccount.createResponse.1.json#" For Status-Code: 4XX,5XX, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-



Header Field Name	Header Field Value	Mandatory/Optional
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: ^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2} GMT))\$
WWW-Authenticate		Optional Status Code: 401
	<challenge>	-
STANDARD HEADER		



Table 8 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID HEADER CUSTOM HEADER

4.1.1.3

Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.1.1.3.1

bss.bssfAccountManagement.settlementAccount Create Request Version 1

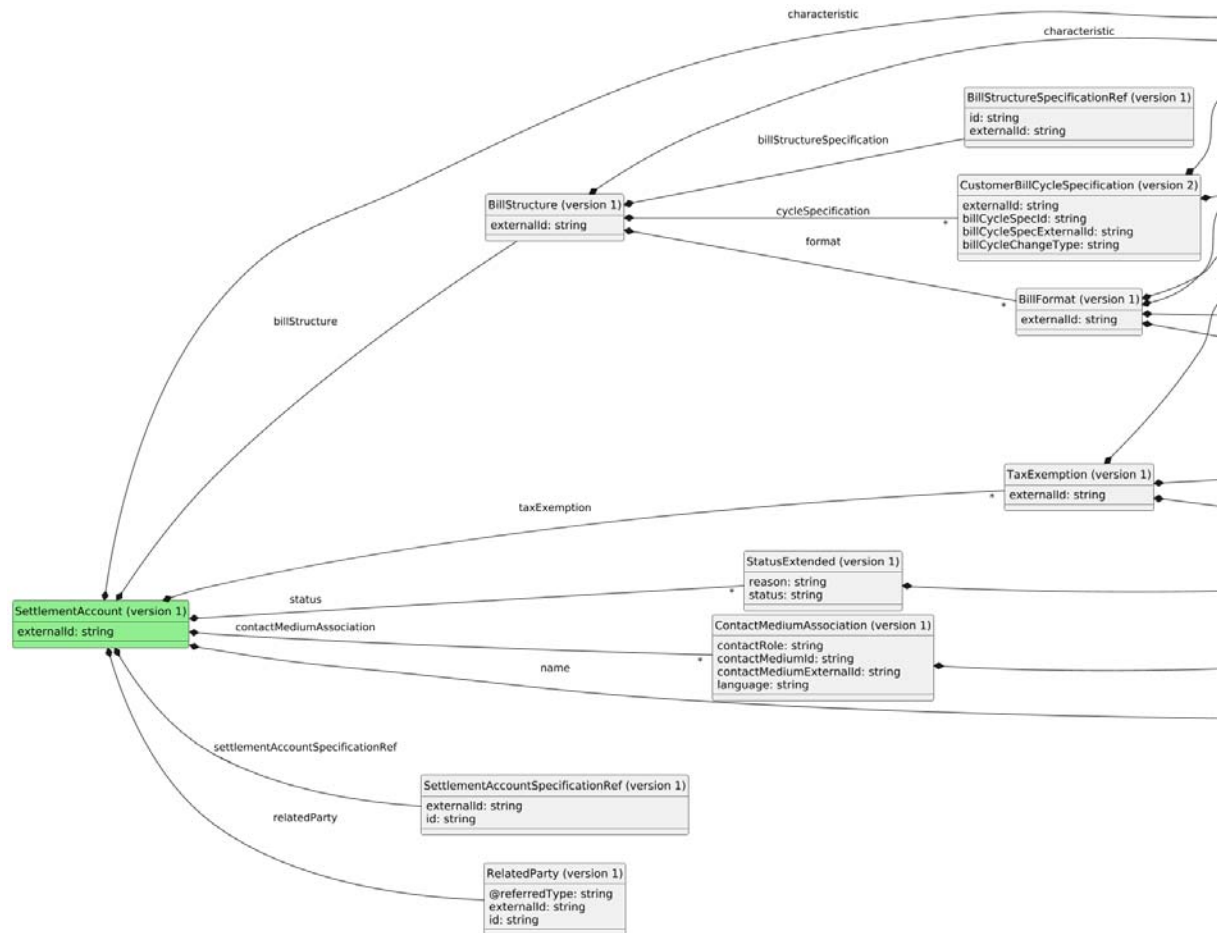


Figure 1 bss.bssfAccountManagement.settlementAccount.createRequest.1 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfAccountManagement.settlementAccount.createRequest.1.json#>

The representation is provided as JSON objects with the following attributes:



Table 9 SettlementAccount (version 1)

Name	Type	Description
SettlementAccount (version 1)	object	A Party account that is used for settlement purposes, like creation of a Settlement Statement, creation of a document for the Partner to do reconciliation, or the creation of a report for reconciliation against an incoming invoice.
settlementAccountSpecificationRef	SettlementAccountSpecificationRef (version 1)	A reference to a settlement account specification.
characteristic	array of CharacteristicValue (version 2)	Personalized characteristic values.
contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a settlement account.
name	array of Name (version 1)	The list of all version related to the name attribute.
status	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
billStructure	BillStructure (version 1)	Bill structure for a SettlementAccount.
relatedParty	RelatedParty (version 1)	Party or party role that is owning this account.
taxExemption	array of TaxExemption (version 1)	The tax exemptions for the settlement account.
externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

SettlementAccountSpecificationRef (version 1)

Table 10 SettlementAccountSpecificationRef (version 1)

Name	Type	Description
SettlementAccountSpecificationRef (version 1)	object	Settlement Account Specification Reference.



Name		Type	Description
	externalId	string	External identifier for the settlement account specification. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	id	string	Unique identifier for the settlement account specification. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256

CharacteristicValue (version 2)

Table 11 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	charSpecId	string	The ID of the characteristic specification. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.



bss.cmn.TimePeriod (version 1)

Table 12 bss.cmn.TimePeriod (version 1)

Name		Type	Description
bss.cmn.TimePeriod (version 1)		object	StartDateTime must be earlier than EndDateTime.
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>



bss.cmn.ValueWithUoM (version 1)

Table 13 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 14 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.



ContactMediumAssociation (version 1)

Table 15 ContactMediumAssociation (version 1)

Name		Type	Description
ContactMediumAssociation (version 1)		object	Represents an assignment of a contact medium to an entity.
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	contactMediumId	string	The reference to a contact medium using id. Pattern: ^(?=\s*\S).* Max length: 256
	contactMediumExternalId	string	The reference to a contact medium using external id. Pattern: ^(?=\s*\S).* Max length: 256
	language	string	The language used for communication. Pattern: ^(?=\s*\S).* Max length: 256

Name (version 1)

Table 16 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.



bss.cmn.StatusExtended (version 1)

Table 17 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillStructure (version 1)

Table 18 BillStructure (version 1)

Name		Type	Description
BillStructure (version 1)		object	Represents a bill structure for a billing account.
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristic	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecification	array of CustomerBillCycleSpecification (version 2)	Settlement cycle specification. Reference to the used bill cycle specification.
	format	array of BillFormat (version 1)	Bill formats of a bill structure.



BillStructureSpecificationRef (version 1)

Table 19 BillStructureSpecificationRef (version 1)

Name		Type	Description
BillStructureSpecificationRef (version 1)		object	Bill Structure Specification Reference.
	id	string	Unique identifier of the bill structure specification. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256

CustomerBillCycleSpecification (version 2)

Table 20 CustomerBillCycleSpecification (version 2)

Name		Type	Description
CustomerBillCycleSpecification (version 2)		object	Data structure used to link a bill cycle to a bill specification.



Name		Type	Description
	externalId	string	External identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	billCycleSpecId	string	Unique identifier of the associated bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	billCycleSpecExternalId	string	External identifier of the associated bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	characteristic	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW

BillFormat (version 1)

Table 21 BillFormat (version 1)

Name	Type	Description
BillFormat (version 1)	object	Represents a bill format a bill structure.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristic	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format

BillFormatSpecificationRef (version 1)

Table 22 BillFormatSpecificationRef (version 1)

Name		Type	Description
BillFormatSpecificationRef (version 1)		object	Bill Format Specification Reference.
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256

BillPresentationMedia (version 1)

Table 23 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.

BillPresentationMediaSpecificationRef (version 1)

Table 24 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

RelatedParty (version 1)

Table 25 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role



Name		Type	Description
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

TaxExemption (version 1)

Table 26 TaxExemption (version 1)

Name		Type	Description
TaxExemption (version 1)		object	Tax exemption.
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristic	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 27 TaxExemptionSpecificationRef (version 1)

Name	Type	Description
TaxExemptionSpecificationRef (version 1)	object	Tax Exemption Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the tax exemption specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256

4.1.1.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.



4.1.1.4.1

bss.bssfAccountManagement.settlementAccount Create Response Version 1

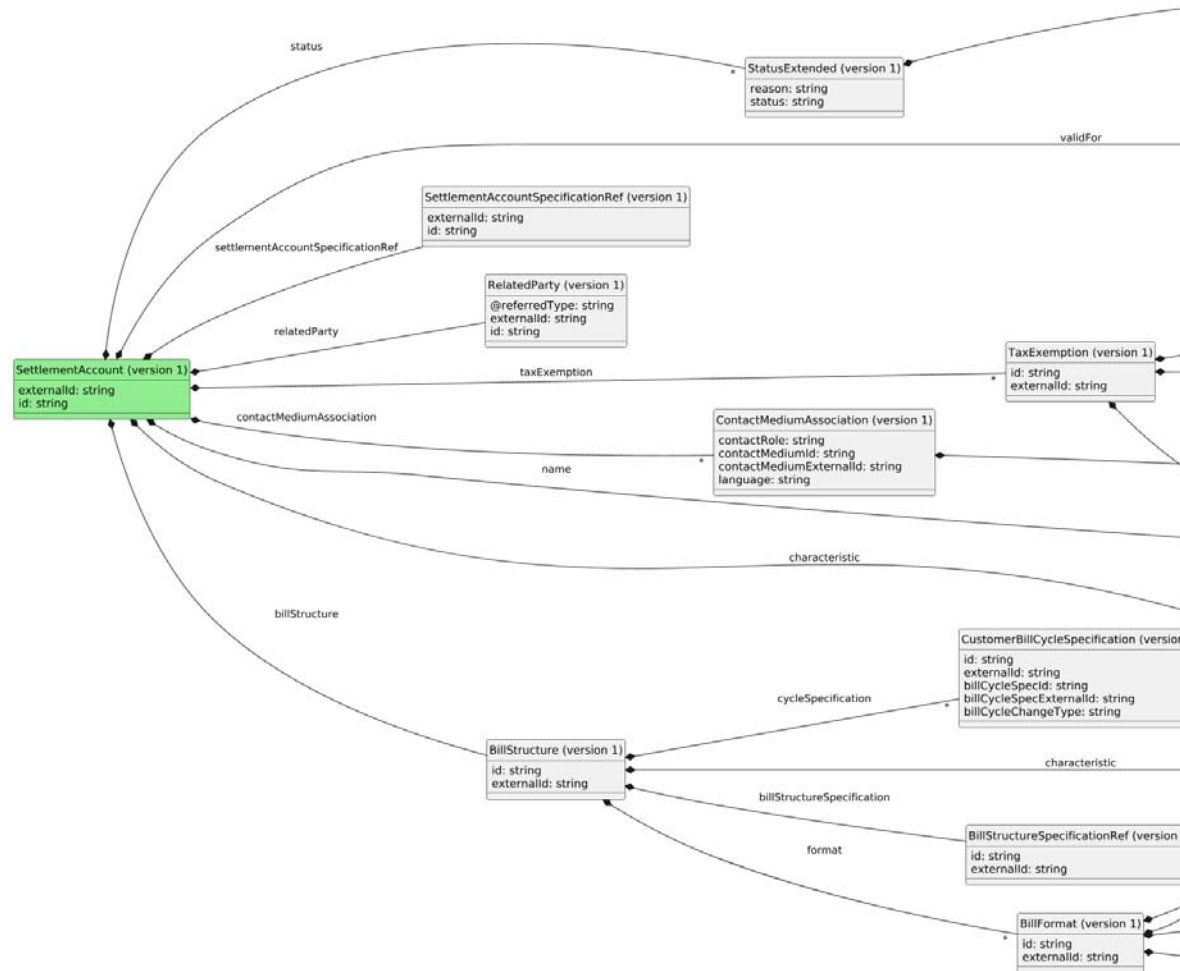


Figure 2 bss.bssfAccountManagement.settlementAccount.createResponse.1
UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfAccountManagement.settlementAccount.createResponse.1.json#>

The representation is provided as JSON objects with the following attributes:



Table 28 SettlementAccount (version 1)

Name		Type	Description
SettlementAccount (version 1)		object	A Party account that is used for settlement purposes, like creation of a Settlement Statement, creation of a document for the Partner to do reconciliation, or the creation of a report for reconciliation against an incoming invoice.
	settlementAccountSpecificationRef	SettlementAccountSpecificationRef (version 1)	A reference to a settlement account specification.
	characteristic	array of CharacteristicValue (version 2)	Personalized characteristic values.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a settlement account.
	name	array of Name (version 1)	The list of all version related to the name attribute.
	status	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
	billStructure	BillStructure (version 1)	Bill structure for a SettlementAccount.
	relatedParty	RelatedParty (version 1)	Party or party role that is owning this account.
	taxExemption	array of TaxExemption (version 1)	The tax exemptions for the settlement account.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the Account.



SettlementAccountSpecificationRef (version 1)

Table 29 SettlementAccountSpecificationRef (version 1)

Name		Type	Description
SettlementAccountSpecificationRef (version 1)		object	Settlement Account Specification Reference.
	externalId	string	External identifier for the settlement account specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	id	string	Unique identifier for the settlement account specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256

CharacteristicValue (version 2)

Table 30 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).* Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).* Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.

bss.cmn.TimePeriod (version 1)

Table 31 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 32 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 33 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.

ContactMediumAssociation (version 1)

Table 34 ContactMediumAssociation (version 1)

Name		Type	Description
ContactMediumAssociation (version 1)		object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	contactMediumId	string	The reference to a contact medium using id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	contactMediumExternalId	string	The reference to a contact medium using external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	language	string	The language used for communication. Pattern: ^(?=\s*\S).*\$ Max length: 256

Name (version 1)

Table 35 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

bss.cmn.StatusExtended (version 1)

Table 36 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.



Name		Type	Description
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillStructure (version 1)

Table 37 BillStructure (version 1)

Name		Type	Description
BillStructure (version 1)		object	Represents a bill structure for a billing account.
	id	string	Unique identifier for the bill structure. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristic	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecification	array of CustomerBillCycleSpecification (version 2)	Settlement cycle specification. Reference to the used bill cycle specification.
	format	array of BillFormat (version 1)	Bill formats of a bill structure.



BillStructureSpecificationRef (version 1)

Table 38 BillStructureSpecificationRef (version 1)

Name		Type	Description
BillStructureSpecificationRef (version 1)		object	Bill Structure Specification Reference.
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256

CustomerBillCycleSpecification (version 2)

Table 39 CustomerBillCycleSpecification (version 2)

Name	Type	Description
CustomerBillCycleSpecification (version 2)	object	Data structure used to link a bill cycle to a bill specification.



Name		Type	Description
	id	string	Unique identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	External identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	billCycleSpecId	string	Unique identifier of the associated bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	billCycleSpecExternalId	string	External identifier of the associated bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	characteristic	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW



BillFormat (version 1)

Table 40 BillFormat (version 1)

Name		Type	Description
BillFormat (version 1)		object	Represents a bill format a bill structure.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristic	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format

BillFormatSpecificationRef (version 1)

Table 41 BillFormatSpecificationRef (version 1)

Name	Type	Description
BillFormatSpecificationRef (version 1)	object	Bill Format Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

BillPresentationMedia (version 1)

Table 42 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 43 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256

RelatedParty (version 1)

Table 44 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256



TaxExemption (version 1)

Table 45 TaxExemption (version 1)

Name		Type	Description
TaxExemption (version 1)		object	Tax exemption.
	id	string	Unique identifier of a tax exemption. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristic	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 46 TaxExemptionSpecificationRef (version 1)

Name	Type	Description
TaxExemptionSpecificationRef (version 1)	object	Tax Exemption Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the tax exemption specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256

4.1.2 Update Settlement Account

Updates settlement account information.

4.1.2.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- PATCH `{scheme:}://{host}[:{port}]/{deploymentComponent}/bssfAccountManagement/v1/relatedParty/{relatedPartyId}/relatedPartyReferredType/{relatedPartyReferredType}/settlementAccount/{id}`
- PATCH `{scheme:}://{host}[:{port}]/{deploymentComponent}/bssfAccountManagement/v1/relatedPartyExternalId/{relatedPartyExternalId}/relatedPartyReferredType/{relatedPartyReferredType}/settlementAccountExternalId/{externalId}`

Path Parameters

The following table describes the path parameters for the operation:

Table 47 Path Parameters

Name	Type	Description
id	string	Settlement Account Identifier. Additional Description: Unique identifier of the account. Maxlength: 256 Pattern: <code>^(?=\s*\S).*</code>



Name	Type	Description
externalId	string	Settlement Account External Identifier. Additional Description: Unique identifier of the account populated by external system. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
relatedPartyId	string	Party (Role) Id - e.g. "bacae1ae-ea85-4397-95d5-29ce56157ffa" Additional Description: Unique identifier of the party or party role. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
relatedPartyExternalId	string	Party (Role) External Id Additional Description: External identifier of the party or party role. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
relatedPartyReferredType	string	The kind of Party (Role). Additional Description: Referred Type. Maxlength: 128

4.1.2.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:



Table 48 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.bssfAccountManagement.settlementAccount.updateResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfAccountManagement.settlementAccount.updateResponse.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Content-Type		Optional
	One of the following: • application/merge-patch+json;profile="http://ericsson.com/bss.bssfAccountManagement.settlementAccount.updateRequest.1.json#";charset=utf-8 • application/merge-patch+json;profile="http://ericsson.com/bss.bssfAccountManagement.settlementAccount.updateRequest.1.json#" • application/merge-patch+json; charset=utf-8 • application/merge-patch+json	-



Header Field Name	Header Field Value	Mandatory/Optional
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 49 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 50 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory
	For Status-Code: 200, one of the following: • application/json;profile="http://ericsson.com/bss.bssfAccountManagement.settlementAccount.updateResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfAccountManagement.settlementAccount.updateResponse.1.json#" For Status-Code: 4XX,5XX, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-



Header Field Name	Header Field Value	Mandatory/Optional
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(((0-9){1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3]([0-9])) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01]([0-9]) 2([0-3]))(:[0-5]([0-9])){2} GMT))\$</code>
WWW-Authenticate		Optional Status Code: 401
	<challenge>	-
STANDARD HEADER		



Table 51 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID HEADER CUSTOM HEADER

4.1.2.3

Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.



4.1.2.3.1

bss.bssfAccountManagement.settlementAccount Update Request Version 1

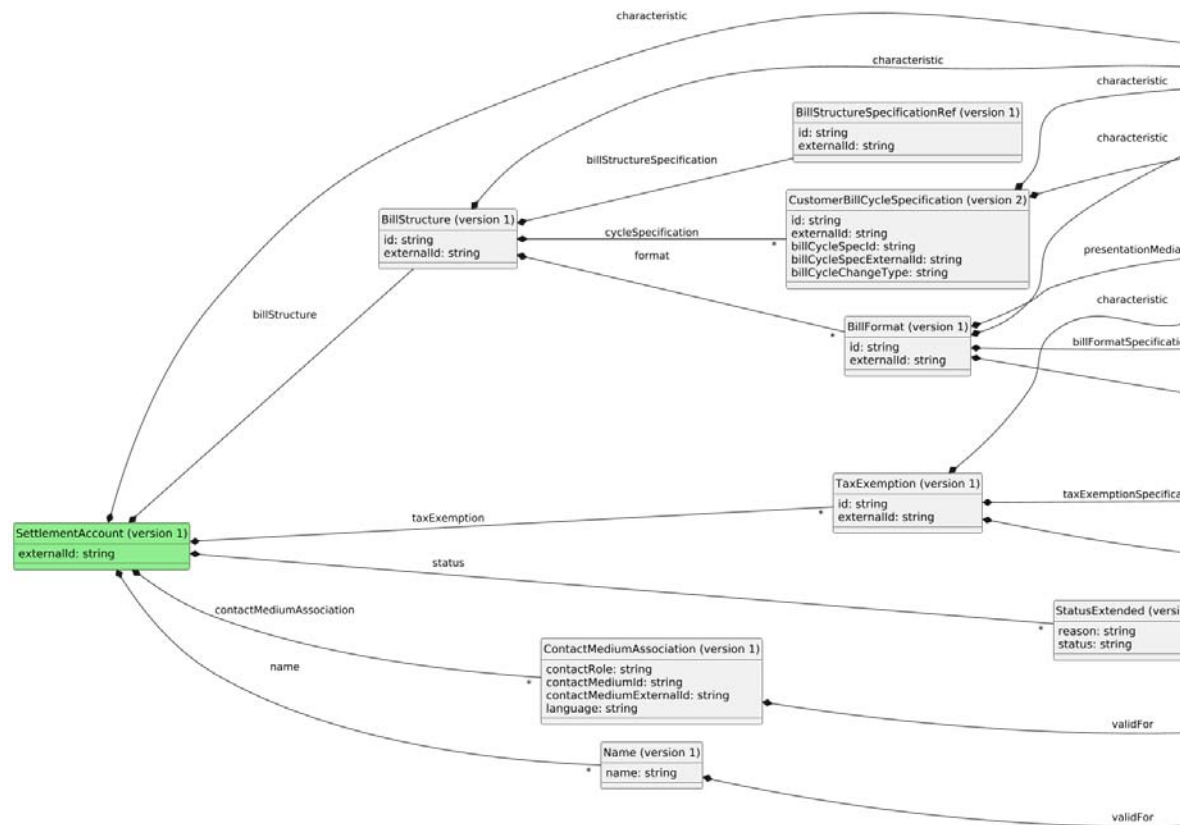


Figure 3 bss.bssfAccountManagement.settlementAccount.updateRequest.1 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfAccountManagement.settlementAccount.updateRequest.1.json#>

The representation is provided as JSON objects with the following attributes:



Table 52 SettlementAccount (version 1)

Name		Type	Description
SettlementAccount (version 1)		object	A Party account that is used for settlement purposes, like creation of a Settlement Statement, creation of a document for the Partner to do reconciliation, or the creation of a report for reconciliation against an incoming invoice.
	characteristic	array of CharacteristicValue (version 2)	Personalized characteristic values.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a settlement account.
	name	array of Name (version 1)	The list of all version related to the name attribute.
	status	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
	billStructure	BillStructure (version 1)	Bill structure for a SettlementAccount.
	taxExemption	array of TaxExemption (version 1)	The tax exemptions for the settlement account.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).* Max length: 256

CharacteristicValue (version 2)

Table 53 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.

bss.cmn.TimePeriod (version 1)

Table 54 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 55 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 56 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).* Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).* Max length: 256
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.

ContactMediumAssociation (version 1)

Table 57 ContactMediumAssociation (version 1)

Name		Type	Description
ContactMediumAssociation (version 1)		object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	contactMediumId	string	The reference to a contact medium using id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	contactMediumExternalId	string	The reference to a contact medium using external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	language	string	The language used for communication. Pattern: ^(?=\s*\S).*\$ Max length: 256

Name (version 1)

Table 58 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

bss.cmn.StatusExtended (version 1)

Table 59 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.



Name		Type	Description
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillStructure (version 1)

Table 60 BillStructure (version 1)

Name		Type	Description
BillStructure (version 1)		object	Represents a bill structure for a billing account.
	id	string	Unique identifier for the bill structure. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristic	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecification	array of CustomerBillCycleSpecification (version 2)	Settlement cycle specification. Reference to the used bill cycle specification.
	format	array of BillFormat (version 1)	Bill formats of a bill structure.



BillStructureSpecificationRef (version 1)

Table 61 BillStructureSpecificationRef (version 1)

Name		Type	Description
BillStructureSpecificationRef (version 1)		object	Bill Structure Specification Reference.
	id	string	Unique identifier of the bill structure specification. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256

CustomerBillCycleSpecification (version 2)

Table 62 CustomerBillCycleSpecification (version 2)

Name	Type	Description
CustomerBillCycleSpecification (version 2)	object	Data structure used to link a bill cycle to a bill specification.



Name		Type	Description
	id	string	Unique identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	External identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	billCycleSpecId	string	Unique identifier of the associated bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	billCycleSpecExternalId	string	External identifier of the associated bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	characteristic	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW



BillFormat (version 1)

Table 63 BillFormat (version 1)

Name		Type	Description
BillFormat (version 1)		object	Represents a bill format a bill structure.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristic	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format

BillFormatSpecificationRef (version 1)

Table 64 BillFormatSpecificationRef (version 1)

Name	Type	Description
BillFormatSpecificationRef (version 1)	object	Bill Format Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

BillPresentationMedia (version 1)

Table 65 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 66 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256

TaxExemption (version 1)

Table 67 TaxExemption (version 1)

Name	Type	Description
TaxExemption (version 1)	object	Tax exemption.



Name		Type	Description
	id	string	Unique identifier of a tax exemption. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristic	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 68 TaxExemptionSpecificationRef (version 1)

Name		Type	Description
TaxExemptionSpecificationRef (version 1)		object	Tax Exemption Specification Reference.
	id	string	Unique identifier of the tax exemption specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256

4.1.2.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.2.4.1 bss.bssfAccountManagement.settlementAccount Update Response Version 1

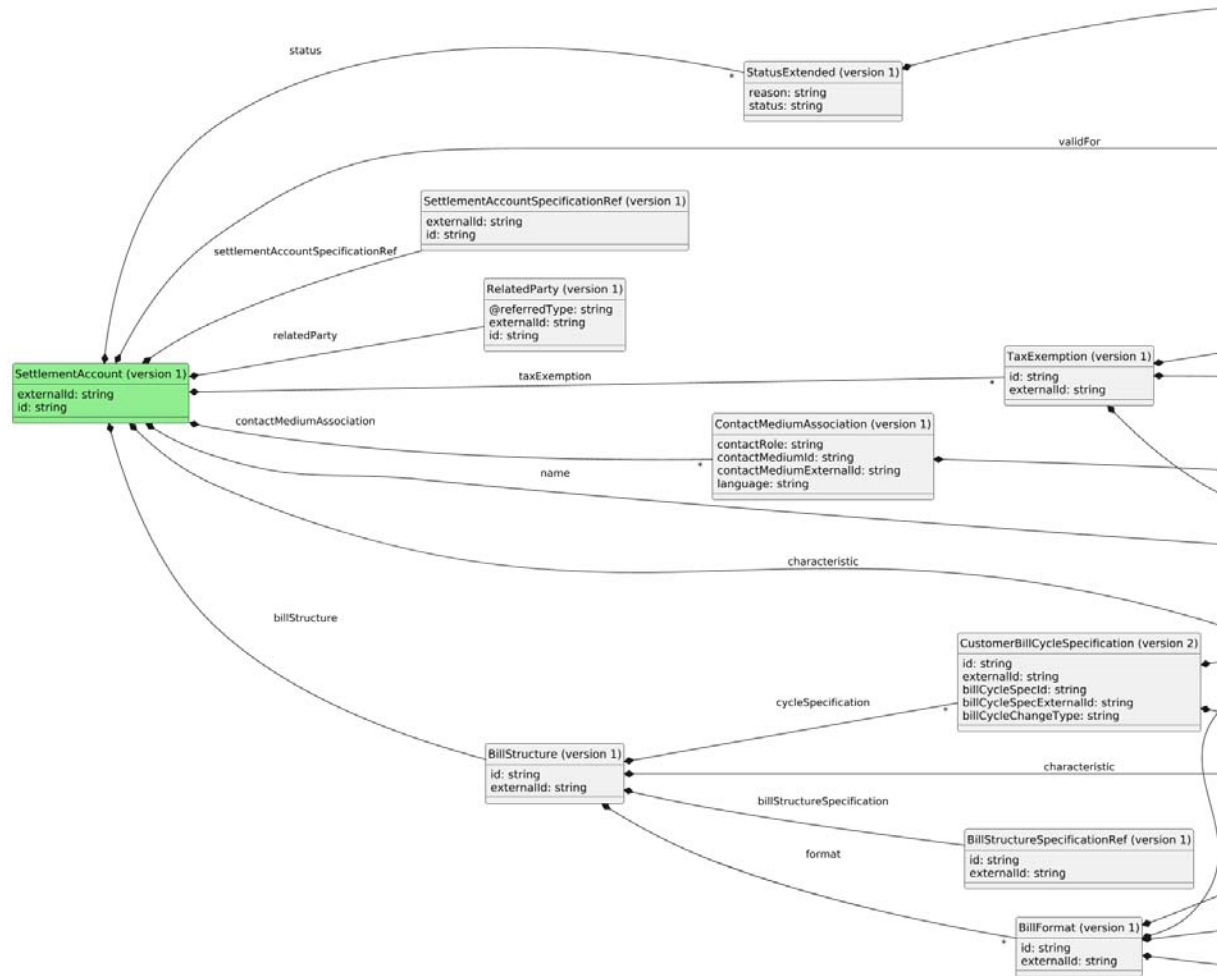


Figure 4 bss.bssfAccountManagement.settlementAccount.updateResponse.1 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfAccountManagement.settlementAccount.updateResponse.1.json#>

The representation is provided as JSON objects with the following attributes:



Table 69 SettlementAccount (version 1)

Name		Type	Description
SettlementAccount (version 1)		object	A Party account that is used for settlement purposes, like creation of a Settlement Statement, creation of a document for the Partner to do reconciliation, or the creation of a report for reconciliation against an incoming invoice.
	settlementAccountSpecificationRef	SettlementAccountSpecificationRef (version 1)	A reference to a settlement account specification.
	characteristic	array of CharacteristicValue (version 2)	Personalized characteristic values.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a settlement account.
	name	array of Name (version 1)	The list of all version related to the name attribute.
	status	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
	billStructure	BillStructure (version 1)	Bill structure for a SettlementAccount.
	relatedParty	RelatedParty (version 1)	Party or party role that is owning this account.
	taxExemption	array of TaxExemption (version 1)	The tax exemptions for the settlement account.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the Account.



SettlementAccountSpecificationRef (version 1)

Table 70 SettlementAccountSpecificationRef (version 1)

Name		Type	Description
SettlementAccountSpecificationRef (version 1)		object	Settlement Account Specification Reference.
	externalId	string	External identifier for the settlement account specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier for the settlement account specification. Pattern: ^(?=\s*\S).*\$ Max length: 256

CharacteristicValue (version 2)

Table 71 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.

bss.cmn.TimePeriod (version 1)

Table 72 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 73 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 74 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).* Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).* Max length: 256
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.

ContactMediumAssociation (version 1)

Table 75 ContactMediumAssociation (version 1)

Name		Type	Description
ContactMediumAssociation (version 1)		object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	contactMediumId	string	The reference to a contact medium using id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	contactMediumExternalId	string	The reference to a contact medium using external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	language	string	The language used for communication. Pattern: ^(?=\s*\S).*\$ Max length: 256

Name (version 1)

Table 76 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

bss.cmn.StatusExtended (version 1)

Table 77 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.



Name		Type	Description
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillStructure (version 1)

Table 78 BillStructure (version 1)

Name		Type	Description
BillStructure (version 1)		object	Represents a bill structure for a billing account.
	id	string	Unique identifier for the bill structure. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristic	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecification	array of CustomerBillCycleSpecification (version 2)	Settlement cycle specification. Reference to the used bill cycle specification.
	format	array of BillFormat (version 1)	Bill formats of a bill structure.



BillStructureSpecificationRef (version 1)

Table 79 BillStructureSpecificationRef (version 1)

Name		Type	Description
BillStructureSpecificationRef (version 1)		object	Bill Structure Specification Reference.
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

CustomerBillCycleSpecification (version 2)

Table 80 CustomerBillCycleSpecification (version 2)

Name	Type	Description
CustomerBillCycleSpecification (version 2)	object	Data structure used to link a bill cycle to a bill specification.



Name		Type	Description
	id	string	Unique identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	externalId	string	External identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	billCycleSpecId	string	Unique identifier of the associated bill cycle specification. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	billCycleSpecExternalId	string	External identifier of the associated bill cycle specification. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	characteristic	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW



BillFormat (version 1)

Table 81 BillFormat (version 1)

Name		Type	Description
BillFormat (version 1)		object	Represents a bill format a bill structure.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristic	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format

BillFormatSpecificationRef (version 1)

Table 82 BillFormatSpecificationRef (version 1)

Name	Type	Description
BillFormatSpecificationRef (version 1)	object	Bill Format Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

BillPresentationMedia (version 1)

Table 83 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 84 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256

RelatedParty (version 1)

Table 85 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256



TaxExemption (version 1)

Table 86 TaxExemption (version 1)

Name		Type	Description
TaxExemption (version 1)		object	Tax exemption.
	id	string	Unique identifier of a tax exemption. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristic	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 87 TaxExemptionSpecificationRef (version 1)

Name	Type	Description
TaxExemptionSpecificationRef (version 1)	object	Tax Exemption Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the tax exemption specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256



5 Generic Interface Parameters

The following sub-sections describe the elements and their structure in the request and response for Generic Interface Parameters.

5.1 Generic Interface Parameters Request

5.1.1 bss.genericInterfaceParameters Request Version 4

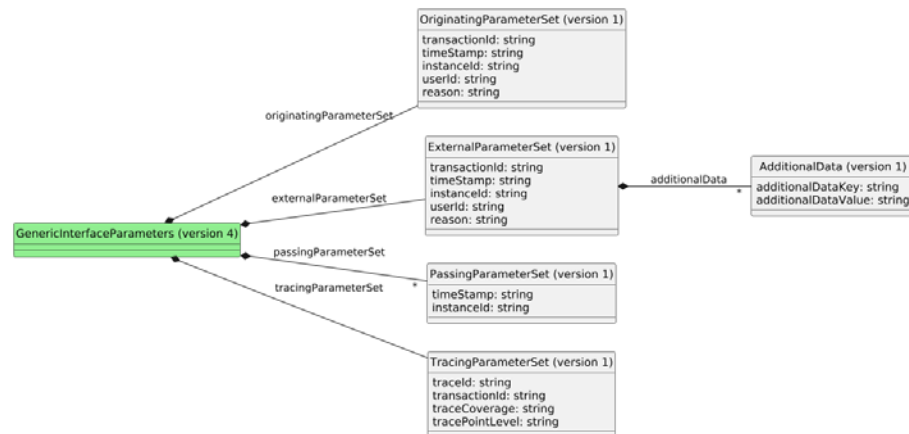


Figure 5 bss.genericInterfaceParameters.request.4 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.genericInterfaceParameters.request.4.json#>

The representation is provided as JSON objects with the following attributes:

Table 88 bss.cmn.GenericInterfaceParameters (version 4)

Name	Type	Description
bss.cmn.GenericInterfaceParameters (version 4)	object	The Generic Interface Parameters (GIP) is used for transaction traceability.



Name		Type	Description
	originatingParameterSet	bss.cmn.OriginatingParameterSet (version 1)	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.
	externalParameterSet	bss.cmn.ExternalParameterSet (version 1)	Information received from the external system that initiated the transaction.
	passingParameterSet	array of bss.cmn.PassingParameterSet (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	bss.cmn.TracingParameterSet (version 1)	Tracing Parameter Set.

5.1.1.1

bss.cmn.OriginatingParameterSet (version 1)

Table 89 bss.cmn.OriginatingParameterSet (version 1)

Name	Type	Description
bss.cmn.OriginatingParameterSet (version 1)	object	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.



Name		Type	Description
	transactionId	string	Unique transaction identifier. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	timeStamp	string	The time stamp when the ops was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	instanceId	string	Identification of the instance that created the ops. Max length: 256
	userId	string	User Identification. Provided at login to the instance creating the ops. Max length: 256
	reason	string	Reason for the transaction. Max length: 256

5.1.1.2

bss.cmn.ExternalParameterSet (version 1)

Table 90 bss.cmn.ExternalParameterSet (version 1)

Name	Type	Description
bss.cmn.ExternalParameterSet (version 1)	object	Information received from the external system that initiated the transaction.



Name		Type	Description
	transactionId	string	Transaction Identifier received from external system. Max length: 256
	timeStamp	string	Transaction time stamp received from external system. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) (02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	instanceId	string	Identification of the instance that sent the transactionId. Max length: 256
	userId	string	User identifier received from external system. Max length: 256
	reason	string	Reason received from external system. Max length: 256
	additionalData	array of bss.cmn.AdditionalData (version 1)	Array of additional data Items from external system.

5.1.1.3

bss.cmn.AdditionalData (version 1)

Table 91 bss.cmn.AdditionalData (version 1)

Name	Type	Description
bss.cmn.AdditionalData (version 1)	object	A key-value structure data received from external system.



Name		Type	Description
	additionalDataKey	string	key of the additional data from external system. Max length: 256
	additionalDataValue	string	value correspond to the key. Max length: 256

5.1.1.4

bss.cmn.PassingParameterSet (version 1)

Table 92 bss.cmn.PassingParameterSet (version 1)

Name		Type	Description
bss.cmn.PassingParameterSet (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the ppsItem was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02]))-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T(((01[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the entity that created the ppsItem. Max length: 256

5.1.1.5

bss.cmn.TracingParameterSet (version 1)

Table 93 bss.cmn.TracingParameterSet (version 1)

Name		Type	Description
bss.cmn.TracingParameterSet (version 1)		object	Tracing Parameter Set.

Name	Type	Description
traceId	string	The unique id for the trace job. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
transactionId	string	The unique id for the transaction. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

5.2 Generic Interface Parameters Response

5.2.1 bss.genericInterfaceParameters Response Version 4

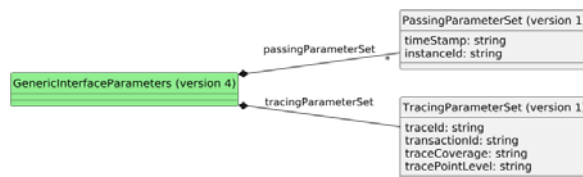


Figure 6 bss.genericInterfaceParameters.response.4 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.genericInterfaceParameters.response.4.json#>

The representation is provided as JSON objects with the following attributes:



Table 94 bss.cmn.GenericInterfaceParameters (version 4)

Name		Type	Description
bss.cmn.GenericInterfaceParameters (version 4)		object	The Generic Interface Parameters (GIP) is used for transaction traceability.
	passingParameterSet	array of bss.cmn.PassingParameterSet (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	bss.cmn.TracingParameterSet (version 1)	Tracing Parameter Set.

5.2.1.1

bss.cmn.PassingParameterSet (version 1)

Table 95 bss.cmn.PassingParameterSet (version 1)

Name		Type	Description
bss.cmn.PassingParameterSet (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the ppsItem was created. Shall adhere to W3 date-time format. Format: date-time Pattern: ^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T(((01[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$
	instanceId	string	Identification of the entity that created the ppsItem. Max length: 256



5.2.1.2 bss.cmn.TracingParameterSet (version 1)

Table 96 bss.cmn.TracingParameterSet (version 1)

Name		Type	Description
bss.cmn.TracingParameterSet (version 1)		object	Tracing Parameter Set.
	traceId	string	The unique id for the trace job. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
	transactionId	string	The unique id for the transaction. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
	traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
	tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

6 Result Representation

Results are reported through HTTP status codes. JSON objects are provided for requests that reaches the application component. The following tables describe the elements and their structure contained in the result representation.

6.1 bss.errorMessage Response Version 2




Figure 7 bss.errorMessage.response.2 UML representation

Applicable profile URI for the representation:

`http://ericsson.com/bss.errorMessage.response.2.json#`

The representation is provided as JSON objects with the following attributes:

Table 97 bss.cmn.ErrorMessageExtended (version 2)

Name		Type	Description
bss.cmn.ErrorMessageExtended (version 2)		object	Extended error message structure.
	supplementaryError	array of bss.cmn.SupplementaryError (version 2)	Supplementary Error.
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	httpStatusCode	integer	HTTP status code.



6.1.1 bss.cmn.SupplementaryError (version 2)

Table 98 bss.cmn.SupplementaryError (version 2)

Name		Type	Description
bss.cmn.Supplementary Error (version 2)		object	Supplementary error message structure. In case of partial error scenarios, this structure may also include successful responses to show what parts went ok.
	source	string	Source of error. Max length: 256
	action	string	Action causing error. Max length: 256
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	httpStatusCode	integer	HTTP status code.

6.2 Result Codes

The supported Error Codes could be found in the 'Error Codes' document.



7 Interface Version Changes

The following sections describe the changes between the interface versions.

7.1 Interface Version 1.0

Table 99 Changes

Resources	Type of Change	Description
N/A	Document created.	First version of the protocol.

7.2 Interface Version 1.1

Table 100 Changes

Resources	Type of Change	Description
SettlementAccount	Added TaxExemption	Added TaxExemption to the settlement account.

7.3 Interface Version 1.2

Table 101 Changes

Resources	Type of Change	Description
All	Added	Added Retry-After header for http status code 503 response. Added ERICSSON.Global-Unique-Request-Id header for all responses. Added http status code 503 for all responses.



7.4 Interface Version 1.3

Table 102 Changes

Resources	Type of Change	Description
All	Updated	Change handling of content-type for request/responses operations.



Reference List

- [1] [RFC 7231 - Hypertext Transfer Protocol \(HTTP/1.1\): Semantics and Content](#)
- [2] [RFC 7230 - Hypertext Transfer Protocol \(HTTP/1.1\): Message Syntax and Routing](#)
- [3] [RFC 6906 - The 'profile' Link Relation Type](#)
- [4] [RFC 4122 - A Universally Unique Identifier \(UUID\) URN Namespace](#)
- [5] [RFC 3986 - Uniform Resource Identifier \(URI\): Generic Syntax](#)
- [6] [RFC 2818 - HTTP Over TLS](#)
- [7] [RFC 2616 - Hypertext Transfer Protocol -- HTTP/1.1](#)