

BSS TMF666 Account Management REST Interface 1.3

INTERFACE DESCRIPTION

Copyright

© Ericsson AB 2025. All Rights Reserved. No part of this document may be reproduced in any form without the written permission of the copyright owner.

Disclaimer

The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. Ericsson shall have no liability for any error or damage of any kind resulting from the use of this document.

This information is intended exclusively for demonstration purposes when used in the development of client-side integrations. It may not include definitions for various elements or behaviors that could arise from client-server interactions involving any third-party products, providers, or deployment platforms, whether external or internal to the delivered product.

Trademark List

Ericsson and the Ericsson logotype are the trademarks or registered trademarks of Telefonaktiebolaget LM Ericsson. All other product or service names mentioned in a document on this server are trademarks of their respective companies.



Contents

1	Introduction	1
1.1	Transfer Mechanism	1
1.2	Authentication and Authorization	1
1.3	Compatibility Mechanism	1
1.3.1	HTTP Content Negotiation	1
1.3.2	Product Customization	1
1.3.3	Backward Compatibility	2
2	Syntax Notation	3
2.1	Resource Identifier	3
2.2	HTTP Headers	3
2.3	Resource Schema and Version	4
3	Service	5
3.1	BSS TMF666 Account Management	5
3.1.1	Description	5
3.2	Service Registry	5
4	Resources	7
4.1	Billing Account	7
4.1.1	Create Billing Account	7
4.1.2	List Billing Account	55
4.1.3	Read Billing Account	85
4.1.4	Update Billing Account	116
4.2	Settlement Account	165
4.2.1	Create Settlement Account	165
4.2.2	Delete Settlement Account	206
4.2.3	List Settlement Account	212
4.2.4	Read Settlement Account	239
4.2.5	Update Settlement Account	267
5	Generic Interface Parameters	311
5.1	Generic Interface Parameters Request	311
5.1.1	bss.genericInterfaceParameters Request Version 4	311
5.2	Generic Interface Parameters Response	316
5.2.1	bss.genericInterfaceParameters Response Version 4	316
6	Result Representation	319
6.1	bss.errorMessage Response Version 2	319
6.1.1	bss.cmn.SupplementaryError (version 2)	320



6.2	Result Codes	320
7	Interface Version Changes	321
7.1	Interface Version 1.0	321
7.2	Interface Version 1.1	321
7.3	Interface Version 1.2	321
7.4	Interface Version 1.3	321
	Reference List	323



1 Introduction

Target Groups

The target group for this document is:

— Solution Integrators

1.1 Transfer Mechanism

The transfer mechanism used is HTTPS. Both requests and responses use headers to send information about the message.

The access port is configurable. Clients that use this interface should support a configurable port.

1.2 Authentication and Authorization

Authentication is controlled by the inclusion of a Java Web Token (JWT) in the authorization header of the HTTP message.

1.3 Compatibility Mechanism

The following version mechanisms are used:

1.3.1 HTTP Content Negotiation

HTTP content negotiation uses the media type in the HTTP Accept header to request a certain version of the resource representation. If the version is not passed in the HTTP Accept header, the server returns the latest version of the resource representation.

For operations supporting error response version 1, if error response version is not specified it is assumed to be error response version 1.

1.3.2 Product Customization

Elements and data types that are specific for product customization are marked with PC in the section describing the element or data type. Functions and characteristics of a product customization is not part of the standard delivery. Contact your local Ericsson office for more information regarding ordering and compatibility.



All elements of a PC message are also product customizations when inside such a message. If an element or data type is marked PC within an otherwise standard record, is noted as such in the relevant chapters.

In order to improve readability the following applies in the rest of the document:

- The following applies to functions marked with (PC). The PC-tag is placed in the description.

1.3.3

Backward Compatibility

Json objects name and/or their respective content stated in this document may be changed without any further notice.

Backward compatibility within a major version is only kept for the messages sent over the network.



2 Syntax Notation

This interface uses a generic syntax that is described in the following sections. For a description of the actual values, refer to Resources.

2.1 Resource Identifier

The resource identifier is expressed by a URI with the following format:

```
{serverRoot}/{api}/{resourcePath}
```

```
{scheme:}://{host}[:{port}]/[{deploymentComponent}]{apiName}/{apiVersion}/{resourcePath}
```

Table 1 Server root parameter

Parameter	Description
serverRoot	Is implementation specific
api	Is the name and version of the API.

Table 2 API and resource path parameters

Parameter	Description
scheme	The Application protocol, for example HTTPS.
host	The network address to access the interface and its connected service.
port	The TCP/IP port used for access. If not specified, default ports for the applications are assumed.
deploymentComponent	The name of the deployment component providing the resource.
apiName	The name of the interface.
apiVersion	The version to use
resourcePath	The resource name and a unique ID.

The full URI must be encoded according to RFC3986 before usage.

2.2 HTTP Headers

The interface uses standard HTTP headers. In addition, custom HTTP headers are used with the following syntax:



ERICSSON.<name>:<value>

If no Accept header field is present, then it is assumed that the client accepts all media types.

2.3 Resource Schema and Version

The resource schema and version indicates that a resource representation follows one or more schemas.

The resource schema and version is identified by a subtype with the following syntax:

application/x.<domain>.<interface>.<resource>.<operationAndDirection>+json;version=<version> or application/x.<domain>.<interface>.<resource>.<operationAndDirection>+merge-patch+json;version=<version> depending on operation.

Table 3 REST Resource Representation Parameters

Parameter	Description
domain	Fixed value: bss
interface	Is the interface name.
resource	Is the resource name.
operationAndDirection	Is the CRUD operation with its direction request and response.
version	Major version of the resource representation.

3 Service

3.1 BSS TMF666 Account Management

Please read the service documentation available to understand how to use this interface in connection with the service.

3.1.1 Description

The Account API provides standardized mechanism for the management of billing accounts.

3.2 Service Registry

The Service Registry is a central repository of available services. Their locations are used by clients to dynamically find the service providers it needs. A service provider registers its services in the registry. Service consumers look up services and service locations.

The services accessed through the interface are the following:

Table 4 Services Exposed in the Service Registry

Service Name	Service Type	Version	Environment	Available Capabilities	Optional Data
BSS_TMF666_Account_Management	REST	1	Prod		
BSS_TMF666_Account_Management	REST	1	Prod		secured=true

Note: This chapter is only applicable for Virtualized deployments.





4 Resources

The interface offers access to different resources. Each resource has its own access path and parameters which are described in the following sections.

The referenced representations are available in a ZIP file at the following location:

edw:/alex?FN=BSSTMF666AccountManagement_v1_3_schemaFile.zip

4.1 Billing Account

A party account used for billing purposes.

4.1.1 Create Billing Account

Creates a billing account.

4.1.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

— POST {scheme:}://{host}[:{port}]/[{deploymentComponent}]/bssTmf666AccountManagement/v1/billingAccount

4.1.1.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 5 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf666AccountManagement.billingAccount.createResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.billingAccount.createResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Content-Type		Mandatory
	One of the following: • application/x.bss.Tmf666AccountManagement.billingAccount.createRequest+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.billingAccount.createRequest+json;version=1 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 6 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 7 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 201, one of the following: • application/x.bss.Tmf666AccountManagement.billingAccount.createResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.billingAccount.createResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3]([0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01]([0-9]) 2([0-3]))(:[0-5]([0-9])){2} GMT))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 8 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.1.1.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.



4.1.1.3.1

bss.Tmf666AccountManagement.billingAccount Create Request Version 1

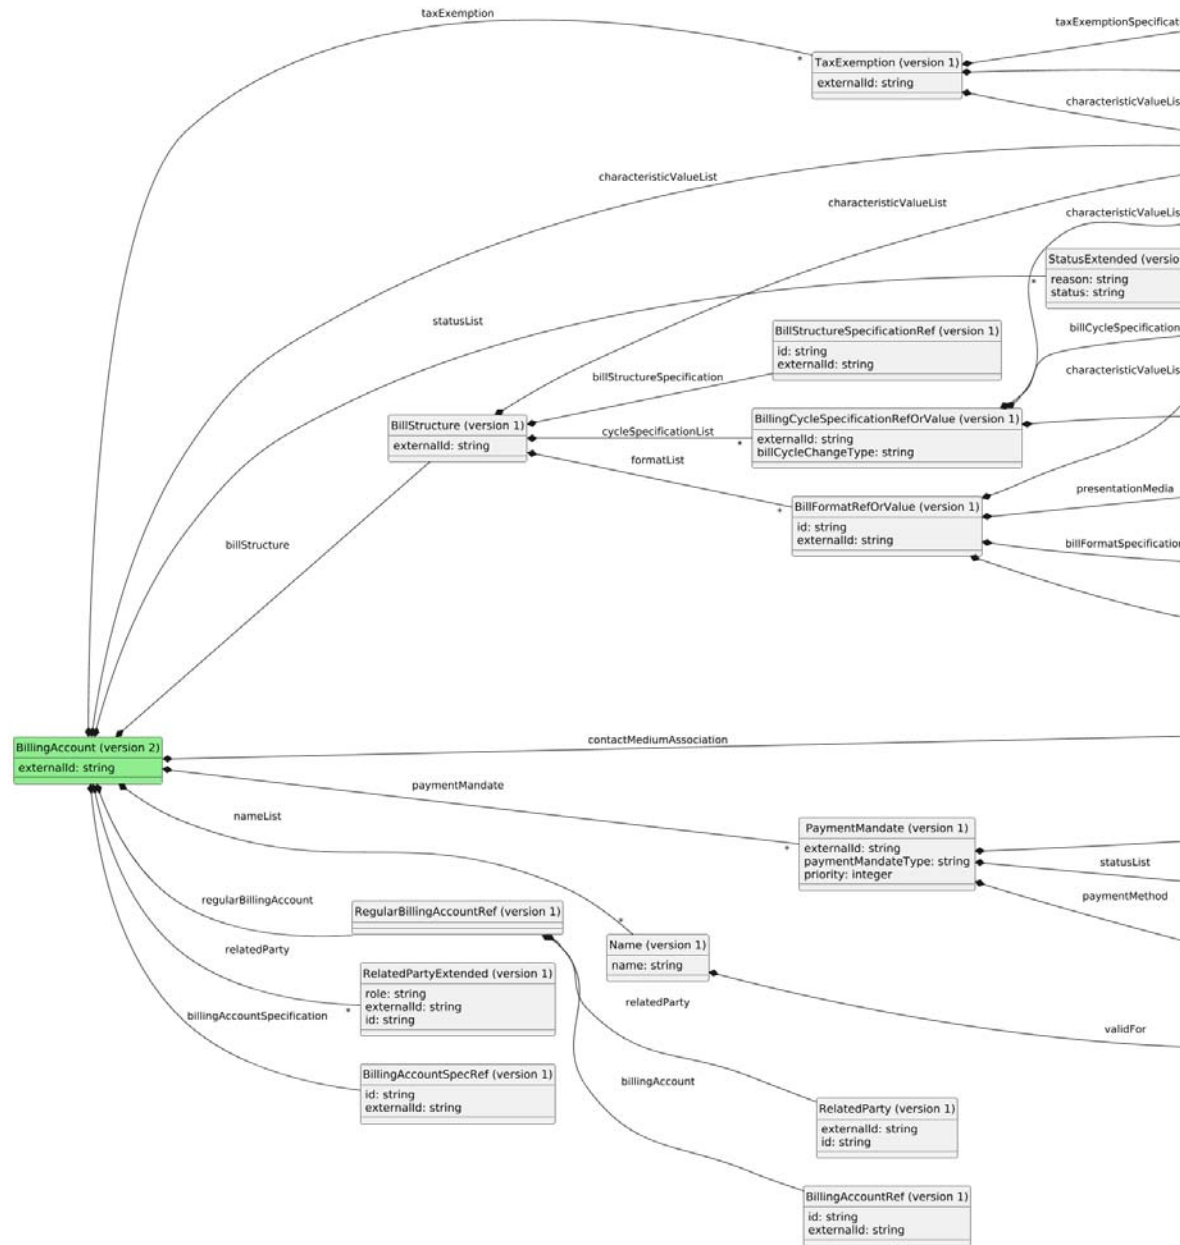


Figure 1 bss.Tmf666AccountManagement.billingAccount.createRequest.1 UML representation

The representation is provided as JSON objects with the following attributes:



Table 9 BillingAccount (version 2)

Name		Type	Description
BillingAccount (version 2)		object	A billing account accumulates all charges from products and contracts that will be shown on the same invoice or prepaid statement.
	regularBillingAccount	RegularBillingAccountRef (version 1)	Reference to a regular billing account incase of virtual billing account.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a billing account.
	statusList	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
	paymentMandate	array of PaymentMandate (version 1)	Payment Mandates for a BillingAccount.
	billStructure	BillStructure (version 1)	Bill structure for a BillingAccount.
	relatedParty	array of RelatedPartyExtended (version 1)	Array of party roles that are related with this billing account
	taxExemption	array of TaxExemption (version 1)	The tax exemptions for the billing account.
	billingAccountSpecification	BillingAccountSpecificationRef (version 1)	billing account specification reference
	nameList	array of Name (version 1)	The list of all version related to the name attribute.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).* Max length: 256



RegularBillingAccountRef (version 1)

Table 10 RegularBillingAccountRef (version 1)

Name		Type	Description
RegularBillingAccountRef (version 1)		object	Regular Billing Account Reference.
	billingAccount	BillingAccountRef (version 1)	Reference to a billing account.
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role.

BillingAccountRef (version 1)

Table 11 BillingAccountRef (version 1)

Name		Type	Description
BillingAccountRef (version 1)		object	Billing Account Reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).* Max length: 256

RelatedParty (version 1)

Table 12 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role



Name		Type	Description
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

CharacteristicValue (version 2)

Table 13 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 14 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0]))))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0]))))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 15 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 16 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 17 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256



ContactMediumAssociation (version 1)

Table 18 ContactMediumAssociation (version 1)

Name		Type	Description
ContactMediumAssociation (version 1)		object	Represents an assignment of a contact medium to an entity.
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).*\$ Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekDayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.WeekdayTimePeriod (version 1)

Table 19 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$

ContactMediumItemRef (version 1)

Table 20 ContactMediumItemRef (version 1)

Name		Type	Description
ContactMediumItemRef (version 1)		object	Reference to a ContactMediumItem.
	id	string	The contact medium item id. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The contact medium item external id. Pattern: ^(?=\s*\S).* Max length: 256



bss.cmn.StatusExtended (version 1)

Table 21 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

PaymentMandate (version 1)

Table 22 PaymentMandate (version 1)

Name	Type	Description
PaymentMandate (version 1)	object	Represents a payment mandate for a billing account.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the payment mandate is valid for.
	externalId	string	External identifier of a payment mandate in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	paymentMandateType	string	Payment mandate type for a payment mandate. Possible values: ONE_OFF RECURRING
	priority	integer	Priority of the payment Mandate. Higher value is the higher priority. The numeric value must be at least 0. The numeric value must not exceed 9223372036854775806.
	paymentMethod	PaymentMethodRef (version 1)	Reference to the payment method.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the Payment Mandate.

PaymentMethodRef (version 1)

Table 23 PaymentMethodRef (version 1)

Name	Type	Description
PaymentMethodRef (version 1)	object	Payment Method Reference.



Name		Type	Description
	id	string	Unique identifier of the payment method. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the payment method in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

bss.cmn.Status (version 1)

Table 24 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillStructure (version 1)

Table 25 BillStructure (version 1)

Name	Type	Description
BillStructure (version 1)	object	Represents a bill structure for a billing account.



Name		Type	Description
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecificationList	array of BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	formatList	array of BillFormatRefOrValue (version 1)	Bill formats of a bill structure.

BillStructureSpecificationRef (version 1)

Table 26 BillStructureSpecificationRef (version 1)

Name		Type	Description
BillStructureSpecificationRef (version 1)		object	Bill Structure Specification Reference.
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256



BillingCycleSpecificationRefOrValue (version 1)

Table 27 BillingCycleSpecificationRefOrValue (version 1)

Name		Type	Description
BillingCycleSpecificationRefOrValue (version 1)		object	Billing Cycle Specification Reference or Value.
	externalId	string	External identifier of the account's bill cycle specification. Pattern: ^(?=\s*\S).* Max length: 256
	billCycleSpecification	BillCycleSpecRef (version 1)	Billing Cycle Specification Reference.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW

BillCycleSpecRef (version 1)

Table 28 BillCycleSpecRef (version 1)

Name	Type	Description
BillCycleSpecRef (version 1)	object	A Billing Cycle specification reference.



Name		Type	Description
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

BillFormatRefOrValue (version 1)

Table 29 BillFormatRefOrValue (version 1)

Name		Type	Description
BillFormatRefOrValue (version 1)		object	Bill Format Reference or Value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format



BillFormatSpecificationRef (version 1)

Table 30 BillFormatSpecificationRef (version 1)

Name		Type	Description
BillFormatSpecificationRef (version 1)		object	Bill Format Specification Reference.
	id	string	Unique identifier of the bill format specification. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256

BillPresentationMedia (version 1)

Table 31 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 32 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256

RelatedPartyExtended (version 1)

Table 33 RelatedPartyExtended (version 1)

Name		Type	Description
RelatedPartyExtended (version 1)		object	Related Party Extended.
	role	string	Role of the related party. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).* Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).* Max length: 256



TaxExemption (version 1)

Table 34 TaxExemption (version 1)

Name		Type	Description
TaxExemption (version 1)		object	Tax exemption.
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValue List	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 35 TaxExemptionSpecificationRef (version 1)

Name		Type	Description
TaxExemptionSpecificationRef (version 1)		object	Tax Exemption Specification Reference.
	id	string	Unique identifier of the tax exemption specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256



BillingAccountSpecRef (version 1)

Table 36 BillingAccountSpecRef (version 1)

Name		Type	Description
BillingAccountSpecRef (version 1)		object	Billing Account Specification Reference.
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

Name (version 1)


Table 37 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

4.1.1.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.1.4.1 bss.Tmf666AccountManagement.billingAccount Create Response Version 1

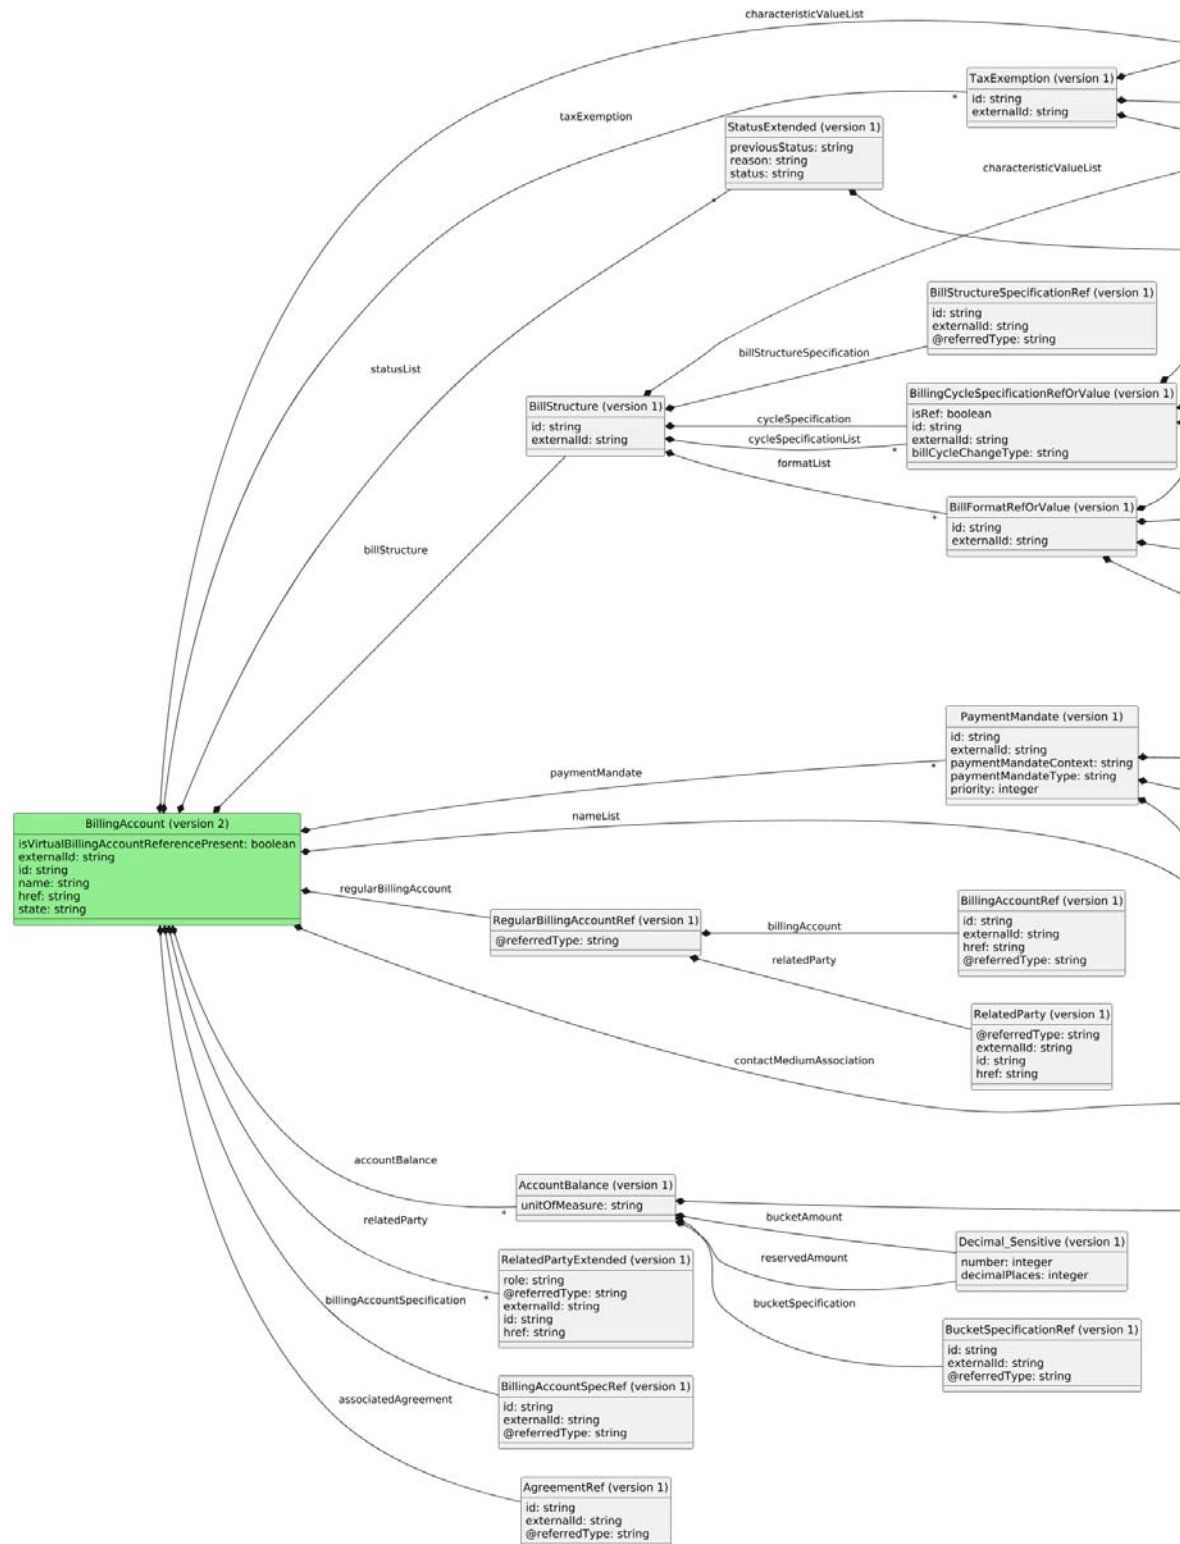



The representation is provided as JSON objects with the following attributes:

Table 38 BillingAccount (version 2)

Name	Type	Description
BillingAccount (version 2)	object	A billing account accumulates all charges from products and contracts that will be shown on the same invoice or prepaid statement.



Name		Type	Description
	regularBillingAccount	RegularBillingAccountRef (version 1)	Reference to a regular billing account incase of virtual billing account.
	isVirtualBillingAccountReferencePresent	boolean	Indicates that the Billing Account is linked to Virtual Billing Accounts.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a billing account.
	statusList	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
	associatedAgreement	AgreementRef (version 1)	Associated agreement.
	paymentMandate	array of PaymentMandate (version 1)	Payment Mandates for a BillingAccount.
	billStructure	BillStructure (version 1)	Bill structure for a BillingAccount.
	relatedParty	array of RelatedPartyExtended (version 1)	Array of party roles that are related with this billing account
	taxExemption	array of TaxExemption (version 1)	The tax exemptions for the billing account.
	billingAccountSpecification	BillingAccountSpecRef (version 1)	billing account specification reference
	accountBalance	array of AccountBalance (version 1)	The account balance for the billing account.
	nameList	array of Name (version 1)	The list of all version related to the name attribute.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	Name of the Account. Max length: 256
	href	string	Href to the resource. Max length: 512
	state	string	Contains the lifecycle state



RegularBillingAccountRef (version 1)

Table 39 RegularBillingAccountRef (version 1)

Name		Type	Description
RegularBillingAccountRef (version 1)		object	Regular Billing Account Reference.
	billingAccount	BillingAccountRef (version 1)	Reference to a billing account.
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role.
	@referredType	string	Referred Type. Max length: 128

BillingAccountRef (version 1)

Table 40 BillingAccountRef (version 1)

Name		Type	Description
BillingAccountRef (version 1)		object	Billing Account Reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128

RelatedParty (version 1)

Table 41 RelatedParty (version 1)

Name	Type	Description
RelatedParty (version 1)	object	Related Party or Party Role



Name		Type	Description
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

CharacteristicValue (version 2)

Table 42 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 43 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 44 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 45 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 46 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.



Name		Type	Description
	id	string	The ID of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	@referredType	string	Referred Type. Max length: 128

ContactMediumAssociation (version 1)

Table 47 ContactMediumAssociation (version 1)

Name	Type	Description
ContactMediumAssociation (version 1)	object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).* Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekdayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.WeekdayTimePeriod (version 1)

Table 48 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$

ContactMediumItemRef (version 1)

Table 49 ContactMediumItemRef (version 1)

Name	Type	Description
ContactMediumItemRef (version 1)	object	Reference to a ContactMediumItem.



Name		Type	Description
	id	string	The contact medium item id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.StatusExtended (version 1)

Table 50 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	previousStatus	string	The Previous status for the given time period. Max length: 256
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

AgreementRef (version 1)

Table 51 AgreementRef (version 1)

Name		Type	Description
AgreementRef (version 1)		object	Agreement Reference.



Name		Type	Description
	id	string	Unique identifier of the agreement instance. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the agreement in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

PaymentMandate (version 1)

Table 52 PaymentMandate (version 1)

Name	Type	Description
PaymentMandate (version 1)	object	Represents a payment mandate for a billing account.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the payment mandate is valid for.
	id	string	Unique identifier for the payment mandate. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a payment mandate in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	paymentMandateContext	string	Payment mandate context for a payment mandate. Possible values: AUTODEBIT
	paymentMandateType	string	Payment mandate type for a payment mandate. Possible values: ONE_OFF RECURRING
	priority	integer	Priority of the payment Mandate. Higher value is the higher priority. The numeric value must be at least 0. The numeric value must not exceed 9223372036854775806.
	paymentMethod	PaymentMethodRef (version 1)	Reference to the payment method.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the Payment Mandate.



PaymentMethodRef (version 1)

Table 53 PaymentMethodRef (version 1)

Name		Type	Description
PaymentMethodRef (version 1)		object	Payment Method Reference.
	id	string	Unique identifier of the payment method. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the payment method in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.Status (version 1)

Table 54 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



BillStructure (version 1)

Table 55 BillStructure (version 1)

Name		Type	Description
BillStructure (version 1)		object	Represents a bill structure for a billing account.
	id	string	Unique identifier for the bill structure. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecification	BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	cycleSpecificationList	array of BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	formatList	array of BillFormatRefOrValue (version 1)	Bill formats of a bill structure.

BillStructureSpecificationRef (version 1)

Table 56 BillStructureSpecificationRef (version 1)

Name	Type	Description
BillStructureSpecificationRef (version 1)	object	Bill Structure Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillingCycleSpecificationRefOrValue (version 1)

Table 57 BillingCycleSpecificationRefOrValue (version 1)

Name	Type	Description
BillingCycleSpecificationRefOrValue (version 1)	object	Billing Cycle Specification Reference or Value.



Name		Type	Description
	isRef	boolean	True if is a reference.
	id	string	Unique identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	External identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	billCycleSpecification	BillCycleSpecRef (version 1)	Billing Cycle Specification Reference.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW

BillCycleSpecRef (version 1)

Table 58 BillCycleSpecRef (version 1)

Name	Type	Description
BillCycleSpecRef (version 1)	object	A Billing Cycle specification reference.



Name		Type	Description
	id	string	Unique identifier of the billing account specification. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillFormatRefOrValue (version 1)

Table 59 BillFormatRefOrValue (version 1)

Name		Type	Description
BillFormatRefOrValue (version 1)		object	Bill Format Reference or Value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format



BillFormatSpecificationRef (version 1)

Table 60 BillFormatSpecificationRef (version 1)

Name		Type	Description
BillFormatSpecificationRef (version 1)		object	Bill Format Specification Reference.
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillPresentationMedia (version 1)

Table 61 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 62 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

RelatedPartyExtended (version 1)

Table 63 RelatedPartyExtended (version 1)

Name	Type	Description
RelatedPartyExtended (version 1)	object	Related Party Extended.



Name		Type	Description
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

TaxExemption (version 1)

Table 64 TaxExemption (version 1)

Name	Type	Description
TaxExemption (version 1)	object	Tax exemption.



Name		Type	Description
	id	string	Unique identifier of a tax exemption. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValue List	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 65 TaxExemptionSpecificationRef (version 1)

Name		Type	Description
TaxExemptionSpecificationRef (version 1)		object	Tax Exemption Specification Reference.
	id	string	Unique identifier of the tax exemption specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



BillingAccountSpecRef (version 1)

Table 66 BillingAccountSpecRef (version 1)

Name		Type	Description
BillingAccountSpecRef (version 1)		object	Billing Account Specification Reference.
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

AccountBalance (version 1)

Table 67 AccountBalance (version 1)

Name		Type	Description
AccountBalance (version 1)		object	Account balance.
	bucketAmount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Billing Account Bucket.
	reservedAmount	bss.cmn.Decimal_Sensitive (version 1)	The reserved amount on the Billing Account Bucket.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	bucketSpecification	BucketSpecificationRef (version 1)	Bucket Specification Reference



bss.cmn.Decimal_Sensitive (version 1)

Table 68 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.

BucketSpecificationRef (version 1)

Table 69 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128



Name (version 1)

Table 70 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

4.1.2 List Billing Account

List Billing Account information.

4.1.2.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

— GET {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf666AccountManagement/v1/billingAccount

Query Parameters

The following table describes the query parameters for the operation:

Table 71 Query Parameters

Name	Type	Description
relatedPartyId	string	Party (Role) Id - e.g. "bacae1ae-ea85-4397-95d5-29ce56157ffa". Additional Description: Unique identifier of the party or party role. Maxlength: 256 Pattern: ^(?=\s*\S).*



Name	Type	Description
relatedPartyExternalId	string	Party (Role) External Id. Additional Description: External identifier of the party or party role. Maxlength: 256 Pattern: ^(?=\s*\S).*
fields	string	Attribute selection fields. Additional Description: This parameter filters the properties that are returned, based on specific criteria. Return one or more fields specified as a comma-delimited list. Pattern: ^(((@[a-zA-Z][a-zA-Z][a-z0-9]*)(?:[A-Z0-9]+[a-z0-9]*)*)\.\.((@[a-zA-Z][a-zA-Z][a-z0-9]*)(?:[A-Z0-9]+[a-z0-9]*)*)*)*(((@[a-zA-Z][a-zA-Z][a-z0-9]*)(?:[A-Z0-9]+[a-z0-9]*)*)\.\.((@[a-zA-Z][a-zA-Z][a-z0-9]*)(?:[A-Z0-9]+[a-z0-9]*)*)*)*)*\$ Maxlength: 512

4.1.2.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 72 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf666AccountManagement.billingAccountList.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.billingAccountList.readResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.

Table 73 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 74 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf666AccountManagement.billingAccountList.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.billingAccountList.readResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3]([0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01]([0-9] 2[0-3])(:[0-5]([0-9])){2} GMT)))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 75 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.1.2.3 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.2.3.1 bss.Tmf666AccountManagement.billingAccountList Read Response Version 1

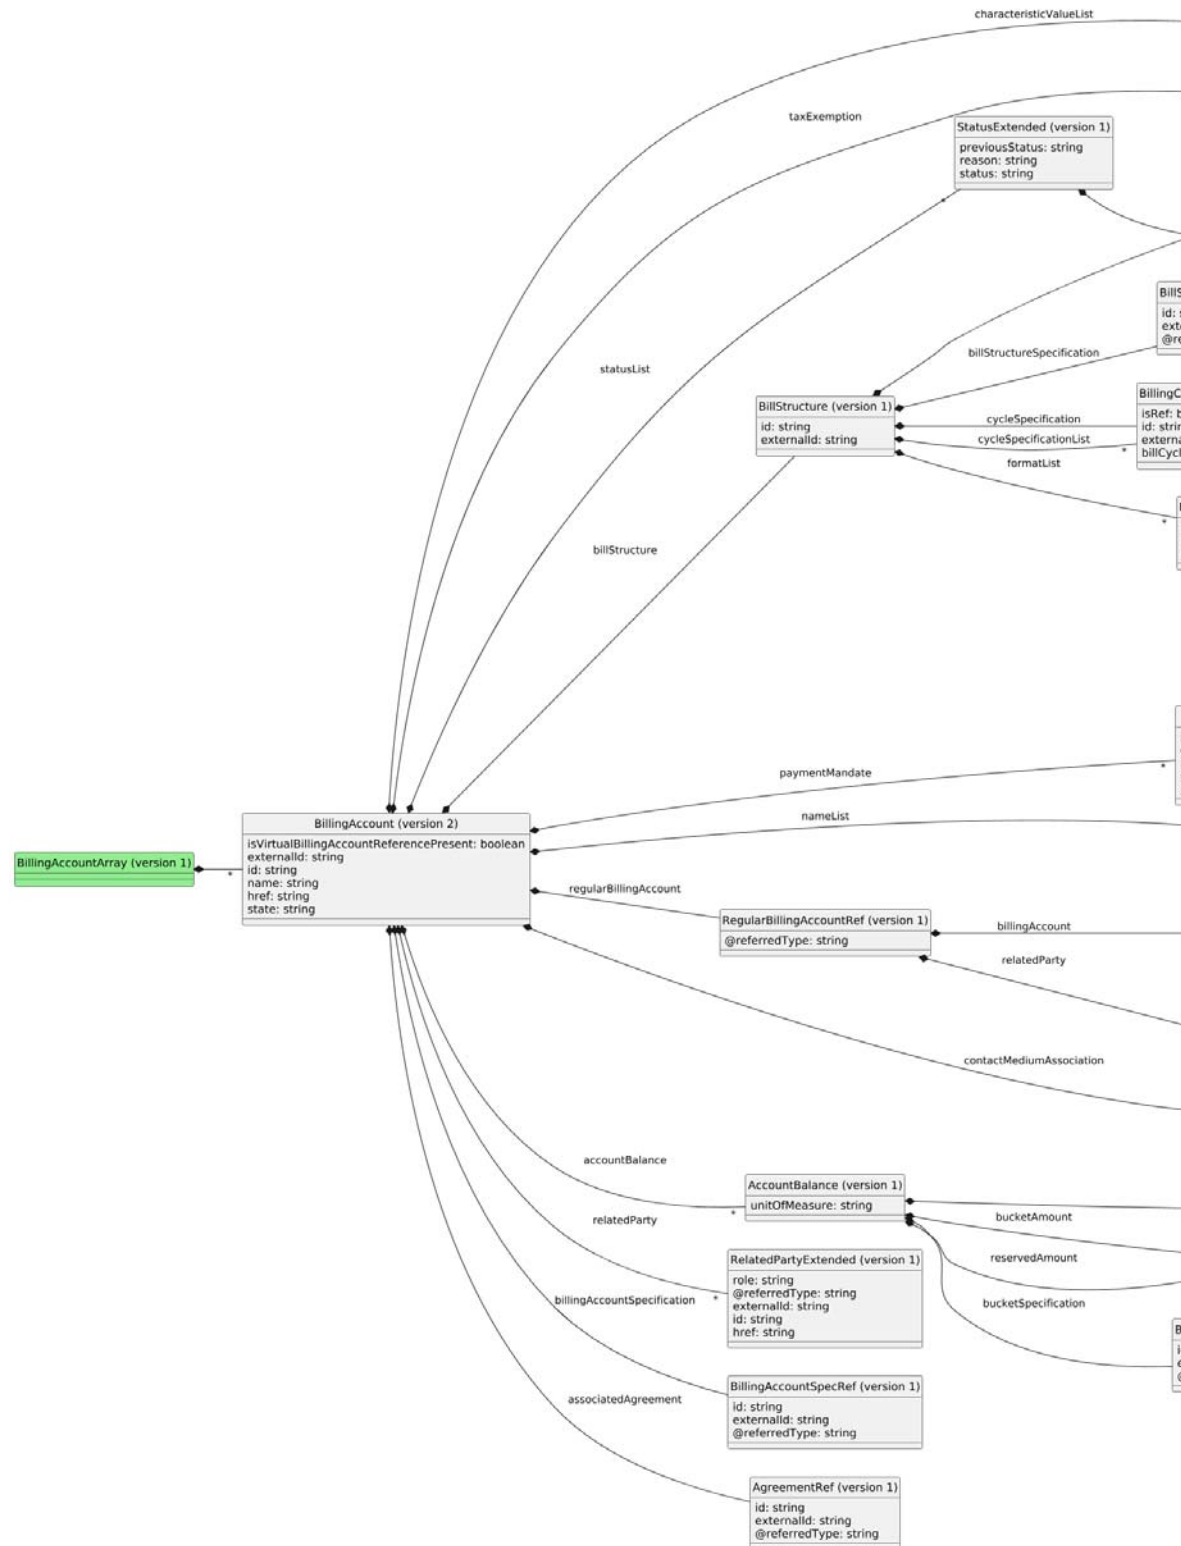


Figure 3 bss.Tmf666AccountManagement.billingAccountList.readResponse.1
UML representation



The representation is provided as JSON objects with the following attributes:

Table 76 BillingAccountArray (version 1)

Name	Type	Description
BillingAccountArray (version 1)	array of BillingAccount (version 2)	A billing account array representing multiple billing accounts.

BillingAccount (version 2)

Table 77 BillingAccount (version 2)

Name	Type	Description
BillingAccount (version 2)	object	A billing account accumulates all charges from products and contracts that will be shown on the same invoice or prepaid statement.



Name		Type	Description
	regularBillingAccount	RegularBillingAccountRef (version 1)	Reference to a regular billing account incase of virtual billing account.
	isVirtualBillingAccountReferencePresent	boolean	Indicates that the Billing Account is linked to Virtual Billing Accounts.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a billing account.
	statusList	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
	associatedAgreement	AgreementRef (version 1)	Associated agreement.
	paymentMandate	array of PaymentMandate (version 1)	Payment Mandates for a BillingAccount.
	billStructure	BillStructure (version 1)	Bill structure for a BillingAccount.
	relatedParty	array of RelatedPartyExtended (version 1)	Array of party roles that are related with this billing account
	taxExemption	array of TaxExemption (version 1)	The tax exemptions for the billing account.
	billingAccountSpecification	BillingAccountSpecRef (version 1)	billing account specification reference
	accountBalance	array of AccountBalance (version 1)	The account balance for the billing account.
	nameList	array of Name (version 1)	The list of all version related to the name attribute.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	Name of the Account. Max length: 256
	href	string	Href to the resource. Max length: 512
	state	string	Contains the lifecycle state



RegularBillingAccountRef (version 1)

Table 78 RegularBillingAccountRef (version 1)

Name		Type	Description
RegularBillingAccountRef (version 1)		object	Regular Billing Account Reference.
	billingAccount	BillingAccountRef (version 1)	Reference to a billing account.
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role.
	@referredType	string	Referred Type. Max length: 128

BillingAccountRef (version 1)

Table 79 BillingAccountRef (version 1)

Name		Type	Description
BillingAccountRef (version 1)		object	Billing Account Reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128

RelatedParty (version 1)

Table 80 RelatedParty (version 1)

Name	Type	Description
RelatedParty (version 1)	object	Related Party or Party Role



Name		Type	Description
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

CharacteristicValue (version 2)

Table 81 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 82 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 83 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 84 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 85 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.



Name		Type	Description
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ContactMediumAssociation (version 1)

Table 86 ContactMediumAssociation (version 1)

Name	Type	Description
ContactMediumAssociation (version 1)	object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).* Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekdayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.WeekdayTimePeriod (version 1)

Table 87 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$

ContactMediumItemRef (version 1)

Table 88 ContactMediumItemRef (version 1)

Name	Type	Description
ContactMediumItemRef (version 1)	object	Reference to a ContactMediumItem.



Name		Type	Description
	id	string	The contact medium item id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.StatusExtended (version 1)

Table 89 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	previousStatus	string	The Previous status for the given time period. Max length: 256
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

AgreementRef (version 1)

Table 90 AgreementRef (version 1)

Name		Type	Description
AgreementRef (version 1)		object	Agreement Reference.



Name		Type	Description
	id	string	Unique identifier of the agreement instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the agreement in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

PaymentMandate (version 1)

Table 91 PaymentMandate (version 1)

Name	Type	Description
PaymentMandate (version 1)	object	Represents a payment mandate for a billing account.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the payment mandate is valid for.
	id	string	Unique identifier for the payment mandate. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	External identifier of a payment mandate in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	paymentMandateContext	string	Payment mandate context for a payment mandate. Possible values: AUTODEBIT
	paymentMandateType	string	Payment mandate type for a payment mandate. Possible values: ONE_OFF RECURRING
	priority	integer	Priority of the payment Mandate. Higher value is the higher priority. The numeric value must be at least 0. The numeric value must not exceed 9223372036854775806.
	paymentMethod	PaymentMethodRef (version 1)	Reference to the payment method.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the Payment Mandate.



PaymentMethodRef (version 1)

Table 92 PaymentMethodRef (version 1)

Name		Type	Description
PaymentMethodRef (version 1)		object	Payment Method Reference.
	id	string	Unique identifier of the payment method. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the payment method in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.Status (version 1)

Table 93 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



BillStructure (version 1)

Table 94 BillStructure (version 1)

Name		Type	Description
BillStructure (version 1)		object	Represents a bill structure for a billing account.
	id	string	Unique identifier for the bill structure. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecification	BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	cycleSpecificationList	array of BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	formatList	array of BillFormatRefOrValue (version 1)	Bill formats of a bill structure.

BillStructureSpecificationRef (version 1)

Table 95 BillStructureSpecificationRef (version 1)

Name	Type	Description
BillStructureSpecificationRef (version 1)	object	Bill Structure Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillingCycleSpecificationRefOrValue (version 1)

Table 96 BillingCycleSpecificationRefOrValue (version 1)

Name	Type	Description
BillingCycleSpecificationRefOrValue (version 1)	object	Billing Cycle Specification Reference or Value.



Name		Type	Description
	isRef	boolean	True if is a reference.
	id	string	Unique identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	External identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	billCycleSpecification	BillCycleSpecRef (version 1)	Billing Cycle Specification Reference.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW

BillCycleSpecRef (version 1)

Table 97 BillCycleSpecRef (version 1)

Name	Type	Description
BillCycleSpecRef (version 1)	object	A Billing Cycle specification reference.



Name		Type	Description
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillFormatRefOrValue (version 1)

Table 98 BillFormatRefOrValue (version 1)

Name		Type	Description
BillFormatRefOrValue (version 1)		object	Bill Format Reference or Value.
	isRef	boolean	True if is a reference.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format



BillFormatSpecificationRef (version 1)

Table 99 BillFormatSpecificationRef (version 1)

Name		Type	Description
BillFormatSpecificationRef (version 1)		object	Bill Format Specification Reference.
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillPresentationMedia (version 1)

Table 100 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 101 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

RelatedPartyExtended (version 1)

Table 102 RelatedPartyExtended (version 1)

Name	Type	Description
RelatedPartyExtended (version 1)	object	Related Party Extended.



Name		Type	Description
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

TaxExemption (version 1)

Table 103 TaxExemption (version 1)

Name	Type	Description
TaxExemption (version 1)	object	Tax exemption.



Name		Type	Description
	id	string	Unique identifier of a tax exemption. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValue List	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 104 TaxExemptionSpecificationRef (version 1)

Name		Type	Description
TaxExemptionSpecificationRef (version 1)		object	Tax Exemption Specification Reference.
	id	string	Unique identifier of the tax exemption specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



BillingAccountSpecRef (version 1)

Table 105 BillingAccountSpecRef (version 1)

Name		Type	Description
BillingAccountSpecRef (version 1)		object	Billing Account Specification Reference.
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

AccountBalance (version 1)

Table 106 AccountBalance (version 1)

Name		Type	Description
AccountBalance (version 1)		object	Account balance.
	bucketAmount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Billing Account Bucket.
	reservedAmount	bss.cmn.Decimal_Sensitive (version 1)	The reserved amount on the Billing Account Bucket.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	bucketSpecification	BucketSpecificationRef (version 1)	Bucket Specification Reference



bss.cmn.Decimal_Sensitive (version 1)

Table 107 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.

BucketSpecificationRef (version 1)

Table 108 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128



Name (version 1)

Table 109 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

4.1.3 Read Billing Account

Retrieves Billing Account information.

4.1.3.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- GET {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf666AccountManagement/v1/billingAccount/{id}
- GET {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf666AccountManagement/v1/billingAccountExternalId/{externalId}

Query Parameters

The following table describes the query parameters for the operation:

Table 110 Query Parameters

Name	Type	Description
relatedPartyId	string	Party (Role) Id - e.g. "bacae1ae-ea85-4397-95d5-29ce56157ffa". Additional Description: Unique identifier of the party or party role. Maxlength: 256 Pattern: ^(?=\s*\S).*



Name	Type	Description
relatedPartyExternalId	string	Party (Role) External Id. Additional Description: External identifier of the party or party role. Maxlength: 256 Pattern: <code>^(?=\s*\S).*</code>
fields	string	Attribute selection fields. Additional Description: This parameter filters the properties that are returned, based on specific criteria. Return one or more fields specified as a comma-delimited list. Pattern: <code>^(((@[a-zA-Z] [a-zA-Z])[a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)\.\.((@[a-zA-Z] [a-zA-Z])[a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)*)*(((@[a-zA-Z] [a-zA-Z])[a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)\.\.((@[a-zA-Z] [a-zA-Z])[a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)*)*)*\$</code> Maxlength: 512

Path Parameters

The following table describes the path parameters for the operation:



Table 111 Path Parameters

Name	Type	Description
id	string	Billing Account Identifier. Additional Description: Unique identifier of the account. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
externalId	string	Billing Account External Identifier. Additional Description: Unique identifier of the account populated by external system. Maxlength: 256 Pattern: ^(?=\s*\S).*\$

4.1.3.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 112 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf666AccountManagement.billingAccount.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.billingAccount.readResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.

Table 113 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 114 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf666AccountManagement.billingAccount.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.billingAccount.readResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: ^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2 } GMT))\$



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 115 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.1.3.3 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.3.3.1 bss.Tmf666AccountManagement.billingAccount Read Response Version 1

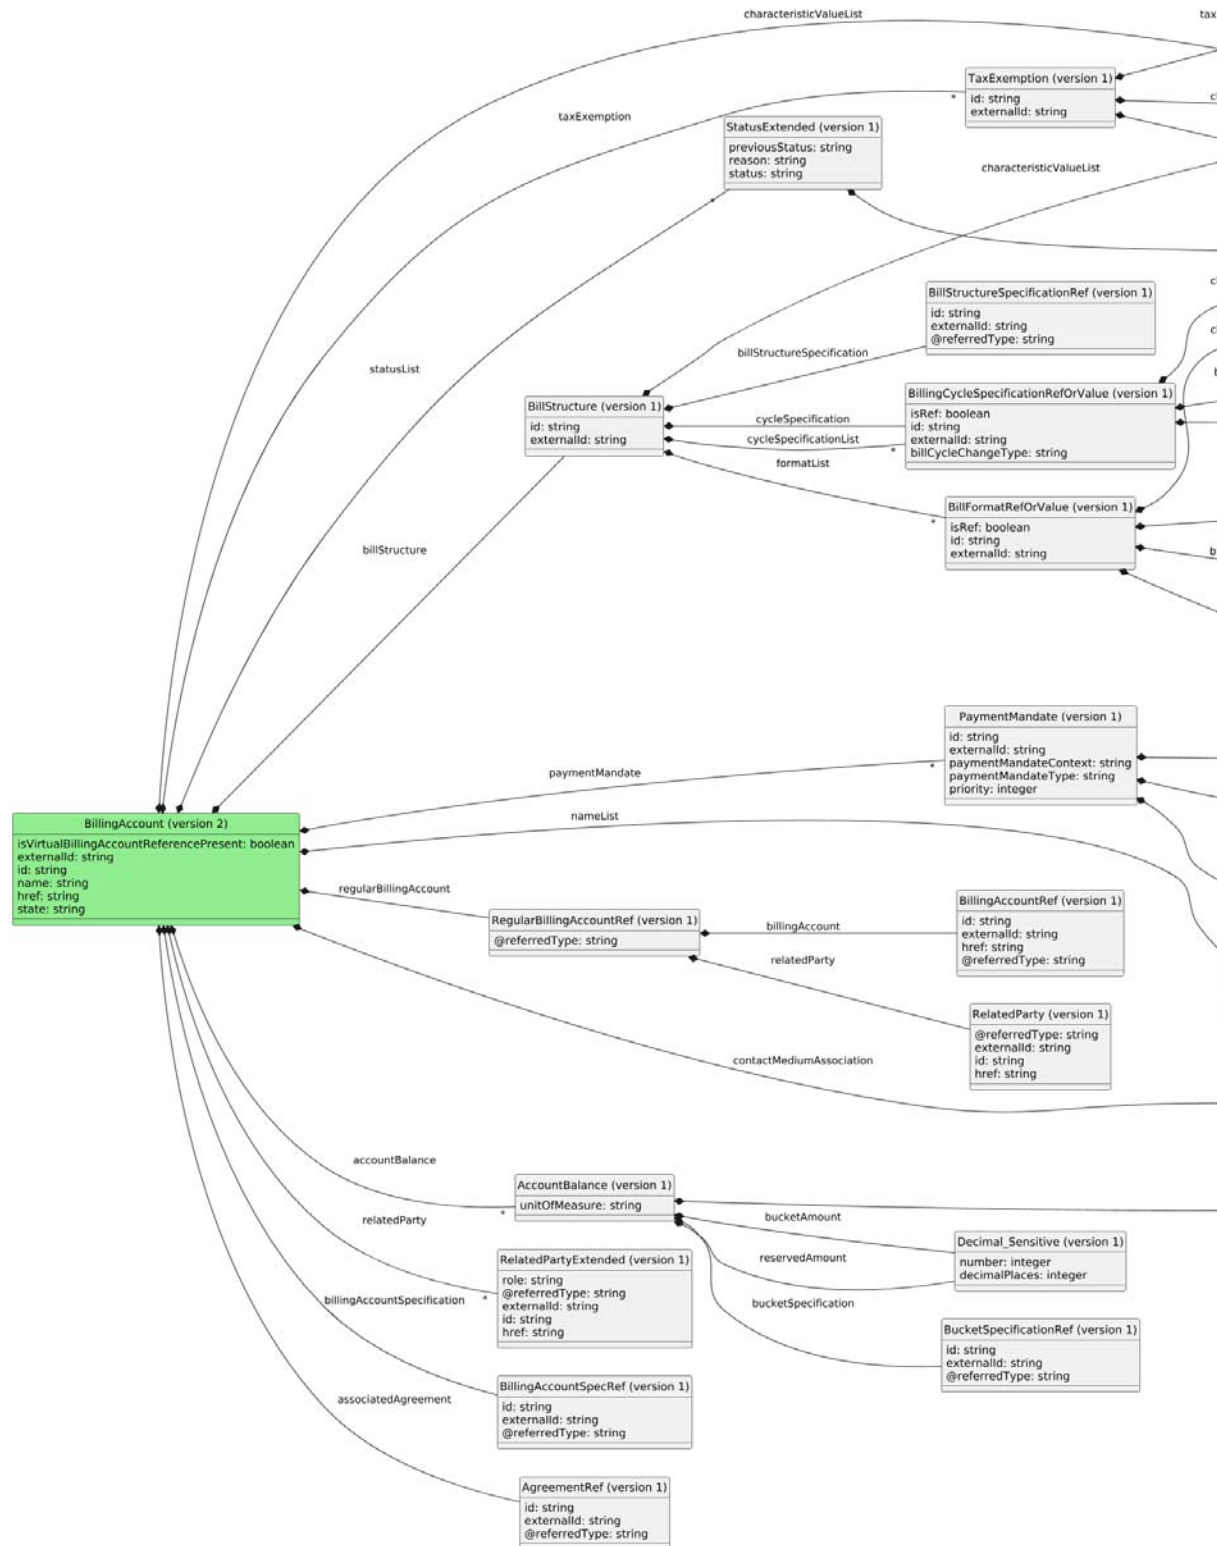


Figure 4 bss.Tmf666AccountManagement.billingAccount.readResponse.1 UML representation



The representation is provided as JSON objects with the following attributes:

Table 116 BillingAccount (version 2)

Name	Type	Description
BillingAccount (version 2)	object	A billing account accumulates all charges from products and contracts that will be shown on the same invoice or prepaid statement.



Name		Type	Description
	regularBillingAccount	RegularBillingAccountRef (version 1)	Reference to a regular billing account incase of virtual billing account.
	isVirtualBillingAccountReferencePresent	boolean	Indicates that the Billing Account is linked to Virtual Billing Accounts.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a billing account.
	statusList	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
	associatedAgreement	AgreementRef (version 1)	Associated agreement.
	paymentMandate	array of PaymentMandate (version 1)	Payment Mandates for a BillingAccount.
	billStructure	BillStructure (version 1)	Bill structure for a BillingAccount.
	relatedParty	array of RelatedPartyExtended (version 1)	Array of party roles that are related with this billing account
	taxExemption	array of TaxExemption (version 1)	The tax exemptions for the billing account.
	billingAccountSpecification	BillingAccountSpecRef (version 1)	billing account specification reference
	accountBalance	array of AccountBalance (version 1)	The account balance for the billing account.
	nameList	array of Name (version 1)	The list of all version related to the name attribute.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\\s*\\S).* Max length: 256
	id	string	Unique identifier of the account. Pattern: ^(?=\\s*\\S).* Max length: 256
	name	string	Name of the Account. Max length: 256
	href	string	Href to the resource. Max length: 512
	state	string	Contains the lifecycle state



RegularBillingAccountRef (version 1)

Table 117 RegularBillingAccountRef (version 1)

Name		Type	Description
RegularBillingAccountRef (version 1)		object	Regular Billing Account Reference.
	billingAccount	BillingAccountRef (version 1)	Reference to a billing account.
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role.
	@referredType	string	Referred Type. Max length: 128

BillingAccountRef (version 1)

Table 118 BillingAccountRef (version 1)

Name		Type	Description
BillingAccountRef (version 1)		object	Billing Account Reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128

RelatedParty (version 1)

Table 119 RelatedParty (version 1)

Name	Type	Description
RelatedParty (version 1)	object	Related Party or Party Role



Name		Type	Description
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

CharacteristicValue (version 2)

Table 120 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 121 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 122 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 123 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 124 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.



Name		Type	Description
	id	string	The ID of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	@referredType	string	Referred Type. Max length: 128

ContactMediumAssociation (version 1)

Table 125 ContactMediumAssociation (version 1)

Name	Type	Description
ContactMediumAssociation (version 1)	object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).* Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekDayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.WeekdayTimePeriod (version 1)

Table 126 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$

ContactMediumItemRef (version 1)

Table 127 ContactMediumItemRef (version 1)

Name	Type	Description
ContactMediumItemRef (version 1)	object	Reference to a ContactMediumItem.



Name		Type	Description
	id	string	The contact medium item id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.StatusExtended (version 1)

Table 128 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	previousStatus	string	The Previous status for the given time period. Max length: 256
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

AgreementRef (version 1)

Table 129 AgreementRef (version 1)

Name		Type	Description
AgreementRef (version 1)		object	Agreement Reference.



Name		Type	Description
	id	string	Unique identifier of the agreement instance. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the agreement in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

PaymentMandate (version 1)

Table 130 PaymentMandate (version 1)

Name	Type	Description
PaymentMandate (version 1)	object	Represents a payment mandate for a billing account.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the payment mandate is valid for.
	id	string	Unique identifier for the payment mandate. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a payment mandate in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	paymentMandateContext	string	Payment mandate context for a payment mandate. Possible values: AUTODEBIT
	paymentMandateType	string	Payment mandate type for a payment mandate. Possible values: ONE_OFF RECURRING
	priority	integer	Priority of the payment Mandate. Higher value is the higher priority. The numeric value must be at least 0. The numeric value must not exceed 9223372036854775806.
	paymentMethod	PaymentMethodRef (version 1)	Reference to the payment method.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the Payment Mandate.



PaymentMethodRef (version 1)

Table 131 PaymentMethodRef (version 1)

Name		Type	Description
PaymentMethodRef (version 1)		object	Payment Method Reference.
	id	string	Unique identifier of the payment method. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the payment method in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.Status (version 1)

Table 132 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



BillStructure (version 1)

Table 133 BillStructure (version 1)

Name		Type	Description
BillStructure (version 1)		object	Represents a bill structure for a billing account.
	id	string	Unique identifier for the bill structure. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecification	BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	cycleSpecificationList	array of BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	formatList	array of BillFormatRefOrValue (version 1)	Bill formats of a bill structure.

BillStructureSpecificationRef (version 1)

Table 134 BillStructureSpecificationRef (version 1)

Name	Type	Description
BillStructureSpecificationRef (version 1)	object	Bill Structure Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillingCycleSpecificationRefOrValue (version 1)

Table 135 BillingCycleSpecificationRefOrValue (version 1)

Name	Type	Description
BillingCycleSpecificationRefOrValue (version 1)	object	Billing Cycle Specification Reference or Value.



Name		Type	Description
	isRef	boolean	True if is a reference.
	id	string	Unique identifier of the account's bill cycle specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the account's bill cycle specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billCycleSpecification	BillCycleSpecRef (version 1)	Billing Cycle Specification Reference.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW

BillCycleSpecRef (version 1)

Table 136 BillCycleSpecRef (version 1)

Name	Type	Description
BillCycleSpecRef (version 1)	object	A Billing Cycle specification reference.



Name		Type	Description
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillFormatRefOrValue (version 1)

Table 137 BillFormatRefOrValue (version 1)

Name		Type	Description
BillFormatRefOrValue (version 1)		object	Bill Format Reference or Value.
	isRef	boolean	True if is a reference.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format



BillFormatSpecificationRef (version 1)

Table 138 BillFormatSpecificationRef (version 1)

Name		Type	Description
BillFormatSpecificationRef (version 1)		object	Bill Format Specification Reference.
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillPresentationMedia (version 1)

Table 139 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 140 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: $^{(?=\text{s}*\text{S}).}.*\$$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: $^{(?=\text{s}*\text{S}).}.*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

RelatedPartyExtended (version 1)

Table 141 RelatedPartyExtended (version 1)

Name	Type	Description
RelatedPartyExtended (version 1)	object	Related Party Extended.



Name		Type	Description
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

TaxExemption (version 1)

Table 142 TaxExemption (version 1)

Name	Type	Description
TaxExemption (version 1)	object	Tax exemption.



Name		Type	Description
	id	string	Unique identifier of a tax exemption. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 143 TaxExemptionSpecificationRef (version 1)

Name		Type	Description
TaxExemptionSpecificationRef (version 1)		object	Tax Exemption Specification Reference.
	id	string	Unique identifier of the tax exemption specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128



BillingAccountSpecRef (version 1)

Table 144 BillingAccountSpecRef (version 1)

Name		Type	Description
BillingAccountSpecRef (version 1)		object	Billing Account Specification Reference.
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	@referredType	string	Referred Type. Max length: 128

AccountBalance (version 1)

Table 145 AccountBalance (version 1)

Name		Type	Description
AccountBalance (version 1)		object	Account balance.
	bucketAmount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Billing Account Bucket.
	reservedAmount	bss.cmn.Decimal_Sensitive (version 1)	The reserved amount on the Billing Account Bucket.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	bucketSpecification	BucketSpecificationRef (version 1)	Bucket Specification Reference



bss.cmn.Decimal_Sensitive (version 1)

Table 146 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.

BucketSpecificationRef (version 1)

Table 147 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



Name (version 1)

Table 148 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

4.1.4 Update Billing Account

Updates a billing account.

4.1.4.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- PATCH {scheme:}/{host}[:{port}]/{deploymentComponent}/bssTmf666AccountManagement/v1/billingAccount/{id}
- PATCH {scheme:}/{host}[:{port}]/{deploymentComponent}/bssTmf666AccountManagement/v1/billingAccountExternalId/{externalId}

Path Parameters

The following table describes the path parameters for the operation:



Table 149 Path Parameters

Name	Type	Description
id	string	Billing Account Identifier. Additional Description: Unique identifier of the account. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
externalId	string	Billing Account External Identifier. Additional Description: Unique identifier of the account populated by external system. Maxlength: 256 Pattern: ^(?=\s*\S).*\$

4.1.4.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 150 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf666AccountManagement.billingAccount.updateResponse+json;version=1; charset=utf-8 • application/x.bss.Tmf666AccountManagement.billingAccount.updateResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2; charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json; charset=utf-8 • application/json	-
Content-Type		Mandatory
	One of the following: • application/x.bss.Tmf666AccountManagement.billingAccount.updateRequest+merge-patch+json;version=1; charset=utf-8 • application/x.bss.Tmf666AccountManagement.billingAccount.updateRequest+merge-patch+json;version=1 • application/merge-patch+json; charset=utf-8 • application/merge-patch+json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 151 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 152 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf666AccountManagement.billingAccount.updateResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.billingAccount.updateResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2} GMT))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 153 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.1.4.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.1.4.3.1

bss.Tmf666AccountManagement.billingAccount Update Request Version 1

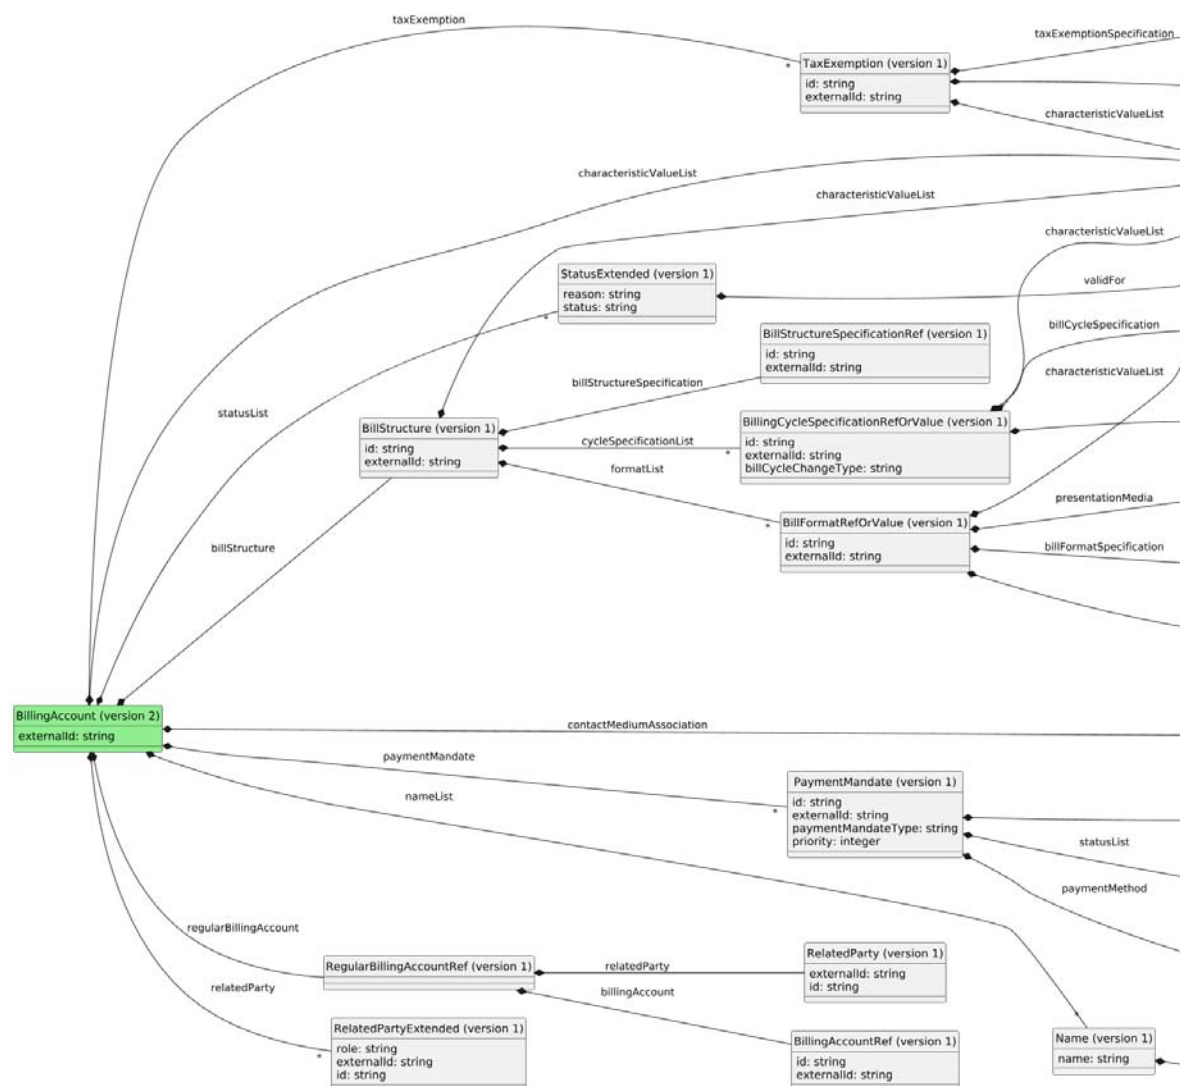


Figure 5 bss.Tmf666AccountManagement.billingAccount.updateRequest.1 UML representation

The representation is provided as JSON objects with the following attributes:

Table 154 BillingAccount (version 2)

Name	Type	Description
BillingAccount (version 2)	object	A billing account accumulates all charges from products and contracts that will be shown on the same invoice or prepaid statement.



Name		Type	Description
	regularBillingAccount	RegularBillingAccountRef (version 1)	Reference to a regular billing account incase of virtual billing account.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a billing account.
	statusList	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
	paymentMandate	array of PaymentMandate (version 1)	Payment Mandates for a BillingAccount.
	billStructure	BillStructure (version 1)	Bill structure for a BillingAccount.
	relatedParty	array of RelatedPartyExtended (version 1)	Array of party roles that are related with this billing account
	taxExemption	array of TaxExemption (version 1)	The tax exemptions for the billing account.
	nameList	array of Name (version 1)	The list of all version related to the name attribute.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

RegularBillingAccountRef (version 1)

Table 155 RegularBillingAccountRef (version 1)

Name		Type	Description
RegularBillingAccountRef (version 1)		object	Regular Billing Account Reference.
	billingAccount	BillingAccountRef (version 1)	Reference to a billing account.
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role.



BillingAccountRef (version 1)

Table 156 BillingAccountRef (version 1)

Name		Type	Description
BillingAccountRef (version 1)		object	Billing Account Reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256

RelatedParty (version 1)

Table 157 RelatedParty (version 1)

Name		Type	Description
RelatedParty (version 1)		object	Related Party or Party Role
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

CharacteristicValue (version 2)

Table 158 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 159 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 160 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 161 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 162 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256



ContactMediumAssociation (version 1)

Table 163 ContactMediumAssociation (version 1)

Name		Type	Description
ContactMediumAssociation (version 1)		object	Represents an assignment of a contact medium to an entity.
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).*\$ Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekdayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.WeekdayTimePeriod (version 1)

Table 164 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$

ContactMediumItemRef (version 1)

Table 165 ContactMediumItemRef (version 1)

Name		Type	Description
ContactMediumItemRef (version 1)		object	Reference to a ContactMediumItem.
	id	string	The contact medium item id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item external id. Pattern: ^(?=\s*\S).*\$ Max length: 256



bss.cmn.StatusExtended (version 1)

Table 166 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

PaymentMandate (version 1)

Table 167 PaymentMandate (version 1)

Name	Type	Description
PaymentMandate (version 1)	object	Represents a payment mandate for a billing account.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the payment mandate is valid for.
	id	string	Unique identifier for the payment mandate. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a payment mandate in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	paymentMandateType	string	Payment mandate type for a payment mandate. Possible values: ONE_OFF RECURRING
	priority	integer	Priority of the payment Mandate. Higher value is the higher priority. The numeric value must be at least 0. The numeric value must not exceed 9223372036854775806.
	paymentMethod	PaymentMethodRef (version 1)	Reference to the payment method.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the Payment Mandate.

PaymentMethodRef (version 1)

Table 168 PaymentMethodRef (version 1)

Name	Type	Description
PaymentMethodRef (version 1)	object	Payment Method Reference.



Name		Type	Description
	id	string	Unique identifier of the payment method. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the payment method in an external system. Pattern: ^(?=\s*\S).* Max length: 256

bss.cmn.Status (version 1)

Table 169 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillStructure (version 1)

Table 170 BillStructure (version 1)

Name	Type	Description
BillStructure (version 1)	object	Represents a bill structure for a billing account.



Name		Type	Description
	id	string	Unique identifier for the bill structure. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecificationList	array of BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	formatList	array of BillFormatRefOrValue (version 1)	Bill formats of a bill structure.

BillStructureSpecificationRef (version 1)

Table 171 BillStructureSpecificationRef (version 1)

Name		Type	Description
BillStructureSpecificationRef (version 1)		object	Bill Structure Specification Reference.
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256



BillingCycleSpecificationRefOrValue (version 1)

Table 172 BillingCycleSpecificationRefOrValue (version 1)

Name		Type	Description
BillingCycleSpecificationRefOrValue (version 1)		object	Billing Cycle Specification Reference or Value.
	id	string	Unique identifier of the account's bill cycle specification. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256
	externalId	string	External identifier of the account's bill cycle specification. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256
	billCycleSpecification	BillCycleSpecRef (version 1)	Billing Cycle Specification Reference.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW

BillCycleSpecRef (version 1)

Table 173 BillCycleSpecRef (version 1)

Name	Type	Description
BillCycleSpecRef (version 1)	object	A Billing Cycle specification reference.



Name		Type	Description
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

BillFormatRefOrValue (version 1)

Table 174 BillFormatRefOrValue (version 1)

Name		Type	Description
BillFormatRefOrValue (version 1)		object	Bill Format Reference or Value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format



BillFormatSpecificationRef (version 1)

Table 175 BillFormatSpecificationRef (version 1)

Name		Type	Description
BillFormatSpecificationRef (version 1)		object	Bill Format Specification Reference.
	id	string	Unique identifier of the bill format specification. Pattern: $^{(?=\text{s*}\text{S}).*\$}$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: $^{(?=\text{s*}\text{S}).*\$}$ Max length: 256

BillPresentationMedia (version 1)

Table 176 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: $^{(?=\text{s*}\text{S}).*\$}$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: $^{(?=\text{s*}\text{S}).*\$}$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 177 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: $^(?=\s*\S).*$$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: $^(?=\s*\S).*$$ Max length: 256

RelatedPartyExtended (version 1)

Table 178 RelatedPartyExtended (version 1)

Name		Type	Description
RelatedPartyExtended (version 1)		object	Related Party Extended.
	role	string	Role of the related party. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: $^(?=\s*\S).*$$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: $^(?=\s*\S).*$$ Max length: 256



TaxExemption (version 1)

Table 179 TaxExemption (version 1)

Name		Type	Description
TaxExemption (version 1)		object	Tax exemption.
	id	string	Unique identifier of a tax exemption. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 180 TaxExemptionSpecificationRef (version 1)

Name	Type	Description
TaxExemptionSpecificationRef (version 1)	object	Tax Exemption Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the tax exemption specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

Name (version 1)


Table 181 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

4.1.4.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.4.4.1 bss.Tmf666AccountManagement.billingAccount Update Response Version 1





The representation is provided as JSON objects with the following attributes:

Table 182 BillingAccount (version 2)

Name	Type	Description
BillingAccount (version 2)	object	A billing account accumulates all charges from products and contracts that will be shown on the same invoice or prepaid statement.



Name		Type	Description
	regularBillingAccount	RegularBillingAccountRef (version 1)	Reference to a regular billing account incase of virtual billing account.
	isVirtualBillingAccountReferencePresent	boolean	Indicates that the Billing Account is linked to Virtual Billing Accounts.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a billing account.
	statusList	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
	associatedAgreement	AgreementRef (version 1)	Associated agreement.
	paymentMandate	array of PaymentMandate (version 1)	Payment Mandates for a BillingAccount.
	billStructure	BillStructure (version 1)	Bill structure for a BillingAccount.
	relatedParty	array of RelatedPartyExtended (version 1)	Array of party roles that are related with this billing account
	taxExemption	array of TaxExemption (version 1)	The tax exemptions for the billing account.
	billingAccountSpecification	BillingAccountSpecRef (version 1)	billing account specification reference
	accountBalance	array of AccountBalance (version 1)	The account balance for the billing account.
	nameList	array of Name (version 1)	The list of all version related to the name attribute.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	Name of the Account. Max length: 256
	href	string	Href to the resource. Max length: 512
	state	string	Contains the lifecycle state



RegularBillingAccountRef (version 1)

Table 183 RegularBillingAccountRef (version 1)

Name		Type	Description
RegularBillingAccountRef (version 1)		object	Regular Billing Account Reference.
	billingAccount	BillingAccountRef (version 1)	Reference to a billing account.
	relatedParty	RelatedParty (version 1)	Reference to the related Party Role.
	@referredType	string	Referred Type. Max length: 128

BillingAccountRef (version 1)

Table 184 BillingAccountRef (version 1)

Name		Type	Description
BillingAccountRef (version 1)		object	Billing Account Reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128

RelatedParty (version 1)

Table 185 RelatedParty (version 1)

Name	Type	Description
RelatedParty (version 1)	object	Related Party or Party Role



Name		Type	Description
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

CharacteristicValue (version 2)

Table 186 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 187 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 188 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 189 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 190 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.



Name		Type	Description
	id	string	The ID of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	@referredType	string	Referred Type. Max length: 128

ContactMediumAssociation (version 1)

Table 191 ContactMediumAssociation (version 1)

Name	Type	Description
ContactMediumAssociation (version 1)	object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).* Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekDayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.WeekdayTimePeriod (version 1)

Table 192 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$

ContactMediumItemRef (version 1)

Table 193 ContactMediumItemRef (version 1)

Name	Type	Description
ContactMediumItemRef (version 1)	object	Reference to a ContactMediumItem.



Name		Type	Description
	id	string	The contact medium item id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.StatusExtended (version 1)

Table 194 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	previousStatus	string	The Previous status for the given time period. Max length: 256
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

AgreementRef (version 1)

Table 195 AgreementRef (version 1)

Name		Type	Description
AgreementRef (version 1)		object	Agreement Reference.



Name		Type	Description
	id	string	Unique identifier of the agreement instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the agreement in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

PaymentMandate (version 1)

Table 196 PaymentMandate (version 1)

Name	Type	Description
PaymentMandate (version 1)	object	Represents a payment mandate for a billing account.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the payment mandate is valid for.
	id	string	Unique identifier for the payment mandate. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	External identifier of a payment mandate in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	paymentMandateContext	string	Payment mandate context for a payment mandate. Possible values: AUTODEBIT
	paymentMandateType	string	Payment mandate type for a payment mandate. Possible values: ONE_OFF RECURRING
	priority	integer	Priority of the payment Mandate. Higher value is the higher priority. The numeric value must be at least 0. The numeric value must not exceed 9223372036854775806.
	paymentMethod	PaymentMethodRef (version 1)	Reference to the payment method.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the Payment Mandate.



PaymentMethodRef (version 1)

Table 197 PaymentMethodRef (version 1)

Name		Type	Description
PaymentMethodRef (version 1)		object	Payment Method Reference.
	id	string	Unique identifier of the payment method. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the payment method in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.Status (version 1)

Table 198 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



BillStructure (version 1)

Table 199 BillStructure (version 1)

Name		Type	Description
BillStructure (version 1)		object	Represents a bill structure for a billing account.
	id	string	Unique identifier for the bill structure. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecification	BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	cycleSpecificationList	array of BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	formatList	array of BillFormatRefOrValue (version 1)	Bill formats of a bill structure.

BillStructureSpecificationRef (version 1)

Table 200 BillStructureSpecificationRef (version 1)

Name	Type	Description
BillStructureSpecificationRef (version 1)	object	Bill Structure Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillingCycleSpecificationRefOrValue (version 1)

Table 201 BillingCycleSpecificationRefOrValue (version 1)

Name	Type	Description
BillingCycleSpecificationRefOrValue (version 1)	object	Billing Cycle Specification Reference or Value.



Name		Type	Description
	isRef	boolean	True if is a reference.
	id	string	Unique identifier of the account's bill cycle specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the account's bill cycle specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billCycleSpecification	BillCycleSpecRef (version 1)	Billing Cycle Specification Reference.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW

BillCycleSpecRef (version 1)

Table 202 BillCycleSpecRef (version 1)

Name	Type	Description
BillCycleSpecRef (version 1)	object	A Billing Cycle specification reference.



Name		Type	Description
	id	string	Unique identifier of the billing account specification. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillFormatRefOrValue (version 1)

Table 203 BillFormatRefOrValue (version 1)

Name		Type	Description
BillFormatRefOrValue (version 1)		object	Bill Format Reference or Value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format



BillFormatSpecificationRef (version 1)

Table 204 BillFormatSpecificationRef (version 1)

Name		Type	Description
BillFormatSpecificationRef (version 1)		object	Bill Format Specification Reference.
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillPresentationMedia (version 1)

Table 205 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 206 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

RelatedPartyExtended (version 1)

Table 207 RelatedPartyExtended (version 1)

Name	Type	Description
RelatedPartyExtended (version 1)	object	Related Party Extended.



Name		Type	Description
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

TaxExemption (version 1)

Table 208 TaxExemption (version 1)

Name	Type	Description
TaxExemption (version 1)	object	Tax exemption.



Name		Type	Description
	id	string	Unique identifier of a tax exemption. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValue List	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 209 TaxExemptionSpecificationRef (version 1)

Name		Type	Description
TaxExemptionSpecificationRef (version 1)		object	Tax Exemption Specification Reference.
	id	string	Unique identifier of the tax exemption specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



BillingAccountSpecRef (version 1)

Table 210 BillingAccountSpecRef (version 1)

Name		Type	Description
BillingAccountSpecRef (version 1)		object	Billing Account Specification Reference.
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

AccountBalance (version 1)

Table 211 AccountBalance (version 1)

Name		Type	Description
AccountBalance (version 1)		object	Account balance.
	bucketAmount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Billing Account Bucket.
	reservedAmount	bss.cmn.Decimal_Sensitive (version 1)	The reserved amount on the Billing Account Bucket.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	bucketSpecification	BucketSpecificationRef (version 1)	Bucket Specification Reference



bss.cmn.Decimal_Sensitive (version 1)

Table 212 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.

BucketSpecificationRef (version 1)

Table 213 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128



Name (version 1)

Table 214 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

4.2 Settlement Account

A party account used for settlement purposes.

4.2.1 Create Settlement Account

Creates a settlement account.

4.2.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

— POST {scheme:}/{host}[:{port}]/{deploymentComponent}/bssTmf66AccountManagement/v1/settlementAccount

4.2.1.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 215 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf666AccountManagement.settlementAccount.createResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.settlementAccount.createResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Content-Type		Mandatory
	One of the following: • application/x.bss.Tmf666AccountManagement.settlementAccount.createRequest+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.settlementAccount.createRequest+json;version=1 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 216 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 217 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 201, one of the following: • application/x.bss.Tmf666AccountManagement.settlementAccount.createResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.settlementAccount.createResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2} GMT))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
STANDARD_HEADER		

Table 218 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters
GURID_HEADER_CUSTOM_HEADER			

4.2.1.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.2.1.3.1 bss.Tmf666AccountManagement.settlementAccount Create Request Version 1

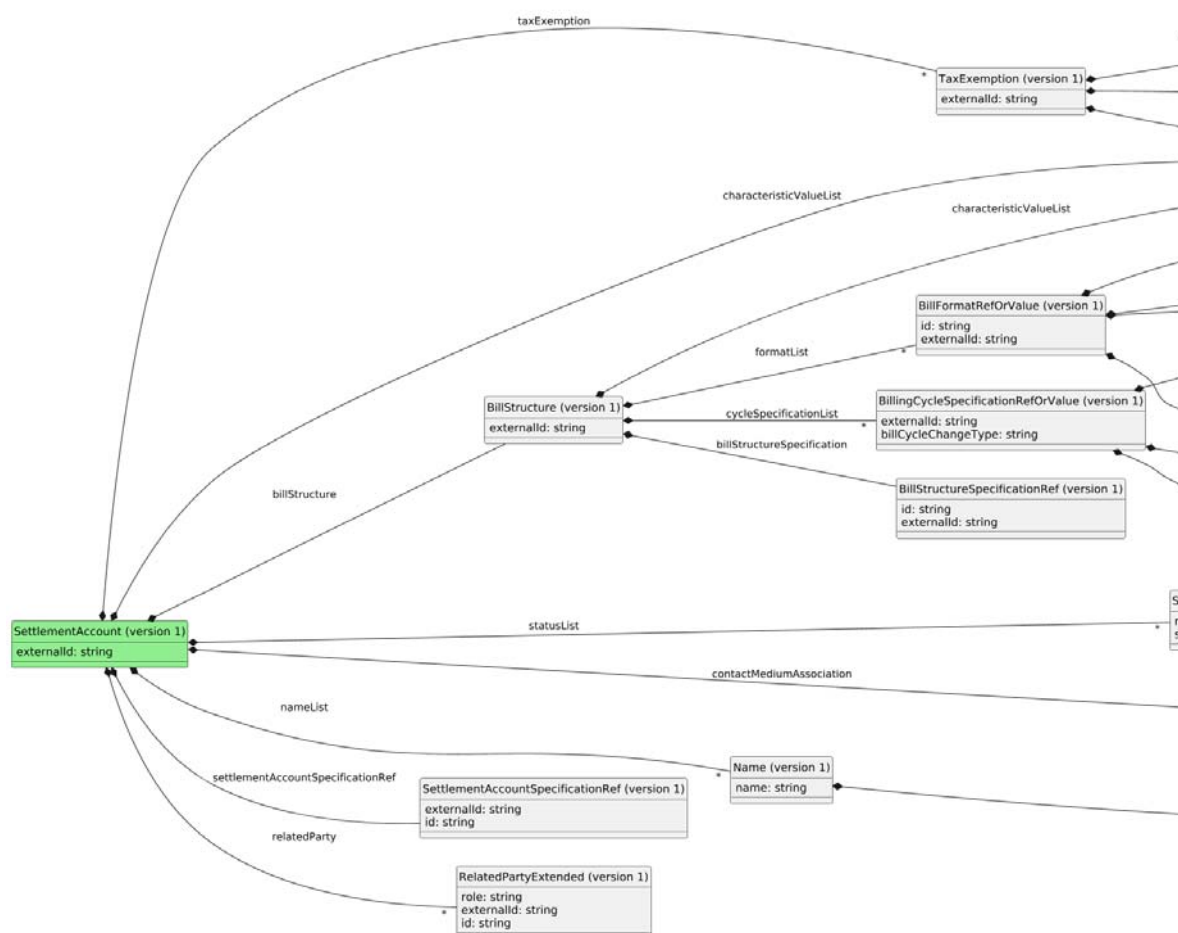


Figure 7 bss.Tmf666AccountManagement.settlementAccount.createRequest.1 UML representation

The representation is provided as JSON objects with the following attributes:



Table 219 SettlementAccount (version 1)

Name	Type	Description
SettlementAccount (version 1)	object	A Party account that is used for settlement purposes, like creation of a Settlement Statement, creation of a document for the Partner to do reconciliation, or the creation of a report for reconciliation against an incoming invoice.
settlementAccountSpecificationRef	SettlementAccountSpecificationRef (version 1)	A reference to a settlement account specification.
characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a settlement account.
nameList	array of Name (version 1)	The list of all version related to the name attribute.
statusList	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
billStructure	BillStructure (version 1)	Bill structure for a SettlementAccount.
relatedParty	array of RelatedPartyExtended (version 1)	Party or party role that is owning this account.
taxExemption	array of TaxExemption (version 1)	The tax exemptions for the settlement account.
externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256

SettlementAccountSpecificationRef (version 1)

Table 220 SettlementAccountSpecificationRef (version 1)

Name	Type	Description
SettlementAccountSpecificationRef (version 1)	object	Settlement Account Specification Reference.



Name		Type	Description
	externalId	string	External identifier for the settlement account specification. Pattern: ^(?=\s*\S).* Max length: 256
	id	string	Unique identifier for the settlement account specification. Pattern: ^(?=\s*\S).* Max length: 256

CharacteristicValue (version 2)

Table 221 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 222 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 223 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 224 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 225 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256



ContactMediumAssociation (version 1)

Table 226 ContactMediumAssociation (version 1)

Name		Type	Description
ContactMediumAssociation (version 1)		object	Represents an assignment of a contact medium to an entity.
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).*\$ Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekDayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.WeekdayTimePeriod (version 1)

Table 227 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>

ContactMediumItemRef (version 1)

Table 228 ContactMediumItemRef (version 1)

Name		Type	Description
ContactMediumItemRef (version 1)		object	Reference to a ContactMediumItem.
	id	string	The contact medium item id. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	externalId	string	The contact medium item external id. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256



Name (version 1)

Table 229 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

bss.cmn.StatusExtended (version 1)

Table 230 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillStructure (version 1)

Table 231 BillStructure (version 1)

Name		Type	Description
BillStructure (version 1)		object	Represents a bill structure for a billing account.



Name		Type	Description
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecificationList	array of BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	formatList	array of BillFormatRefOrValue (version 1)	Bill formats of a bill structure.

BillStructureSpecificationRef (version 1)

Table 232 BillStructureSpecificationRef (version 1)

Name		Type	Description
BillStructureSpecificationRef (version 1)		object	Bill Structure Specification Reference.
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256



BillingCycleSpecificationRefOrValue (version 1)

Table 233 BillingCycleSpecificationRefOrValue (version 1)

Name		Type	Description
BillingCycleSpecificationRefOrValue (version 1)		object	Billing Cycle Specification Reference or Value.
	externalId	string	External identifier of the account's bill cycle specification. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	billCycleSpecification	BillCycleSpecRef (version 1)	Billing Cycle Specification Reference.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW

BillCycleSpecRef (version 1)

Table 234 BillCycleSpecRef (version 1)

Name	Type	Description
BillCycleSpecRef (version 1)	object	A Billing Cycle specification reference.



Name		Type	Description
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

BillFormatRefOrValue (version 1)

Table 235 BillFormatRefOrValue (version 1)

Name		Type	Description
BillFormatRefOrValue (version 1)		object	Bill Format Reference or Value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format



BillFormatSpecificationRef (version 1)

Table 236 BillFormatSpecificationRef (version 1)

Name		Type	Description
BillFormatSpecificationRef (version 1)		object	Bill Format Specification Reference.
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

BillPresentationMedia (version 1)

Table 237 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 238 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256

RelatedPartyExtended (version 1)

Table 239 RelatedPartyExtended (version 1)

Name		Type	Description
RelatedPartyExtended (version 1)		object	Related Party Extended.
	role	string	Role of the related party. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256



TaxExemption (version 1)

Table 240 TaxExemption (version 1)

Name		Type	Description
TaxExemption (version 1)		object	Tax exemption.
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValue List	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 241 TaxExemptionSpecificationRef (version 1)

Name		Type	Description
TaxExemptionSpecificationRef (version 1)		object	Tax Exemption Specification Reference.
	id	string	Unique identifier of the tax exemption specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256



4.2.1.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.2.1.4.1

bss.Tmf666AccountManagement.settlementAccount Create Response Version 1

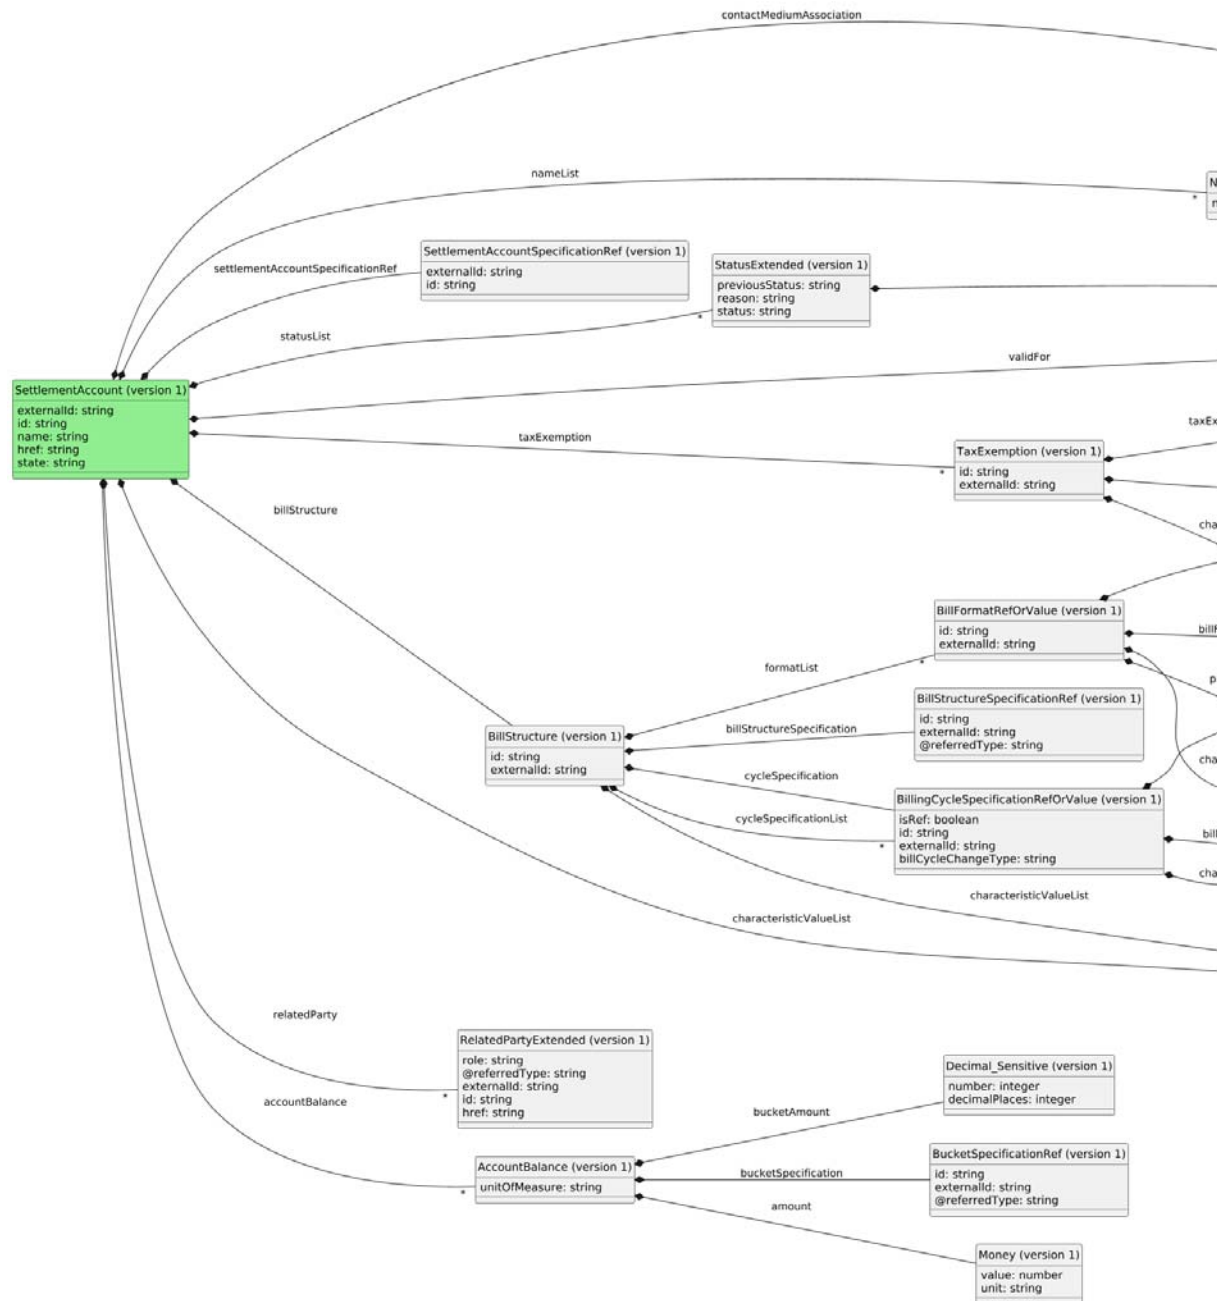


Figure 8 bss.Tmf666AccountManagement.settlementAccount.createResponse.1 UML representation

The representation is provided as JSON objects with the following attributes:



Table 242 SettlementAccount (version 1)

Name	Type	Description
SettlementAccount (version 1)	object	A Party account that is used for settlement purposes, like creation of a Settlement Statement, creation of a document for the Partner to do reconciliation, or the creation of a report for reconciliation against an incoming invoice.



Name		Type	Description
	settlementAccountSpecificationRef	SettlementAccountSpecificationRef (version 1)	A reference to a settlement account specification.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a settlement account.
	nameList	array of Name (version 1)	The list of all version related to the name attribute.
	statusList	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
	billStructure	BillStructure (version 1)	Bill structure for a SettlementAccount.
	relatedParty	array of RelatedPartyExtended (version 1)	Party or party role that is owning this account.
	taxExemption	array of TaxExemption (version 1)	The tax exemptions for the settlement account.
	accountBalance	array of AccountBalance (version 1)	The account balance for the settlement account.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the Account.
	name	string	Name of the Account. Max length: 256
	href	string	Href to the resource. Max length: 512
	state	string	Contains the lifecycle state Max length: 256



SettlementAccountSpecificationRef (version 1)

Table 243 SettlementAccountSpecificationRef (version 1)

Name		Type	Description
SettlementAccountSpecificationRef (version 1)		object	Settlement Account Specification Reference.
	externalId	string	External identifier for the settlement account specification. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256
	id	string	Unique identifier for the settlement account specification. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256

CharacteristicValue (version 2)

Table 244 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 245 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 246 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 247 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 248 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.



Name		Type	Description
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ContactMediumAssociation (version 1)

Table 249 ContactMediumAssociation (version 1)

Name	Type	Description
ContactMediumAssociation (version 1)	object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).* Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekdayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.WeekdayTimePeriod (version 1)

Table 250 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000)?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00))\$
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000)?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00))\$

ContactMediumItemRef (version 1)

Table 251 ContactMediumItemRef (version 1)

Name	Type	Description
ContactMediumItemRef (version 1)	object	Reference to a ContactMediumItem.



Name		Type	Description
	id	string	The contact medium item id. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The contact medium item external id. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

Name (version 1)

Table 252 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

bss.cmn.StatusExtended (version 1)

Table 253 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.



Name		Type	Description
	previousStatus	string	The Previous status for the given time period. Max length: 256
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillStructure (version 1)

Table 254 BillStructure (version 1)

Name	Type	Description
BillStructure (version 1)	object	Represents a bill structure for a billing account.



Name		Type	Description
	id	string	Unique identifier for the bill structure. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecification	BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	cycleSpecificationList	array of BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	formatList	array of BillFormatRefOrValue (version 1)	Bill formats of a bill structure.

BillStructureSpecificationRef (version 1)

Table 255 BillStructureSpecificationRef (version 1)

Name	Type	Description
BillStructureSpecificationRef (version 1)	object	Bill Structure Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).*\$\nMax length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).*\$\nMax length: 256
	@referredType	string	Referred Type. Max length: 128

BillingCycleSpecificationRefOrValue (version 1)

Table 256 BillingCycleSpecificationRefOrValue (version 1)

Name	Type	Description
BillingCycleSpecificationRefOrValue (version 1)	object	Billing Cycle Specification Reference or Value.



Name		Type	Description
	isRef	boolean	True if is a reference.
	id	string	Unique identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	External identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	billCycleSpecification	BillCycleSpecRef (version 1)	Billing Cycle Specification Reference.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW

BillCycleSpecRef (version 1)

Table 257 BillCycleSpecRef (version 1)

Name	Type	Description
BillCycleSpecRef (version 1)	object	A Billing Cycle specification reference.



Name		Type	Description
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillFormatRefOrValue (version 1)

Table 258 BillFormatRefOrValue (version 1)

Name		Type	Description
BillFormatRefOrValue (version 1)		object	Bill Format Reference or Value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format



BillFormatSpecificationRef (version 1)

Table 259 BillFormatSpecificationRef (version 1)

Name		Type	Description
BillFormatSpecificationRef (version 1)		object	Bill Format Specification Reference.
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillPresentationMedia (version 1)

Table 260 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 261 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

RelatedPartyExtended (version 1)

Table 262 RelatedPartyExtended (version 1)

Name	Type	Description
RelatedPartyExtended (version 1)	object	Related Party Extended.



Name		Type	Description
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

TaxExemption (version 1)

Table 263 TaxExemption (version 1)

Name	Type	Description
TaxExemption (version 1)	object	Tax exemption.



Name		Type	Description
	id	string	Unique identifier of a tax exemption. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValue List	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 264 TaxExemptionSpecificationRef (version 1)

Name		Type	Description
TaxExemptionSpecificationRef (version 1)		object	Tax Exemption Specification Reference.
	id	string	Unique identifier of the tax exemption specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



AccountBalance (version 1)

Table 265 AccountBalance (version 1)

Name		Type	Description
AccountBalance (version 1)		object	Account balance.
	amount	Money (version 1)	The balance of the Billing Account Bucket.
	bucketAmount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Billing Account Bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	bucketSpecification	BucketSpecificationRef (version 1)	Bucket Specification Reference

Money (version 1)

Table 266 Money (version 1)

Name		Type	Description
Money (version 1)		object	A base/value business entity used to represent money.
	value	number	A float. A positive floating point number. The numeric value must be at least -3.4028234663852884E38. The numeric value must not exceed 3.4028234663852884E38.
	unit	string	A string. Currency (ISO4217 norm uses 3 letters to define the currency). Max length: 32

bss.cmn.Decimal_Sensitive (version 1)

Table 267 bss.cmn.Decimal_Sensitive (version 1)

Name	Type	Description
bss.cmn.Decimal_Sensitive (version 1)	object	Amount representation.



Name		Type	Description
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.

BucketSpecificationRef (version 1)

Table 268 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	@referredType	string	Referred Type. Max length: 128

4.2.2 Delete Settlement Account

Delete a settlement account.



4.2.2.1

Operations

The following HTTP methods and URIs are applicable to perform the operation:

- DELETE {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf66AccountManagement/v1/settlementAccount/{id}
- DELETE {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf66AccountManagement/v1/settlementAccountExternalId/{externalId}

Query Parameters

The following table describes the query parameters for the operation:

Table 269 Query Parameters

Name	Type	Description
relatedPartyId	string	Party (Role) Id - e.g. "bacae1ae-ea85-4397-95d5-29ce56157ffa". Additional Description: Unique identifier of the party or party role. Maxlength: 256 Pattern: ^(?=\s*\S).*
relatedPartyExternalId	string	Party (Role) External Id. Additional Description: External identifier of the party or party role. Maxlength: 256 Pattern: ^(?=\s*\S).*

Path Parameters

The following table describes the path parameters for the operation:



Table 270 Path Parameters

Name	Type	Description
id	string	Settlement Account Identifier. Additional Description: Unique identifier of the account. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
externalId	string	Settlement Account External Identifier. Additional Description: Unique identifier of the account populated by external system. Maxlength: 256 Pattern: ^(?=\s*\S).*\$

4.2.2.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 271 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional
	A non-empty subset of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-



Header Field Name	Header Field Value	Mandatory/Optional
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 272 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 273 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Optional
	For Status-Code: 204, Content-type header field is not applicable For Status-Code: 4XX,5XX,503, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
X-Content-Type-Options		Optional
	no-sniff	Optional
RESPONSE		



Table 274 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

4.2.3 List Settlement Account

List Settlement Account information.



4.2.3.1

Operations

The following HTTP methods and URIs are applicable to perform the operation:

— GET {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf666AccountManagement/v1/settlementAccount

Query Parameters

The following table describes the query parameters for the operation:

Table 275 Query Parameters

Name	Type	Description
relatedPartyId	string	Party (Role) Id - e.g. "bacae1ae-ea85-4397-95d5-29ce56157ffa". Additional Description: Unique identifier of the party or party role. Maxlength: 256 Pattern: ^(?=\s*\S).*



Name	Type	Description
relatedPartyExternalId	string	Party (Role) External Id. Additional Description: External identifier of the party or party role. Maxlength: 256 Pattern: <code>^(?=\s*\S).*</code> \$
fields	string	Attribute selection fields. Additional Description: This parameter filters the properties that are returned, based on specific criteria. Return one or more fields specified as a comma-delimited list. Pattern: <code>^(((@[a-zA-Z][a-zA-Z][a-z0-9]*)(?:[A-Z0-9]+[a-z0-9]*)*)\.\.((@[a-zA-Z][a-zA-Z][a-z0-9]*)(?:[A-Z0-9]+[a-z0-9]*)*)*)*(((@[a-zA-Z][a-zA-Z][a-z0-9]*)(?:[A-Z0-9]+[a-z0-9]*)*)\.\.((@[a-zA-Z][a-zA-Z][a-z0-9]*)(?:[A-Z0-9]+[a-z0-9]*)*)*)*)*\$</code> Maxlength: 512

4.2.3.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 276 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf666AccountManagement.settlementAccountList.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.settlementAccountList.readResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.

Table 277 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 278 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf666AccountManagement.settlementAccountList.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.settlementAccountList.readResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2 } GMT))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
STANDARD_HEADER		


Table 279 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters
GURID_HEADER_CUSTOM_HEADER			

4.2.3.3 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

bss.Tmf666AccountManagement.settlementAccountList Read Response Version 1



/1 Uen E | 2025-10-02



Table 280 SettlementAccountArray (version 1)

Name	Type	Description
SettlementAccountArray (version 1)	array of SettlementAccount (version 1)	A settlement account array representing multiple settlement accounts.

SettlementAccount (version 1)

Table 281 SettlementAccount (version 1)

Name	Type	Description
SettlementAccount (version 1)	object	A Party account that is used for settlement purposes, like creation of a Settlement Statement, creation of a document for the Partner to do reconciliation, or the creation of a report for reconciliation against an incoming invoice.



Name		Type	Description
	settlementAccountSpecificationRef	SettlementAccountSpecificationRef (version 1)	A reference to a settlement account specification.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a settlement account.
	nameList	array of Name (version 1)	The list of all version related to the name attribute.
	statusList	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
	billStructure	BillStructure (version 1)	Bill structure for a SettlementAccount.
	relatedParty	array of RelatedPartyExtended (version 1)	Party or party role that is owning this account.
	taxExemption	array of TaxExemption (version 1)	The tax exemptions for the settlement account.
	accountBalance	array of AccountBalance (version 1)	The account balance for the settlement account.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the Account.
	name	string	Name of the Account. Max length: 256
	href	string	Href to the resource. Max length: 512
	state	string	Contains the lifecycle state Max length: 256



SettlementAccountSpecificationRef (version 1)

Table 282 SettlementAccountSpecificationRef (version 1)

Name		Type	Description
SettlementAccountSpecificationRef (version 1)		object	Settlement Account Specification Reference.
	externalId	string	External identifier for the settlement account specification. Pattern: ^(?=\s*\S).*\$\br/> Max length: 256
	id	string	Unique identifier for the settlement account specification. Pattern: ^(?=\s*\S).*\$\br/> Max length: 256

CharacteristicValue (version 2)

Table 283 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 284 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 285 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 286 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 287 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.



Name		Type	Description
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ContactMediumAssociation (version 1)

Table 288 ContactMediumAssociation (version 1)

Name	Type	Description
ContactMediumAssociation (version 1)	object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).* Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekDayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.WeekdayTimePeriod (version 1)

Table 289 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>

ContactMediumItemRef (version 1)

Table 290 ContactMediumItemRef (version 1)

Name	Type	Description
ContactMediumItemRef (version 1)	object	Reference to a ContactMediumItem.



Name		Type	Description
	id	string	The contact medium item id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

Name (version 1)

Table 291 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

bss.cmn.StatusExtended (version 1)

Table 292 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.



Name		Type	Description
	previousStatus	string	The Previous status for the given time period. Max length: 256
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillStructure (version 1)

Table 293 BillStructure (version 1)

Name	Type	Description
BillStructure (version 1)	object	Represents a bill structure for a billing account.



Name		Type	Description
	id	string	Unique identifier for the bill structure. Pattern: ^(?=\s*\S).*\$\nMax length: 256
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).*\$\nMax length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecification	BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	cycleSpecificationList	array of BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	formatList	array of BillFormatRefOrValue (version 1)	Bill formats of a bill structure.

BillStructureSpecificationRef (version 1)

Table 294 BillStructureSpecificationRef (version 1)

Name	Type	Description
BillStructureSpecificationRef (version 1)	object	Bill Structure Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillingCycleSpecificationRefOrValue (version 1)

Table 295 BillingCycleSpecificationRefOrValue (version 1)

Name	Type	Description
BillingCycleSpecificationRefOrValue (version 1)	object	Billing Cycle Specification Reference or Value.



Name		Type	Description
	isRef	boolean	True if is a reference.
	id	string	Unique identifier of the account's bill cycle specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the account's bill cycle specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billCycleSpecification	BillCycleSpecRef (version 1)	Billing Cycle Specification Reference.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW

BillCycleSpecRef (version 1)

Table 296 BillCycleSpecRef (version 1)

Name	Type	Description
BillCycleSpecRef (version 1)	object	A Billing Cycle specification reference.



Name		Type	Description
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillFormatRefOrValue (version 1)

Table 297 BillFormatRefOrValue (version 1)

Name		Type	Description
BillFormatRefOrValue (version 1)		object	Bill Format Reference or Value.
	isRef	boolean	True if is a reference.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format



BillFormatSpecificationRef (version 1)

Table 298 BillFormatSpecificationRef (version 1)

Name		Type	Description
BillFormatSpecificationRef (version 1)		object	Bill Format Specification Reference.
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillPresentationMedia (version 1)

Table 299 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 300 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

RelatedPartyExtended (version 1)

Table 301 RelatedPartyExtended (version 1)

Name	Type	Description
RelatedPartyExtended (version 1)	object	Related Party Extended.



Name		Type	Description
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

TaxExemption (version 1)

Table 302 TaxExemption (version 1)

Name	Type	Description
TaxExemption (version 1)	object	Tax exemption.



Name		Type	Description
	id	string	Unique identifier of a tax exemption. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 303 TaxExemptionSpecificationRef (version 1)

Name		Type	Description
TaxExemptionSpecificationRef (version 1)		object	Tax Exemption Specification Reference.
	id	string	Unique identifier of the tax exemption specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128



AccountBalance (version 1)

Table 304 AccountBalance (version 1)

Name		Type	Description
AccountBalance (version 1)		object	Account balance.
	amount	Money (version 1)	The balance of the Billing Account Bucket.
	bucketAmount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Billing Account Bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	bucketSpecification	BucketSpecificationRef (version 1)	Bucket Specification Reference

Money (version 1)

Table 305 Money (version 1)

Name		Type	Description
Money (version 1)		object	A base/value business entity used to represent money.
	value	number	A float. A positive floating point number. The numeric value must be at least -3.4028234663852884E38. The numeric value must not exceed 3.4028234663852884E38.
	unit	string	A string. Currency (ISO4217 norm uses 3 letters to define the currency). Max length: 32

bss.cmn.Decimal_Sensitive (version 1)

Table 306 bss.cmn.Decimal_Sensitive (version 1)

Name	Type	Description
bss.cmn.Decimal_Sensitive (version 1)	object	Amount representation.



Name		Type	Description
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.

BucketSpecificationRef (version 1)

Table 307 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	@referredType	string	Referred Type. Max length: 128

4.2.4 Read Settlement Account

Retrieves Settlement Account information.



4.2.4.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- GET {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf666AccountManagement/v1/settlementAccount/{id}
- GET {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf666AccountManagement/v1/settlementAccountExternalId/{externalId}

Query Parameters

The following table describes the query parameters for the operation:

Table 308 Query Parameters

Name	Type	Description
relatedPartyId	string	Party (Role) Id - e.g. "bacae1ae-ea85-4397-95d5-29ce56157ffa". Additional Description: Unique identifier of the party or party role. Maxlength: 256 Pattern: ^(?:=\s*\S).*



Name	Type	Description
relatedPartyExternalId	string	Party (Role) External Id. Additional Description: External identifier of the party or party role. Maxlength: 256 Pattern: <code>^(?=\s*\S).*</code>
fields	string	Attribute selection fields. Additional Description: This parameter filters the properties that are returned, based on specific criteria. Return one or more fields specified as a comma-delimited list. Pattern: <code>^((@[a-zA-Z] [a-zA-Z])[a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)\.(.((@[a-zA-Z] [a-zA-Z])[a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)*)*((@[a-zA-Z] [a-zA-Z])[a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)\.(.((@[a-zA-Z] [a-zA-Z])[a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)*)*)*\$</code> Maxlength: 512

Path Parameters

The following table describes the path parameters for the operation:



Table 309 Path Parameters

Name	Type	Description
id	string	Settlement Account Identifier Additional Description: Unique identifier of the account. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
externalId	string	Settlement Account External Identifier Additional Description: Unique identifier of the account populated by external system. Maxlength: 256 Pattern: ^(?=\s*\S).*\$

4.2.4.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 310 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf666AccountManagement.settlementAccount.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.settlementAccount.readResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.

Table 311 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 312 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf666AccountManagement.settlementAccount.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.settlementAccount.readResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3]([0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01]([0-9]) 2([0-3]))(:[0-5]([0-9])){2} GMT))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
STANDARD_HEADER		

Table 313 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters
GURID_HEADER_CUSTOM_HEADER			

4.2.4.3 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.



4.2.4.3.1

bss.Tmf666AccountManagement.settlementAccount Read Response Version 1

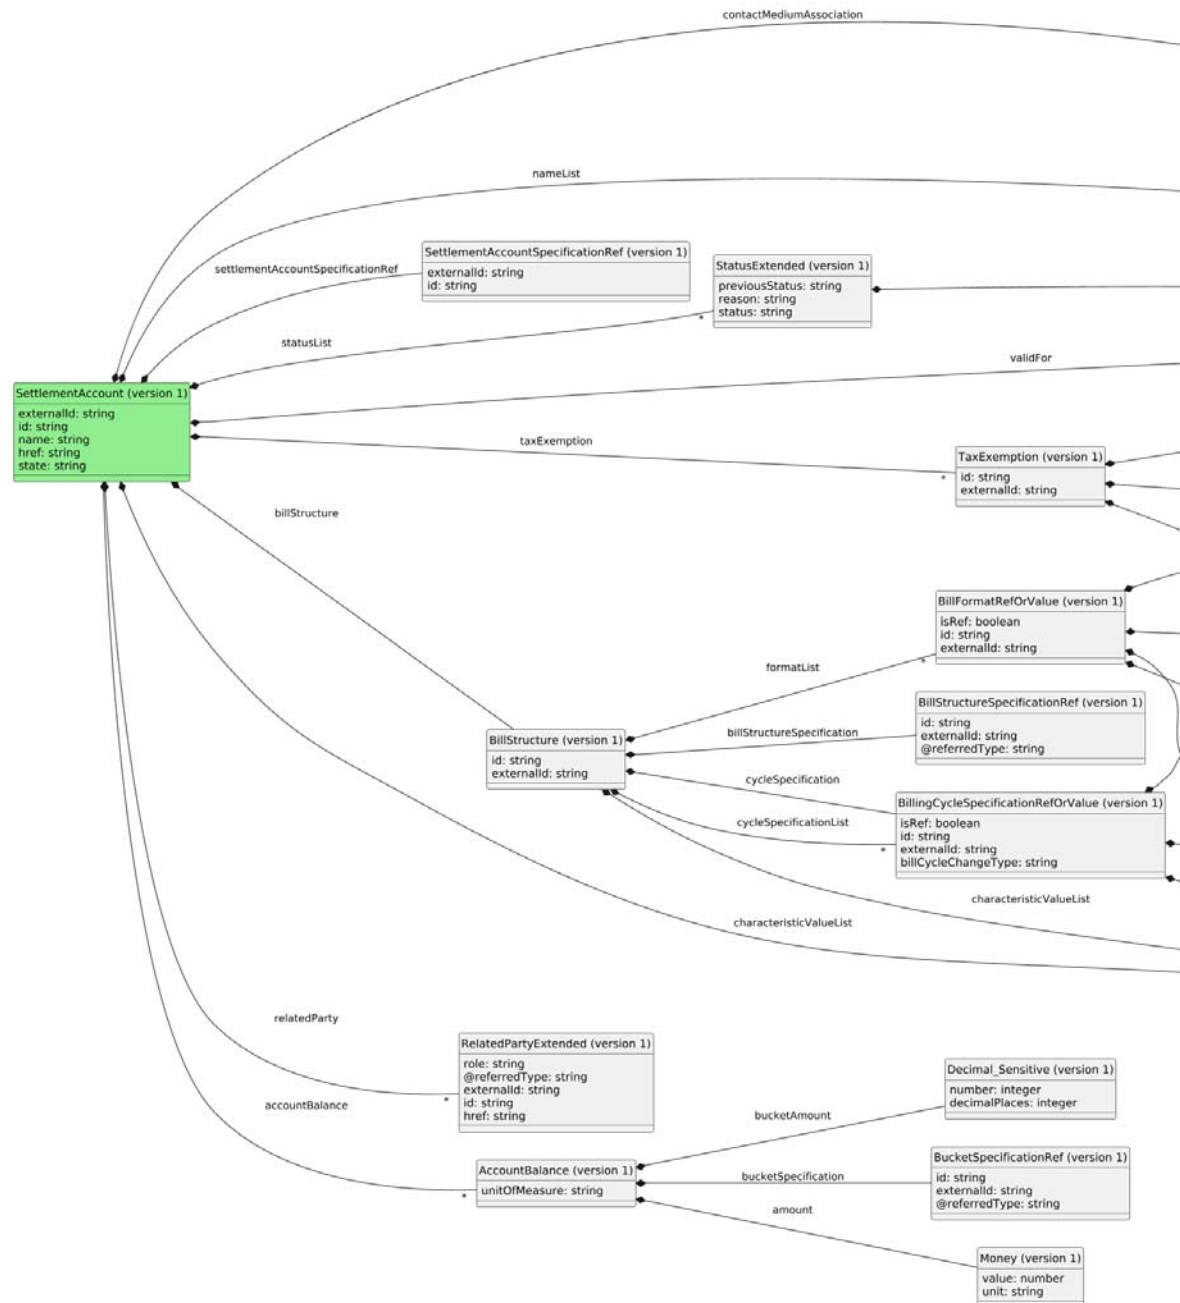


Figure 10 `bss.Tmf666AccountManagement.settlementAccount.readResponse.1` UML representation

The representation is provided as JSON objects with the following attributes:



Table 314 SettlementAccount (version 1)

Name	Type	Description
SettlementAccount (version 1)	object	A Party account that is used for settlement purposes, like creation of a Settlement Statement, creation of a document for the Partner to do reconciliation, or the creation of a report for reconciliation against an incoming invoice.



Name		Type	Description
	settlementAccountSpecificationRef	SettlementAccountSpecificationRef (version 1)	A reference to a settlement account specification.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a settlement account.
	nameList	array of Name (version 1)	The list of all version related to the name attribute.
	statusList	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
	billStructure	BillStructure (version 1)	Bill structure for a SettlementAccount.
	relatedParty	array of RelatedPartyExtended (version 1)	Party or party role that is owning this account.
	taxExemption	array of TaxExemption (version 1)	The tax exemptions for the settlement account.
	accountBalance	array of AccountBalance (version 1)	The account balance for the settlement account.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the Account.
	name	string	Name of the Account. Max length: 256
	href	string	Href to the resource. Max length: 512
	state	string	Contains the lifecycle state Max length: 256



SettlementAccountSpecificationRef (version 1)

Table 315 SettlementAccountSpecificationRef (version 1)

Name		Type	Description
SettlementAccountSpecificationRef (version 1)		object	Settlement Account Specification Reference.
	externalId	string	External identifier for the settlement account specification. Pattern: ^(?=\s*\S).*\$\br/> Max length: 256
	id	string	Unique identifier for the settlement account specification. Pattern: ^(?=\s*\S).*\$\br/> Max length: 256

CharacteristicValue (version 2)

Table 316 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 317 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 318 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 319 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 320 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.



Name		Type	Description
	id	string	The ID of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	@referredType	string	Referred Type. Max length: 128

ContactMediumAssociation (version 1)

Table 321 ContactMediumAssociation (version 1)

Name	Type	Description
ContactMediumAssociation (version 1)	object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).*\$ Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekDayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.WeekdayTimePeriod (version 1)

Table 322 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>

ContactMediumItemRef (version 1)

Table 323 ContactMediumItemRef (version 1)

Name	Type	Description
ContactMediumItemRef (version 1)	object	Reference to a ContactMediumItem.



Name		Type	Description
	id	string	The contact medium item id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

Name (version 1)

Table 324 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

bss.cmn.StatusExtended (version 1)

Table 325 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.



Name		Type	Description
	previousStatus	string	The Previous status for the given time period. Max length: 256
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillStructure (version 1)

Table 326 BillStructure (version 1)

Name	Type	Description
BillStructure (version 1)	object	Represents a bill structure for a billing account.



Name		Type	Description
	id	string	Unique identifier for the bill structure. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecification	BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	cycleSpecificationList	array of BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	formatList	array of BillFormatRefOrValue (version 1)	Bill formats of a bill structure.

BillStructureSpecificationRef (version 1)

Table 327 BillStructureSpecificationRef (version 1)

Name	Type	Description
BillStructureSpecificationRef (version 1)	object	Bill Structure Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillingCycleSpecificationRefOrValue (version 1)

Table 328 BillingCycleSpecificationRefOrValue (version 1)

Name	Type	Description
BillingCycleSpecificationRefOrValue (version 1)	object	Billing Cycle Specification Reference or Value.



Name		Type	Description
	isRef	boolean	True if is a reference.
	id	string	Unique identifier of the account's bill cycle specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the account's bill cycle specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billCycleSpecification	BillCycleSpecRef (version 1)	Billing Cycle Specification Reference.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW

BillCycleSpecRef (version 1)

Table 329 BillCycleSpecRef (version 1)

Name	Type	Description
BillCycleSpecRef (version 1)	object	A Billing Cycle specification reference.



Name		Type	Description
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillFormatRefOrValue (version 1)

Table 330 BillFormatRefOrValue (version 1)

Name		Type	Description
BillFormatRefOrValue (version 1)		object	Bill Format Reference or Value.
	isRef	boolean	True if is a reference.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format



BillFormatSpecificationRef (version 1)

Table 331 BillFormatSpecificationRef (version 1)

Name		Type	Description
BillFormatSpecificationRef (version 1)		object	Bill Format Specification Reference.
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillPresentationMedia (version 1)

Table 332 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 333 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: $^(?=\s*\S).*\$$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: $^(?=\s*\S).*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

RelatedPartyExtended (version 1)

Table 334 RelatedPartyExtended (version 1)

Name	Type	Description
RelatedPartyExtended (version 1)	object	Related Party Extended.



Name		Type	Description
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

TaxExemption (version 1)

Table 335 TaxExemption (version 1)

Name	Type	Description
TaxExemption (version 1)	object	Tax exemption.



Name		Type	Description
	id	string	Unique identifier of a tax exemption. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 336 TaxExemptionSpecificationRef (version 1)

Name		Type	Description
TaxExemptionSpecificationRef (version 1)		object	Tax Exemption Specification Reference.
	id	string	Unique identifier of the tax exemption specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128



AccountBalance (version 1)

Table 337 AccountBalance (version 1)

Name		Type	Description
AccountBalance (version 1)		object	Account balance.
	amount	Money (version 1)	The balance of the Billing Account Bucket.
	bucketAmount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Billing Account Bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	bucketSpecification	BucketSpecificationRef (version 1)	Bucket Specification Reference

Money (version 1)

Table 338 Money (version 1)

Name		Type	Description
Money (version 1)		object	A base/value business entity used to represent money.
	value	number	A float. A positive floating point number. The numeric value must be at least -3.4028234663852884E38. The numeric value must not exceed 3.4028234663852884E38.
	unit	string	A string. Currency (ISO4217 norm uses 3 letters to define the currency). Max length: 32

bss.cmn.Decimal_Sensitive (version 1)

Table 339 bss.cmn.Decimal_Sensitive (version 1)

Name	Type	Description
bss.cmn.Decimal_Sensitive (version 1)	object	Amount representation.



Name		Type	Description
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.

BucketSpecificationRef (version 1)

Table 340 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	@referredType	string	Referred Type. Max length: 128

4.2.5 Update Settlement Account

Updates a settlement account.



4.2.5.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- PATCH {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf666AccountManagement/v1/settlementAccount/{id}
- PATCH {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf666AccountManagement/v1/settlementAccountExternalId/{externalId}

Path Parameters

The following table describes the path parameters for the operation:

Table 341 Path Parameters

Name	Type	Description
id	string	Settlement Account Identifier. Additional Description: Unique identifier of the account. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
externalId	string	Settlement Account External Identifier. Additional Description: Unique identifier of the account populated by external system. Maxlength: 256 Pattern: ^(?=\s*\S).*\$

4.2.5.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:



Table 342 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional
	A non-empty subset of the following: • application/x.bss.Tmf666AccountManagement.settlementAccount.updateResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.settlementAccount.updateResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Content-Type		Mandatory
	One of the following: • application/x.bss.Tmf666AccountManagement.settlementAccount.updateRequest+merge-patch+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.settlementAccount.updateRequest+merge-patch+json;version=1 • application/merge-patch+json;charset=utf-8 • application/merge-patch+json	-



Header Field Name	Header Field Value	Mandatory/Optional
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 343 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 344 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf666AccountManagement.settlementAccount.updateResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf666AccountManagement.settlementAccount.updateResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2} GMT))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
STANDARD_HEADER		

Table 345 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters
GURID_HEADER_CUSTOM_HEADER			

4.2.5.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.



4.2.5.3.1

bss.Tmf666AccountManagement.settlementAccount Update Request Version 1

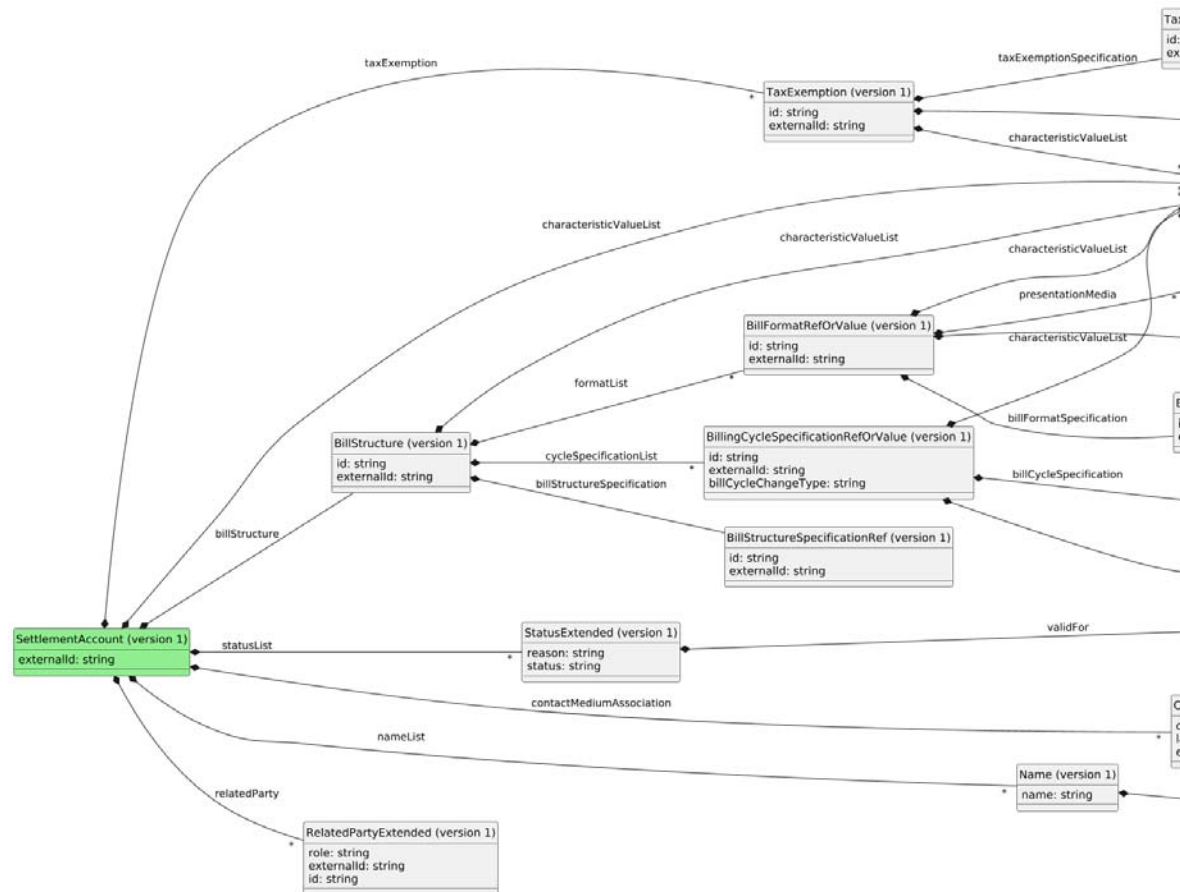


Figure 11 `bss.Tmf666AccountManagement.settlementAccount.updateRequest` UML representation

The representation is provided as JSON objects with the following attributes:



Table 346 SettlementAccount (version 1)

Name	Type	Description
SettlementAccount (version 1)	object	A Party account that is used for settlement purposes, like creation of a Settlement Statement, creation of a document for the Partner to do reconciliation, or the creation of a report for reconciliation against an incoming invoice.
characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a settlement account.
nameList	array of Name (version 1)	The list of all version related to the name attribute.
statusList	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
billStructure	BillStructure (version 1)	Bill structure for a SettlementAccount.
relatedParty	array of RelatedPartyExtended (version 1)	Party or party role that is owning this account.
taxExemption	array of TaxExemption (version 1)	The tax exemptions for the settlement account.
externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).* Max length: 256

CharacteristicValue (version 2)

Table 347 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 348 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) (02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) (02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 349 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 350 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 351 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256



ContactMediumAssociation (version 1)

Table 352 ContactMediumAssociation (version 1)

Name		Type	Description
ContactMediumAssociation (version 1)		object	Represents an assignment of a contact medium to an entity.
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).*\$ Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekDayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.WeekdayTimePeriod (version 1)

Table 353 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: <code>^(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$</code>

ContactMediumItemRef (version 1)

Table 354 ContactMediumItemRef (version 1)

Name		Type	Description
ContactMediumItemRef (version 1)		object	Reference to a ContactMediumItem.
	id	string	The contact medium item id. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	externalId	string	The contact medium item external id. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256



Name (version 1)

Table 355 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

bss.cmn.StatusExtended (version 1)

Table 356 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillStructure (version 1)

Table 357 BillStructure (version 1)

Name		Type	Description
BillStructure (version 1)		object	Represents a bill structure for a billing account.



Name		Type	Description
	id	string	Unique identifier for the bill structure. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecificationList	array of BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	formatList	array of BillFormatRefOrValue (version 1)	Bill formats of a bill structure.

BillStructureSpecificationRef (version 1)

Table 358 BillStructureSpecificationRef (version 1)

Name		Type	Description
BillStructureSpecificationRef (version 1)		object	Bill Structure Specification Reference.
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256



BillingCycleSpecificationRefOrValue (version 1)

Table 359 BillingCycleSpecificationRefOrValue (version 1)

Name		Type	Description
BillingCycleSpecificationRefOrValue (version 1)		object	Billing Cycle Specification Reference or Value.
	id	string	Unique identifier of the account's bill cycle specification. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	externalId	string	External identifier of the account's bill cycle specification. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	billCycleSpecification	BillCycleSpecRef (version 1)	Billing Cycle Specification Reference.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.comn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW

BillCycleSpecRef (version 1)

Table 360 BillCycleSpecRef (version 1)

Name	Type	Description
BillCycleSpecRef (version 1)	object	A Billing Cycle specification reference.



Name		Type	Description
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

BillFormatRefOrValue (version 1)

Table 361 BillFormatRefOrValue (version 1)

Name		Type	Description
BillFormatRefOrValue (version 1)		object	Bill Format Reference or Value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format



BillFormatSpecificationRef (version 1)

Table 362 BillFormatSpecificationRef (version 1)

Name		Type	Description
BillFormatSpecificationRef (version 1)		object	Bill Format Specification Reference.
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

BillPresentationMedia (version 1)

Table 363 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 364 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256

RelatedPartyExtended (version 1)

Table 365 RelatedPartyExtended (version 1)

Name		Type	Description
RelatedPartyExtended (version 1)		object	Related Party Extended.
	role	string	Role of the related party. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256



TaxExemption (version 1)

Table 366 TaxExemption (version 1)

Name		Type	Description
TaxExemption (version 1)		object	Tax exemption.
	id	string	Unique identifier of a tax exemption. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristicValue List	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 367 TaxExemptionSpecificationRef (version 1)

Name	Type	Description
TaxExemptionSpecificationRef (version 1)	object	Tax Exemption Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the tax exemption specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256

4.2.5.4

Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.2.5.4.1

bss.Tmf666AccountManagement.settlementAccount Update Response Version 1

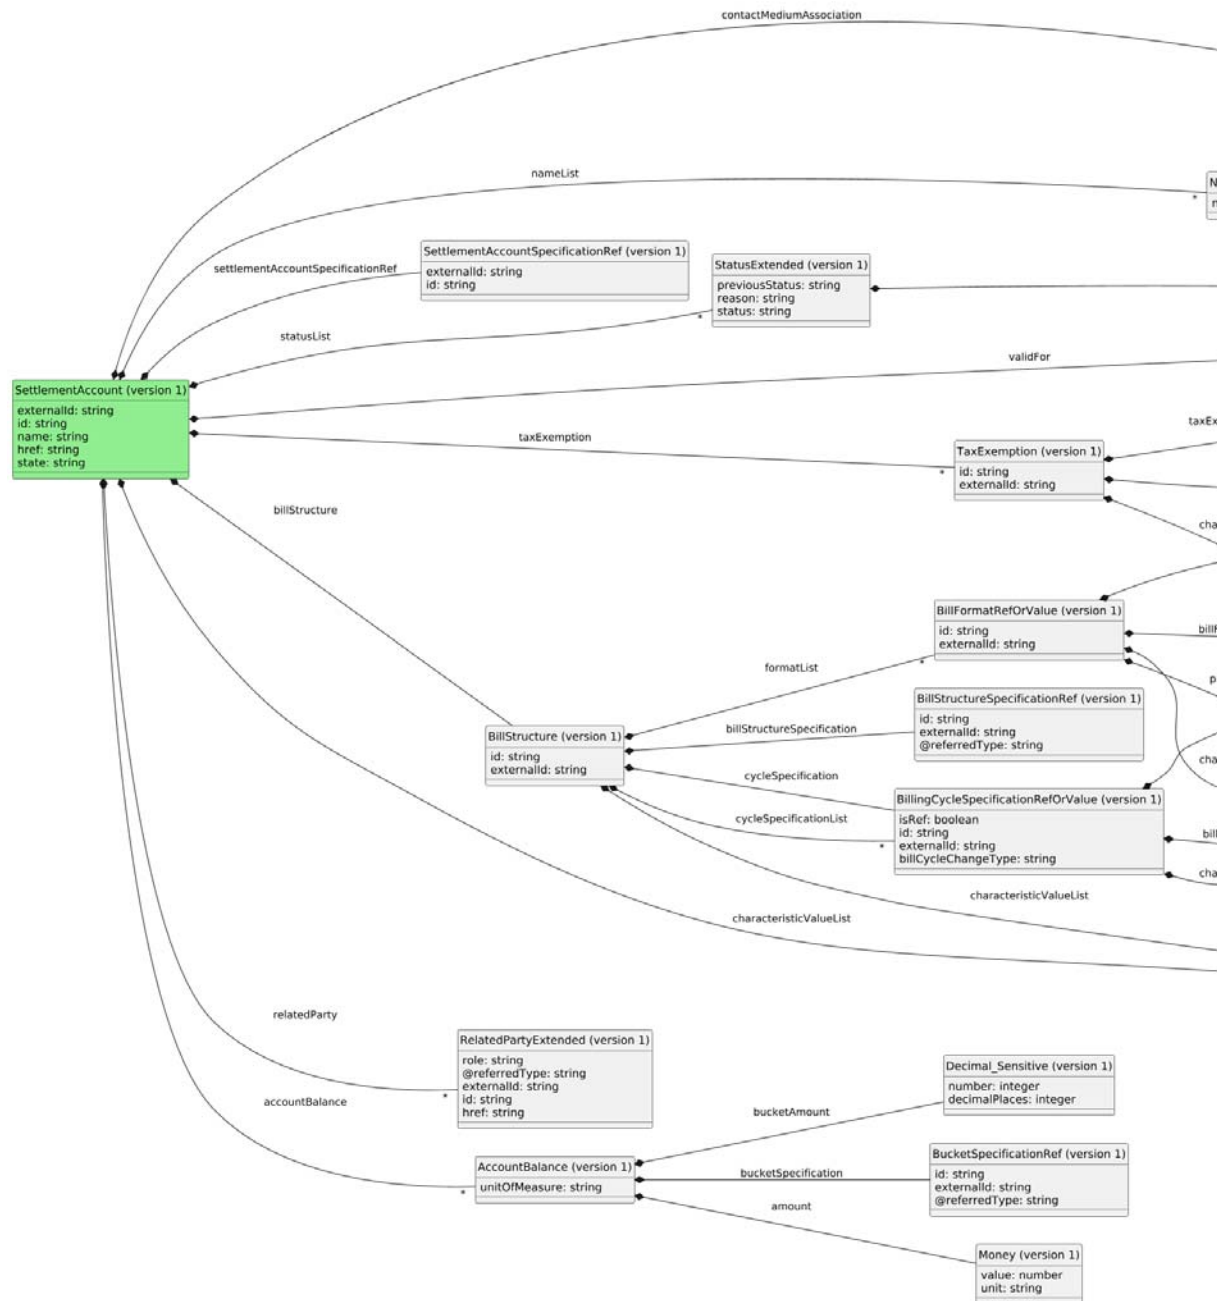


Figure 12 bss.Tmf666AccountManagement.settlementAccount.updateResponse.1 UML representation

The representation is provided as JSON objects with the following attributes:



Table 368 SettlementAccount (version 1)

Name	Type	Description
SettlementAccount (version 1)	object	A Party account that is used for settlement purposes, like creation of a Settlement Statement, creation of a document for the Partner to do reconciliation, or the creation of a report for reconciliation against an incoming invoice.



Name		Type	Description
	settlementAccountSpecificationRef	SettlementAccountSpecificationRef (version 1)	A reference to a settlement account specification.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	contactMediumAssociation	array of ContactMediumAssociation (version 1)	A list of contact medium association to a settlement account.
	nameList	array of Name (version 1)	The list of all version related to the name attribute.
	statusList	array of bss.cmn.StatusExtended (version 1)	The status of the account, for example active.
	billStructure	BillStructure (version 1)	Bill structure for a SettlementAccount.
	relatedParty	array of RelatedPartyExtended (version 1)	Party or party role that is owning this account.
	taxExemption	array of TaxExemption (version 1)	The tax exemptions for the settlement account.
	accountBalance	array of AccountBalance (version 1)	The account balance for the settlement account.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).* Max length: 256
	id	string	Unique identifier of the account. Pattern: ^(?=\s*\S).* Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the Account.
	name	string	Name of the Account. Max length: 256
	href	string	Href to the resource. Max length: 512
	state	string	Contains the lifecycle state Max length: 256



SettlementAccountSpecificationRef (version 1)

Table 369 SettlementAccountSpecificationRef (version 1)

Name		Type	Description
SettlementAccountSpecificationRef (version 1)		object	Settlement Account Specification Reference.
	externalId	string	External identifier for the settlement account specification. Pattern: ^(?=\s*\S).* Max length: 256
	id	string	Unique identifier for the settlement account specification. Pattern: ^(?=\s*\S).* Max length: 256

CharacteristicValue (version 2)

Table 370 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 371 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 372 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 373 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 374 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.



Name		Type	Description
	id	string	The ID of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	@referredType	string	Referred Type. Max length: 128

ContactMediumAssociation (version 1)

Table 375 ContactMediumAssociation (version 1)

Name	Type	Description
ContactMediumAssociation (version 1)	object	Represents an assignment of a contact medium to an entity.



Name		Type	Description
	contactRole	string	Represents a contact role. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the contact medium association is valid.
	language	string	The language used for communication. Pattern: ^(?=\s*\S).* Max length: 256
	enabled	boolean	The boolean flag to enable or disable notifications.
	enabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are allowed.
	disabledDateTimePeriod	array of bss.cmn.TimePeriod (version 1)	Time period where notifications are not allowed.
	disabledWeekDayTimePeriod	array of bss.cmn.WeekdayTimePeriod (version 1)	Time period on a day of week where notifications are not allowed.
	contactMediumItem	ContactMediumItemRef (version 1)	The reference to a contact medium item.

bss.cmn.WeekdayTimePeriod (version 1)

Table 376 bss.cmn.WeekdayTimePeriod (version 1)

Name	Type	Description
bss.cmn.WeekdayTimePeriod (version 1)	object	Common sub-data structure that contains a week day and start and end time for week day.



Name		Type	Description
	weekday	integer	Number of the day of a week. Example is 1 for Monday. The numeric value must be at least 0. The numeric value must not exceed 6.
	start	string	The start time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$
	end	string	The end time of weekday. Example is '14:35:05.003+01:00'. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000?)(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 10 11):[0-5][0-9] 12:00)))\$

ContactMediumItemRef (version 1)

Table 377 ContactMediumItemRef (version 1)

Name	Type	Description
ContactMediumItemRef (version 1)	object	Reference to a ContactMediumItem.



Name		Type	Description
	id	string	The contact medium item id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

Name (version 1)

Table 378 Name (version 1)

Name		Type	Description
Name (version 1)		object	Name is the versioned attribute element for string values that represent proper names.
	name	string	The 'name' attribute of name version. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period when the name is valid.

bss.cmn.StatusExtended (version 1)

Table 379 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.



Name		Type	Description
	previousStatus	string	The Previous status for the given time period. Max length: 256
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

BillStructure (version 1)

Table 380 BillStructure (version 1)

Name	Type	Description
BillStructure (version 1)	object	Represents a bill structure for a billing account.



Name		Type	Description
	id	string	Unique identifier for the bill structure. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	External identifier of a bill structure in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill structure.
	billStructureSpecification	BillStructureSpecificationRef (version 1)	Reference to the bill structure specification.
	cycleSpecification	BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	cycleSpecificationList	array of BillingCycleSpecificationRefOrValue (version 1)	Billing cycle specification. Reference to the used bill cycle specification.
	formatList	array of BillFormatRefOrValue (version 1)	Bill formats of a bill structure.

BillStructureSpecificationRef (version 1)

Table 381 BillStructureSpecificationRef (version 1)

Name	Type	Description
BillStructureSpecificationRef (version 1)	object	Bill Structure Specification Reference.



Name		Type	Description
	id	string	Unique identifier of the bill structure specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	Identifier of the bill structure specification in an external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillingCycleSpecificationRefOrValue (version 1)

Table 382 BillingCycleSpecificationRefOrValue (version 1)

Name	Type	Description
BillingCycleSpecificationRefOrValue (version 1)	object	Billing Cycle Specification Reference or Value.



Name		Type	Description
	isRef	boolean	True if is a reference.
	id	string	Unique identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	External identifier of the account's bill cycle specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	billCycleSpecification	BillCycleSpecRef (version 1)	Billing Cycle Specification Reference.
	characteristicValueList	array of CharacteristicValue (version 2)	Personalized characteristic values.
	validFor	bss.cmn.TimePeriod (version 1)	The time period the bill cycle spec is valid for.
	billCycleChangeType	string	Pro-rationing information that is used when doing a bill cycle change. Possible values: NO_PRORATE PRORATE_END_CURRENT PRORATE_POS_START_NEW PRORATE_NEG_START_NEW

BillCycleSpecRef (version 1)

Table 383 BillCycleSpecRef (version 1)

Name	Type	Description
BillCycleSpecRef (version 1)	object	A Billing Cycle specification reference.



Name		Type	Description
	id	string	Unique identifier of the billing account specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the billing account specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillFormatRefOrValue (version 1)

Table 384 BillFormatRefOrValue (version 1)

Name		Type	Description
BillFormatRefOrValue (version 1)		object	Bill Format Reference or Value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill format is valid for.
	id	string	Unique identifier for the bill format. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill format in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the bill format.
	billFormatSpecification	BillFormatSpecificationRef (version 1)	Reference to the bill format specification.
	presentationMedia	array of BillPresentationMedia (version 1)	The list of bill presentation media for a bill format



BillFormatSpecificationRef (version 1)

Table 385 BillFormatSpecificationRef (version 1)

Name		Type	Description
BillFormatSpecificationRef (version 1)		object	Bill Format Specification Reference.
	id	string	Unique identifier of the bill format specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bill format specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

BillPresentationMedia (version 1)

Table 386 BillPresentationMedia (version 1)

Name		Type	Description
BillPresentationMedia (version 1)		object	Represents a bill presentation media for a bill format.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the bill presentation media is valid for.
	id	string	Unique identifier for the bill presentation media. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a bill presentation media in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	billPresentationMediaSpecification	BillPresentationMediaSpecificationRef (version 1)	Reference to the bill presentation media specification.



BillPresentationMediaSpecificationRef (version 1)

Table 387 BillPresentationMediaSpecificationRef (version 1)

Name		Type	Description
BillPresentationMediaSpecificationRef (version 1)		object	Bill Presentation Media Specification Reference.
	id	string	Unique identifier of the bill presentation media specification. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	externalId	string	Identifier of the bill presentation media specification in an external system. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

RelatedPartyExtended (version 1)

Table 388 RelatedPartyExtended (version 1)

Name	Type	Description
RelatedPartyExtended (version 1)	object	Related Party Extended.



Name		Type	Description
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

TaxExemption (version 1)

Table 389 TaxExemption (version 1)

Name	Type	Description
TaxExemption (version 1)	object	Tax exemption.



Name		Type	Description
	id	string	Unique identifier of a tax exemption. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValue List	array of CharacteristicValue (version 2)	A list of tax exemption characteristic values. Only if the characteristics need to be personalized.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the tax exemption.
	taxExemptionSpecification	TaxExemptionSpecificationRef (version 1)	Reference to the tax exemption specification.

TaxExemptionSpecificationRef (version 1)

Table 390 TaxExemptionSpecificationRef (version 1)

Name		Type	Description
TaxExemptionSpecificationRef (version 1)		object	Tax Exemption Specification Reference.
	id	string	Unique identifier of the tax exemption specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the tax exemption specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



AccountBalance (version 1)

Table 391 AccountBalance (version 1)

Name		Type	Description
AccountBalance (version 1)		object	Account balance.
	amount	Money (version 1)	The balance of the Billing Account Bucket.
	bucketAmount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Billing Account Bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	bucketSpecification	BucketSpecificationRef (version 1)	Bucket Specification Reference

Money (version 1)

Table 392 Money (version 1)

Name		Type	Description
Money (version 1)		object	A base/value business entity used to represent money.
	value	number	A float. A positive floating point number. The numeric value must be at least -3.4028234663852884E38. The numeric value must not exceed 3.4028234663852884E38.
	unit	string	A string. Currency (ISO4217 norm uses 3 letters to define the currency). Max length: 32

bss.cmn.Decimal_Sensitive (version 1)

Table 393 bss.cmn.Decimal_Sensitive (version 1)

Name	Type	Description
bss.cmn.Decimal_Sensitive (version 1)	object	Amount representation.



Name		Type	Description
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.

BucketSpecificationRef (version 1)

Table 394 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	@referredType	string	Referred Type. Max length: 128

5

Generic Interface Parameters

The following sub-sections describe the elements and their structure in the request and response for Generic Interface Parameters.

5.1

Generic Interface Parameters Request

5.1.1

bss.genericInterfaceParameters Request Version 4

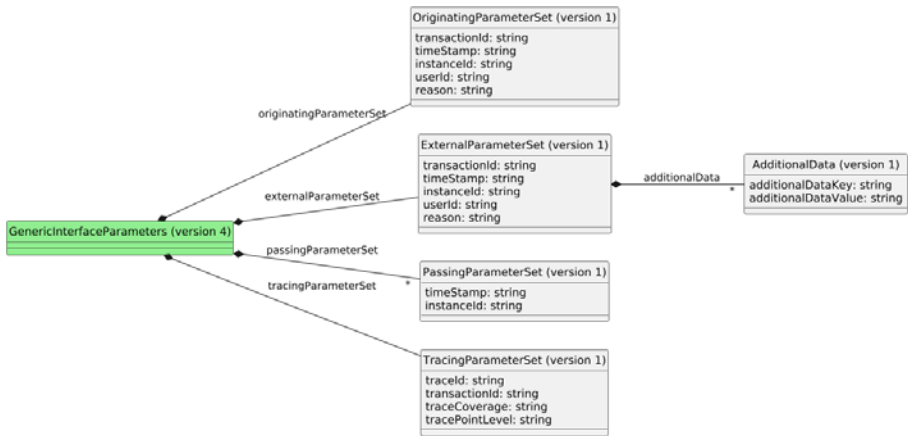


Figure 13 bss.genericInterfaceParameters.request.4 UML representation

The representation is provided as JSON objects with the following attributes:

Table 395 bss.cmn.GenericInterfaceParameters (version 4)

Name	Type	Description
bss.cmn.GenericInterfac eParameters (version 4)	object	The Generic Interface Parameters (GIP) is used for transaction traceability.



Name		Type	Description
	originatingParameterSet	bss.cmn.OriginatingParameterSet (version 1)	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.
	externalParameterSet	bss.cmn.ExternalParameterSet (version 1)	Information received from the external system that initiated the transaction.
	passingParameterSet	array of bss.cmn.PassingParameterSet (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	bss.cmn.TracingParameterSet (version 1)	Tracing Parameter Set.

5.1.1.1

bss.cmn.OriginatingParameterSet (version 1)

Table 396 bss.cmn.OriginatingParameterSet (version 1)

Name	Type	Description
bss.cmn.OriginatingParameterSet (version 1)	object	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.



Name		Type	Description
	transactionId	string	Unique transaction identifier. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	timeStamp	string	The time stamp when the ops was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((0[1-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that created the ops. Max length: 256
	userId	string	User Identification. Provided at login to the instance creating the ops. Max length: 256
	reason	string	Reason for the transaction. Max length: 256

5.1.1.2

bss.cmn.ExternalParameterSet (version 1)

Table 397 bss.cmn.ExternalParameterSet (version 1)

Name	Type	Description
bss.cmn.ExternalParameterSet (version 1)	object	Information received from the external system that initiated the transaction.



Name		Type	Description
	transactionId	string	Transaction Identifier received from external system. Max length: 256
	timeStamp	string	Transaction time stamp received from external system. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that sent the transactionId. Max length: 256
	userId	string	User identifier received from external system. Max length: 256
	reason	string	Reason received from external system. Max length: 256
	additionalData	array of <code>bss.cmn.AdditionalData (version 1)</code>	Array of additional data Items from external system.

5.1.1.3

`bss.cmn.AdditionalData (version 1)`

Table 398 `bss.cmn.AdditionalData (version 1)`

Name	Type	Description
<code>bss.cmn.AdditionalData (version 1)</code>	object	A key-value structure data received from external system.



Name		Type	Description
	additionalDataKey	string	key of the additional data from external system. Max length: 256
	additionalDataValue	string	value correspond to the key. Max length: 256

5.1.1.4

bss.cmn.PassingParameterSet (version 1)

Table 399 bss.cmn.PassingParameterSet (version 1)

Name		Type	Description
bss.cmn.PassingParameterSet (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the ppsItem was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0]))T(((01[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	instanceId	string	Identification of the entity that created the ppsItem. Max length: 256

5.1.1.5

bss.cmn.TracingParameterSet (version 1)

Table 400 bss.cmn.TracingParameterSet (version 1)

Name		Type	Description
bss.cmn.TracingParameterSet (version 1)		object	Tracing Parameter Set.



Name		Type	Description
	traceId	string	The unique id for the trace job. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	transactionId	string	The unique id for the transaction. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
	tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

5.2 Generic Interface Parameters Response

5.2.1 bss.genericInterfaceParameters Response Version 4

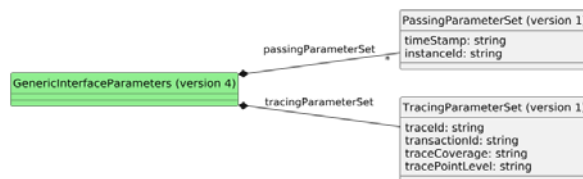


Figure 14 bss.genericInterfaceParameters.response.4 UML representation

The representation is provided as JSON objects with the following attributes:

Table 401 bss.cmn.GenericInterfaceParameters (version 4)

Name	Type	Description
bss.cmn.GenericInterfaceParameters (version 4)	object	The Generic Interface Parameters (GIP) is used for transaction traceability.



Name		Type	Description
	passingParameterSet	array of <code>bss.cmn.PassingParameterSet</code> (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	<code>bss.cmn.TracingParameterSet</code> (version 1)	Tracing Parameter Set.

5.2.1.1

`bss.cmn.PassingParameterSet` (version 1)

Table 402 `bss.cmn.PassingParameterSet` (version 1)

Name		Type	Description
<code>bss.cmn.PassingParameterSet</code> (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the <code>ppsItem</code> was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0]))))T(((0[1][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the entity that created the <code>ppsItem</code> . Max length: 256

5.2.1.2

`bss.cmn.TracingParameterSet` (version 1)

Table 403 `bss.cmn.TracingParameterSet` (version 1)

Name		Type	Description
<code>bss.cmn.TracingParameterSet</code> (version 1)		object	Tracing Parameter Set.



Name		Type	Description
	traceId	string	The unique id for the trace job. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	transactionId	string	The unique id for the transaction. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
	tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

6Result Representation

Results are reported through HTTP status codes. JSON objects are provided for requests that reaches the application component. The following tables describe the elements and their structure contained in the result representation.

6.1bss.errorMessage Response Version 2




Figure 15 bss.errorMessage.response.2 UML representation

The representation is provided as JSON objects with the following attributes:

Table 404 bss.cmn.ErrorMessageExtended (version 2)

Name		Type	Description
bss.cmn.ErrorMessageExtended (version 2)		object	Extended error message structure.
	supplementaryError	array of bss.cmn.SupplementaryError (version 2)	Supplementary Error.
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	httpStatusCode	integer	HTTP status code.



6.1.1 **bss.cmn.SupplementaryError (version 2)**

Table 405 bss.cmn.SupplementaryError (version 2)

Name		Type	Description
bss.cmn.Supplementary Error (version 2)		object	Supplementary error message structure. In case of partial error scenarios, this structure may also include successful responses to show what parts went ok.
	source	string	Source of error. Max length: 256
	action	string	Action causing error. Max length: 256
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	httpStatusCode	integer	HTTP status code.

6.2 **Result Codes**

The supported Error Codes could be found in the 'Error Codes' document.



7 Interface Version Changes

The following sections describe the changes between the interface versions.

7.1 Interface Version 1.0

Table 406 Changes

Resources	Type of Change	Description
N/A	N/A	First version.

7.2 Interface Version 1.1

Table 407 Changes

Resources	Type of Change	Description
All	Add	Added Http Status Code 406 in the list of response code.
All	Remove	Removed http status code 401 and 403 from error messages.

7.3 Interface Version 1.2

Table 408 Changes

Resources	Type of Change	Description
Settlement Account	Add	Added Resource Settlement Account.

7.4 Interface Version 1.3

Table 409 Changes

Resources	Type of Change	Description
All	Updated	Change handling of content-type for request/responses operations.





Reference List

- [1] [RFC 7231 - Hypertext Transfer Protocol \(HTTP/1.1\): Semantics and Content](#)
- [2] [RFC 7230 - Hypertext Transfer Protocol \(HTTP/1.1\): Message Syntax and Routing](#)
- [3] [RFC 6906 - The 'profile' Link Relation Type](#)
- [4] [RFC 4122 - A Universally Unique Identifier \(UUID\) URN Namespace](#)
- [5] [RFC 3986 - Uniform Resource Identifier \(URI\): Generic Syntax](#)
- [6] [RFC 2818 - HTTP Over TLS](#)
- [7] [RFC 2616 - Hypertext Transfer Protocol -- HTTP/1.1](#)