

BSS TMF632 Party Management REST Interface 1.5

INTERFACE DESCRIPTION

Copyright

© Ericsson AB 2025. All Rights Reserved. No part of this document may be reproduced in any form without the written permission of the copyright owner.

Disclaimer

The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. Ericsson shall have no liability for any error or damage of any kind resulting from the use of this document.

This information is intended exclusively for demonstration purposes when used in the development of client-side integrations. It may not include definitions for various elements or behaviors that could arise from client-server interactions involving any third-party products, providers, or deployment platforms, whether external or internal to the delivered product.

Trademark List

Ericsson and the Ericsson logotype are the trademarks or registered trademarks of Telefonaktiebolaget LM Ericsson. All other product or service names mentioned in a document on this server are trademarks of their respective companies.



Contents

1	Introduction	1
1.1	Transfer Mechanism	1
1.2	Authentication and Authorization	1
1.3	Compatibility Mechanism	1
1.3.1	HTTP Content Negotiation	1
1.3.2	Product Customization	1
1.3.3	Backward Compatibility	2
2	Syntax Notation	3
2.1	Resource Identifier	3
2.2	HTTP Headers	3
2.3	Resource Schema and Version	4
3	Service	5
3.1	BSS TMF632 Party Management	5
3.1.1	Description	5
3.2	Service Registry	5
4	Resources	7
4.1	Individual	7
4.1.1	Create Individual	7
4.1.2	Read Individual	30
4.1.3	Update Individual	45
4.2	Organization	67
4.2.1	Create Organization	67
4.2.2	Read Organization	94
4.2.3	Update Organization	113
5	Generic Interface Parameters	141
5.1	Generic Interface Parameters Request	141
5.1.1	bss.genericInterfaceParameters Request Version 4	141
5.2	Generic Interface Parameters Response	146
5.2.1	bss.genericInterfaceParameters Response Version 4	146
6	Result Representation	149
6.1	bss.errorMessage Response Version 2	149
6.1.1	bss.cmn.SupplementaryError (version 2)	150
6.2	Result Codes	150
7	Interface Version Changes	151



7.1	Interface Version 1.0	151
7.2	Interface Version 1.1	151
7.3	Interface Version 1.2	151
7.4	Interface Version 1.3	152
7.5	Interface Version 1.4	152
7.6	Interface Version 1.5	152
Reference List		153



1 Introduction

Target Groups

The target group for this document is:

— Solution Integrators

1.1 Transfer Mechanism

The transfer mechanism used is HTTPS. Both requests and responses use headers to send information about the message.

The access port is configurable. Clients that use this interface should support a configurable port.

1.2 Authentication and Authorization

Authentication is controlled by the inclusion of a Java Web Token (JWT) in the authorization header of the HTTP message.

1.3 Compatibility Mechanism

The following version mechanisms are used:

1.3.1 HTTP Content Negotiation

HTTP content negotiation uses the media type in the HTTP Accept header to request a certain version of the resource representation. If the version is not passed in the HTTP Accept header, the server returns the latest version of the resource representation.

For operations supporting error response version 1, if error response version is not specified it is assumed to be error response version 1.

1.3.2 Product Customization

Elements and data types that are specific for product customization are marked with PC in the section describing the element or data type. Functions and characteristics of a product customization is not part of the standard delivery. Contact your local Ericsson office for more information regarding ordering and compatibility.



All elements of a PC message are also product customizations when inside such a message. If an element or data type is marked PC within an otherwise standard record, is noted as such in the relevant chapters.

In order to improve readability the following applies in the rest of the document:

- The following applies to functions marked with (PC). The PC-tag is placed in the description.

1.3.3 Backward Compatibility

Json objects name and/or their respective content stated in this document may be changed without any further notice.

Backward compatibility within a major version is only kept for the messages sent over the network.



2 Syntax Notation

This interface uses a generic syntax that is described in the following sections. For a description of the actual values, refer to Resources.

2.1 Resource Identifier

The resource identifier is expressed by a URI with the following format:

```
{serverRoot}/{api}/{resourcePath}
```

```
{scheme:}://{host}[:{port}]/[{deploymentComponent}]{apiName}/{apiVersion}/{resourcePath}
```

Table 1 Server root parameter

Parameter	Description
serverRoot	Is implementation specific
api	Is the name and version of the API.

Table 2 API and resource path parameters

Parameter	Description
scheme	The Application protocol, for example HTTPS.
host	The network address to access the interface and its connected service.
port	The TCP/IP port used for access. If not specified, default ports for the applications are assumed.
deploymentComponent	The name of the deployment component providing the resource.
apiName	The name of the interface.
apiVersion	The version to use
resourcePath	The resource name and a unique ID.

The full URI must be encoded according to RFC3986 before usage.

2.2 HTTP Headers

The interface uses standard HTTP headers. In addition, custom HTTP headers are used with the following syntax:



ERICSSON.<name>:<value>

If no Accept header field is present, then it is assumed that the client accepts all media types.

2.3 Resource Schema and Version

The resource schema and version indicates that a resource representation follows one or more schemas.

The resource schema and version is identified by a subtype with the following syntax:

application/x.<domain>.<interface>.<resource>.<operationAndDirection>+json;version=<version> or application/x.<domain>.<interface>.<resource>.<operationAndDirection>+merge-patch+json;version=<version> depending on operation.

Table 3 REST Resource Representation Parameters

Parameter	Description
domain	Fixed value: bss
interface	Is the interface name.
resource	Is the resource name.
operationAndDirection	Is the CRUD operation with its direction request and response.
version	Major version of the resource representation.

3 Service

3.1 BSS TMF632 Party Management

Please read the service documentation available to understand how to use this interface in connection with the service.

3.1.1 Description

Party Management provides the ability necessary to store and maintain information on a party.

3.2 Service Registry

The Service Registry is a central repository of available services. Their locations are used by clients to dynamically find the service providers it needs. A service provider registers its services in the registry. Service consumers look up services and service locations.

The services accessed through the interface are the following:

Table 4 Services Exposed in the Service Registry

Service Name	Service Type	Version	Environment	Available Capabilities	Optional Data
BSS_TMF632_Party_Management	REST	1	Prod		
BSS_TMF632_Party_Management	REST	1	Prod		secured=true

Note: This chapter is only applicable for Virtualized deployments.





4 Resources

The interface offers access to different resources. Each resource has its own access path and parameters which are described in the following sections.

The referenced representations are available in a ZIP file at the following location:

edw:/alex?FN=BSSTMF632PartyManagement_v1_5_schemaFile.zip

4.1 Individual

An entity that represents an individual. An individual owns the contact medium through which the different party roles can be contacted.

4.1.1 Create Individual

Creates an individual.

4.1.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

— POST {scheme:}://{host}[:{port}]/[{deploymentComponent}]/bssTmf632PartyManagement/v1/individual

4.1.1.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 5 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf632PartyManagement.individual.createResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.individual.createResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Content-Type		Mandatory
	One of the following: • application/x.bss.Tmf632PartyManagement.individual.createRequest+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.individual.createRequest+json;version=1 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 6 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 7 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 201, one of the following: • application/x.bss.Tmf632PartyManagement.individual.createResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.individual.createResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3]([0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01]([0-9]) 2[0-3])(:[0-5]([0-9])){2} GMT))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 8 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.1.1.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.1.1.3.1 bss.Tmf632PartyManagement.individual Create Request Version 1

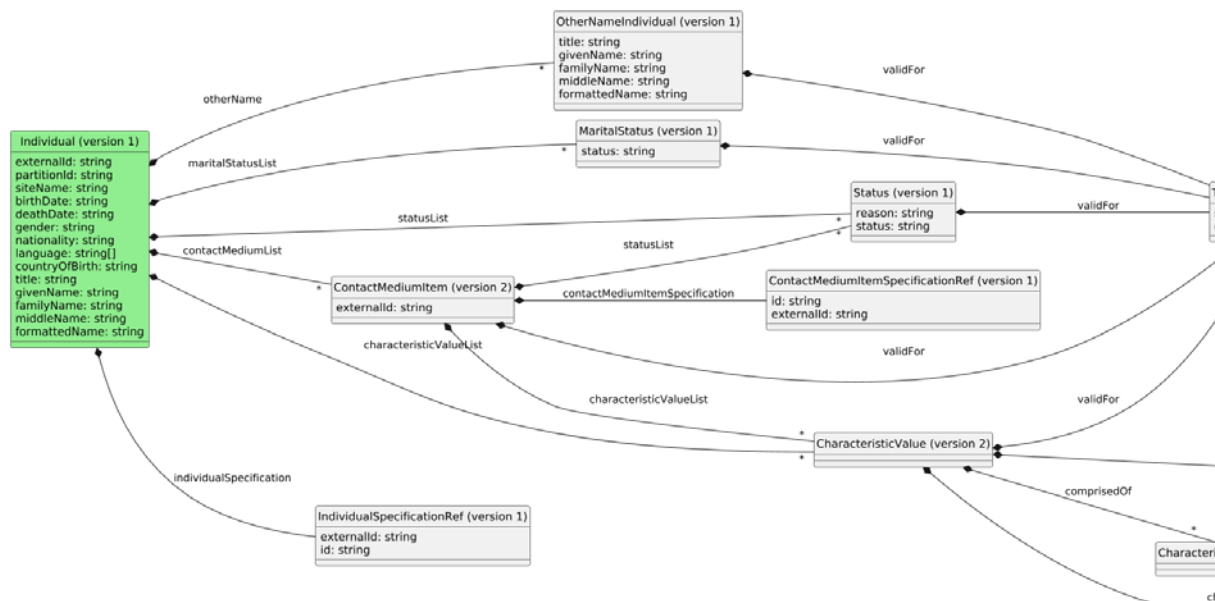


Figure 1 bss.Tmf632PartyManagement.individual.createRequest.1 UML representation

The representation is provided as JSON objects with the following attributes:



Table 9 Individual (version 1)

Name	Type	Description
Individual (version 1)	object	Represents an individual.



Name		Type	Description
	maritalStatusList	array of MaritalStatus (version 1)	List of known marital statuses.
	otherName	array of OtherName Individual (version 1)	Other names.
	statusList	array of bss.cmn.Status (version 1)	Array of Individual statuses.
	contactMediumList	array of ContactMediumItem (version 2)	The contact medium for this party.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of Individual characteristic values.
	externalId	string	External identifier for the party as an individual. Pattern: ^(?=\s*\S).* Max length: 256
	partitionId	string	The target partition for this individual party. Max length: 32
	siteName	string	The target site name for this individual party. Max length: 32
	birthDate	string	Date of birthday. DateTime according to W3. yyyy-MM-ddThh:mm:ss(.SSS)TZD, where TZD = Z or +hh:mm or -hh:mm (eg 1997-07-16T19:20:30.45+01:00). Format: date-time Pattern: ^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) (0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+ (-[0-9] 1[0-3]):[0-5][0-9] 14:00))-((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$
	deathDate	string	Date of death date. DateTime according to W3. yyyy-MM-ddThh:mm:ss(.SSS)TZD, where TZD = Z or +hh:mm or -hh:mm (eg 1997-07-16T19:20:30.45+01:00). Format: date-time Pattern: ^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) (0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+ (-[0-9] 1[0-3]):[0-5][0-9] 14:00))-((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$



MaritalStatus (version 1)

Table 10 MaritalStatus (version 1)

Name		Type	Description
MaritalStatus (version 1)		object	Marital status (like married, single, divorced, widowed).
	status	string	Unique identifier of the marital status. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	The time period this entity is valid for.

bss.cmn.TimePeriod (version 1)

Table 11 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

OtherNameIndividual (version 1)

Table 12 OtherNameIndividual (version 1)

Name	Type	Description
OtherNameIndividual (version 1)	object	Represents an individual name.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The party name must be valid for the complete time period the party is valid.
	title	string	Personal title like Mrs, Ms. Pattern: ^(?=\s*\S).*\$ Max length: 256
	givenName	string	The given name. Max length: 128
	familyName	string	The last name. Max length: 128
	middleName	string	The middle name. Max length: 128
	formattedName	string	The formatted name. Max length: 128

bss.cmn.Status (version 1)

Table 13 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



ContactMediumItem (version 2)

Table 14 ContactMediumItem (version 2)

Name		Type	Description
ContactMediumItem (version 2)		object	Represents a means by which communication may be established with a party.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the contact medium is valid for.
	externalId	string	External identifier of a contact medium in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the contact medium.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the contactMedium.
	contactMediumItemSpecification	ContactMediumItemSpecificationRef (version 1)	The contact medium item specification.

CharacteristicValue (version 2)

Table 15 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.



bss.cmn.ValueWithUoM (version 1)

Table 16 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 17 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 18 SpecCharacteristicRef (version 1)

Name	Type	Description
SpecCharacteristicRef (version 1)	object	The spec characteristic reference.



Name		Type	Description
	id	string	The ID of the referenced spec characteristic. Pattern: $^(?=\s*\S).*$$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: $^(?=\s*\S).*$$ Max length: 256

ContactMediumItemSpecificationRef (version 1)

Table 19 ContactMediumItemSpecificationRef (version 1)

Name		Type	Description
ContactMediumItemSpecificationRef (version 1)		object	Reference to a ContactMediumItemSpecification.
	id	string	The contact medium item specification id. Pattern: $^(?=\s*\S).*$$ Max length: 256
	externalId	string	The contact medium item specification external id. Pattern: $^(?=\s*\S).*$$ Max length: 256

IndividualSpecificationRef (version 1)

Table 20 IndividualSpecificationRef (version 1)

Name		Type	Description
IndividualSpecificationRef (version 1)		object	Individual Specification Reference.



Name	Type	Description
externalId	string	External identifier for the individual specification reference. Pattern: $^(?=\s*\S).*\$$ Max length: 256
id	string	Unique identifier for the individual specification reference. Pattern: $^(?=\s*\S).*\$$ Max length: 256

4.1.1.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.1.4.1 bss.Tmf632PartyManagement.individual Create Response Version 1

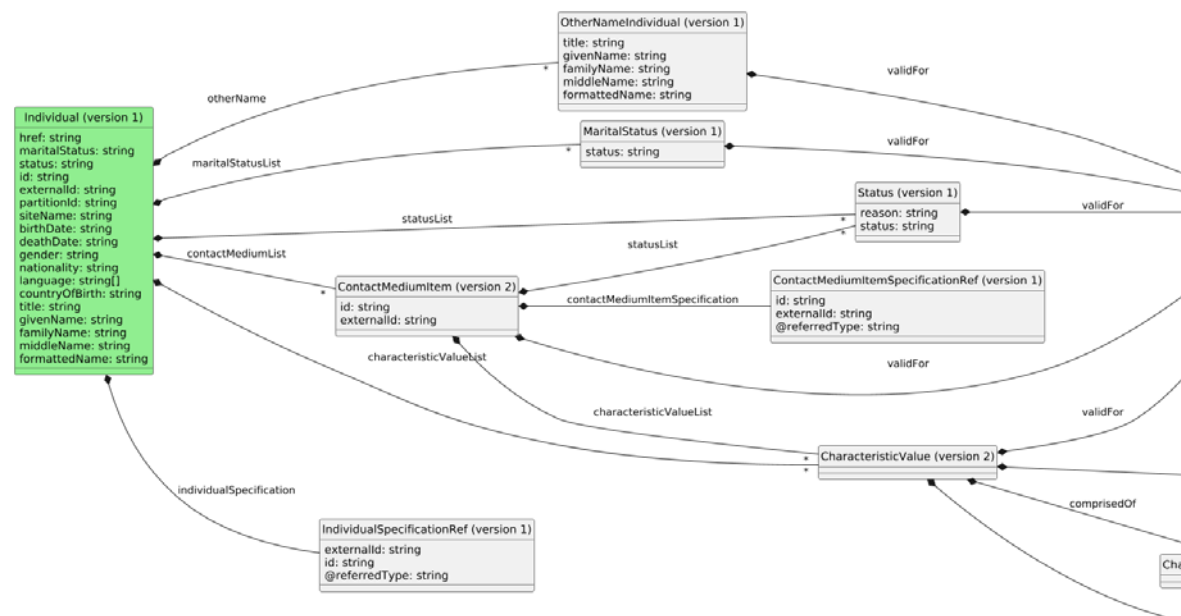


Figure 2 bss.Tmf632PartyManagement.individual.createResponse.1 UML representation

The representation is provided as JSON objects with the following attributes:



Table 21 Individual (version 1)

Name	Type	Description
Individual (version 1)	object	Represents an individual.



Name		Type	Description
	href	string	Href to the resource. Max length: 512
	maritalStatus	string	Current marital status. Max length: 32
	maritalStatusList	array of MaritalStatus (version 1)	List of known marital statuses.
	otherName	array of OtherName Individual (version 1)	Other names.
	status	string	Current status. Max length: 256
	statusList	array of bss.cmn.Status (version 1)	Array of Individual statuses.
	contactMediumList	array of ContactMediumItem (version 2)	The contact medium for this party.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of Individual characteristic values.
	id	string	Unique identifier for the party as an individual. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier for the party as an individual. Pattern: ^(?=\s*\S).*\$ Max length: 256
	partitionId	string	The target partition for this individual party. Max length: 32
	siteName	string	The target site name for this individual party. Max length: 32
	birthDate	string	Date of birthday. DateTime according to W3. yyyy-MM-ddThh:mm:ss(.SSS)TZD, where TZD = Z or +hh:mm or -hh:mm (eg 1997-07-16T19:20:30.45+01:00). Format: date-time Pattern: ^\d{4}-(((0[13578] 231[02]))-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30))T((01 09 12[0-31] 0-5



MaritalStatus (version 1)

Table 22 MaritalStatus (version 1)

Name		Type	Description
MaritalStatus (version 1)		object	Marital status (like married, single, divorced, widowed).
	status	string	Unique identifier of the marital status. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	The time period this entity is valid for.

bss.cmn.TimePeriod (version 1)

Table 23 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

OtherNameIndividual (version 1)

Table 24 OtherNameIndividual (version 1)

Name	Type	Description
OtherNameIndividual (version 1)	object	Represents an individual name.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The party name must be valid for the complete time period the party is valid.
	title	string	Personal title like Mrs, Ms. Pattern: ^(?=\s*\S).*\$ Max length: 256
	givenName	string	The given name. Max length: 128
	familyName	string	The last name. Max length: 128
	middleName	string	The middle name. Max length: 128
	formattedName	string	The formatted name. Max length: 128

bss.cmn.Status (version 1)

Table 25 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



ContactMediumItem (version 2)

Table 26 ContactMediumItem (version 2)

Name		Type	Description
ContactMediumItem (version 2)		object	Represents a means by which communication may be established with a party.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the contact medium is valid for.
	id	string	Unique identifier for the contact medium. Pattern: $^(?=\s*\S).*$$ Max length: 256
	externalId	string	External identifier of a contact medium in an external system. Pattern: $^(?=\s*\S).*$$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the contact medium.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the contactMedium.
	contactMediumItemSpecification	ContactMediumItemSpecificationRef (version 1)	The contact medium item specification.

CharacteristicValue (version 2)

Table 27 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 28 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 29 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.



SpecCharacteristicRef (version 1)

Table 30 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ContactMediumItemSpecificationRef (version 1)

Table 31 ContactMediumItemSpecificationRef (version 1)

Name		Type	Description
ContactMediumItemSpecificationRef (version 1)		object	Reference to a ContactMediumItemSpecification.
	id	string	The contact medium item specification id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item specification external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



IndividualSpecificationRef (version 1)

Table 32 IndividualSpecificationRef (version 1)

Name		Type	Description
IndividualSpecificationRef (version 1)		object	Individual Specification Reference.
	externalId	string	External identifier for the individual specification reference. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	id	string	Unique identifier for the individual specification reference. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	@referredType	string	Referred Type. Max length: 128

4.1.2 Read Individual

Retrieves individual information.

4.1.2.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- GET `{scheme:}/{host}[:{port}]/{deploymentComponent}/bssTmf632PartyManagement/v1/individual/{id}`
- GET `{scheme:}/{host}[:{port}]/{deploymentComponent}/bssTmf632PartyManagement/v1/individualExternalId/{externalId}`

Path Parameters

The following table describes the path parameters for the operation:



Table 33 Path Parameters

Name	Type	Description
id	string	Individual Identifier. Additional Description: Unique identifier for the party as an individual. Maxlength: 256 Pattern: ^(?=\s*\S).*
externalId	string	Individual External Identifier. Additional Description: External identifier for the party as an individual. Maxlength: 256 Pattern: ^(?=\s*\S).*

4.1.2.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 34 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf632PartyManagement.individual.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.individual.readResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.

Table 35 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 36 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf632PartyManagement.individual.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.individual.readResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: ^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2 } GMT))\$



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 37 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.1.2.3 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.2.3.1 bss.Tmf632PartyManagement.individual Read Response Version 1

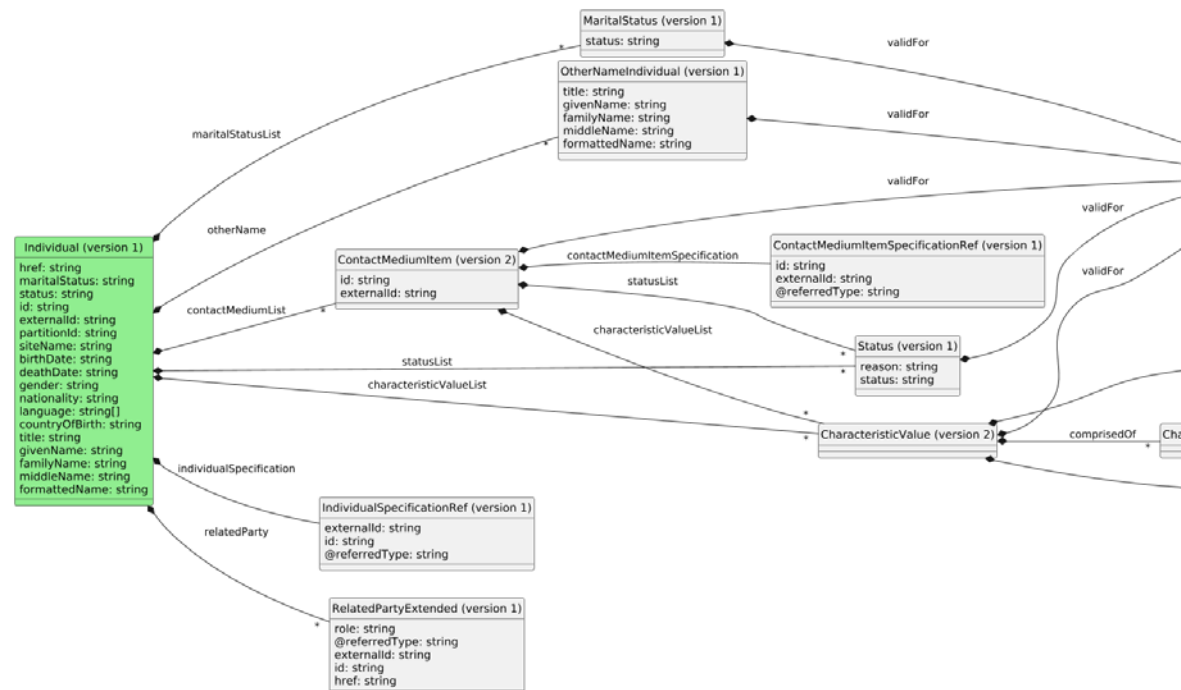


Figure 3 bss.Tmf632PartyManagement.individual.readResponse.1 UML representation

The representation is provided as JSON objects with the following attributes:



Table 38 Individual (version 1)

Name	Type	Description
Individual (version 1)	object	Represents an individual.



Name		Type	Description
	href	string	Href to the resource. Max length: 512
	maritalStatus	string	Current marital status. Max length: 32
	maritalStatusList	array of MaritalStatus (version 1)	List of known marital statuses.
	otherName	array of OtherName Individual (version 1)	Other names.
	status	string	Current status. Max length: 256
	statusList	array of bss.cmn.Status (version 1)	Array of Individual statuses.
	contactMediumList	array of ContactMediumItem (version 2)	The contact medium for this party.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of Individual characteristic values.
	relatedParty	array of RelatedPartyExtended (version 1)	The set of party role references.
	id	string	Unique identifier for the party as an individual. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier for the party as an individual. Pattern: ^(?=\s*\S).*\$ Max length: 256
	partitionId	string	The target partition for this individual party. Max length: 32
	siteName	string	The target site name for this individual party. Max length: 32
	birthDate	string	Date of birthday. DateTime according to W3. yyyy-MM-ddThh:mm:ss(.SSS)TZD, where TZD = Z or +hh:mm or -hh:mm (eg 1997-07-16T19:20:30.45+01:00). Format: date-time Pattern: ^\d{4}-((0[13578]



MaritalStatus (version 1)

Table 39 MaritalStatus (version 1)

Name		Type	Description
MaritalStatus (version 1)		object	Marital status (like married, single, divorced, widowed).
	status	string	Unique identifier of the marital status. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	The time period this entity is valid for.

bss.cmn.TimePeriod (version 1)

Table 40 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

OtherNameIndividual (version 1)

Table 41 OtherNameIndividual (version 1)

Name	Type	Description
OtherNameIndividual (version 1)	object	Represents an individual name.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The party name must be valid for the complete time period the party is valid.
	title	string	Personal title like Mrs, Ms. Pattern: ^(?=\s*\S).*\$ Max length: 256
	givenName	string	The given name. Max length: 128
	familyName	string	The last name. Max length: 128
	middleName	string	The middle name. Max length: 128
	formattedName	string	The formatted name. Max length: 128

bss.cmn.Status (version 1)

Table 42 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



ContactMediumItem (version 2)

Table 43 ContactMediumItem (version 2)

Name		Type	Description
ContactMediumItem (version 2)		object	Represents a means by which communication may be established with a party.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the contact medium is valid for.
	id	string	Unique identifier for the contact medium. Pattern: $^(?=\s*\S).*$$ Max length: 256
	externalId	string	External identifier of a contact medium in an external system. Pattern: $^(?=\s*\S).*$$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the contact medium.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the contactMedium.
	contactMediumItemSpecification	ContactMediumItemSpecificationRef (version 1)	The contact medium item specification.

CharacteristicValue (version 2)

Table 44 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 45 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 46 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.



SpecCharacteristicRef (version 1)

Table 47 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ContactMediumItemSpecificationRef (version 1)

Table 48 ContactMediumItemSpecificationRef (version 1)

Name		Type	Description
ContactMediumItemSpecificationRef (version 1)		object	Reference to a ContactMediumItemSpecification.
	id	string	The contact medium item specification id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item specification external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



RelatedPartyExtended (version 1)

Table 49 RelatedPartyExtended (version 1)

Name		Type	Description
RelatedPartyExtended (version 1)		object	Related Party Extended.
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

IndividualSpecificationRef (version 1)

Table 50 IndividualSpecificationRef (version 1)

Name	Type	Description
IndividualSpecificationRef (version 1)	object	Individual Specification Reference.



Name		Type	Description
	externalId	string	External identifier for the individual specification reference. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	id	string	Unique identifier for the individual specification reference. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	@referredType	string	Referred Type. Max length: 128

4.1.3 Update Individual

Updates an individual.

4.1.3.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- PATCH `{scheme:}/{host}[:{port}]/{deploymentComponent}/bssTmf632PartyManagement/v1/individual/{id}`
- PATCH `{scheme:}/{host}[:{port}]/{deploymentComponent}/bssTmf632PartyManagement/v1/individualExternalId/{externalId}`

Path Parameters

The following table describes the path parameters for the operation:



Table 51 Path Parameters

Name	Type	Description
id	string	Individual Identifier. Additional Description: Unique identifier for the party as an individual. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
externalId	string	Individual External Identifier. Additional Description: External identifier for the party as an individual. Maxlength: 256 Pattern: ^(?=\s*\S).*\$

4.1.3.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 52 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf632PartyManagement.individual.updateResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.individual.updateResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Content-Type		Mandatory
	One of the following: • application/x.bss.Tmf632PartyManagement.individual.updateRequest+merge-patch+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.individual.updateRequest+merge-patch+json;version=1 • application/merge-patch+json;charset=utf-8 • application/merge-patch+json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 53 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 54 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf632PartyManagement.individual.updateResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.individual.updateResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: ^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2 } GMT))\$



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 55 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.1.3.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.1.3.3.1 bss.Tmf632PartyManagement.individual Update Request Version 1

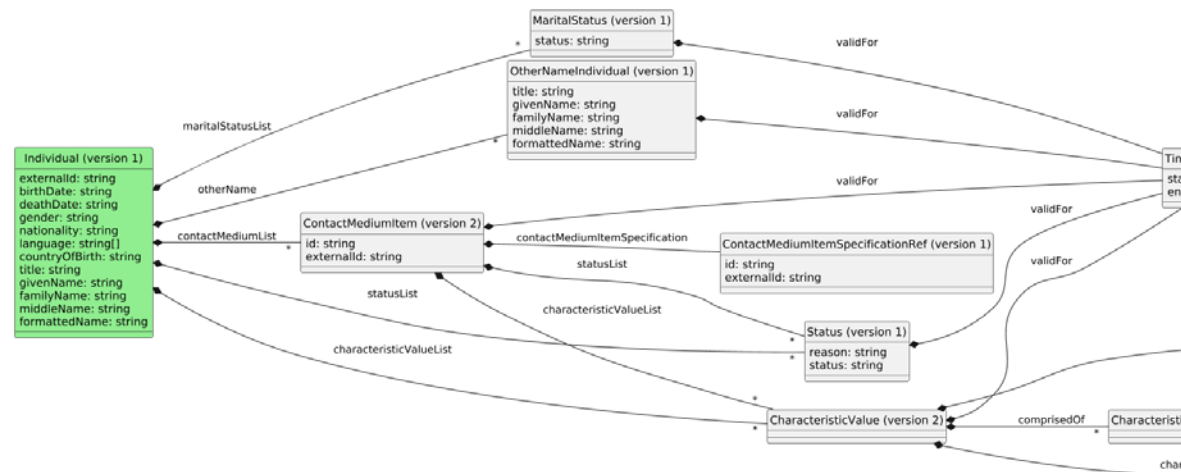


Figure 4 bss.Tmf632PartyManagement.individual.updateRequest.1 UML representation

The representation is provided as JSON objects with the following attributes:

Table 56 Individual (version 1)

Name	Type	Description
Individual (version 1)	object	Represents an individual.



Name		Type	Description
	maritalStatusList	array of MaritalStatus (version 1)	List of known marital statuses.
	otherName	array of OtherName Individual (version 1)	Other names.
	statusList	array of bss.cmn.Status (version 1)	Array of Individual statuses.
	contactMediumList	array of ContactMediumItem (version 2)	The contact medium for this party.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of Individual characteristic values.
	externalId	string	External identifier for the party as an individual. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	birthDate	string	Date of birthday. DateTime according to W3. yyyy-MM-ddThh:mm:ss(.SSS)TZD, where TZD = Z or +hh:mm or -hh:mm (eg 1997-07-16T19:20:30.45+01:00). Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) (02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+ (-[0-9] 1[0-3]):[0-5][0-9] 14:00) (-([0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	deathDate	string	Date of death date. DateTime according to W3. yyyy-MM-ddThh:mm:ss(.SSS)TZD, where TZD = Z or +hh:mm or -hh:mm (eg 1997-07-16T19:20:30.45+01:00). Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) (02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+ (-[0-9] 1[0-3]):[0-5][0-9] 14:00) (-([0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	gender	string	Gender.



MaritalStatus (version 1)

Table 57 MaritalStatus (version 1)

Name		Type	Description
MaritalStatus (version 1)		object	Marital status (like married, single, divorced, widowed).
	status	string	Unique identifier of the marital status. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	The time period this entity is valid for.

bss.cmn.TimePeriod (version 1)

Table 58 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

OtherNameIndividual (version 1)

Table 59 OtherNameIndividual (version 1)

Name	Type	Description
OtherNameIndividual (version 1)	object	Represents an individual name.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The party name must be valid for the complete time period the party is valid.
	title	string	Personal title like Mrs, Ms. Pattern: ^(?=\s*\S).*\$ Max length: 256
	givenName	string	The given name. Max length: 128
	familyName	string	The last name. Max length: 128
	middleName	string	The middle name. Max length: 128
	formattedName	string	The formatted name. Max length: 128

bss.cmn.Status (version 1)

Table 60 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



ContactMediumItem (version 2)

Table 61 ContactMediumItem (version 2)

Name		Type	Description
ContactMediumItem (version 2)		object	Represents a means by which communication may be established with a party.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the contact medium is valid for.
	id	string	Unique identifier for the contact medium. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a contact medium in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the contact medium.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the contactMedium.
	contactMediumItemSpecification	ContactMediumItemSpecificationRef (version 1)	The contact medium item specification.

CharacteristicValue (version 2)

Table 62 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 63 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 64 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.



SpecCharacteristicRef (version 1)

Table 65 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256

ContactMediumItemSpecificationRef (version 1)

Table 66 ContactMediumItemSpecificationRef (version 1)

Name		Type	Description
ContactMediumItemSpecificationRef (version 1)		object	Reference to a ContactMediumItemSpecification.
	id	string	The contact medium item specification id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item specification external id. Pattern: ^(?=\s*\S).*\$ Max length: 256

4.1.3.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.3.4.1

bss.Tmf632PartyManagement.individual Update Response Version 1

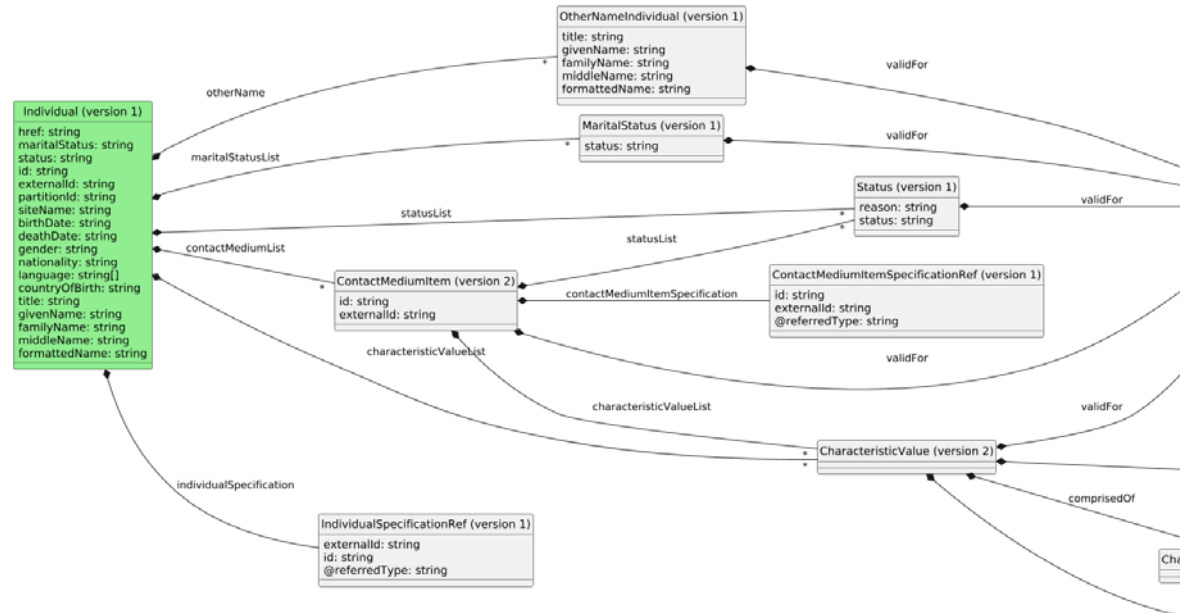


Figure 5 bss.Tmf632PartyManagement.individual.updateResponse.1 UML representation

The representation is provided as JSON objects with the following attributes:

Table 67 Individual (version 1)

Name	Type	Description
Individual (version 1)	object	Represents an individual.



Name		Type	Description
	href	string	Href to the resource. Max length: 512
	maritalStatus	string	Current marital status. Max length: 32
	maritalStatusList	array of MaritalStatus (version 1)	List of known marital statuses.
	otherName	array of OtherName Individual (version 1)	Other names.
	status	string	Current status. Max length: 256
	statusList	array of bss.cmn.Status (version 1)	Array of Individual statuses.
	contactMediumList	array of ContactMediumItem (version 2)	The contact medium for this party.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of Individual characteristic values.
	id	string	Unique identifier for the party as an individual. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier for the party as an individual. Pattern: ^(?=\s*\S).*\$ Max length: 256
	partitionId	string	The target partition for this individual party. Max length: 32
	siteName	string	The target site name for this individual party. Max length: 32
	birthDate	string	Date of birthday. DateTime according to W3. yyyy-MM-ddThh:mm:ss(.SSS)TZD, where TZD = Z or +hh:mm or -hh:mm (eg 1997-07-16T19:20:30.45+01:00). Format: date-time Pattern: ^\d{4}-(0[13578] 1[02])-(0[1-9] 1[12][0-9] 3[01])T((02-(0[1-9] 1[12][0-9])) (0[469] 11)-(0[1-9] 1[12][0-9] 30))T((011[0-9] 2[0-31]:[0-5



MaritalStatus (version 1)

Table 68 MaritalStatus (version 1)

Name		Type	Description
MaritalStatus (version 1)		object	Marital status (like married, single, divorced, widowed).
	status	string	Unique identifier of the marital status. Max length: 32
	validFor	bss.cmn.TimePeriod (version 1)	The time period this entity is valid for.

bss.cmn.TimePeriod (version 1)

Table 69 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

OtherNameIndividual (version 1)

Table 70 OtherNameIndividual (version 1)

Name	Type	Description
OtherNameIndividual (version 1)	object	Represents an individual name.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The party name must be valid for the complete time period the party is valid.
	title	string	Personal title like Mrs, Ms. Pattern: ^(?=\s*\S).*\$ Max length: 256
	givenName	string	The given name. Max length: 128
	familyName	string	The last name. Max length: 128
	middleName	string	The middle name. Max length: 128
	formattedName	string	The formatted name. Max length: 128

bss.cmn.Status (version 1)

Table 71 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



ContactMediumItem (version 2)

Table 72 ContactMediumItem (version 2)

Name		Type	Description
ContactMediumItem (version 2)		object	Represents a means by which communication may be established with a party.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the contact medium is valid for.
	id	string	Unique identifier for the contact medium. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a contact medium in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the contact medium.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the contactMedium.
	contactMediumItemSpecification	ContactMediumItemSpecificationRef (version 1)	The contact medium item specification.

CharacteristicValue (version 2)

Table 73 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 74 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 75 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.



SpecCharacteristicRef (version 1)

Table 76 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ContactMediumItemSpecificationRef (version 1)

Table 77 ContactMediumItemSpecificationRef (version 1)

Name		Type	Description
ContactMediumItemSpecificationRef (version 1)		object	Reference to a ContactMediumItemSpecification.
	id	string	The contact medium item specification id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item specification external id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



IndividualSpecificationRef (version 1)

Table 78 IndividualSpecificationRef (version 1)

Name		Type	Description
IndividualSpecificationRef (version 1)		object	Individual Specification Reference.
	externalId	string	External identifier for the individual specification reference. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	id	string	Unique identifier for the individual specification reference. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	@referredType	string	Referred Type. Max length: 128

4.2 Organization

An entity that represents an organization. Organization represents a group of people identified by shared interests or purpose. Examples include business, department and enterprise. Because of the complex nature of many businesses, both organizations and organization units are represented by the same data.

4.2.1 Create Organization

Creates an Organization.

4.2.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

— POST `{scheme:}/{host}[:{port}]/{deploymentComponent}/bssTmf632PartyManagement/v1/organization`

4.2.1.2 HTTP Headers

The following standard and custom HTTP headers are supported.



Request

HTTP headers available for the request are as follows:

Table 79 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional
	A non-empty subset of the following: • application/x.bss.Tmf632PartyManagement.organization.createResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.organization.createResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Content-Type		Mandatory
	One of the following: • application/x.bss.Tmf632PartyManagement.organization.createRequest+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.organization.createRequest+json;version=1 • application/json;charset=utf-8 • application/json	-



Header Field Name	Header Field Value	Mandatory/Optional
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 80 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 81 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 201, one of the following: • application/x.bss.Tmf632PartyManagement.organization.createResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.organization.createResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: ^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun),([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2} GMT))\$

Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 82 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.2.1.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.2.1.3.1 bss.Tmf632PartyManagement.organization Create Request Version 1

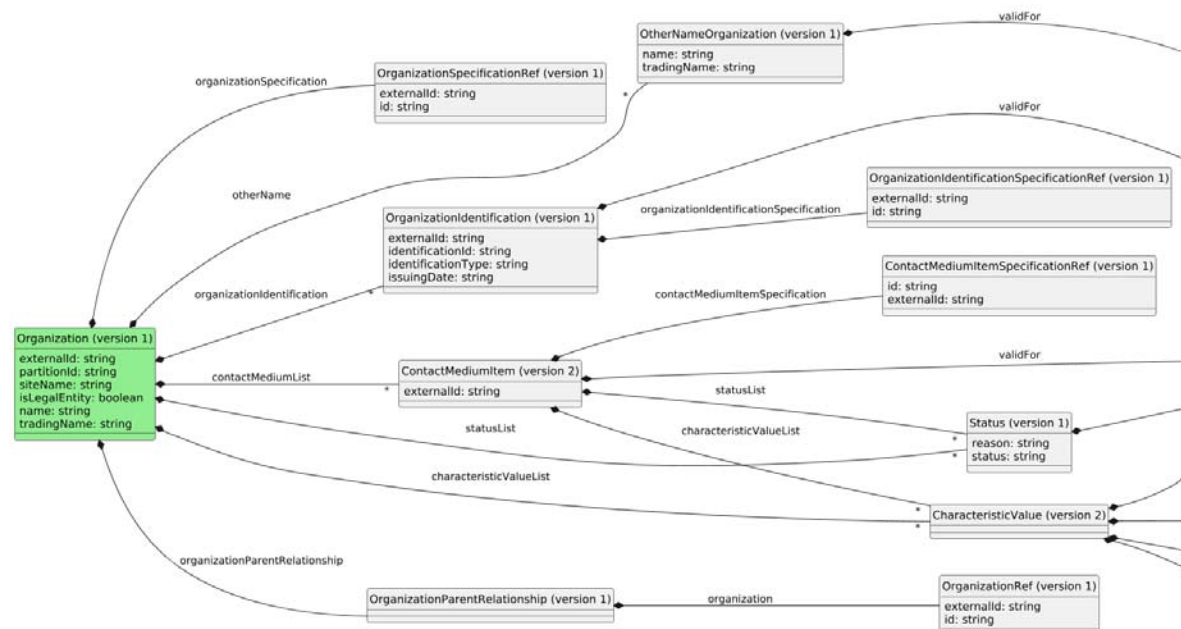


Figure 6 bss.Tmf632PartyManagement.organization.createRequest.1 UML representation

The representation is provided as JSON objects with the following attributes:



Table 83 Organization (version 1)

Name	Type	Description
Organization (version 1)	object	Represents an organization.



Name		Type	Description
	externalId	string	External identifier for the party as an organization. Pattern: ^(?=\s*\S).*\$ Max length: 256
	partitionId	string	The target partition for this organization party. Max length: 32
	siteName	string	The target site name for this organization party. Max length: 32
	isLegalEntity	boolean	Determine if is a legal organization
	name	string	Organization name. A word, term, or phrase by which an organization is known and distinguished from other organizations. Max length: 128
	tradingName	string	Organization trading name. The name that the organization (unit) trades under Max length: 128
	contactMediumList	array of ContactMediumItem (version 2)	The contact medium for this party.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of party characteristic values.
	statusList	array of bss.cmn.Status (version 1)	Array of party statuses. Used to control organization lifecycle, e.g. Created, Active, Inactive and Terminated.
	otherName	array of OtherNameOrganization (version 1)	Other name organization.
	organizationParentRelationship	OrganizationParentRelationship (version 1)	Organization parent relationship.
	organizationSpecification	OrganizationSpecificationRef (version 1)	Organization Specification Reference.
	organizationIdentification	array of OrganizationIdentification (version 1)	Information used as proof of identity by an organization.



ContactMediumItem (version 2)

Table 84 ContactMediumItem (version 2)

Name		Type	Description
ContactMediumItem (version 2)		object	Represents a means by which communication may be established with a party.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the contact medium is valid for.
	externalId	string	External identifier of a contact medium in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the contact medium.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the contactMedium.
	contactMediumItemSpecification	ContactMediumItemSpecificationRef (version 1)	The contact medium item specification.

bss.cmn.TimePeriod (version 1)

Table 85 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0])))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0])))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

CharacteristicValue (version 2)

Table 86 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 87 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 88 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.



SpecCharacteristicRef (version 1)

Table 89 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256

bss.cmn.Status (version 1)

Table 90 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

ContactMediumItemSpecificationRef (version 1)

Table 91 ContactMediumItemSpecificationRef (version 1)

Name		Type	Description
ContactMediumItemSpecificationRef (version 1)		object	Reference to a ContactMediumItemSpecification.



Name		Type	Description
	id	string	The contact medium item specification id. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The contact medium item specification external id. Pattern: ^(?=\s*\S).* Max length: 256

OtherNameOrganization (version 1)

Table 92 OtherNameOrganization (version 1)

Name		Type	Description
OtherNameOrganization (version 1)		object	Represents an organization name.
	validFor	bss.cmn.TimePeriod (version 1)	The organization name must be valid for the complete time period the party is valid.
	name	string	The organization name. Max length: 128
	tradingName	string	The trading name. Max length: 128

OrganizationParentRelationship (version 1)

Table 93 OrganizationParentRelationship (version 1)

Name		Type	Description
OrganizationParentRelationship (version 1)		object	Represents an relationship between organization and parent.
	organization	OrganizationRef (version 1)	The organization reference.



OrganizationRef (version 1)

Table 94 OrganizationRef (version 1)

Name		Type	Description
OrganizationRef (version 1)		object	Organization Reference.
	externalId	string	External identifier for the party as an organization. Pattern: $^(?=\backslash s*\backslash S).*\$$ Max length: 256
	id	string	Unique identifier for the party as an organization. Pattern: $^(?=\backslash s*\backslash S).*\$$ Max length: 256

OrganizationSpecificationRef (version 1)

Table 95 OrganizationSpecificationRef (version 1)

Name		Type	Description
OrganizationSpecificationRef (version 1)		object	Organization Specification Reference.
	externalId	string	External identifier for the party as an organization. Pattern: $^(?=\backslash s*\backslash S).*\$$ Max length: 256
	id	string	Unique identifier for the party as an organization. Pattern: $^(?=\backslash s*\backslash S).*\$$ Max length: 256

OrganizationIdentification (version 1)

Table 96 OrganizationIdentification (version 1)

Name		Type	Description
OrganizationIdentification (version 1)		object	Represents our registration of information used as proof of identity by an organization.



Name		Type	Description
	externalId	string	External identifier for the organization Identification. Pattern: ^(?=\s*\S).* Max length: 256
	identificationId	string	Identifier. Max length: 256
	identificationType	string	Type of identification information used to identify the company in a country or internationally. Max length: 256
	issuingDate	string	Issuing date. Format: date-time Pattern: ^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01]) (02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T(((0[1][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$
	organizationIdentificationSpecification	OrganizationIdentificationSpecificationRef (version 1)	Organization Identification Specification Reference.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the organization identification is valid.

OrganizationIdentificationSpecificationRef (version 1)

Table 97 OrganizationIdentificationSpecificationRef (version 1)

Name	Type	Description
OrganizationIdentificationSpecificationRef (version 1)	object	Organization Identification Specification Reference.



Name		Type	Description
	externalId	string	External identifier for the organization identification specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	id	string	Unique identifier for the organization identification specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256

4.2.1.4

Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.



4.2.1.4.1

bss.Tmf632PartyManagement.organization Create Response Version 1

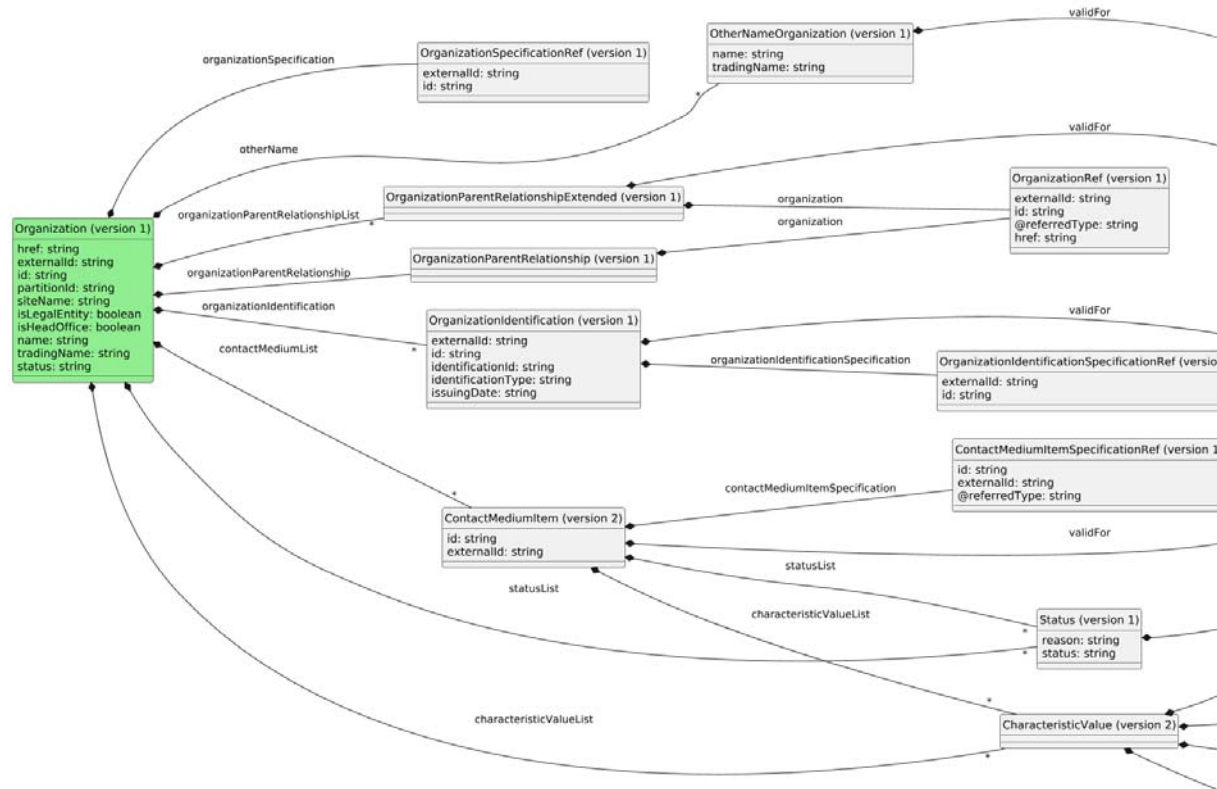


Figure 7 bss.Tmf632PartyManagement.organization.createResponse.1 UML representation

The representation is provided as JSON objects with the following attributes:

Table 98 Organization (version 1)

Name	Type	Description
Organization (version 1)	object	Represents an organization.



Name		Type	Description
	href	string	Href to the resource. Max length: 512
	externalId	string	External identifier for the party as an organization. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier for the party as an organization. Pattern: ^(?=\s*\S).*\$ Max length: 256
	partitionId	string	The target partition for this organization party. Max length: 32
	siteName	string	The target site name for this organization party. Max length: 32
	isLegalEntity	boolean	Determine if is a legal organization
	isHeadOffice	boolean	Determine if is top node for a hierarchy organization
	name	string	Organization name. A word, term, or phrase by which an organization is known and distinguished from other organizations. Max length: 128
	tradingName	string	Organization trading name. The name that the organization (unit) trades under Max length: 128
	contactMediumList	array of ContactMediumItem (version 2)	The contact medium for this party.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of party characteristic values.
	statusList	array of bss.cmn.Status (version 1)	Array of party statuses. Used to control organization lifecycle, e.g. Created, Active, Inactive and Terminated.
	status	string	Current status. Max length: 256
	otherName	array of OtherNameOrganization	Other name organization.



ContactMediumItem (version 2)

Table 99 ContactMediumItem (version 2)

Name		Type	Description
ContactMediumItem (version 2)		object	Represents a means by which communication may be established with a party.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the contact medium is valid for.
	id	string	Unique identifier for the contact medium. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a contact medium in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the contact medium.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the contactMedium.
	contactMediumItemSpecification	ContactMediumItemSpecificationRef (version 1)	The contact medium item specification.

bss.cmn.TimePeriod (version 1)

Table 100 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

CharacteristicValue (version 2)

Table 101 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 102 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 103 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.



SpecCharacteristicRef (version 1)

Table 104 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.Status (version 1)

Table 105 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



ContactMediumItemSpecificationRef (version 1)

Table 106 ContactMediumItemSpecificationRef (version 1)

Name		Type	Description
ContactMediumItemSpecificationRef (version 1)		object	Reference to a ContactMediumItemSpecification.
	id	string	The contact medium item specification id. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The contact medium item specification external id. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

OtherNameOrganization (version 1)

Table 107 OtherNameOrganization (version 1)

Name		Type	Description
OtherNameOrganization (version 1)		object	Represents an organization name.
	validFor	bss.cmn.TimePeriod (version 1)	The organization name must be valid for the complete time period the party is valid.
	name	string	The organization name. Max length: 128
	tradingName	string	The trading name. Max length: 128



OrganizationParentRelationship (version 1)

Table 108 OrganizationParentRelationship (version 1)

Name		Type	Description
OrganizationParentRelationship (version 1)		object	Represents an relationship between organization and parent.
	organization	OrganizationRef (version 1)	The organization reference.

OrganizationRef (version 1)

Table 109 OrganizationRef (version 1)

Name		Type	Description
OrganizationRef (version 1)		object	Organization Reference.
	externalId	string	External identifier for the party as an organization. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	id	string	Unique identifier for the party as an organization. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128
	href	string	Href to the resource. Max length: 512

OrganizationSpecificationRef (version 1)

Table 110 OrganizationSpecificationRef (version 1)

Name		Type	Description
OrganizationSpecificationRef (version 1)		object	Organization Specification Reference.



Name		Type	Description
	externalId	string	External identifier for the party as an organization. Pattern: ^(?=\s*\S).* Max length: 256
	id	string	Unique identifier for the party as an organization. Pattern: ^(?=\s*\S).* Max length: 256

OrganizationIdentification (version 1)

Table 111 OrganizationIdentification (version 1)

Name	Type	Description
OrganizationIdentification (version 1)	object	Represents our registration of information used as proof of identity by an organization.



Name		Type	Description
	externalId	string	External identifier for the organization Identification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier for the organization Identification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	identificationId	string	Identifier. Max length: 256
	identificationType	string	Type of identification information used to identify the company in a country or internationally. Max length: 256
	issuingDate	string	Issuing date. Format: date-time Pattern: ^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$
	organizationIdentificationSpecification	OrganizationIdentificationSpecificationRef (version 1)	Organization Identification Specification Reference.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the organization identification is valid.



OrganizationIdentificationSpecificationRef (version 1)

Table 112 OrganizationIdentificationSpecificationRef (version 1)

Name		Type	Description
OrganizationIdentificationSpecificationRef (version 1)		object	Organization Identification Specification Reference.
	externalId	string	External identifier for the organization identification specification. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	id	string	Unique identifier for the organization identification specification. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256

OrganizationParentRelationshipExtended (version 1)

Table 113 OrganizationParentRelationshipExtended (version 1)

Name		Type	Description
OrganizationParentRelationshipExtended (version 1)		object	Represents a list of relationships between an organization and its parent organizations.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the relationship is valid for.
	organization	OrganizationRef (version 1)	The organization reference.

4.2.2 Read Organization

Retrieves Organization information.

4.2.2.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- GET {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf632PartyManagement/v1/organization/{id}

— GET {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf632PartyManagement/v1/organizationExternalId/{externalId}

Query Parameters

The following table describes the query parameters for the operation:

Table 114 Query Parameters

Name	Type	Description
fields	string	Attribute selection fields. Additional Description: This parameter filters the properties that are returned, based on specific criteria. Return one or more fields specified as a comma-delimited list. Pattern: ^(((@[a-zA-Z][a-zA-Z])[a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)\.(.(@[a-zA-Z][a-zA-Z])[a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)*(.((@[a-zA-Z][a-zA-Z])[a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)\.(.(@[a-zA-Z][a-zA-Z])[a-z0-9]*(?:[A-Z0-9]+[a-z0-9]*)*)*)*\$ Maxlength: 512

Path Parameters

The following table describes the path parameters for the operation:



Table 115 Path Parameters

Name	Type	Description
id	string	Organization Identifier. Additional Description: Unique identifier for the party as an organization. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
externalId	string	Organization External Identifier. Additional Description: External identifier for the party as an organization. Maxlength: 256 Pattern: ^(?=\s*\S).*\$

4.2.2.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 116 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf632PartyManagement.organization.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.organization.readResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.

Table 117 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 118 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf632PartyManagement.organization.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.organization.readResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3]([0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01]([0-9] 2[0-3])(:[0-5]([0-9])?}{2} GMT)))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 119 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.2.2.3 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.2.2.3.1

bss.Tmf632PartyManagement.organization Read Response Version 1

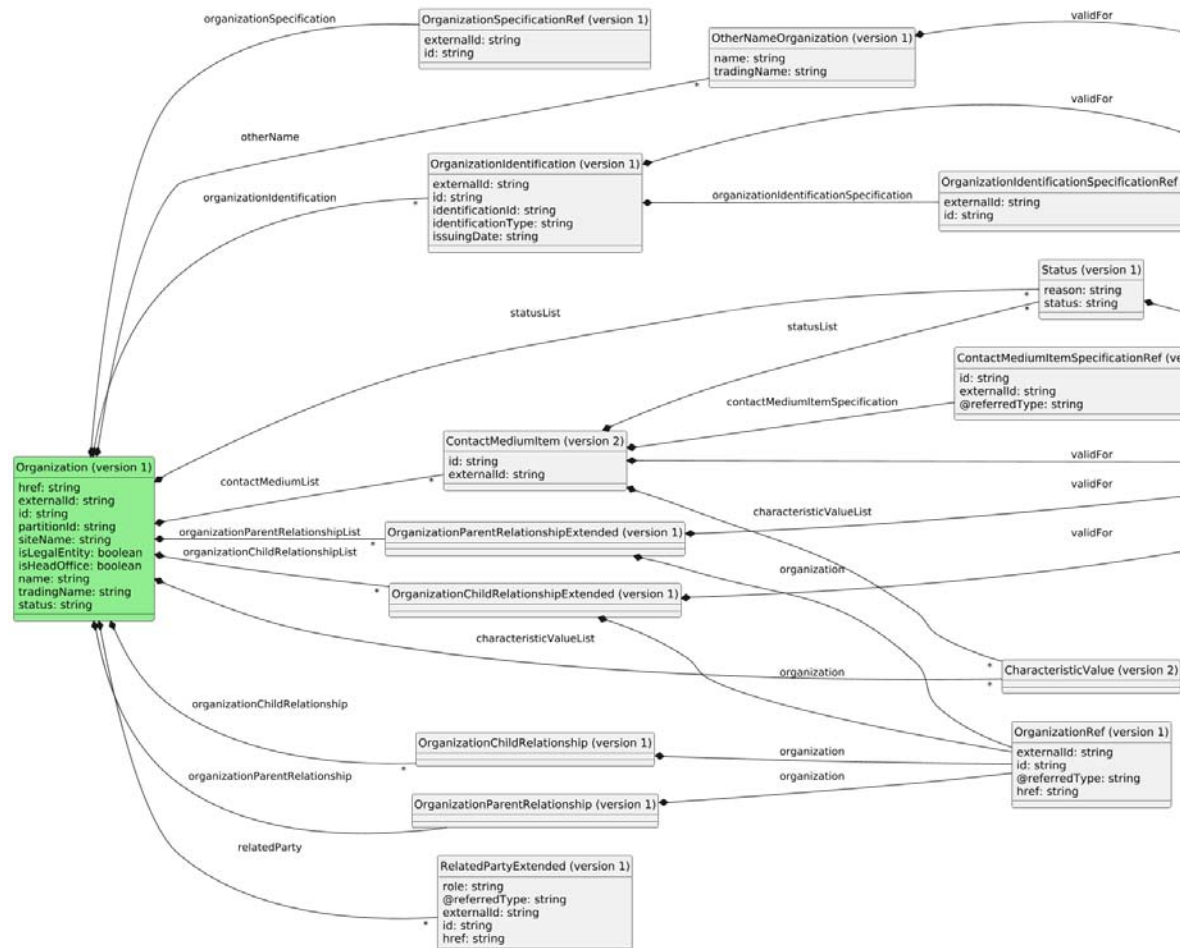


Figure 8 bss.Tmf632PartyManagement.organization.readResponse.1 UML representation

The representation is provided as JSON objects with the following attributes:

Table 120 Organization (version 1)

Name	Type	Description
Organization (version 1)	object	Represents an organization.



Name		Type	Description
	href	string	Href to the resource. Max length: 512
	externalId	string	External identifier for the party as an organization. Pattern: ^(?=\s*\S).* Max length: 256
	id	string	Unique identifier for the party as an organization. Pattern: ^(?=\s*\S).* Max length: 256
	partitionId	string	The target partition for this organization party. Max length: 32
	siteName	string	The target site name for this organization party. Max length: 32
	isLegalEntity	boolean	Determine if is a legal organization
	isHeadOffice	boolean	Determine if is top node for a hierarchy organization
	name	string	Organization name. A word, term, or phrase by which an organization is known and distinguished from other organizations. Max length: 128
	tradingName	string	Organization trading name. The name that the organization (unit) trades under Max length: 128
	contactMediumList	array of ContactMediumItem (version 2)	The contact medium for this party.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of party characteristic values.
	statusList	array of bss.cmn.Status (version 1)	Array of party statuses. Used to control organization lifecycle, e.g. Created, Active, Inactive and Terminated.
	status	string	Current status. Max length: 256
	otherName	array of OtherNameOrganization	Other name organization.



ContactMediumItem (version 2)

Table 121 ContactMediumItem (version 2)

Name		Type	Description
ContactMediumItem (version 2)		object	Represents a means by which communication may be established with a party.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the contact medium is valid for.
	id	string	Unique identifier for the contact medium. Pattern: $^(?=\s*\S).*$$ Max length: 256
	externalId	string	External identifier of a contact medium in an external system. Pattern: $^(?=\s*\S).*$$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the contact medium.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the contactMedium.
	contactMediumItemSpecification	ContactMediumItemSpecificationRef (version 1)	The contact medium item specification.

bss.cmn.TimePeriod (version 1)

Table 122 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

CharacteristicValue (version 2)

Table 123 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 124 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 125 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.



SpecCharacteristicRef (version 1)

Table 126 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.Status (version 1)

Table 127 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



ContactMediumItemSpecificationRef (version 1)

Table 128 ContactMediumItemSpecificationRef (version 1)

Name		Type	Description
ContactMediumItemSpecificationRef (version 1)		object	Reference to a ContactMediumItemSpecification.
	id	string	The contact medium item specification id. Pattern: $^(?=\s*\S).*$$ Max length: 256
	externalId	string	The contact medium item specification external id. Pattern: $^(?=\s*\S).*$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

OtherNameOrganization (version 1)

Table 129 OtherNameOrganization (version 1)

Name		Type	Description
OtherNameOrganization (version 1)		object	Represents an organization name.
	validFor	bss.cmn.TimePeriod (version 1)	The organization name must be valid for the complete time period the party is valid.
	name	string	The organization name. Max length: 128
	tradingName	string	The trading name. Max length: 128



OrganizationChildRelationship (version 1)

Table 130 OrganizationChildRelationship (version 1)

Name		Type	Description
OrganizationChildRelationship (version 1)		object	Represents an relationship between organization and child.
	organization	OrganizationRef (version 1)	The organization reference.

OrganizationRef (version 1)

Table 131 OrganizationRef (version 1)

Name		Type	Description
OrganizationRef (version 1)		object	Organization Reference.
	externalId	string	External identifier for the party as an organization. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier for the party as an organization. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128
	href	string	Href to the resource. Max length: 512

OrganizationParentRelationship (version 1)

Table 132 OrganizationParentRelationship (version 1)

Name		Type	Description
OrganizationParentRelationship (version 1)		object	Represents an relationship between organization and parent.
	organization	OrganizationRef (version 1)	The organization reference.



OrganizationSpecificationRef (version 1)

Table 133 OrganizationSpecificationRef (version 1)

Name		Type	Description
OrganizationSpecificationRef (version 1)		object	Organization Specification Reference.
	externalId	string	External identifier for the party as an organization. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier for the party as an organization. Pattern: ^(?=\s*\S).*\$ Max length: 256

OrganizationIdentification (version 1)

Table 134 OrganizationIdentification (version 1)

Name	Type	Description
OrganizationIdentification (version 1)	object	Represents our registration of information used as proof of identity by an organization.



Name		Type	Description
	externalId	string	External identifier for the organization Identification. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	id	string	Unique identifier for the organization Identification. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	identificationId	string	Identifier. Max length: 256
	identificationType	string	Type of identification information used to identify the company in a country or internationally. Max length: 256
	issuingDate	string	Issuing date. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	organizationIdentificationSpecification	OrganizationIdentificationSpecificationRef (version 1)	Organization Identification Specification Reference.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the organization identification is valid.



OrganizationIdentificationSpecificationRef (version 1)

Table 135 OrganizationIdentificationSpecificationRef (version 1)

Name		Type	Description
OrganizationIdentificationSpecificationRef (version 1)		object	Organization Identification Specification Reference.
	externalId	string	External identifier for the organization identification specification. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256
	id	string	Unique identifier for the organization identification specification. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256

RelatedPartyExtended (version 1)

Table 136 RelatedPartyExtended (version 1)

Name	Type	Description
RelatedPartyExtended (version 1)	object	Related Party Extended.



Name		Type	Description
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

OrganizationChildRelationshipExtended (version 1)

Table 137 OrganizationChildRelationshipExtended (version 1)

Name		Type	Description
OrganizationChildRelationshipExtended (version 1)		object	Represents a list of relationships between an organization and its child organizations.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the relationship is valid for .
	organization	OrganizationRef (version 1)	The organization reference.

OrganizationParentRelationshipExtended (version 1)

Table 138 OrganizationParentRelationshipExtended (version 1)

Name		Type	Description
OrganizationParentRelationshipExtended (version 1)		object	Represents a list of relationships between an organization and its parent organizations.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the relationship is valid for.
	organization	OrganizationRef (version 1)	The organization reference.

4.2.3 Update Organization

Updates an Organization.

4.2.3.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- PATCH {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf632PartyManagement/v1/organization/{id}
- PATCH {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf632PartyManagement/v1/organizationExternalId/{externalId}

Path Parameters

The following table describes the path parameters for the operation:

Table 139 Path Parameters

Name	Type	Description
id	string	Organization Identifier. Additional Description: Unique identifier for the party as an organization. Maxlength: 256 Pattern: ^(?=\s*\S).*
externalId	string	Organization External Identifier. Additional Description: External identifier for the party as an organization. Maxlength: 256 Pattern: ^(?=\s*\S).*



4.2.3.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 140 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional
	A non-empty subset of the following: • application/x.bss.Tmf632PartyManagement.organization.updateResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.organization.updateResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;char set=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	One of the following: • application/x.bss.Tmf632PartyManagement.organization.updateRequest+merge-patch+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.organization.updateRequest+merge-patch+json;version=1 • application/merge-patch+json;charset=utf-8 • application/merge-patch+json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 141 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 142 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf632PartyManagement.organization.updateResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf632PartyManagement.organization.updateResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: ^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2 } GMT))\$



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 143 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.2.3.3

Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.2.3.3.1

bss.Tmf632PartyManagement.organization Update Request Version 1

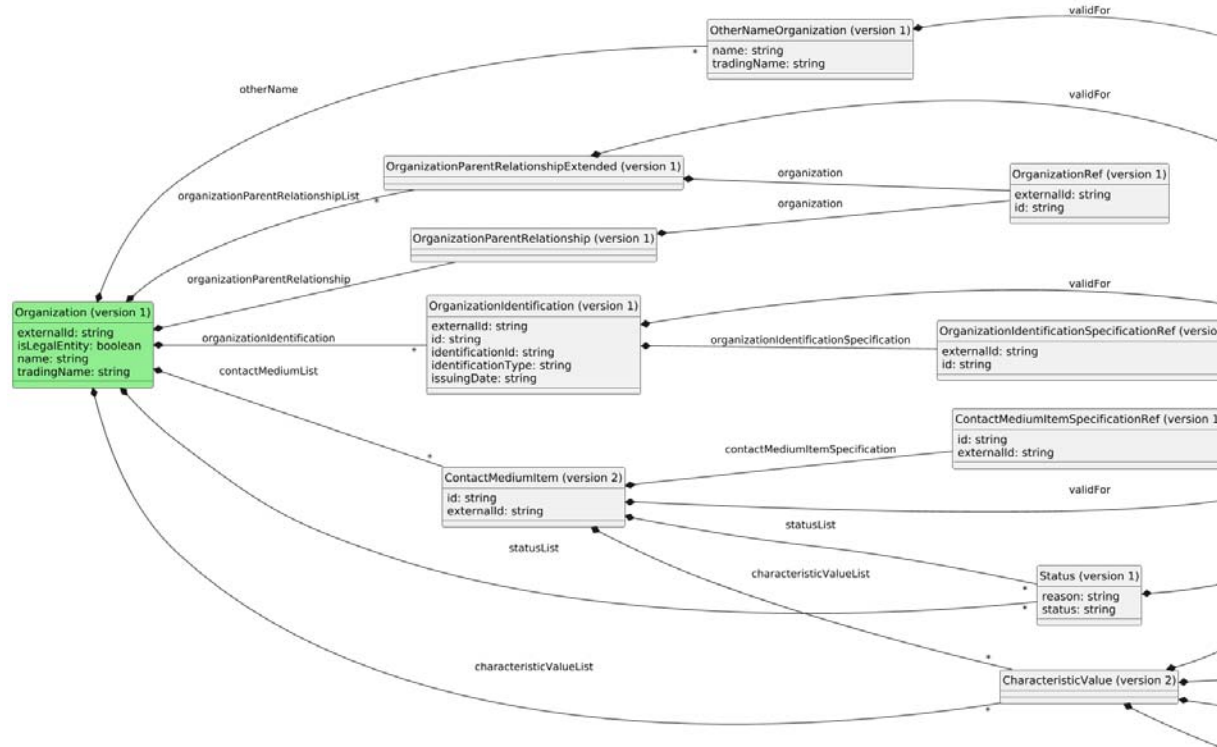


Figure 9 bss.Tmf632PartyManagement.organization.updateRequest.1 UML representation

The representation is provided as JSON objects with the following attributes:

Table 144 Organization (version 1)

Name	Type	Description
Organization (version 1)	object	Represents an organization.



Name		Type	Description
	externalId	string	External identifier for the party as an organization. Pattern: ^(?=\s*\S).* Max length: 256
	isLegalEntity	boolean	Determine if is a legal organization
	name	string	Organization name. A word, term, or phrase by which an organization is known and distinguished from other organizations. Max length: 128
	tradingName	string	Organization trading name. The name that the organization (unit) trades under Max length: 128
	contactMediumList	array of ContactMediumItem (version 2)	The contact medium for this party.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of party characteristic values.
	statusList	array of bss.cmn.Status (version 1)	Array of party statuses. Used to control organization lifecycle, e.g. Created, Active, Inactive and Terminated.
	otherName	array of OtherNameOrganization (version 1)	Other name organization.
	organizationParentRelationship	OrganizationParentRelationship (version 1)	Organization parent relationship.
	organizationIdentification	array of OrganizationIdentification (version 1)	Information used as proof of identity by an organization.
	organizationParentRelationshipList	array of OrganizationParentRelationshipExtended (version 1)	Organization parent relationships.



ContactMediumItem (version 2)

Table 145 ContactMediumItem (version 2)

Name		Type	Description
ContactMediumItem (version 2)		object	Represents a means by which communication may be established with a party.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the contact medium is valid for.
	id	string	Unique identifier for the contact medium. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a contact medium in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the contact medium.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the contactMedium.
	contactMediumItemSpecification	ContactMediumItemSpecificationRef (version 1)	The contact medium item specification.

bss.cmn.TimePeriod (version 1)

Table 146 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30))))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30))))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

CharacteristicValue (version 2)

Table 147 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 148 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 149 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.



SpecCharacteristicRef (version 1)

Table 150 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256

bss.cmn.Status (version 1)

Table 151 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

ContactMediumItemSpecificationRef (version 1)

Table 152 ContactMediumItemSpecificationRef (version 1)

Name		Type	Description
ContactMediumItemSpecificationRef (version 1)		object	Reference to a ContactMediumItemSpecification.



Name		Type	Description
	id	string	The contact medium item specification id. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The contact medium item specification external id. Pattern: ^(?=\s*\S).*\$ Max length: 256

OtherNameOrganization (version 1)

Table 153 OtherNameOrganization (version 1)

Name		Type	Description
OtherNameOrganization (version 1)		object	Represents an organization name.
	validFor	bss.cmn.TimePeriod (version 1)	The organization name must be valid for the complete time period the party is valid.
	name	string	The organization name. Max length: 128
	tradingName	string	The trading name. Max length: 128

OrganizationParentRelationship (version 1)

Table 154 OrganizationParentRelationship (version 1)

Name		Type	Description
OrganizationParentRelationship (version 1)		object	Represents an relationship between organization and parent.
	organization	OrganizationRef (version 1)	The organization reference.



OrganizationRef (version 1)

Table 155 OrganizationRef (version 1)

Name		Type	Description
OrganizationRef (version 1)		object	Organization Reference.
	externalId	string	External identifier for the party as an organization. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier for the party as an organization. Pattern: ^(?=\s*\S).*\$ Max length: 256

OrganizationIdentification (version 1)

Table 156 OrganizationIdentification (version 1)

Name	Type	Description
OrganizationIdentification (version 1)	object	Represents our registration of information used as proof of identity by an organization.



Name		Type	Description
	externalId	string	External identifier for the organization Identification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	id	string	Unique identifier for the organization Identification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	identificationId	string	Identifier. Max length: 256
	identificationType	string	Type of identification information used to identify the company in a country or internationally. Max length: 256
	issuingDate	string	Issuing date. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	organizationIdentificationSpecification	OrganizationIdentificationSpecificationRef (version 1)	Organization Identification Specification Reference.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the organization identification is valid.



OrganizationIdentificationSpecificationRef (version 1)

Table 157 OrganizationIdentificationSpecificationRef (version 1)

Name		Type	Description
OrganizationIdentificationSpecificationRef (version 1)		object	Organization Identification Specification Reference.
	externalId	string	External identifier for the organization identification specification. Pattern: $^(?=\s*\S).*\$$ Max length: 256
	id	string	Unique identifier for the organization identification specification. Pattern: $^(?=\s*\S).*\$$ Max length: 256

OrganizationParentRelationshipExtended (version 1)

Table 158 OrganizationParentRelationshipExtended (version 1)

Name		Type	Description
OrganizationParentRelationshipExtended (version 1)		object	Represents a list of relationships between an organization and its parent organizations.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the relationship is valid for.
	organization	OrganizationRef (version 1)	The organization reference.

4.2.3.4

Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.2.3.4.1

bss.Tmf632PartyManagement.organization Update Response Version 1

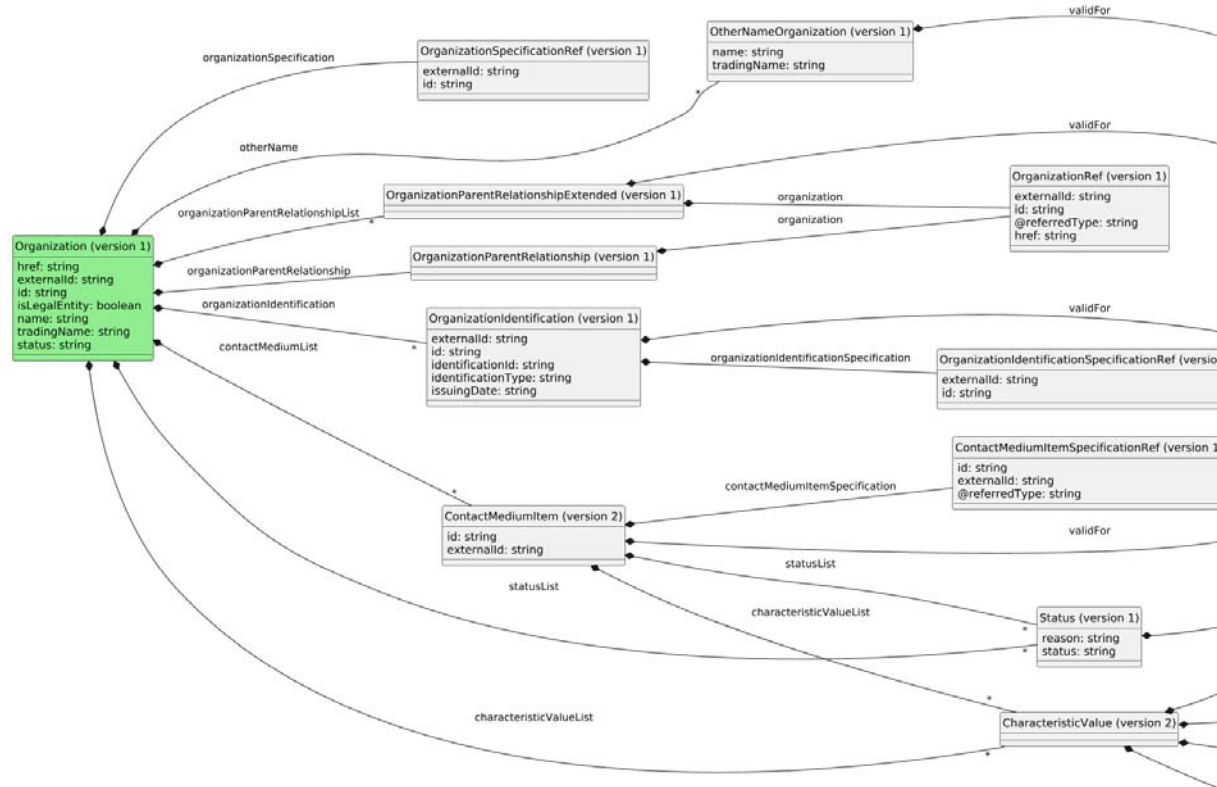


Figure 10 bss.Tmf632PartyManagement.organization.updateResponse.1 UML representation

The representation is provided as JSON objects with the following attributes:

Table 159 Organization (version 1)

Name	Type	Description
Organization (version 1)	object	Represents an organization.



Name		Type	Description
	href	string	Href to the resource. Max length: 512
	externalId	string	External identifier for the party as an organization. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier for the party as an organization. Pattern: ^(?=\s*\S).*\$ Max length: 256
	isLegalEntity	boolean	Determine if is a legal organization
	name	string	Organization name. A word, term, or phrase by which an organization is known and distinguished from other organizations. Max length: 128
	tradingName	string	Organization trading name. The name that the organization (unit) trades under Max length: 128
	contactMediumList	array of ContactMediumItem (version 2)	The contact medium for this party.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of party characteristic values.
	statusList	array of bss.cmn.Status (version 1)	Array of party statuses. Used to control organization lifecycle, e.g. Created, Active, Inactive and Terminated.
	status	string	Current status. Max length: 256
	otherName	array of OtherNameOrganization (version 1)	Other name organization.
	organizationParentRelationship	OrganizationParentRelationship (version 1)	Organization parent relationship.
	organizationSpecification	OrganizationSpecificationRef (version 1)	Organization Specification Reference.
	organizationIdentification	array of OrganizationIdentification (version 1)	Information used as proof of identity by an organization.



ContactMediumItem (version 2)

Table 160 ContactMediumItem (version 2)

Name		Type	Description
ContactMediumItem (version 2)		object	Represents a means by which communication may be established with a party.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the contact medium is valid for.
	id	string	Unique identifier for the contact medium. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of a contact medium in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValueList	array of CharacteristicValue (version 2)	Characteristic values of the contact medium.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the contactMedium.
	contactMediumItemSpecification	ContactMediumItemSpecificationRef (version 1)	The contact medium item specification.

bss.cmn.TimePeriod (version 1)

Table 161 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

CharacteristicValue (version 2)

Table 162 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.ValueWithUoM (version 1)

Table 163 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 164 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.



SpecCharacteristicRef (version 1)

Table 165 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.Status (version 1)

Table 166 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



ContactMediumItemSpecificationRef (version 1)

Table 167 ContactMediumItemSpecificationRef (version 1)

Name		Type	Description
ContactMediumItemSpecificationRef (version 1)		object	Reference to a ContactMediumItemSpecification.
	id	string	The contact medium item specification id. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The contact medium item specification external id. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

OtherNameOrganization (version 1)

Table 168 OtherNameOrganization (version 1)

Name		Type	Description
OtherNameOrganization (version 1)		object	Represents an organization name.
	validFor	bss.cmn.TimePeriod (version 1)	The organization name must be valid for the complete time period the party is valid.
	name	string	The organization name. Max length: 128
	tradingName	string	The trading name. Max length: 128



OrganizationParentRelationship (version 1)

Table 169 OrganizationParentRelationship (version 1)

Name		Type	Description
OrganizationParentRelationship (version 1)		object	Represents an relationship between organization and parent.
	organization	OrganizationRef (version 1)	The organization reference.

OrganizationRef (version 1)

Table 170 OrganizationRef (version 1)

Name		Type	Description
OrganizationRef (version 1)		object	Organization Reference.
	externalId	string	External identifier for the party as an organization. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	id	string	Unique identifier for the party as an organization. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128
	href	string	Href to the resource. Max length: 512

OrganizationSpecificationRef (version 1)

Table 171 OrganizationSpecificationRef (version 1)

Name		Type	Description
OrganizationSpecificationRef (version 1)		object	Organization Specification Reference.



Name		Type	Description
	externalId	string	External identifier for the party as an organization. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	id	string	Unique identifier for the party as an organization. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256

OrganizationIdentification (version 1)

Table 172 OrganizationIdentification (version 1)

Name	Type	Description
OrganizationIdentification (version 1)	object	Represents our registration of information used as proof of identity by an organization.



Name		Type	Description
	externalId	string	External identifier for the organization Identification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	id	string	Unique identifier for the organization Identification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	identificationId	string	Identifier. Max length: 256
	identificationType	string	Type of identification information used to identify the company in a country or internationally. Max length: 256
	issuingDate	string	Issuing date. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	organizationIdentificationSpecification	OrganizationIdentificationSpecificationRef (version 1)	Organization Identification Specification Reference.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the organization identification is valid.



OrganizationIdentificationSpecificationRef (version 1)

Table 173 OrganizationIdentificationSpecificationRef (version 1)

Name		Type	Description
OrganizationIdentificationSpecificationRef (version 1)		object	Organization Identification Specification Reference.
	externalId	string	External identifier for the organization identification specification. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256
	id	string	Unique identifier for the organization identification specification. Pattern: $^{(?=\backslash s^*\backslash S)}.*\$$ Max length: 256

OrganizationParentRelationshipExtended (version 1)

Table 174 OrganizationParentRelationshipExtended (version 1)

Name		Type	Description
OrganizationParentRelationshipExtended (version 1)		object	Represents a list of relationships between an organization and its parent organizations.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the relationship is valid for.
	organization	OrganizationRef (version 1)	The organization reference.

5

Generic Interface Parameters

The following sub-sections describe the elements and their structure in the request and response for Generic Interface Parameters.

5.1

Generic Interface Parameters Request

5.1.1

bss.genericInterfaceParameters Request Version 4

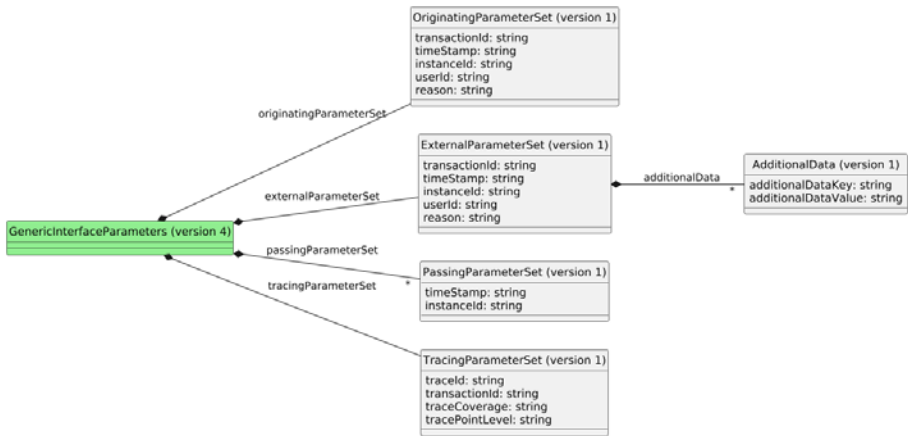


Figure 11 bss.genericInterfaceParameters.request.4 UML representation

The representation is provided as JSON objects with the following attributes:

Table 175 bss.cmn.GenericInterfaceParameters (version 4)

Name	Type	Description
bss.cmn.GenericInterfac eParameters (version 4)	object	The Generic Interface Parameters (GIP) is used for transaction traceability.



Name		Type	Description
	originatingParameterSet	bss.cmn.OriginatingParameterSet (version 1)	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.
	externalParameterSet	bss.cmn.ExternalParameterSet (version 1)	Information received from the external system that initiated the transaction.
	passingParameterSet	array of bss.cmn.PassingParameterSet (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	bss.cmn.TracingParameterSet (version 1)	Tracing Parameter Set.

5.1.1.1

bss.cmn.OriginatingParameterSet (version 1)

Table 176 bss.cmn.OriginatingParameterSet (version 1)

Name	Type	Description
bss.cmn.OriginatingParameterSet (version 1)	object	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.



Name		Type	Description
	transactionId	string	Unique transaction identifier. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	timeStamp	string	The time stamp when the ops was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((0[1-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00)-((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that created the ops. Max length: 256
	userId	string	User Identification. Provided at login to the instance creating the ops. Max length: 256
	reason	string	Reason for the transaction. Max length: 256

5.1.1.2

bss.cmn.ExternalParameterSet (version 1)

Table 177 bss.cmn.ExternalParameterSet (version 1)

Name	Type	Description
bss.cmn.ExternalParameterSet (version 1)	object	Information received from the external system that initiated the transaction.



Name		Type	Description
	transactionId	string	Transaction Identifier received from external system. Max length: 256
	timeStamp	string	Transaction time stamp received from external system. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that sent the transactionId. Max length: 256
	userId	string	User identifier received from external system. Max length: 256
	reason	string	Reason received from external system. Max length: 256
	additionalData	array of <code>bss.cmn.AdditionalData (version 1)</code>	Array of additional data Items from external system.

5.1.1.3

`bss.cmn.AdditionalData (version 1)`

Table 178 `bss.cmn.AdditionalData (version 1)`

Name	Type	Description
<code>bss.cmn.AdditionalData (version 1)</code>	object	A key-value structure data received from external system.



Name		Type	Description
	additionalDataKey	string	key of the additional data from external system. Max length: 256
	additionalDataValue	string	value correspond to the key. Max length: 256

5.1.1.4

bss.cmn.PassingParameterSet (version 1)

Table 179 bss.cmn.PassingParameterSet (version 1)

Name		Type	Description
bss.cmn.PassingParameterSet (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the ppsItem was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02]))-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0]))))T(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the entity that created the ppsItem. Max length: 256

5.1.1.5

bss.cmn.TracingParameterSet (version 1)

Table 180 bss.cmn.TracingParameterSet (version 1)

Name		Type	Description
bss.cmn.TracingParameterSet (version 1)		object	Tracing Parameter Set.



Name		Type	Description
	traceId	string	The unique id for the trace job. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	transactionId	string	The unique id for the transaction. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
	tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

5.2 Generic Interface Parameters Response

5.2.1 bss.genericInterfaceParameters Response Version 4

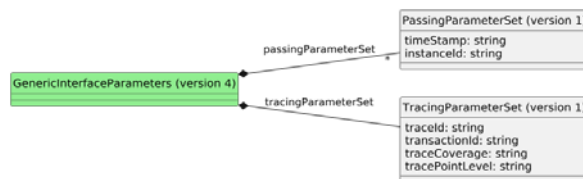


Figure 12 bss.genericInterfaceParameters.response.4 UML representation

The representation is provided as JSON objects with the following attributes:

Table 181 bss.cmn.GenericInterfaceParameters (version 4)

Name	Type	Description
bss.cmn.GenericInterfaceParameters (version 4)	object	The Generic Interface Parameters (GIP) is used for transaction traceability.



Name		Type	Description
	passingParameterSet	array of <code>bss.cmn.PassingParameterSet</code> (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	<code>bss.cmn.TracingParameterSet</code> (version 1)	Tracing Parameter Set.

5.2.1.1

`bss.cmn.PassingParameterSet` (version 1)

Table 182 `bss.cmn.PassingParameterSet` (version 1)

Name		Type	Description
<code>bss.cmn.PassingParameterSet</code> (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the <code>ppsItem</code> was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0]))))T(((0[1][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	instanceId	string	Identification of the entity that created the <code>ppsItem</code> . Max length: 256

5.2.1.2

`bss.cmn.TracingParameterSet` (version 1)

Table 183 `bss.cmn.TracingParameterSet` (version 1)

Name		Type	Description
<code>bss.cmn.TracingParameterSet</code> (version 1)		object	Tracing Parameter Set.



Name		Type	Description
	traceId	string	The unique id for the trace job. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	transactionId	string	The unique id for the transaction. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
	tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

6 Result Representation

Results are reported through HTTP status codes. JSON objects are provided for requests that reaches the application component. The following tables describe the elements and their structure contained in the result representation.

6.1 bss.errorMessage Response Version 2




Figure 13 bss.errorMessage.response.2 UML representation

The representation is provided as JSON objects with the following attributes:

Table 184 bss.cmn.ErrorMessageExtended (version 2)

Name		Type	Description
bss.cmn.ErrorMessageExtended (version 2)		object	Extended error message structure.
	supplementaryError	array of bss.cmn.SupplementaryError (version 2)	Supplementary Error.
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	httpStatusCode	integer	HTTP status code.



6.1.1 **bss.cmn.SupplementaryError (version 2)**

Table 185 bss.cmn.SupplementaryError (version 2)

Name		Type	Description
bss.cmn.Supplementary Error (version 2)		object	Supplementary error message structure. In case of partial error scenarios, this structure may also include successful responses to show what parts went ok.
	source	string	Source of error. Max length: 256
	action	string	Action causing error. Max length: 256
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	httpStatusCode	integer	HTTP status code.

6.2 **Result Codes**

The supported Error Codes could be found in the 'Error Codes' document.



7 Interface Version Changes

The following sections describe the changes between the interface versions.

7.1 Interface Version 1.0

Table 186 Changes

Resources	Type of Change	Description
N/A	N/A	First version.

7.2 Interface Version 1.1

Table 187 Changes

Resources	Type of Change	Description
All	Added	Added Retry-After header for http status code 503 response. Added ERICSSON.Global-Unique-Request-Id header for all responses. Added http status code 503 for all responses.

7.3 Interface Version 1.2

Table 188 Changes

Resources	Type of Change	Description
All	Add	Added Http Status Code 406 in the list of response code.
All	Remove	Removed http status code 401 and 403 from error messages.



7.4 Interface Version 1.3

Table 189 Changes

Resources	Type of Change	Description
Organization	Added	Added Organization resource.

7.5 Interface Version 1.4

Table 190 Changes

Resources	Type of Change	Description
All	Updated	Change handling of content-type for request/responses operations.

7.6 Interface Version 1.5

Table 191 Changes

Resources	Type of Change	Description
Individual	Added attribute.	Added siteName attribute in the request and response create Individual and response of read Individual.



Reference List

- [1] [RFC 7231 - Hypertext Transfer Protocol \(HTTP/1.1\): Semantics and Content](#)
- [2] [RFC 7230 - Hypertext Transfer Protocol \(HTTP/1.1\): Message Syntax and Routing](#)
- [3] [RFC 6906 - The 'profile' Link Relation Type](#)
- [4] [RFC 4122 - A Universally Unique Identifier \(UUID\) URN Namespace](#)
- [5] [RFC 3986 - Uniform Resource Identifier \(URI\): Generic Syntax](#)
- [6] [RFC 2818 - HTTP Over TLS](#)
- [7] [RFC 2616 - Hypertext Transfer Protocol -- HTTP/1.1](#)