

BSS TMF637 Product Inventory Management REST Interface 1.5

INTERFACE DESCRIPTION

Copyright

© Ericsson AB 2025. All Rights Reserved. No part of this document may be reproduced in any form without the written permission of the copyright owner.

Disclaimer

The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. Ericsson shall have no liability for any error or damage of any kind resulting from the use of this document.

This information is intended exclusively for demonstration purposes when used in the development of client-side integrations. It may not include definitions for various elements or behaviors that could arise from client-server interactions involving any third-party products, providers, or deployment platforms, whether external or internal to the delivered product.

Trademark List

Ericsson and the Ericsson logotype are the trademarks or registered trademarks of Telefonaktiebolaget LM Ericsson. All other product or service names mentioned in a document on this server are trademarks of their respective companies.



Contents

1	Introduction	1
1.1	Transfer Mechanism	1
1.2	Authentication and Authorization	1
1.3	Compatibility Mechanism	1
1.3.1	HTTP Content Negotiation	1
1.3.2	Product Customization	1
1.3.3	Backward Compatibility	2
2	Syntax Notation	3
2.1	Resource Identifier	3
2.2	HTTP Headers	3
2.3	Resource Schema and Version	4
3	Service	5
3.1	BSS TMF637 Product Inventory Management	5
3.1.1	Description	5
3.2	Service Registry	5
4	Resources	7
4.1	Product	7
4.1.1	Create Product	7
4.1.2	List Product	70
4.1.3	Read Product	108
4.1.4	Update Product	146
5	Generic Interface Parameters	203
5.1	Generic Interface Parameters Request	203
5.1.1	bss.genericInterfaceParameters Request Version 4	203
5.2	Generic Interface Parameters Response	208
5.2.1	bss.genericInterfaceParameters Response Version 4	208
6	Result Representation	211
6.1	bss.errorMessage Response Version 2	211
6.1.1	bss.cmn.SupplementaryError (version 2)	212
6.2	Result Codes	212
7	Interface Version Changes	213
7.1	Interface Version 1.0	213
7.2	Interface Version 1.1	213



7.3	Interface Version 1.2	213
7.4	Interface Version 1.3	213
7.5	Interface Version 1.4	214
7.6	Interface Version 1.5	214
Reference List		215



1 Introduction

Target Groups

The target group for this document is:

— Solution Integrators

1.1 Transfer Mechanism

The transfer mechanism used is HTTPS. Both requests and responses use headers to send information about the message.

The access port is configurable. Clients that use this interface should support a configurable port.

1.2 Authentication and Authorization

Authentication is controlled by the inclusion of a Java Web Token (JWT) in the authorization header of the HTTP message.

1.3 Compatibility Mechanism

The following version mechanisms are used:

1.3.1 HTTP Content Negotiation

HTTP content negotiation uses the media type in the HTTP Accept header to request a certain version of the resource representation. If the version is not passed in the HTTP Accept header, the server returns the latest version of the resource representation.

For operations supporting error response version 1, if error response version is not specified it is assumed to be error response version 1.

1.3.2 Product Customization

Elements and data types that are specific for product customization are marked with PC in the section describing the element or data type. Functions and characteristics of a product customization is not part of the standard delivery. Contact your local Ericsson office for more information regarding ordering and compatibility.



All elements of a PC message are also product customizations when inside such a message. If an element or data type is marked PC within an otherwise standard record, is noted as such in the relevant chapters.

In order to improve readability the following applies in the rest of the document:

- The following applies to functions marked with (PC). The PC-tag is placed in the description.

1.3.3 Backward Compatibility

Json objects name and/or their respective content stated in this document may be changed without any further notice.

Backward compatibility within a major version is only kept for the messages sent over the network.



2 Syntax Notation

This interface uses a generic syntax that is described in the following sections. For a description of the actual values, refer to Resources.

2.1 Resource Identifier

The resource identifier is expressed by a URI with the following format:

`{serverRoot}/{api}/{resourcePath}`

`{scheme:}://{host}[:{port}]/[{deploymentComponent}]{apiName}/{apiVersion}/{resourcePath}`

Table 1 Server root parameter

Parameter	Description
serverRoot	Is implementation specific
api	Is the name and version of the API.

Table 2 API and resource path parameters

Parameter	Description
scheme	The Application protocol, for example HTTPS.
host	The network address to access the interface and its connected service.
port	The TCP/IP port used for access. If not specified, default ports for the applications are assumed.
deploymentComponent	The name of the deployment component providing the resource.
apiName	The name of the interface.
apiVersion	The version to use
resourcePath	The resource name and a unique ID.

The full URI must be encoded according to RFC3986 before usage.

2.2 HTTP Headers

The interface uses standard HTTP headers. In addition, custom HTTP headers are used with the following syntax:



ERICSSON.<name>:<value>

If no Accept header field is present, then it is assumed that the client accepts all media types.

2.3 Resource Schema and Version

The resource schema and version indicates that a resource representation follows one or more schemas.

The resource schema and version is identified by a subtype with the following syntax:

application/x.<domain>.<interface>.<resource>.<operationAndDirection>+json;version=<version> or application/x.<domain>.<interface>.<resource>.<operationAndDirection>+merge-patch+json;version=<version> depending on operation.

Table 3 REST Resource Representation Parameters

Parameter	Description
domain	Fixed value: bss
interface	Is the interface name.
resource	Is the resource name.
operationAndDirection	Is the CRUD operation with its direction request and response.
version	Major version of the resource representation.

3 Service

3.1 BSS TMF637 Product Inventory Management

Please read the service documentation available to understand how to use this interface in connection with the service.

3.1.1 Description

The Product API provides a standardized mechanism to retrieve product inventory information.

3.2 Service Registry

The Service Registry is a central repository of available services. Their locations are used by clients to dynamically find the service providers it needs. A service provider registers its services in the registry. Service consumers look up services and service locations.

The services accessed through the interface are the following:

Table 4 Services Exposed in the Service Registry

Service Name	Service Type	Version	Environment	Available Capabilities	Optional Data
BSS_TMF637_Product_Inventory_Management	REST	1	Prod		
BSS_TMF637_Product_Inventory_Management	REST	1	Prod		secured=true

Note: This chapter is only applicable for Virtualized deployments.





4 Resources

The interface offers access to different resources. Each resource has its own access path and parameters which are described in the following sections.

The referenced representations are available in a ZIP file at the following location:

edw:/alex?FN=BSSTMF637ProductInventoryManagement_v1_5_schemaFile.zip

4.1 Product

A Product represents an instance of a product offering subscribed to by a party, such as a customer, the place where the product is in use, as well as configuration characteristics, such as assigned telephone numbers and internet addresses. The Product also tracks the services and/or resources through which the product is realized.

4.1.1 Create Product

Create product information.

4.1.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

— POST {scheme:}://{host}[:{port}]/[{deploymentComponent}]/bssTmf637ProductInventoryManagement/v1/product

4.1.1.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 5 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf637ProductInventoryManagement.product.createResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf637ProductInventoryManagement.product.createResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Content-Type		Mandatory
	One of the following: • application/x.bss.Tmf637ProductInventoryManagement.product.createRequest+json;version=1;charset=utf-8 • application/x.bss.Tmf637ProductInventoryManagement.product.createRequest+json;version=1 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 6 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 7 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 201, one of the following: • application/x.bss.Tmf637ProductInventoryManagement.product.createResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf637ProductInventoryManagement.product.createResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2} GMT))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 8 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.1.1.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.1.1.3.1 bss.Tmf637ProductInventoryManagement.product Create Request Version 1

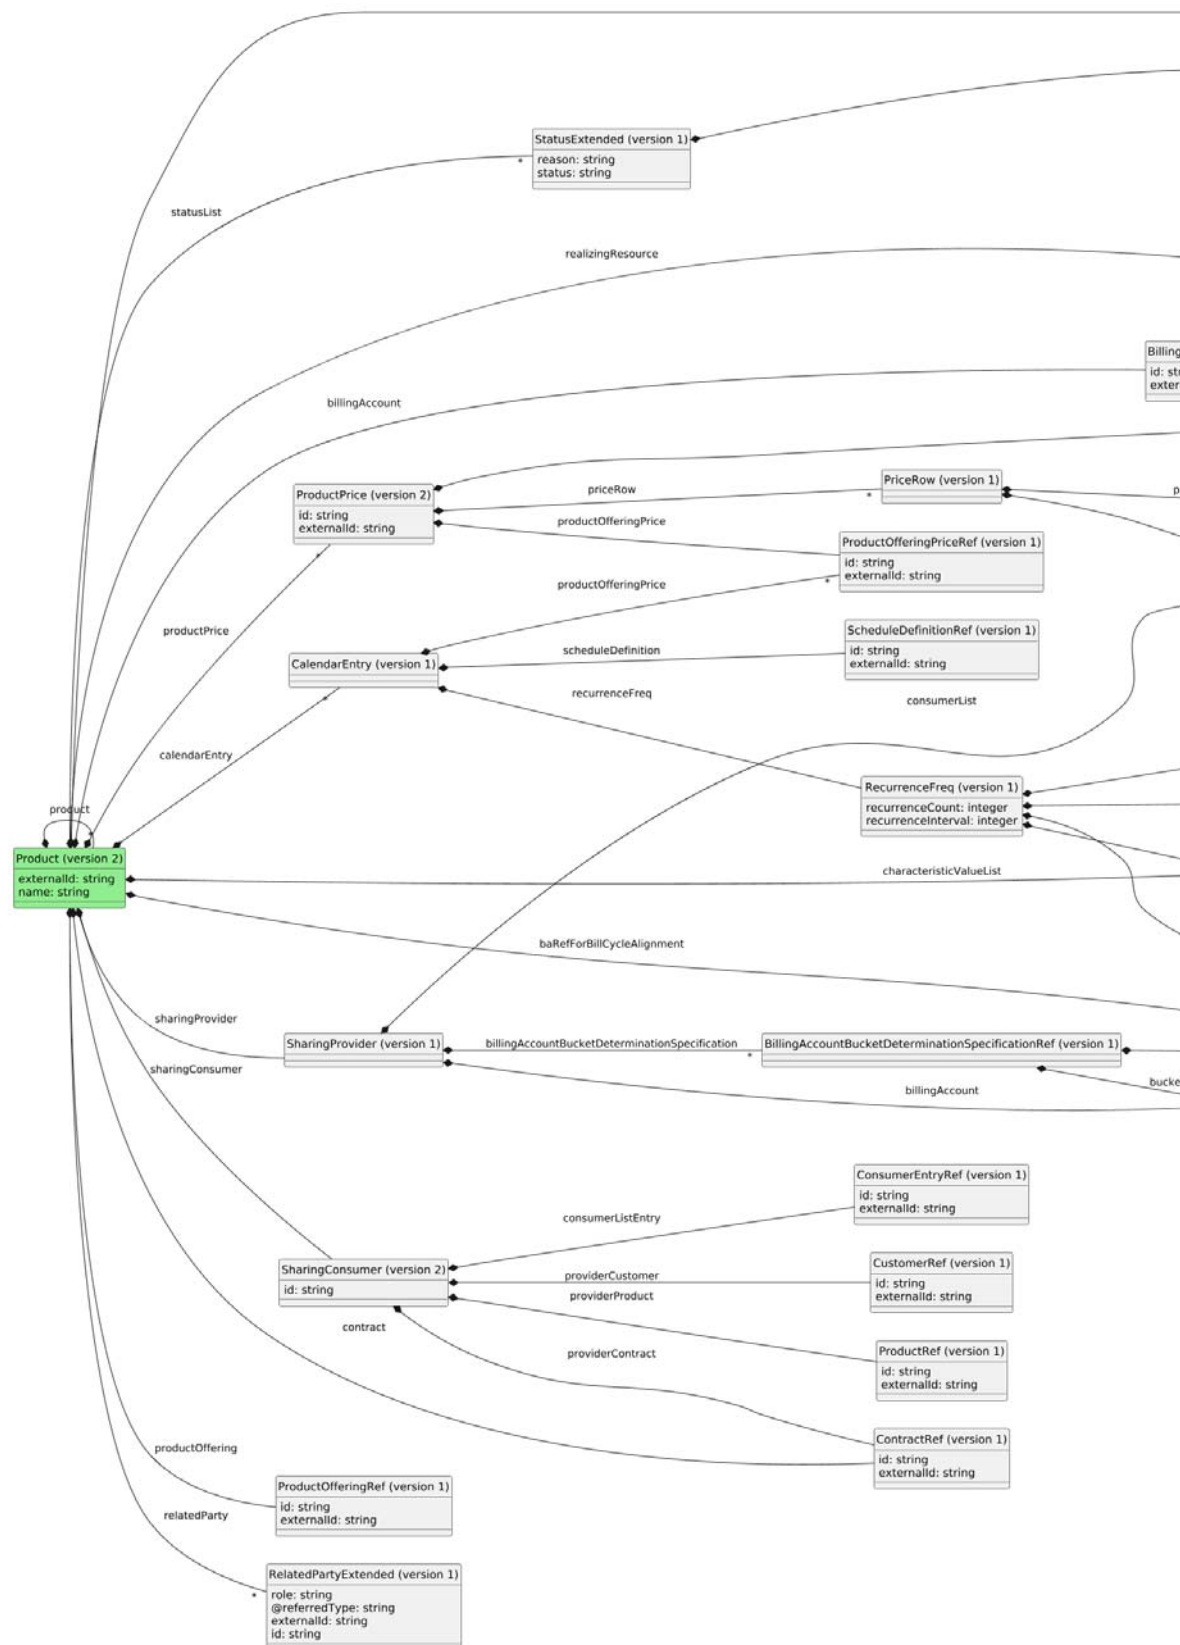


Figure 1 bss.Tmf637ProductInventoryManagement.product.createRequest.1 UML representation



The representation is provided as JSON objects with the following attributes:

Table 9 Product (version 2)

Name	Type	Description
Product (version 2)	object	Product derived from a product offering related to a contract.



Name		Type	Description
	externalId	string	Identifier of the product in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	name	string	A word, term, or phrase by which the product is known and distinguished from other products. Not guaranteed to be unique. Max length: 128
	characteristicValueList	array of CharacteristicValue (version 2)	A list of product characteristic values. Only if the characteristics need to be personalized.
	statusList	array of bss.cmn.StatusExtended (version 1)	A list of statuses linked to the product.
	productPrice	array of ProductPrice (version 2)	List of product prices.
	product	array of Product (version 2)	References to sub-products in a hierarchical product structure.
	sharingProvider	SharingProvider (version 1)	Information of the provider configuration. Only applicable for provider products.
	sharingConsumer	SharingConsumer (version 2)	The provider whom this product is sharing from. Only applicable for consumer products.
	baRefForBillingCycleAlignment	BillingAccountRef (version 1)	Customer's Billing Account Id for Billing Cycle.
	contract	ContractRef (version 1)	Contract.
	billingAccount	BillingAccountRefExt (version 1)	Billing Account used to Invoice the charges from product.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the Product.
	calendarEntry	array of CalendarEntry (version 1)	List of calendar entry.
	productOffering	ProductOfferingRef (version 1)	The product offering reference.
	realizingResource	array of Resource (version 2)	The resource reference.
	relatedParty	array of RelatedPartyExtended (version 1)	List of related parties.



CharacteristicValue (version 2)

Table 10 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 11 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 12 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 13 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 14 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: <code>^(?=\s*\S).*</code> Max length: 256



bss.cmn.StatusExtended (version 1)

Table 15 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

ProductPrice (version 2)

Table 16 ProductPrice (version 2)

Name		Type	Description
ProductPrice (version 2)		object	Product price details corresponding to a product related to a contract.
	id	string	Unique identifier of a product price. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	External identifier of the product price. Pattern: ^(?=\s*\S).* Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the product price is valid for.
	productOfferingPrice	ProductOfferingPriceRef (version 1)	The references of product offering price.
	priceRow	array of PriceRow (version 1)	The price row.



ProductOfferingPriceRef (version 1)

Table 17 ProductOfferingPriceRef (version 1)

Name		Type	Description
ProductOfferingPriceRef (version 1)		object	The product offering price reference.
	id	string	The ID of the referenced product offering price. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced product offering price. Pattern: ^(?=\s*\S).*\$ Max length: 256

PriceRow (version 1)

Table 18 PriceRow (version 1)

Name		Type	Description
PriceRow (version 1)		object	Price row.
	priceAction	array of PriceAction (version 1)	The price action.
	productOfferingPriceRow	ProductOfferingPriceRowRef (version 1)	The reference of the product offering price row.

PriceAction (version 1)

Table 19 PriceAction (version 1)

Name	Type	Description
PriceAction (version 1)	object	Price action.



Name		Type	Description
	action	ActionRef (version 1)	The reference of the action.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of product price characteristic values. Only if the characteristics need to be personalized.
	actionCharacteristicValueList	array of ActionCharacteristicValue (version 1)	A list of product price action characteristic values. Only if the characteristics need to be personalized.

ActionRef (version 1)

Table 20 ActionRef (version 1)

Name		Type	Description
ActionRef (version 1)		object	Reference of the action.
	id	string	The ID of the referenced action. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external ID of the referenced action. Pattern: ^(?=\s*\S).* Max length: 256

ActionCharacteristicValue (version 1)

Table 21 ActionCharacteristicValue (version 1)

Name		Type	Description
ActionCharacteristicValue (version 1)		object	Action Characteristic value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the Action Characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The Action Characteristic value.
	actionCharacteristicSpecificationUserRef	EntitySpecRef (version 1)	Action Characteristic Specification Use reference.



EntitySpecRef (version 1)

Table 22 EntitySpecRef (version 1)

Name		Type	Description
EntitySpecRef (version 1)		object	Reference to an entity specification.
	id	string	Unique identifier of the specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

ProductOfferingPriceRowRef (version 1)

Table 23 ProductOfferingPriceRowRef (version 1)

Name		Type	Description
ProductOfferingPriceRowRef (version 1)		object	The product offering price row reference.
	id	string	The ID of the referenced product offering price row. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced product offering price row. Pattern: ^(?=\s*\S).*\$ Max length: 256

SharingProvider (version 1)

Table 24 SharingProvider (version 1)

Name		Type	Description
SharingProvider (version 1)		object	Information required for the provider specific parts of a sharing product.



Name		Type	Description
	billingAccount	array of BillingAccountRef (version 1)	List of billing accounts to be shared. Only applicable for products connected to a sharing provider specification with the characteristic must select BA set to true.
	consumerList	array of ConsumerEntry (version 1)	List of consumers to share to.
	billingAccountBucketDeterminationSpecification	array of BillingAccountBucketDeterminationSpecificationRef (version 1)	List of billing accounts and its Bucket Determination Specification to be shared. Only applicable for products connected to a sharing provider specification with the characteristic must select BA set to true.

BillingAccountRef (version 1)

Table 25 BillingAccountRef (version 1)

Name		Type	Description
BillingAccountRef (version 1)		object	Billing Account Reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).* Max length: 256

ConsumerEntry (version 1)

Table 26 ConsumerEntry (version 1)

Name		Type	Description
ConsumerEntry (version 1)		object	The consumer that is consuming the shared provider product.



Name		Type	Description
	externalId	string	Unique identifier of a Consumer Entry in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	id	string	Unique identifier of the consumer entry. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerCustomerId	string	The identifier of the customer that the consumer belongs to. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerCustomerExternalId	string	The external identifier of the customer that the consumer belongs to. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerContractId	string	The identifier of the consumer contract. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerContractExternalId	string	The external identifier of the consumer contract. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the consumer entry is valid for.



BillingAccountBucketDeterminationSpecificationRef (version 1)

Table 27 BillingAccountBucketDeterminationSpecificationRef (version 1)

Name		Type	Description
BillingAccountBucketDeterminationSpecificationRef (version 1)		object	Billing Account Bucket Determination Specification Reference.
	billingAccount	BillingAccountRef (version 1)	Billing account reference.
	bucketDeterminationSpecification	BucketDeterminationSpecificationRef (version 1)	Bucket determination specification.

BucketDeterminationSpecificationRef (version 1)

Table 28 BucketDeterminationSpecificationRef (version 1)

Name		Type	Description
BucketDeterminationSpecificationRef (version 1)		object	Bucket Determination Specification Reference.
	id	string	Unique identifier of the bucket determination specification. Pattern: $^{(?=\text{s*}\text{S}).*\$}$ Max length: 256
	externalId	string	Identifier of the bucket determination specification in an external system. Pattern: $^{(?=\text{s*}\text{S}).*\$}$ Max length: 256

SharingConsumer (version 2)

Table 29 SharingConsumer (version 2)

Name	Type	Description
SharingConsumer (version 2)	object	Links the sharing provider that the sharing consumer is consuming from.



Name		Type	Description
	id	string	Unique identifier of a sharing consumer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	providerContract	ContractRef (version 1)	Provider Contract Reference.
	providerProduct	ProductRef (version 1)	Provider Product Reference.
	providerCustomer	CustomerRef (version 1)	Provider Customer Reference.
	consumerListEntry	ConsumerEntryRef (version 1)	Customer List Entry Reference.

ContractRef (version 1)

Table 30 ContractRef (version 1)

Name		Type	Description
ContractRef (version 1)		object	Contract Reference.
	id	string	Identifier of a contract instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the contract for interaction in external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

ProductRef (version 1)

Table 31 ProductRef (version 1)

Name		Type	Description
ProductRef (version 1)		object	Product Reference.



Name		Type	Description
	id	string	ID of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256

CustomerRef (version 1)

Table 32 CustomerRef (version 1)

Name		Type	Description
CustomerRef (version 1)		object	Customer Reference.
	id	string	ID of the customer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External Id of the customer. Pattern: ^(?=\s*\S).*\$ Max length: 256

ConsumerEntryRef (version 1)

Table 33 ConsumerEntryRef (version 1)

Name		Type	Description
ConsumerEntryRef (version 1)		object	Consumer Entry Reference.
	id	string	Unique identifier of the consumer entry instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the consumer entry in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256



BillingAccountRefExt (version 1)

Table 34 BillingAccountRefExt (version 1)

Name		Type	Description
BillingAccountRefExt (version 1)		object	Billing Account Reference extended to include validFor.
	validFor	bss.cmn.TimePeriod (version 1)	The start time to change the billing account reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256

CalendarEntry (version 1)

Table 35 CalendarEntry (version 1)

Name		Type	Description
CalendarEntry (version 1)		object	Calendar Entry.
	scheduleDefinition	ScheduleDefinitionRef (version 1)	The reference of a schedule definition.
	productOfferingPrice	array of ProductOfferingPriceRef (version 1)	The references of product offering price.
	recurrenceFreq	RecurrenceFreq (version 1)	Recurrence frequency of a schedule definition.

ScheduleDefinitionRef (version 1)

Table 36 ScheduleDefinitionRef (version 1)

Name		Type	Description
ScheduleDefinitionRef (version 1)		object	Schedule Definition Reference.



Name		Type	Description
	id	string	Unique identifier of the schedule definition. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the schedule definition in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256

RecurrenceFreq (version 1)

Table 37 RecurrenceFreq (version 1)

Name		Type	Description
RecurrenceFreq (version 1)		object	Recurrence frequency of schedule definition.
	recurrenceCount	integer	Recurrence count of a schedule definition. The numeric value must be at least 1. The numeric value must not exceed 9223372036854775806.
	recurrenceInterval	integer	Recurrence interval of a schedule definition. The numeric value must be at least 1. The numeric value must not exceed 9223372036854775806.
	time	TimePredefinedTimeZone (version 1)	Time with predefined time zone.
	weekly	Weekly (version 1)	Recurrence frequency Weekly.
	monthly	Monthly (version 1)	Recurrence frequency monthly.
	yearly	Yearly (version 1)	Recurrence frequency yearly.



TimePredefinedTimeZone (version 1)

Table 38 TimePredefinedTimeZone (version 1)

Name		Type	Description
TimePredefinedTimeZo ne (version 1)		object	A time with a predefined time zone.
	time	string	This type defines a time value based on the definition found at http://www.w3.org/TR/xmlschema-2/#time . Fractional seconds with three decimals are mandatory. Leap seconds are not supported. Example values are '14:35:05.003'. The latter example is the recommended format. Pattern: ^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000)?)\$
	timeZone	string	This specifies which predefined time zone to be used. Possible values: HOME_TIME_ZONE

Weekly (version 1)

Table 39 Weekly (version 1)

Name		Type	Description
Weekly (version 1)		object	Schedule definition by weekly.
	recurrenceByDay	array of string	Recurrence by weekdays. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY



Monthly (version 1)

Table 40 Monthly (version 1)

Name		Type	Description
Monthly (version 1)		object	Schedule definition by monthly.
	monthDayNumber	array of MonthDay Number (version 1)	Monthly schedule definition by month day number.
	weekdayOfMonth	WeekdayOfMonth (version 1)	Monthly schedule definition by weekday of month.

MonthDayNumber (version 1)

Table 41 MonthDayNumber (version 1)

Name		Type	Description
MonthDayNumber (version 1)		object	List of days of month.
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByMonth Day	integer	Recurrence by month day. The numeric value must be at least 1. The numeric value must not exceed 28.

WeekdayOfMonth (version 1)

Table 42 WeekdayOfMonth (version 1)

Name		Type	Description
WeekdayOfMonth (version 1)		object	Schedule definition by weekday of month.



Name		Type	Description
	recurrenceByDay	string	Recurrence by weekday. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY
	weekNumber	string	Recurrence by week number of the month. Possible values: FIRST SECOND THIRD FOURTH LAST

Yearly (version 1)

Table 43 Yearly (version 1)

Name		Type	Description
Yearly (version 1)		object	Recurrence frequency of schedule definition.
	weekdaysOfYear	WeekdaysOfYear (version 1)	Yearly schedule definition by weekdays of year.
	daysOfMonth	DaysOfMonth (version 1)	Yearly schedule definition by days of month.
	daysOfYear	array of DaysOfYear (version 1)	Yearly schedule definition by days of year.



WeekdaysOfYear (version 1)

Table 44 WeekdaysOfYear (version 1)

Name		Type	Description
WeekdaysOfYear (version 1)		object	Yearly schedule definition by weekdays of year.
	recurrenceByDay	array of string	Recurrence by weekdays. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY
	weekNumber	array of WeekNumber (version 1)	Week number of the year.

WeekNumber (version 1)

Table 45 WeekNumber (version 1)

Name		Type	Description
WeekNumber (version 1)		object	List of week number of the year.
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByWeekNo	integer	Recurrence by week number of the year. The numeric value must be at least 1. The numeric value must not exceed 52.



DaysOfMonth (version 1)

Table 46 DaysOfMonth (version 1)

Name		Type	Description
DaysOfMonth (version 1)		object	Schedule definition by days of month.
	monthDayNumber	array of MonthDay Number (version 1)	Recurrence by month day.
	recurrenceByMonth	array of string	Recurrence by months. Possible values: JANUARY FEBRUARY MARCH APRIL MAY JUNE JULY AUGUST SEPTEMBER OCTOBER NOVEMBER DECEMBER

DaysOfYear (version 1)

Table 47 DaysOfYear (version 1)

Name	Type	Description
DaysOfYear (version 1)	object	Yearly schedule definition by days of year.



Name		Type	Description
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByYearDay	integer	Recurrence by year day. The numeric value must be at least 1. The numeric value must not exceed 366.

ProductOfferingRef (version 1)

Table 48 ProductOfferingRef (version 1)

Name		Type	Description
ProductOfferingRef (version 1)		object	The product offering reference.
	id	string	The ID of the referenced product offering. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external ID of the referenced product offering. Pattern: <code>^(?=\s*\S).*</code> Max length: 256

Resource (version 2)

Table 49 Resource (version 2)

Name	Type	Description
Resource (version 2)	object	Structure of a logical resource the represent an identification.



Name		Type	Description
	externalId	string	An external identifier of a logical resource. Pattern: $^(?=\s*\S).*\$$ Max length: 256
	characteristicValue List	array of CharacteristicValue (version 2)	A list of the logical resources characteristic values. Only if the characteristics need to be personalized.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the resource.
	resourceNumber	string	The complete number to identify the resource. For an MSISDN-DCS (GSM standard 1800) this is CC + NDC + SN. For an MSISDN-PCS (GSM standard PCS 1900) this is CC + NPA + SN. For an IMSI this is MCC + MNC + MSIN. (CC = Country code, NDC = National destination code, NPA = Number planning area, SN = Subscriber number, MCC = Mobile country code, MNC = Mobile network code, MSIN = Mobile subscriber identification number). Max length: 512
	resourceSpecification	ResourceSpecificationRef (version 1)	Resource specification definition.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the resource is valid for.

bss.cmn.Status (version 1)

Table 50 bss.cmn.Status (version 1)

Name	Type	Description
bss.cmn.Status (version 1)	object	Structure of one status version element.



Name		Type	Description
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

ResourceSpecificationRef (version 1)

Table 51 ResourceSpecificationRef (version 1)

Name		Type	Description
ResourceSpecificationRef (version 1)		object	Resource Specification Reference.
	id	string	Unique identifier of the resource specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	External identifier of the resource specification. Pattern: ^(?=\s*\S).* Max length: 256

RelatedPartyExtended (version 1)

Table 52 RelatedPartyExtended (version 1)

Name		Type	Description
RelatedPartyExtended (version 1)		object	Related Party Extended.




Name		Type	Description
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

4.1.1.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.1.4.1 bss.Tmf637ProductInventoryManagement.product Create Response Version 1

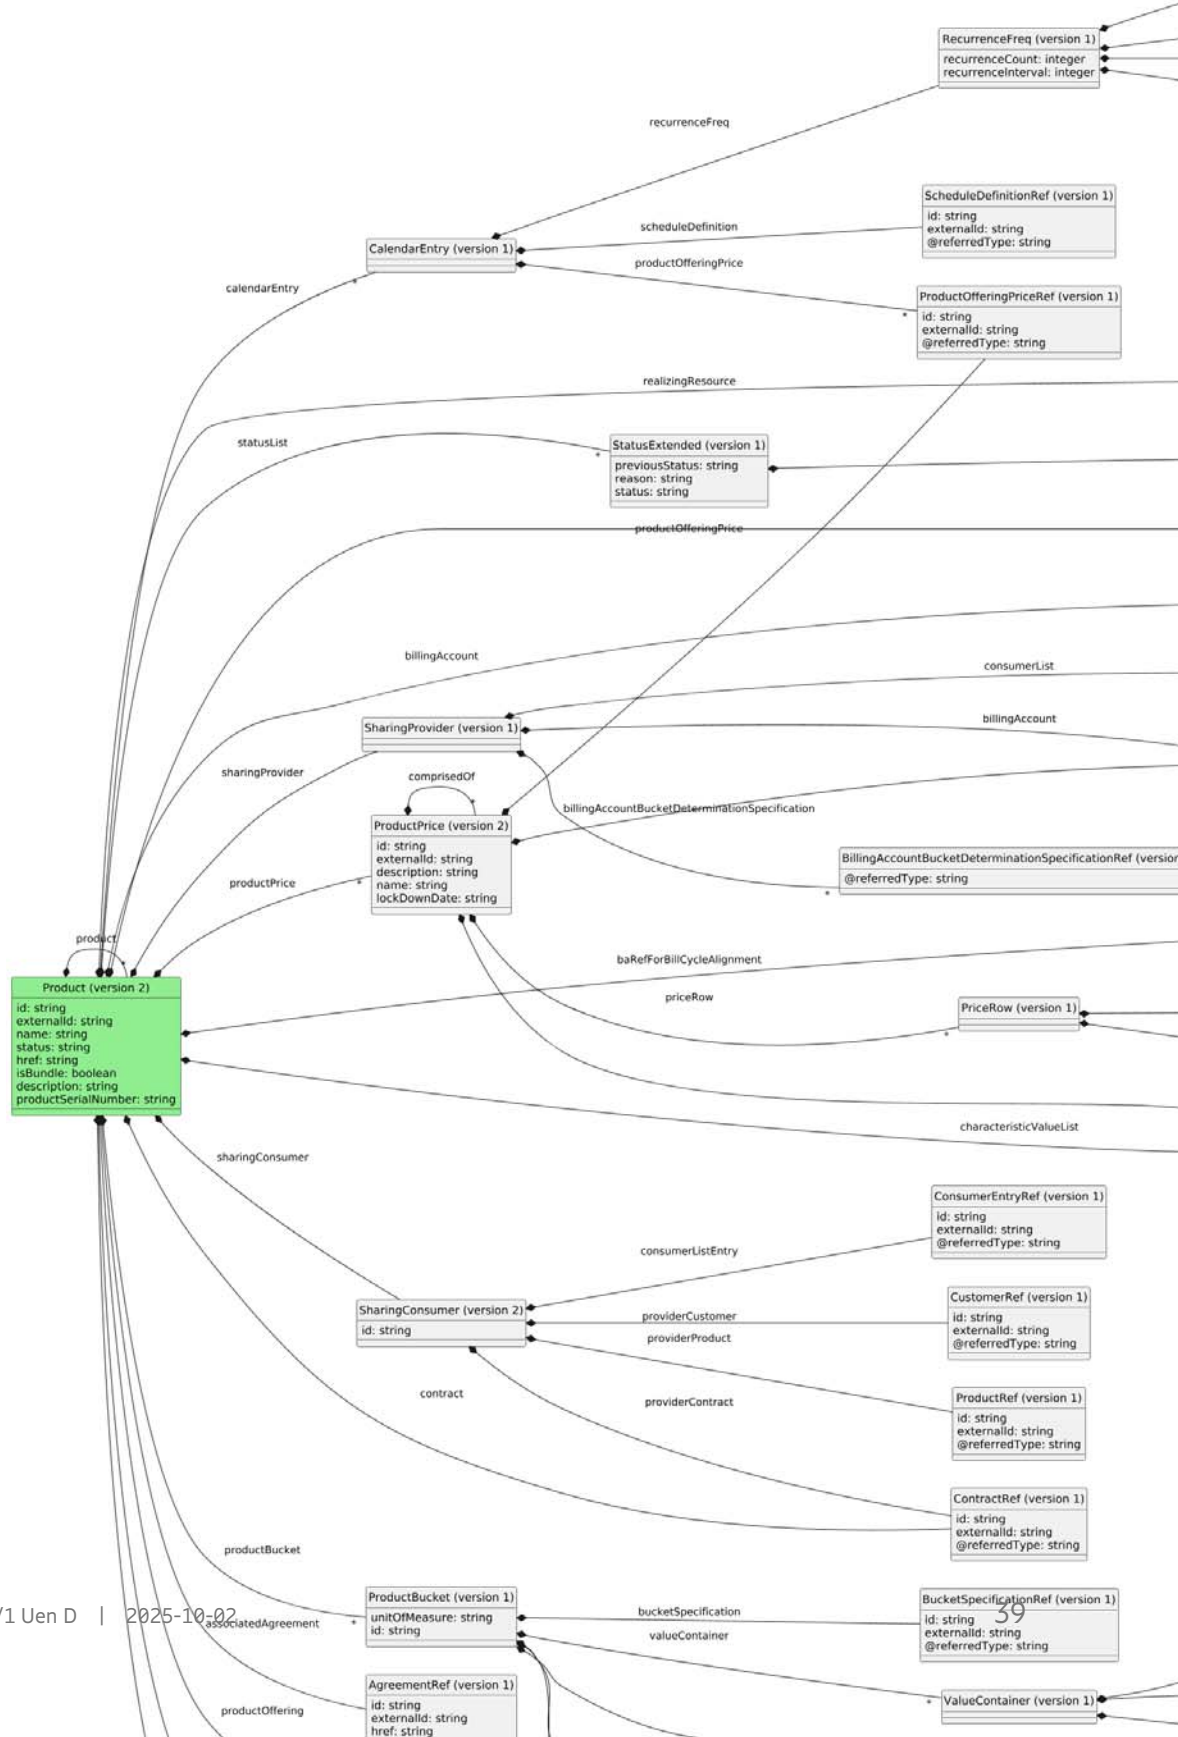



The representation is provided as JSON objects with the following attributes:

Table 53 Product (version 2)

Name	Type	Description
Product (version 2)	object	Product derived from a product offering related to a contract.



Name		Type	Description
	id	string	Unique identifier of a product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the product in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	A word, term, or phrase by which the product is known and distinguished from other products. Not guaranteed to be unique. Max length: 128
	characteristicValueList	array of CharacteristicValue (version 2)	A list of product characteristic values. Only if the characteristics need to be personalized.
	statusList	array of bss.cmn.StatusExtended (version 1)	A list of statuses linked to the product.
	status	string	Status of the product Max length: 256
	productPrice	array of ProductPrice (version 2)	List of product prices.
	product	array of Product (version 2)	References to sub-products in a hierarchical product structure.
	sharingProvider	SharingProvider (version 1)	Information of the provider configuration. Only applicable for provider products.
	sharingConsumer	SharingConsumer (version 2)	The provider whom this product is sharing from. Only applicable for consumer products.
	baRefForBillingCycleAlignment	BillingAccountRef (version 1)	Customer's Billing Account Id for Billing Cycle.
	associatedAgreement	AgreementRef (version 1)	Associated agreement.
	contract	ContractRef (version 1)	Contract.
	billingAccount	BillingAccountRefExt (version 1)	Billing Account used to Invoice the charges from product.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the Product.
	calendarEntry	array of CalendarEntry (version 1)	List of calendar entry.



CharacteristicValue (version 2)

Table 54 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 55 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 56 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 57 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 58 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.



Name		Type	Description
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.StatusExtended (version 1)

Table 59 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	previousStatus	string	The Previous status for the given time period. Max length: 256
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

ProductPrice (version 2)

Table 60 ProductPrice (version 2)

Name		Type	Description
ProductPrice (version 2)		object	Product price details corresponding to a product related to a contract.



Name		Type	Description
	id	string	Unique identifier of a product price. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the product price. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the product price is valid for.
	comprisedOf	array of ProductPrice (version 2)	References to sub-product prices in a hierarchical product price structure.
	characteristicValueList	array of CharacteristicValuePrice (version 2)	A list of product price characteristic values. Only if the characteristics need to be personalized.
	productOfferingPrice	ProductOfferingPriceRef (version 1)	The references of product offering price.
	priceRow	array of PriceRow (version 1)	The price row.
	description	string	Product price description. A narrative that explains in detail the semantics of this product price. Max length: 128
	name	string	A short descriptive name. Max length: 128
	lockDownDate	string	This is the date on which the product price is locked. Format: date-time Pattern: ^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) (0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$



CharacteristicValuePrice (version 2)

Table 61 CharacteristicValuePrice (version 2)

Name		Type	Description
CharacteristicValuePrice (version 2)		object	A value of a Characteristic.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any. Deprecated
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

ProductOfferingPriceRef (version 1)

Table 62 ProductOfferingPriceRef (version 1)

Name		Type	Description
ProductOfferingPriceRef (version 1)		object	The product offering price reference.
	id	string	The ID of the referenced product offering price. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external ID of the referenced product offering price. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128



PriceRow (version 1)

Table 63 PriceRow (version 1)

Name		Type	Description
PriceRow (version 1)		object	Price row.
	priceAction	array of PriceAction (version 1)	The price action.
	productOfferingPriceRow	ProductOfferingPriceRowRef (version 1)	The reference of the product offering price row.

PriceAction (version 1)

Table 64 PriceAction (version 1)

Name		Type	Description
PriceAction (version 1)		object	Price action.
	action	ActionRef (version 1)	The reference of the action.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of product price characteristic values. Only if the characteristics need to be personalized.
	actionCharacteristicValueList	array of ActionCharacteristicValue (version 1)	A list of product price action characteristic values. Only if the characteristics need to be personalized.

ActionRef (version 1)

Table 65 ActionRef (version 1)

Name	Type	Description
ActionRef (version 1)	object	Reference of the action.



Name		Type	Description
	id	string	The ID of the referenced action. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external ID of the referenced action. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

ActionCharacteristicValue (version 1)

Table 66 ActionCharacteristicValue (version 1)

Name		Type	Description
ActionCharacteristicValue (version 1)		object	Action Characteristic value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the Action Characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The Action Characteristic value.
	actionCharacteristicSpecificationUseRef	EntitySpecRef (version 1)	Action Characteristic Specification Use reference.

EntitySpecRef (version 1)

Table 67 EntitySpecRef (version 1)

Name		Type	Description
EntitySpecRef (version 1)		object	Reference to an entity specification.



Name		Type	Description
	id	string	Unique identifier of the specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

ProductOfferingPriceRowRef (version 1)

Table 68 ProductOfferingPriceRowRef (version 1)

Name		Type	Description
ProductOfferingPriceRowRef (version 1)		object	The product offering price row reference.
	id	string	The ID of the referenced product offering price row. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced product offering price row. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

SharingProvider (version 1)

Table 69 SharingProvider (version 1)

Name		Type	Description
SharingProvider (version 1)		object	Information required for the provider specific parts of a sharing product.



Name		Type	Description
	billingAccount	array of BillingAccountRef (version 1)	List of billing accounts to be shared. Only applicable for products connected to a sharing provider specification with the characteristic must select BA set to true.
	consumerList	array of ConsumerEntry (version 1)	List of consumers to share to.
	billingAccountBucketDeterminationSpecification	array of BillingAccountBucketDeterminationSpecificationRef (version 1)	List of billing accounts and its Bucket Determination Specification to be shared. Only applicable for products connected to a sharing provider specification with the characteristic must select BA set to true.

BillingAccountRef (version 1)

Table 70 BillingAccountRef (version 1)

Name		Type	Description
BillingAccountRef (version 1)		object	Billing Account Reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128



ConsumerEntry (version 1)

Table 71 ConsumerEntry (version 1)

Name		Type	Description
ConsumerEntry (version 1)		object	The consumer that is consuming the shared provider product.
	externalId	string	Unique identifier of a Consumer Entry in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	id	string	Unique identifier of the consumer entry. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerCustomerId	string	The identifier of the customer that the consumer belongs to. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerCustomerExternalId	string	The external identifier of the customer that the consumer belongs to. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerContractId	string	The identifier of the consumer contract. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerContractExternalId	string	The external identifier of the consumer contract. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the consumer entry is valid for.



BillingAccountBucketDeterminationSpecificationRef (version 1)

Table 72 BillingAccountBucketDeterminationSpecificationRef (version 1)

Name		Type	Description
BillingAccountBucketDeterminationSpecificationRef (version 1)		object	Billing Account Bucket Determination Specification Reference.
	billingAccount	BillingAccountRef (version 1)	Billing account reference.
	bucketDeterminationSpecification	BucketDeterminationSpecificationRef (version 1)	Bucket determination specification.
	@referredType	string	Referred Type. Max length: 128

BucketDeterminationSpecificationRef (version 1)

Table 73 BucketDeterminationSpecificationRef (version 1)

Name		Type	Description
BucketDeterminationSpecificationRef (version 1)		object	Bucket Determination Specification Reference.
	id	string	Unique identifier of the bucket determination specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the bucket determination specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128



SharingConsumer (version 2)

Table 74 SharingConsumer (version 2)

Name		Type	Description
SharingConsumer (version 2)		object	Links the sharing provider that the sharing consumer is consuming from.
	id	string	Unique identifier of a sharing consumer. Pattern: ^(?=\s*\S).* Max length: 256
	providerContract	ContractRef (version 1)	Provider Contract Reference.
	providerProduct	ProductRef (version 1)	Provider Product Reference.
	providerCustomer	CustomerRef (version 1)	Provider Customer Reference.
	consumerListEntry	ConsumerEntryRef (version 1)	Customer List Entry Reference.

ContractRef (version 1)

Table 75 ContractRef (version 1)

Name		Type	Description
ContractRef (version 1)		object	Contract Reference.
	id	string	Identifier of a contract instance. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	External identifier of the contract for interaction in external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128



ProductRef (version 1)

Table 76 ProductRef (version 1)

Name		Type	Description
ProductRef (version 1)		object	Product Reference.
	id	string	ID of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

CustomerRef (version 1)

Table 77 CustomerRef (version 1)

Name		Type	Description
CustomerRef (version 1)		object	Customer Reference.
	id	string	ID of the customer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External Id of the customer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ConsumerEntryRef (version 1)

Table 78 ConsumerEntryRef (version 1)

Name		Type	Description
ConsumerEntryRef (version 1)		object	Consumer Entry Reference.



Name		Type	Description
	id	string	Unique identifier of the consumer entry instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the consumer entry in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

AgreementRef (version 1)

Table 79 AgreementRef (version 1)

Name		Type	Description
AgreementRef (version 1)		object	Agreement Reference.
	id	string	Unique identifier of the agreement instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the agreement in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128



BillingAccountRefExt (version 1)

Table 80 BillingAccountRefExt (version 1)

Name		Type	Description
BillingAccountRefExt (version 1)		object	Billing Account Reference extended to include validFor.
	validFor	bss.cmn.TimePeriod (version 1)	The start time to change the billing account reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128

CalendarEntry (version 1)

Table 81 CalendarEntry (version 1)

Name		Type	Description
CalendarEntry (version 1)		object	Calendar Entry.
	scheduleDefinition	ScheduleDefinition Ref (version 1)	The reference of a schedule definition.
	productOfferingPrice	array of Product OfferingPriceRef (version 1)	The references of product offering price.
	recurrenceFreq	RecurrenceFreq (version 1)	Recurrence frequency of a schedule definition.



ScheduleDefinitionRef (version 1)

Table 82 ScheduleDefinitionRef (version 1)

Name		Type	Description
ScheduleDefinitionRef (version 1)		object	Schedule Definition Reference.
	id	string	Unique identifier of the schedule definition. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the schedule definition in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

RecurrenceFreq (version 1)

Table 83 RecurrenceFreq (version 1)

Name	Type	Description
RecurrenceFreq (version 1)	object	Recurrence frequency of schedule definition.



Name		Type	Description
	recurrenceCount	integer	Recurrence count of a schedule definition. The numeric value must be at least 1. The numeric value must not exceed 9223372036854775806.
	recurrenceInterval	integer	Recurrence interval of a schedule definition. The numeric value must be at least 1. The numeric value must not exceed 9223372036854775806.
	time	TimePredefinedTimeZone (version 1)	Time with predefined time zone.
	weekly	Weekly (version 1)	Recurrence frequency Weekly.
	monthly	Monthly (version 1)	Recurrence frequency monthly.
	yearly	Yearly (version 1)	Recurrence frequency yearly.

TimePredefinedTimeZone (version 1)

Table 84 TimePredefinedTimeZone (version 1)

Name	Type	Description
TimePredefinedTimeZone (version 1)	object	A time with a predefined time zone.



Name		Type	Description
	time	string	This type defines a time value based on the definition found at http://www.w3.org/TR/xmlschema-2/#time . Fractional seconds with three decimals are mandatory. Leap seconds are not supported. Example values are '14:35:05.003'. The latter example is the recommended format. Pattern: <code>^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000)?</code> \$
	timeZone	string	This specifies which predefined time zone to be used. Possible values: HOME_TIME_ZONE

Weekly (version 1)

Table 85 Weekly (version 1)

Name		Type	Description
Weekly (version 1)		object	Schedule definition by weekly.
	recurrenceByDay	array of string	Recurrence by weekdays. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY



Monthly (version 1)

Table 86 Monthly (version 1)

Name		Type	Description
Monthly (version 1)		object	Schedule definition by monthly.
	monthDayNumber	array of MonthDay Number (version 1)	Monthly schedule definition by month day number.
	weekdayOfMonth	WeekdayOfMonth (version 1)	Monthly schedule definition by weekday of month.

MonthDayNumber (version 1)

Table 87 MonthDayNumber (version 1)

Name		Type	Description
MonthDayNumber (version 1)		object	List of days of month.
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByMonth Day	integer	Recurrence by month day. The numeric value must be at least 1. The numeric value must not exceed 28.

WeekdayOfMonth (version 1)

Table 88 WeekdayOfMonth (version 1)

Name		Type	Description
WeekdayOfMonth (version 1)		object	Schedule definition by weekday of month.



Name		Type	Description
	recurrenceByDay	string	Recurrence by weekday. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY
	weekNumber	string	Recurrence by week number of the month. Possible values: FIRST SECOND THIRD FOURTH LAST

Yearly (version 1)

Table 89 Yearly (version 1)

Name		Type	Description
Yearly (version 1)		object	Recurrence frequency of schedule definition.
	weekdaysOfYear	WeekdaysOfYear (version 1)	Yearly schedule definition by weekdays of year.
	daysOfMonth	DaysOfMonth (version 1)	Yearly schedule definition by days of month.
	daysOfYear	array of DaysOfYear (version 1)	Yearly schedule definition by days of year.



WeekdaysOfYear (version 1)

Table 90 WeekdaysOfYear (version 1)

Name		Type	Description
WeekdaysOfYear (version 1)		object	Yearly schedule definition by weekdays of year.
	recurrenceByDay	array of string	Recurrence by weekdays. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY
	weekNumber	array of WeekNumber (version 1)	Week number of the year.

WeekNumber (version 1)

Table 91 WeekNumber (version 1)

Name		Type	Description
WeekNumber (version 1)		object	List of week number of the year.
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByWeekNo	integer	Recurrence by week number of the year. The numeric value must be at least 1. The numeric value must not exceed 52.



DaysOfMonth (version 1)

Table 92 DaysOfMonth (version 1)

Name		Type	Description
DaysOfMonth (version 1)		object	Schedule definition by days of month.
	monthDayNumber	array of MonthDay Number (version 1)	Recurrence by month day.
	recurrenceByMonth	array of string	Recurrence by months. Possible values: JANUARY FEBRUARY MARCH APRIL MAY JUNE JULY AUGUST SEPTEMBER OCTOBER NOVEMBER DECEMBER

DaysOfYear (version 1)

Table 93 DaysOfYear (version 1)

Name	Type	Description
DaysOfYear (version 1)	object	Yearly schedule definition by days of year.



Name		Type	Description
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByYearDay	integer	Recurrence by year day. The numeric value must be at least 1. The numeric value must not exceed 366.

ProductOfferingRef (version 1)

Table 94 ProductOfferingRef (version 1)

Name		Type	Description
ProductOfferingRef (version 1)		object	The product offering reference.
	id	string	The ID of the referenced product offering. Pattern: $^{(?=\s*\S)}.*\$$ Max length: 256
	externalId	string	The external ID of the referenced product offering. Pattern: $^{(?=\s*\S)}.*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

Resource (version 2)

Table 95 Resource (version 2)

Name		Type	Description
Resource (version 2)		object	Structure of a logical resource the represent an identification.



Name		Type	Description
	id	string	A unique identifier of a logical resource. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	An external identifier of a logical resource. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	characteristicValue List	array of CharacteristicValue (version 2)	A list of the logical resources characteristic values. Only if the characteristics need to be personalized.
	statusList	array of <code>bss.cmn.Status</code> (version 1)	A list of all versions of statuses linked to the resource.
	resourceNumber	string	The complete number to identify the resource. For an MSISDN-DCS (GSM standard 1800) this is CC + NDC + SN. For an MSISDN-PCS (GSM standard PCS 1900) this is CC + NPA + SN. For an IMSI this is MCC + MNC + MSIN. (CC = Country code, NDC = National destination code, NPA = Number planning area, SN = Subscriber number, MCC = Mobile country code, MNC = Mobile network code, MSIN = Mobile subscriber identification number). Max length: 512
	resourceSpecification	ResourceSpecificationRef (version 1)	Resource specification definition.
	validFor	<code>bss.cmn.TimePeriod</code> (version 1)	The time period that the resource is valid for.



bss.cmn.Status (version 1)

Table 96 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

ResourceSpecificationRef (version 1)

Table 97 ResourceSpecificationRef (version 1)

Name		Type	Description
ResourceSpecificationRef (version 1)		object	Resource Specification Reference.
	id	string	Unique identifier of the resource specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the resource specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ServiceRef (version 1)

Table 98 ServiceRef (version 1)

Name	Type	Description
ServiceRef (version 1)	object	Service Reference.



Name		Type	Description
	id	string	Unique identifier of the resource instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

RelatedPartyExtended (version 1)

Table 99 RelatedPartyExtended (version 1)

Name		Type	Description
RelatedPartyExtended (version 1)		object	Related Party Extended.
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

ProductBucket (version 1)

Table 100 ProductBucket (version 1)

Name		Type	Description
ProductBucket (version 1)		object	Product bucket.



Name		Type	Description
	amount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Product Bucket.
	reservedAmount	bss.cmn.Decimal_Sensitive (version 1)	The reserved amount on the Product Bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	valueContainer	array of ValueContainer (version 1)	Product bucket value container.
	replenishedAmount	bss.cmn.Decimal_Sensitive (version 1)	The replenished amount of the bucket.
	id	string	Unique identifier of a product bucket. Pattern: ^(?=\s*\S).*\$ Max length: 256
	bucketSpecification	BucketSpecificationRef (version 1)	Bucket Specification Reference.

bss.cmn.Decimal_Sensitive (version 1)

Table 101 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.



ValueContainer (version 1)

Table 102 ValueContainer (version 1)

Name		Type	Description
ValueContainer (version 1)		object	Value Container.
	amount	bss.cmn.Decimal_Sensitive (version 1)	The amount of this value container.
	replenishedAmount	bss.cmn.Decimal_Sensitive (version 1)	The replenished amount of the value container.
	validFor	bss.cmn.TimePeriod (version 1)	The validity period of the value container.

BucketSpecificationRef (version 1)

Table 103 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

4.1.2 List Product

List product information.

4.1.2.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:



— GET {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf637ProductInventoryManagement/v1/product

Query Parameters

The following table describes the query parameters for the operation:

Table 104 Query Parameters

Name	Type	Description
contractId	string	Contract Identifier. Additional Description: Unique identifier of the contract. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
contractExternalId	string	Contract External Identifier. Additional Description: External identifier of the contract for interaction in external system. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
relatedPartyId	string	Party (Role) Id - e.g. "bacae1ae-ea85-4397-95d5-29ce56157ffa". Additional Description: Unique identifier of the party or party role. Maxlength: 256 Pattern: ^(?=\s*\S).*\$



Name	Type	Description
relatedPartyExternalId	string	Party (Role) External Id. Additional Description: External identifier of the party or party role. Maxlength: 256 Pattern: <code>^(?=\s*\S).*</code> \$
fields	string	Attribute selection fields. Additional Description: This parameter filters the properties that are returned, based on specific criteria. Return one or more fields specified as a comma-delimited list. Pattern: <code>^(((@[a-zA-Z][a-zA-Z][a-z0-9]*)(?:[A-Z0-9]+[a-z0-9]*)*)\.\.((@[a-zA-Z][a-zA-Z][a-z0-9]*)(?:[A-Z0-9]+[a-z0-9]*)*)*)*(((@[a-zA-Z][a-zA-Z][a-z0-9]*)(?:[A-Z0-9]+[a-z0-9]*)*)\.\.((@[a-zA-Z][a-zA-Z][a-z0-9]*)(?:[A-Z0-9]+[a-z0-9]*)*)*)*)*\$</code> Maxlength: 512

4.1.2.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 105 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf637ProductInventoryManagement.productList.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf637ProductInventoryManagement.productList.readResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.

Table 106 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 107 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf637ProductInventoryManagement.productList.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf637ProductInventoryManagement.productList.readResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2} GMT))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
STANDARD_HEADER		

Table 108 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters
GURID_HEADER_CUSTOM_HEADER			

4.1.2.3 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.2.3.1 bss.Tmf637ProductInventoryManagement.productList Read Response Version 1





The representation is provided as JSON objects with the following attributes:

Table 109 ProductArray (version 1)

Name	Type	Description
ProductArray (version 1)	array of Product (version 2)	A product array representing multiple products.

Product (version 2)

Table 110 Product (version 2)

Name	Type	Description
Product (version 2)	object	Product derived from a product offering related to a contract.



Name		Type	Description
	id	string	Unique identifier of a product. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the product in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	name	string	A word, term, or phrase by which the product is known and distinguished from other products. Not guaranteed to be unique. Max length: 128
	characteristicValueList	array of CharacteristicValue (version 2)	A list of product characteristic values. Only if the characteristics need to be personalized.
	statusList	array of bss.cmn.StatusExtended (version 1)	A list of statuses linked to the product.
	status	string	Status of the product Max length: 256
	productPrice	array of ProductPrice (version 2)	List of product prices.
	product	array of Product (version 2)	References to sub-products in a hierarchical product structure.
	sharingProvider	SharingProvider (version 1)	Information of the provider configuration. Only applicable for provider products.
	sharingConsumer	SharingConsumer (version 2)	The provider whom this product is sharing from. Only applicable for consumer products.
	baRefForBillingCycleAlignment	BillingAccountRef (version 1)	Customer's Billing Account Id for Billing Cycle.
	associatedAgreement	AgreementRef (version 1)	Associated agreement.
	contract	ContractRef (version 1)	Contract.
	billingAccount	BillingAccountRefExt (version 1)	Billing Account used to Invoice the charges from product.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the Product.
	calendarEntry	array of CalendarEntry (version 1)	List of calendar entry.



CharacteristicValue (version 2)

Table 111 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 112 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 113 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 114 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 115 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.



Name		Type	Description
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.StatusExtended (version 1)

Table 116 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	previousStatus	string	The Previous status for the given time period. Max length: 256
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

ProductPrice (version 2)

Table 117 ProductPrice (version 2)

Name		Type	Description
ProductPrice (version 2)		object	Product price details corresponding to a product related to a contract.



Name		Type	Description
	id	string	Unique identifier of a product price. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the product price. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the product price is valid for.
	comprisedOf	array of ProductPrice (version 2)	References to sub-product prices in a hierarchical product price structure.
	characteristicValueList	array of CharacteristicValuePrice (version 2)	A list of product price characteristic values. Only if the characteristics need to be personalized.
	productOfferingPrice	ProductOfferingPriceRef (version 1)	The references of product offering price.
	priceRow	array of PriceRow (version 1)	The price row.
	description	string	Product price description. A narrative that explains in detail the semantics of this product price. Max length: 128
	name	string	A short descriptive name. Max length: 128
	lockDownDate	string	This is the date on which the product price is locked. Format: date-time Pattern: ^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) (0[469] 11)-(0[1-9] [12][0-9] 3[0])))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$



CharacteristicValuePrice (version 2)

Table 118 CharacteristicValuePrice (version 2)

Name		Type	Description
CharacteristicValuePrice (version 2)		object	A value of a Characteristic.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any. Deprecated
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

ProductOfferingPriceRef (version 1)

Table 119 ProductOfferingPriceRef (version 1)

Name		Type	Description
ProductOfferingPriceRef (version 1)		object	The product offering price reference.
	id	string	The ID of the referenced product offering price. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external ID of the referenced product offering price. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128



PriceRow (version 1)

Table 120 PriceRow (version 1)

Name		Type	Description
PriceRow (version 1)		object	Price row.
	priceAction	array of PriceAction (version 1)	The price action.
	productOfferingPriceRow	ProductOfferingPriceRowRef (version 1)	The reference of the product offering price row.

PriceAction (version 1)

Table 121 PriceAction (version 1)

Name		Type	Description
PriceAction (version 1)		object	Price action.
	action	ActionRef (version 1)	The reference of the action.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of product price characteristic values. Only if the characteristics need to be personalized.
	actionCharacteristicValueList	array of ActionCharacteristicValue (version 1)	A list of product price action characteristic values. Only if the characteristics need to be personalized.

ActionRef (version 1)

Table 122 ActionRef (version 1)

Name	Type	Description
ActionRef (version 1)	object	Reference of the action.



Name		Type	Description
	id	string	The ID of the referenced action. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced action. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ActionCharacteristicValue (version 1)

Table 123 ActionCharacteristicValue (version 1)

Name		Type	Description
ActionCharacteristicValue (version 1)		object	Action Characteristic value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the Action Characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The Action Characteristic value.
	actionCharacteristicSpecificationUseRef	EntitySpecRef (version 1)	Action Characteristic Specification Use reference.

EntitySpecRef (version 1)

Table 124 EntitySpecRef (version 1)

Name	Type	Description
EntitySpecRef (version 1)	object	Reference to an entity specification.



Name		Type	Description
	id	string	Unique identifier of the specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256

ProductOfferingPriceRowRef (version 1)

Table 125 ProductOfferingPriceRowRef (version 1)

Name		Type	Description
ProductOfferingPriceRowRef (version 1)		object	The product offering price row reference.
	id	string	The ID of the referenced product offering price row. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external ID of the referenced product offering price row. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

SharingProvider (version 1)

Table 126 SharingProvider (version 1)

Name		Type	Description
SharingProvider (version 1)		object	Information required for the provider specific parts of a sharing product.



Name		Type	Description
	billingAccount	array of BillingAccountRef (version 1)	List of billing accounts to be shared. Only applicable for products connected to a sharing provider specification with the characteristic must select BA set to true.
	consumerList	array of ConsumerEntry (version 1)	List of consumers to share to.
	billingAccountBucketDeterminationSpecification	array of BillingAccountBucketDeterminationSpecificationRef (version 1)	List of billing accounts and its Bucket Determination Specification to be shared. Only applicable for products connected to a sharing provider specification with the characteristic must select BA set to true.

BillingAccountRef (version 1)

Table 127 BillingAccountRef (version 1)

Name		Type	Description
BillingAccountRef (version 1)		object	Billing Account Reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128



ConsumerEntry (version 1)

Table 128 ConsumerEntry (version 1)

Name		Type	Description
ConsumerEntry (version 1)		object	The consumer that is consuming the shared provider product.
	externalId	string	Unique identifier of a Consumer Entry in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	id	string	Unique identifier of the consumer entry. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerCustomerId	string	The identifier of the customer that the consumer belongs to. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerCustomerExternalId	string	The external identifier of the customer that the consumer belongs to. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerContractId	string	The identifier of the consumer contract. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerContractExternalId	string	The external identifier of the consumer contract. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the consumer entry is valid for.



BillingAccountBucketDeterminationSpecificationRef (version 1)

Table 129 BillingAccountBucketDeterminationSpecificationRef (version 1)

Name		Type	Description
BillingAccountBucketDeterminationSpecificationRef (version 1)		object	Billing Account Bucket Determination Specification Reference.
	billingAccount	BillingAccountRef (version 1)	Billing account reference.
	bucketDeterminationSpecification	BucketDeterminationSpecificationRef (version 1)	Bucket determination specification.
	@referredType	string	Referred Type. Max length: 128

BucketDeterminationSpecificationRef (version 1)

Table 130 BucketDeterminationSpecificationRef (version 1)

Name		Type	Description
BucketDeterminationSpecificationRef (version 1)		object	Bucket Determination Specification Reference.
	id	string	Unique identifier of the bucket determination specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bucket determination specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



SharingConsumer (version 2)

Table 131 SharingConsumer (version 2)

Name		Type	Description
SharingConsumer (version 2)		object	Links the sharing provider that the sharing consumer is consuming from.
	id	string	Unique identifier of a sharing consumer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	providerContract	ContractRef (version 1)	Provider Contract Reference.
	providerProduct	ProductRef (version 1)	Provider Product Reference.
	providerCustomer	CustomerRef (version 1)	Provider Customer Reference.
	consumerListEntry	ConsumerEntryRef (version 1)	Customer List Entry Reference.

ContractRef (version 1)

Table 132 ContractRef (version 1)

Name		Type	Description
ContractRef (version 1)		object	Contract Reference.
	id	string	Identifier of a contract instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the contract for interaction in external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



ProductRef (version 1)

Table 133 ProductRef (version 1)

Name		Type	Description
ProductRef (version 1)		object	Product Reference.
	id	string	ID of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

CustomerRef (version 1)

Table 134 CustomerRef (version 1)

Name		Type	Description
CustomerRef (version 1)		object	Customer Reference.
	id	string	ID of the customer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External Id of the customer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ConsumerEntryRef (version 1)

Table 135 ConsumerEntryRef (version 1)

Name		Type	Description
ConsumerEntryRef (version 1)		object	Consumer Entry Reference.



Name		Type	Description
	id	string	Unique identifier of the consumer entry instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the consumer entry in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

AgreementRef (version 1)

Table 136 AgreementRef (version 1)

Name		Type	Description
AgreementRef (version 1)		object	Agreement Reference.
	id	string	Unique identifier of the agreement instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the agreement in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128



BillingAccountRefExt (version 1)

Table 137 BillingAccountRefExt (version 1)

Name		Type	Description
BillingAccountRefExt (version 1)		object	Billing Account Reference extended to include validFor.
	validFor	bss.cmn.TimePeriod (version 1)	The start time to change the billing account reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128

CalendarEntry (version 1)

Table 138 CalendarEntry (version 1)

Name		Type	Description
CalendarEntry (version 1)		object	Calendar Entry.
	scheduleDefinition	ScheduleDefinition Ref (version 1)	The reference of a schedule definition.
	productOfferingPrice	array of Product OfferingPriceRef (version 1)	The references of product offering price.
	recurrenceFreq	RecurrenceFreq (version 1)	Recurrence frequency of a schedule definition.



ScheduleDefinitionRef (version 1)

Table 139 ScheduleDefinitionRef (version 1)

Name		Type	Description
ScheduleDefinitionRef (version 1)		object	Schedule Definition Reference.
	id	string	Unique identifier of the schedule definition. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the schedule definition in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	@referredType	string	Referred Type. Max length: 128

RecurrenceFreq (version 1)

Table 140 RecurrenceFreq (version 1)

Name	Type	Description
RecurrenceFreq (version 1)	object	Recurrence frequency of schedule definition.



Name		Type	Description
	recurrenceCount	integer	Recurrence count of a schedule definition. The numeric value must be at least 1. The numeric value must not exceed 9223372036854775806.
	recurrenceInterval	integer	Recurrence interval of a schedule definition. The numeric value must be at least 1. The numeric value must not exceed 9223372036854775806.
	time	TimePredefinedTimeZone (version 1)	Time with predefined time zone.
	weekly	Weekly (version 1)	Recurrence frequency Weekly.
	monthly	Monthly (version 1)	Recurrence frequency monthly.
	yearly	Yearly (version 1)	Recurrence frequency yearly.

TimePredefinedTimeZone (version 1)

Table 141 TimePredefinedTimeZone (version 1)

Name	Type	Description
TimePredefinedTimeZone (version 1)	object	A time with a predefined time zone.



Name		Type	Description
	time	string	This type defines a time value based on the definition found at http://www.w3.org/TR/xmlschema-2/#time . Fractional seconds with three decimals are mandatory. Leap seconds are not supported. Example values are '14:35:05.003'. The latter example is the recommended format. Pattern: <code>^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000)?</code> \$
	timeZone	string	This specifies which predefined time zone to be used. Possible values: HOME_TIME_ZONE

Weekly (version 1)

Table 142 Weekly (version 1)

Name		Type	Description
Weekly (version 1)		object	Schedule definition by weekly.
	recurrenceByDay	array of string	Recurrence by weekdays. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY



Monthly (version 1)

Table 143 Monthly (version 1)

Name		Type	Description
Monthly (version 1)		object	Schedule definition by monthly.
	monthDayNumber	array of MonthDay Number (version 1)	Monthly schedule definition by month day number.
	weekdayOfMonth	WeekdayOfMonth (version 1)	Monthly schedule definition by weekday of month.

MonthDayNumber (version 1)

Table 144 MonthDayNumber (version 1)

Name		Type	Description
MonthDayNumber (version 1)		object	List of days of month.
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByMonth Day	integer	Recurrence by month day. The numeric value must be at least 1. The numeric value must not exceed 28.

WeekdayOfMonth (version 1)

Table 145 WeekdayOfMonth (version 1)

Name		Type	Description
WeekdayOfMonth (version 1)		object	Schedule definition by weekday of month.



Name		Type	Description
	recurrenceByDay	string	Recurrence by weekday. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY
	weekNumber	string	Recurrence by week number of the month. Possible values: FIRST SECOND THIRD FOURTH LAST

Yearly (version 1)

Table 146 Yearly (version 1)

Name		Type	Description
Yearly (version 1)		object	Recurrence frequency of schedule definition.
	weekdaysOfYear	WeekdaysOfYear (version 1)	Yearly schedule definition by weekdays of year.
	daysOfMonth	DaysOfMonth (version 1)	Yearly schedule definition by days of month.
	daysOfYear	array of DaysOfYear (version 1)	Yearly schedule definition by days of year.



WeekdaysOfYear (version 1)

Table 147 WeekdaysOfYear (version 1)

Name		Type	Description
WeekdaysOfYear (version 1)		object	Yearly schedule definition by weekdays of year.
	recurrenceByDay	array of string	Recurrence by weekdays. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY
	weekNumber	array of WeekNumber (version 1)	Week number of the year.

WeekNumber (version 1)

Table 148 WeekNumber (version 1)

Name		Type	Description
WeekNumber (version 1)		object	List of week number of the year.
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByWeekNo	integer	Recurrence by week number of the year. The numeric value must be at least 1. The numeric value must not exceed 52.



DaysOfMonth (version 1)

Table 149 DaysOfMonth (version 1)

Name		Type	Description
DaysOfMonth (version 1)		object	Schedule definition by days of month.
	monthDayNumber	array of MonthDay Number (version 1)	Recurrence by month day.
	recurrenceByMonth	array of string	Recurrence by months. Possible values: JANUARY FEBRUARY MARCH APRIL MAY JUNE JULY AUGUST SEPTEMBER OCTOBER NOVEMBER DECEMBER

DaysOfYear (version 1)

Table 150 DaysOfYear (version 1)

Name	Type	Description
DaysOfYear (version 1)	object	Yearly schedule definition by days of year.



Name		Type	Description
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByYearDay	integer	Recurrence by year day. The numeric value must be at least 1. The numeric value must not exceed 366.

ProductOfferingRef (version 1)

Table 151 ProductOfferingRef (version 1)

Name		Type	Description
ProductOfferingRef (version 1)		object	The product offering reference.
	id	string	The ID of the referenced product offering. Pattern: $^{(?=\s*\S)}.*\$$ Max length: 256
	externalId	string	The external ID of the referenced product offering. Pattern: $^{(?=\s*\S)}.*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

Resource (version 2)

Table 152 Resource (version 2)

Name		Type	Description
Resource (version 2)		object	Structure of a logical resource the represent an identification.



Name		Type	Description
	id	string	A unique identifier of a logical resource. Pattern: ^(?=\s*\S).*\$\br/> Max length: 256
	externalId	string	An external identifier of a logical resource. Pattern: ^(?=\s*\S).*\$\br/> Max length: 256
	characteristicValue List	array of CharacteristicValue (version 2)	A list of the logical resources characteristic values. Only if the characteristics need to be personalized.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the resource.
	resourceNumber	string	The complete number to identify the resource. For an MSISDN-DCS (GSM standard 1800) this is CC + NDC + SN. For an MSISDN-PCS (GSM standard PCS 1900) this is CC + NPA + SN. For an IMSI this is MCC + MNC + MSIN. (CC = Country code, NDC = National destination code, NPA = Number planning area, SN = Subscriber number, MCC = Mobile country code, MNC = Mobile network code, MSIN = Mobile subscriber identification number). Max length: 512
	resourceSpecification	ResourceSpecificationRef (version 1)	Resource specification definition.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the resource is valid for.



bss.cmn.Status (version 1)

Table 153 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

ResourceSpecificationRef (version 1)

Table 154 ResourceSpecificationRef (version 1)

Name		Type	Description
ResourceSpecificationRef (version 1)		object	Resource Specification Reference.
	id	string	Unique identifier of the resource specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the resource specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ServiceRef (version 1)

Table 155 ServiceRef (version 1)

Name		Type	Description
ServiceRef (version 1)		object	Service Reference.



Name		Type	Description
	id	string	Unique identifier of the resource instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

RelatedPartyExtended (version 1)

Table 156 RelatedPartyExtended (version 1)

Name		Type	Description
RelatedPartyExtended (version 1)		object	Related Party Extended.
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

ProductBucket (version 1)

Table 157 ProductBucket (version 1)

Name		Type	Description
ProductBucket (version 1)		object	Product bucket.



Name		Type	Description
	amount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Product Bucket.
	reservedAmount	bss.cmn.Decimal_Sensitive (version 1)	The reserved amount on the Product Bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	valueContainer	array of ValueContainer (version 1)	Product bucket value container.
	replenishedAmount	bss.cmn.Decimal_Sensitive (version 1)	The replenished amount of the bucket.
	id	string	Unique identifier of a product bucket. Pattern: ^(?=\s*\S).*\$ Max length: 256
	bucketSpecification	BucketSpecificationRef (version 1)	Bucket Specification Reference.

bss.cmn.Decimal_Sensitive (version 1)

Table 158 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.



ValueContainer (version 1)

Table 159 ValueContainer (version 1)

Name		Type	Description
ValueContainer (version 1)		object	Value Container.
	amount	bss.cmn.Decimal_Sensitive (version 1)	The amount of this value container.
	replenishedAmount	bss.cmn.Decimal_Sensitive (version 1)	The replenished amount of the value container.
	validFor	bss.cmn.TimePeriod (version 1)	The validity period of the value container.

BucketSpecificationRef (version 1)

Table 160 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

4.1.3 Read Product

Retrieves product information.

4.1.3.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:



- GET {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf637ProductInventoryManagement/v1/product/{id}
- GET {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf637ProductInventoryManagement/v1/productExternalId/{externalId}

Query Parameters

The following table describes the query parameters for the operation:

Table 161 Query Parameters

Name	Type	Description
contractId	string	Contract Identifier. Additional Description: Unique identifier of the contract. Maxlength: 256 Pattern: ^(?=\s*\S).*
contractExternalId	string	Contract External Identifier. Additional Description: External identifier of the contract for interaction in external system. Maxlength: 256 Pattern: ^(?=\s*\S).*



Name	Type	Description
relatedPartyId	string	Party (Role) Id - e.g. "bacae1ae-ea85-4397-95d5-29ce56157ffa". Additional Description: Unique identifier of the party or party role. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
relatedPartyExternalId	string	Party (Role) External Id. Additional Description: External identifier of the party or party role. Maxlength: 256 Pattern: ^(?=\s*\S).*\$

Path Parameters

The following table describes the path parameters for the operation:

Table 162 Path Parameters

Name	Type	Description
id	string	Product Identifier. Additional Description: Unique identifier of a product. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
externalId	string	Product External Identifier. Additional Description: Identifier of the product in an external system. Maxlength: 256 Pattern: ^(?=\s*\S).*\$



4.1.3.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 163 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional
	A non-empty subset of the following: • application/x.bss.Tmf637ProductInventoryManagement.product.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf637ProductInventoryManagement.product.readResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 164 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:

Table 165 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf637ProductInventoryManagement.product.readResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf637ProductInventoryManagement.product.readResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3]([0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01]([0-9]) 2[0-3])(:[0-5][0-9]){2} GMT)))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
-------------------	--------------------	--------------------

STANDARD_HEADER

Table 166 Customized Response HTTP Headers


Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID_HEADER_CUSTOM_HEADER

4.1.3.3 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.3.3.1 bss.Tmf637ProductInventoryManagement.product Read Response Version 1

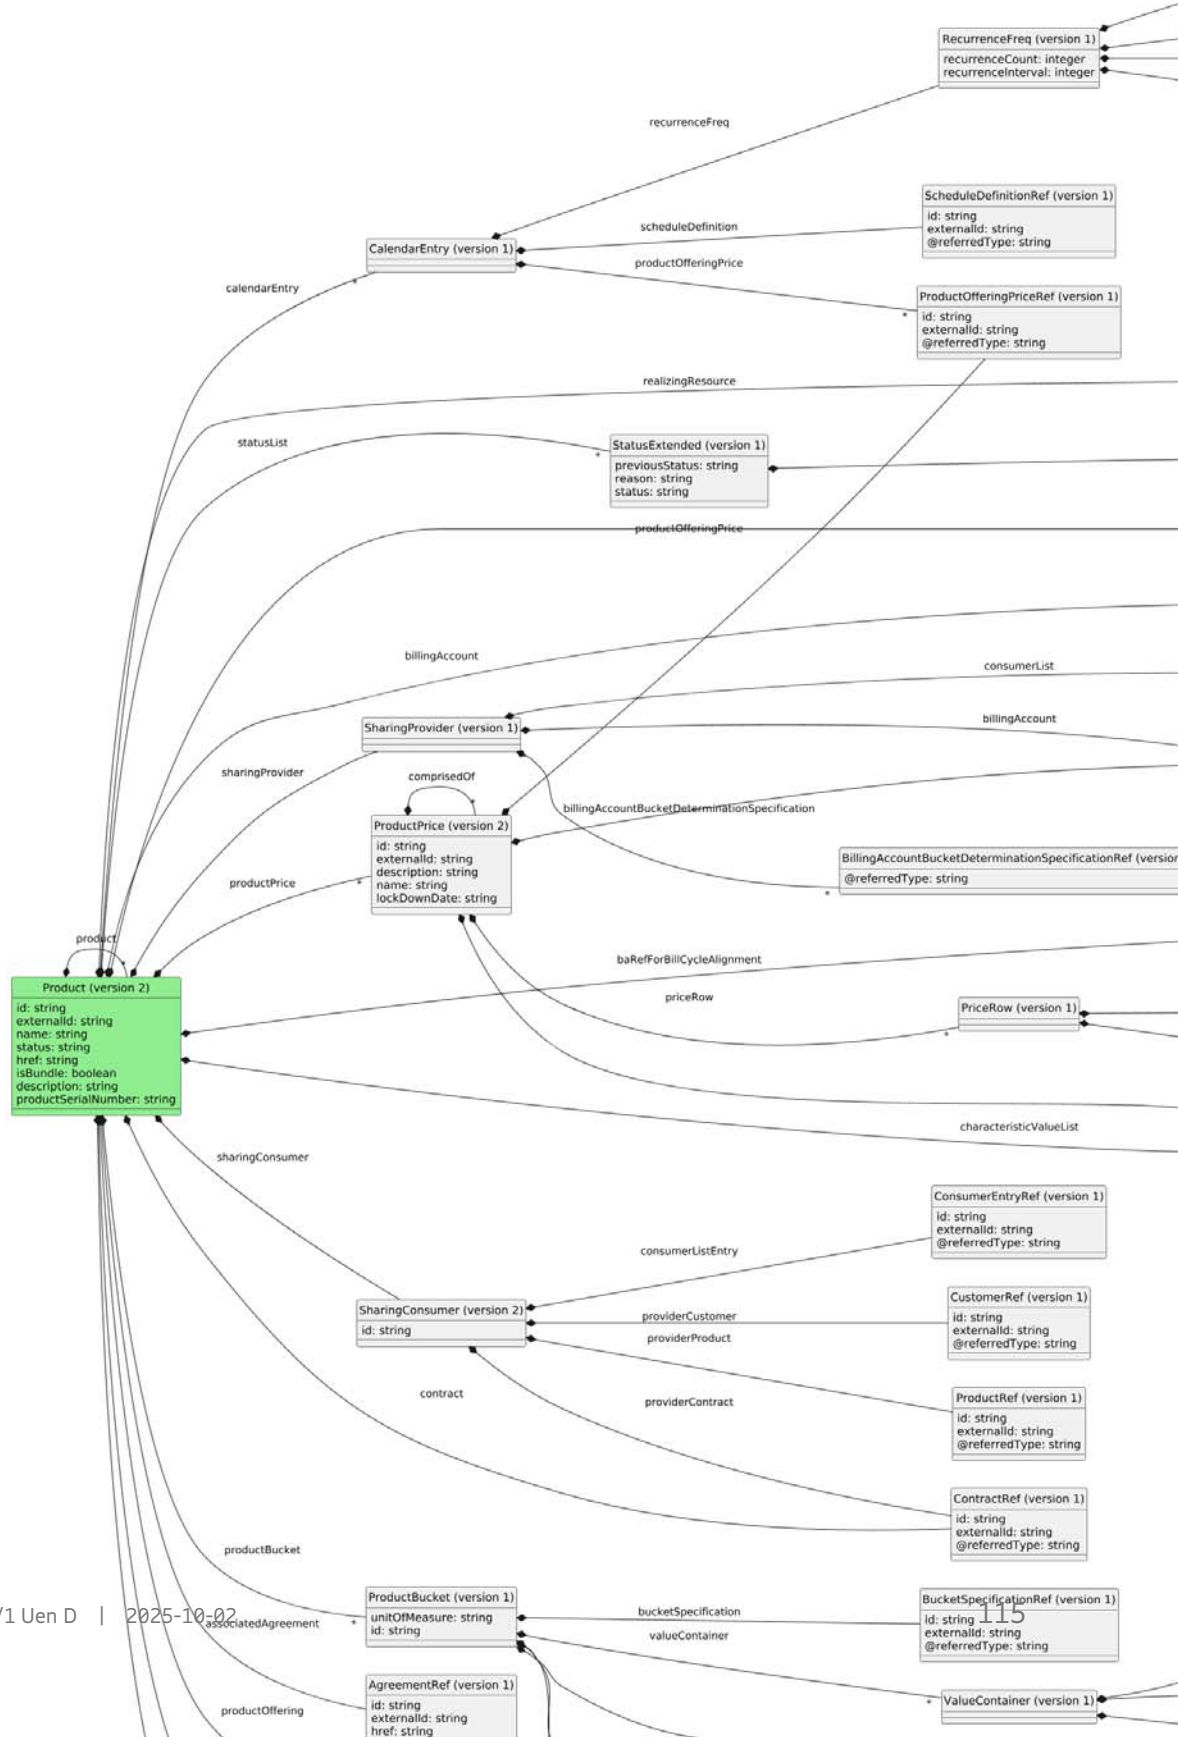



The representation is provided as JSON objects with the following attributes:

Table 167 Product (version 2)

Name	Type	Description
Product (version 2)	object	Product derived from a product offering related to a contract.



Name		Type	Description
	id	string	Unique identifier of a product. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the product in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	name	string	A word, term, or phrase by which the product is known and distinguished from other products. Not guaranteed to be unique. Max length: 128
	characteristicValueList	array of CharacteristicValue (version 2)	A list of product characteristic values. Only if the characteristics need to be personalized.
	statusList	array of bss.cmn.StatusExtended (version 1)	A list of statuses linked to the product.
	status	string	Status of the product Max length: 256
	productPrice	array of ProductPrice (version 2)	List of product prices.
	product	array of Product (version 2)	References to sub-products in a hierarchical product structure.
	sharingProvider	SharingProvider (version 1)	Information of the provider configuration. Only applicable for provider products.
	sharingConsumer	SharingConsumer (version 2)	The provider whom this product is sharing from. Only applicable for consumer products.
	baRefForBillingCycleAlignment	BillingAccountRef (version 1)	Customer's Billing Account Id for Billing Cycle.
	associatedAgreement	AgreementRef (version 1)	Associated agreement.
	contract	ContractRef (version 1)	Contract.
	billingAccount	BillingAccountRefExt (version 1)	Billing Account used to Invoice the charges from product.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the Product.
	calendarEntry	array of CalendarEntry (version 1)	List of calendar entry.



CharacteristicValue (version 2)

Table 168 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 169 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 170 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 171 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 172 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.



Name		Type	Description
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.StatusExtended (version 1)

Table 173 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	previousStatus	string	The Previous status for the given time period. Max length: 256
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

ProductPrice (version 2)

Table 174 ProductPrice (version 2)

Name		Type	Description
ProductPrice (version 2)		object	Product price details corresponding to a product related to a contract.



Name		Type	Description
	id	string	Unique identifier of a product price. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	External identifier of the product price. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the product price is valid for.
	comprisedOf	array of ProductPrice (version 2)	References to sub-product prices in a hierarchical product price structure.
	characteristicValueList	array of CharacteristicValuePrice (version 2)	A list of product price characteristic values. Only if the characteristics need to be personalized.
	productOfferingPrice	ProductOfferingPriceRef (version 1)	The references of product offering price.
	priceRow	array of PriceRow (version 1)	The price row.
	description	string	Product price description. A narrative that explains in detail the semantics of this product price. Max length: 128
	name	string	A short descriptive name. Max length: 128
	lockDownDate	string	This is the date on which the product price is locked. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) (0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00)) (-(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>



CharacteristicValuePrice (version 2)

Table 175 CharacteristicValuePrice (version 2)

Name		Type	Description
CharacteristicValuePrice (version 2)		object	A value of a Characteristic.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any. Deprecated
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

ProductOfferingPriceRef (version 1)

Table 176 ProductOfferingPriceRef (version 1)

Name		Type	Description
ProductOfferingPriceRef (version 1)		object	The product offering price reference.
	id	string	The ID of the referenced product offering price. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external ID of the referenced product offering price. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128



PriceRow (version 1)

Table 177 PriceRow (version 1)

Name		Type	Description
PriceRow (version 1)		object	Price row.
	priceAction	array of PriceAction (version 1)	The price action.
	productOfferingPriceRow	ProductOfferingPriceRowRef (version 1)	The reference of the product offering price row.

PriceAction (version 1)

Table 178 PriceAction (version 1)

Name		Type	Description
PriceAction (version 1)		object	Price action.
	action	ActionRef (version 1)	The reference of the action.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of product price characteristic values. Only if the characteristics need to be personalized.
	actionCharacteristicValueList	array of ActionCharacteristicValue (version 1)	A list of product price action characteristic values. Only if the characteristics need to be personalized.

ActionRef (version 1)

Table 179 ActionRef (version 1)

Name	Type	Description
ActionRef (version 1)	object	Reference of the action.



Name		Type	Description
	id	string	The ID of the referenced action. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced action. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ActionCharacteristicValue (version 1)

Table 180 ActionCharacteristicValue (version 1)

Name		Type	Description
ActionCharacteristicValue (version 1)		object	Action Characteristic value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the Action Characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The Action Characteristic value.
	actionCharacteristicSpecificationUseRef	EntitySpecRef (version 1)	Action Characteristic Specification Use reference.

EntitySpecRef (version 1)

Table 181 EntitySpecRef (version 1)

Name	Type	Description
EntitySpecRef (version 1)	object	Reference to an entity specification.



Name		Type	Description
	id	string	Unique identifier of the specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256

ProductOfferingPriceRowRef (version 1)

Table 182 ProductOfferingPriceRowRef (version 1)

Name		Type	Description
ProductOfferingPriceRowRef (version 1)		object	The product offering price row reference.
	id	string	The ID of the referenced product offering price row. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external ID of the referenced product offering price row. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

SharingProvider (version 1)

Table 183 SharingProvider (version 1)

Name		Type	Description
SharingProvider (version 1)		object	Information required for the provider specific parts of a sharing product.



Name		Type	Description
	billingAccount	array of BillingAccountRef (version 1)	List of billing accounts to be shared. Only applicable for products connected to a sharing provider specification with the characteristic must select BA set to true.
	consumerList	array of ConsumerEntry (version 1)	List of consumers to share to.
	billingAccountBucketDeterminationSpecification	array of BillingAccountBucketDeterminationSpecificationRef (version 1)	List of billing accounts and its Bucket Determination Specification to be shared. Only applicable for products connected to a sharing provider specification with the characteristic must select BA set to true.

BillingAccountRef (version 1)

Table 184 BillingAccountRef (version 1)

Name		Type	Description
BillingAccountRef (version 1)		object	Billing Account Reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128



ConsumerEntry (version 1)

Table 185 ConsumerEntry (version 1)

Name		Type	Description
ConsumerEntry (version 1)		object	The consumer that is consuming the shared provider product.
	externalId	string	Unique identifier of a Consumer Entry in an external system. Pattern: $^(?=\S*\S).*\$$ Max length: 256
	id	string	Unique identifier of the consumer entry. Pattern: $^(?=\S*\S).*\$$ Max length: 256
	consumerCustomerId	string	The identifier of the customer that the consumer belongs to. Pattern: $^(?=\S*\S).*\$$ Max length: 256
	consumerCustomerExternalId	string	The external identifier of the customer that the consumer belongs to. Pattern: $^(?=\S*\S).*\$$ Max length: 256
	consumerContractId	string	The identifier of the consumer contract. Pattern: $^(?=\S*\S).*\$$ Max length: 256
	consumerContractExternalId	string	The external identifier of the consumer contract. Pattern: $^(?=\S*\S).*\$$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the consumer entry is valid for.



BillingAccountBucketDeterminationSpecificationRef (version 1)

Table 186 BillingAccountBucketDeterminationSpecificationRef (version 1)

Name		Type	Description
BillingAccountBucketDeterminationSpecificationRef (version 1)		object	Billing Account Bucket Determination Specification Reference.
	billingAccount	BillingAccountRef (version 1)	Billing account reference.
	bucketDeterminationSpecification	BucketDeterminationSpecificationRef (version 1)	Bucket determination specification.
	@referredType	string	Referred Type. Max length: 128

BucketDeterminationSpecificationRef (version 1)

Table 187 BucketDeterminationSpecificationRef (version 1)

Name		Type	Description
BucketDeterminationSpecificationRef (version 1)		object	Bucket Determination Specification Reference.
	id	string	Unique identifier of the bucket determination specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the bucket determination specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



SharingConsumer (version 2)

Table 188 SharingConsumer (version 2)

Name		Type	Description
SharingConsumer (version 2)		object	Links the sharing provider that the sharing consumer is consuming from.
	id	string	Unique identifier of a sharing consumer. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	providerContract	ContractRef (version 1)	Provider Contract Reference.
	providerProduct	ProductRef (version 1)	Provider Product Reference.
	providerCustomer	CustomerRef (version 1)	Provider Customer Reference.
	consumerListEntry	ConsumerEntryRef (version 1)	Customer List Entry Reference.

ContractRef (version 1)

Table 189 ContractRef (version 1)

Name		Type	Description
ContractRef (version 1)		object	Contract Reference.
	id	string	Identifier of a contract instance. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	externalId	string	External identifier of the contract for interaction in external system. Pattern: $^(?=\backslash s^*\backslash S).*\$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



ProductRef (version 1)

Table 190 ProductRef (version 1)

Name		Type	Description
ProductRef (version 1)		object	Product Reference.
	id	string	ID of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

CustomerRef (version 1)

Table 191 CustomerRef (version 1)

Name		Type	Description
CustomerRef (version 1)		object	Customer Reference.
	id	string	ID of the customer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External Id of the customer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ConsumerEntryRef (version 1)

Table 192 ConsumerEntryRef (version 1)

Name		Type	Description
ConsumerEntryRef (version 1)		object	Consumer Entry Reference.



Name		Type	Description
	id	string	Unique identifier of the consumer entry instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the consumer entry in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

AgreementRef (version 1)

Table 193 AgreementRef (version 1)

Name		Type	Description
AgreementRef (version 1)		object	Agreement Reference.
	id	string	Unique identifier of the agreement instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the agreement in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128



BillingAccountRefExt (version 1)

Table 194 BillingAccountRefExt (version 1)

Name		Type	Description
BillingAccountRefExt (version 1)		object	Billing Account Reference extended to include validFor.
	validFor	bss.cmn.TimePeriod (version 1)	The start time to change the billing account reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128

CalendarEntry (version 1)

Table 195 CalendarEntry (version 1)

Name		Type	Description
CalendarEntry (version 1)		object	Calendar Entry.
	scheduleDefinition	ScheduleDefinition Ref (version 1)	The reference of a schedule definition.
	productOfferingPrice	array of Product OfferingPriceRef (version 1)	The references of product offering price.
	recurrenceFreq	RecurrenceFreq (version 1)	Recurrence frequency of a schedule definition.



ScheduleDefinitionRef (version 1)

Table 196 ScheduleDefinitionRef (version 1)

Name		Type	Description
ScheduleDefinitionRef (version 1)		object	Schedule Definition Reference.
	id	string	Unique identifier of the schedule definition. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the schedule definition in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

RecurrenceFreq (version 1)

Table 197 RecurrenceFreq (version 1)

Name	Type	Description
RecurrenceFreq (version 1)	object	Recurrence frequency of schedule definition.



Name		Type	Description
	recurrenceCount	integer	Recurrence count of a schedule definition. The numeric value must be at least 1. The numeric value must not exceed 9223372036854775806.
	recurrenceInterval	integer	Recurrence interval of a schedule definition. The numeric value must be at least 1. The numeric value must not exceed 9223372036854775806.
	time	TimePredefinedTimeZone (version 1)	Time with predefined time zone.
	weekly	Weekly (version 1)	Recurrence frequency Weekly.
	monthly	Monthly (version 1)	Recurrence frequency monthly.
	yearly	Yearly (version 1)	Recurrence frequency yearly.

TimePredefinedTimeZone (version 1)

Table 198 TimePredefinedTimeZone (version 1)

Name	Type	Description
TimePredefinedTimeZone (version 1)	object	A time with a predefined time zone.



Name		Type	Description
	time	string	This type defines a time value based on the definition found at http://www.w3.org/TR/xmlschema-2/#time . Fractional seconds with three decimals are mandatory. Leap seconds are not supported. Example values are '14:35:05.003'. The latter example is the recommended format. Pattern: <code>^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000)?</code> \$
	timeZone	string	This specifies which predefined time zone to be used. Possible values: HOME_TIME_ZONE

Weekly (version 1)

Table 199 Weekly (version 1)

Name		Type	Description
Weekly (version 1)		object	Schedule definition by weekly.
	recurrenceByDay	array of string	Recurrence by weekdays. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY



Monthly (version 1)

Table 200 Monthly (version 1)

Name		Type	Description
Monthly (version 1)		object	Schedule definition by monthly.
	monthDayNumber	array of MonthDay Number (version 1)	Monthly schedule definition by month day number.
	weekdayOfMonth	WeekdayOfMonth (version 1)	Monthly schedule definition by weekday of month.

MonthDayNumber (version 1)

Table 201 MonthDayNumber (version 1)

Name		Type	Description
MonthDayNumber (version 1)		object	List of days of month.
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByMonth Day	integer	Recurrence by month day. The numeric value must be at least 1. The numeric value must not exceed 28.

WeekdayOfMonth (version 1)

Table 202 WeekdayOfMonth (version 1)

Name		Type	Description
WeekdayOfMonth (version 1)		object	Schedule definition by weekday of month.



Name		Type	Description
	recurrenceByDay	string	Recurrence by weekday. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY
	weekNumber	string	Recurrence by week number of the month. Possible values: FIRST SECOND THIRD FOURTH LAST

Yearly (version 1)

Table 203 Yearly (version 1)

Name		Type	Description
Yearly (version 1)		object	Recurrence frequency of schedule definition.
	weekdaysOfYear	WeekdaysOfYear (version 1)	Yearly schedule definition by weekdays of year.
	daysOfMonth	DaysOfMonth (version 1)	Yearly schedule definition by days of month.
	daysOfYear	array of DaysOfYear (version 1)	Yearly schedule definition by days of year.



WeekdaysOfYear (version 1)

Table 204 WeekdaysOfYear (version 1)

Name		Type	Description
WeekdaysOfYear (version 1)		object	Yearly schedule definition by weekdays of year.
	recurrenceByDay	array of string	Recurrence by weekdays. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY
	weekNumber	array of WeekNumber (version 1)	Week number of the year.

WeekNumber (version 1)

Table 205 WeekNumber (version 1)

Name		Type	Description
WeekNumber (version 1)		object	List of week number of the year.
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByWeekNo	integer	Recurrence by week number of the year. The numeric value must be at least 1. The numeric value must not exceed 52.



DaysOfMonth (version 1)

Table 206 DaysOfMonth (version 1)

Name		Type	Description
DaysOfMonth (version 1)		object	Schedule definition by days of month.
	monthDayNumber	array of MonthDay Number (version 1)	Recurrence by month day.
	recurrenceByMonth	array of string	Recurrence by months. Possible values: JANUARY FEBRUARY MARCH APRIL MAY JUNE JULY AUGUST SEPTEMBER OCTOBER NOVEMBER DECEMBER

DaysOfYear (version 1)

Table 207 DaysOfYear (version 1)

Name	Type	Description
DaysOfYear (version 1)	object	Yearly schedule definition by days of year.



Name		Type	Description
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByYearDay	integer	Recurrence by year day. The numeric value must be at least 1. The numeric value must not exceed 366.

ProductOfferingRef (version 1)

Table 208 ProductOfferingRef (version 1)

Name		Type	Description
ProductOfferingRef (version 1)		object	The product offering reference.
	id	string	The ID of the referenced product offering. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external ID of the referenced product offering. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128

Resource (version 2)

Table 209 Resource (version 2)

Name		Type	Description
Resource (version 2)		object	Structure of a logical resource the represent an identification.



Name		Type	Description
	id	string	A unique identifier of a logical resource. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	An external identifier of a logical resource. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValue List	array of CharacteristicValue (version 2)	A list of the logical resources characteristic values. Only if the characteristics need to be personalized.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the resource.
	resourceNumber	string	The complete number to identify the resource. For an MSISDN-DCS (GSM standard 1800) this is CC + NDC + SN. For an MSISDN-PCS (GSM standard PCS 1900) this is CC + NPA + SN. For an IMSI this is MCC + MNC + MSIN. (CC = Country code, NDC = National destination code, NPA = Number planning area, SN = Subscriber number, MCC = Mobile country code, MNC = Mobile network code, MSIN = Mobile subscriber identification number). Max length: 512
	resourceSpecification	ResourceSpecificationRef (version 1)	Resource specification definition.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the resource is valid for.



bss.cmn.Status (version 1)

Table 210 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

ResourceSpecificationRef (version 1)

Table 211 ResourceSpecificationRef (version 1)

Name		Type	Description
ResourceSpecificationRef (version 1)		object	Resource Specification Reference.
	id	string	Unique identifier of the resource specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the resource specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ServiceRef (version 1)

Table 212 ServiceRef (version 1)

Name		Type	Description
ServiceRef (version 1)		object	Service Reference.



Name		Type	Description
	id	string	Unique identifier of the resource instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

RelatedPartyExtended (version 1)

Table 213 RelatedPartyExtended (version 1)

Name		Type	Description
RelatedPartyExtended (version 1)		object	Related Party Extended.
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the related party. Max length: 512

ProductBucket (version 1)

Table 214 ProductBucket (version 1)

Name		Type	Description
ProductBucket (version 1)		object	Product bucket.



Name		Type	Description
	amount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Product Bucket.
	reservedAmount	bss.cmn.Decimal_Sensitive (version 1)	The reserved amount on the Product Bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	valueContainer	array of ValueContainer (version 1)	Product bucket value container.
	replenishedAmount	bss.cmn.Decimal_Sensitive (version 1)	The replenished amount of the bucket.
	id	string	Unique identifier of a product bucket. Pattern: ^(?=\s*\S).*\$ Max length: 256
	bucketSpecification	BucketSpecificationRef (version 1)	Bucket Specification Reference.

bss.cmn.Decimal_Sensitive (version 1)

Table 215 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.



ValueContainer (version 1)

Table 216 ValueContainer (version 1)

Name		Type	Description
ValueContainer (version 1)		object	Value Container.
	amount	bss.cmn.Decimal_Sensitive (version 1)	The amount of this value container.
	replenishedAmount	bss.cmn.Decimal_Sensitive (version 1)	The replenished amount of the value container.
	validFor	bss.cmn.TimePeriod (version 1)	The validity period of the value container.

BucketSpecificationRef (version 1)

Table 217 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

4.1.4 Update Product

Update product information.

4.1.4.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:



- PATCH {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf637ProductInventoryManagement/v1/product/{id}
- PATCH {scheme:}://{host}[:{port}]/{deploymentComponent}/bssTmf637ProductInventoryManagement/v1/productExternalId/{externalId}

Path Parameters

The following table describes the path parameters for the operation:

Table 218 Path Parameters

Name	Type	Description
id	string	Product Identifier. Additional Description: Unique identifier of a product. Maxlength: 256 Pattern: ^(?=\s*\S).*
externalId	string	Product External Identifier. Additional Description: Identifier of the product in an external system. Maxlength: 256 Pattern: ^(?=\s*\S).*

4.1.4.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 219 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/x.bss.Tmf637ProductInventoryManagement.product.updateResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf637ProductInventoryManagement.product.updateResponse+json;version=1 • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2 • application/json;charset=utf-8 • application/json	-
Content-Type		Mandatory
	One of the following: • application/x.bss.Tmf637ProductInventoryManagement.product.updateRequest+merge-patch+json;version=1;charset=utf-8 • application/x.bss.Tmf637ProductInventoryManagement.product.updateRequest+merge-patch+json;version=1 • application/merge-patch+json;charset=utf-8 • application/merge-patch+json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 220 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 221 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/x.bss.Tmf637ProductInventoryManagement.product.updateResponse+json;version=1;charset=utf-8 • application/x.bss.Tmf637ProductInventoryManagement.product.updateResponse+json;version=1 For Status-Code: 4XX,5XX, one of the following: • application/x.bss.errorMessage.response+json;version=2;charset=utf-8 • application/x.bss.errorMessage.response+json;version=2	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3]([0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01]([0-9]) 2([0-3]))(:[0-5]([0-9])){2} GMT))\$</code>



Header Field Name	Header Field Value	Mandatory/Optional
STANDARD_HEADER		

Table 222 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters
GURID_HEADER_CUSTOM_HEADER			

4.1.4.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.



4.1.4.3.1

bss.Tmf637ProductInventoryManagement.product Update Request Version 1

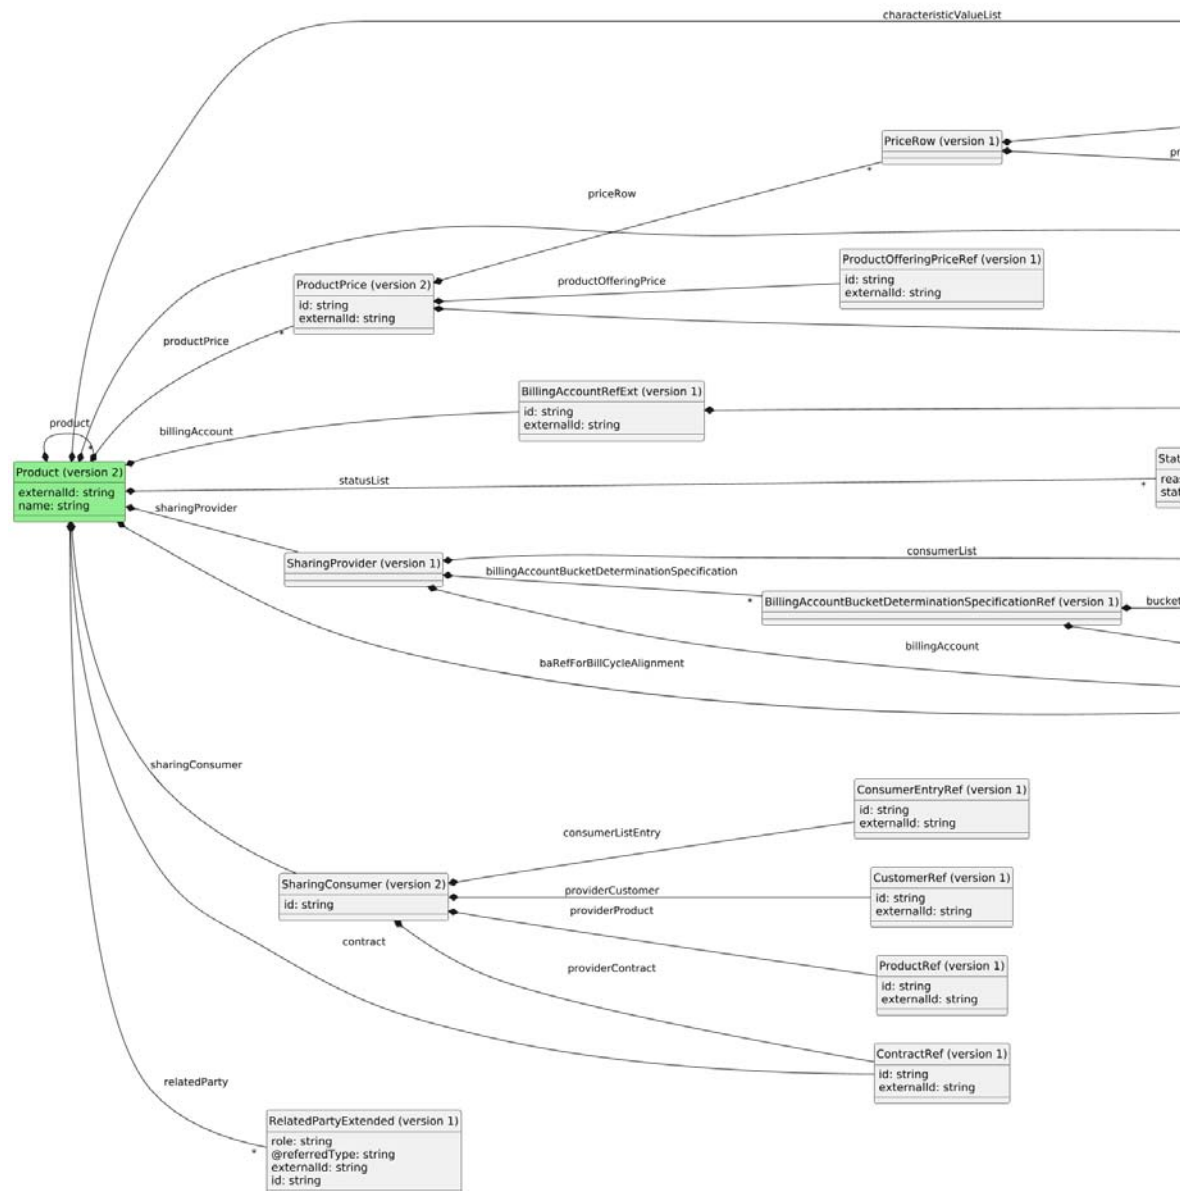


Figure 5 bss.Tmf637ProductInventoryManagement.product.updateRequest.1 UML representation

The representation is provided as JSON objects with the following attributes:



Table 223 Product (version 2)

Name	Type	Description
Product (version 2)	object	Product derived from a product offering related to a contract.



Name		Type	Description
	externalId	string	Identifier of the product in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	name	string	A word, term, or phrase by which the product is known and distinguished from other products. Not guaranteed to be unique. Max length: 128
	characteristicValueList	array of CharacteristicValue (version 2)	A list of product characteristic values. Only if the characteristics need to be personalized.
	statusList	array of bss.cmn.StatusExtended (version 1)	A list of statuses linked to the product.
	productPrice	array of ProductPrice (version 2)	List of product prices.
	product	array of Product (version 2)	References to sub-products in a hierarchical product structure.
	sharingProvider	SharingProvider (version 1)	Information of the provider configuration. Only applicable for provider products.
	sharingConsumer	SharingConsumer (version 2)	The provider whom this product is sharing from. Only applicable for consumer products.
	baRefForBillingCycleAlignment	BillingAccountRef (version 1)	Customer's Billing Account Id for Billing Cycle.
	contract	ContractRef (version 1)	Contract.
	billingAccount	BillingAccountRefExt (version 1)	Billing Account used to Invoice the charges from product.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the Product.
	relatedParty	array of RelatedPartyExtended (version 1)	List of related parties.



CharacteristicValue (version 2)

Table 224 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 225 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 226 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 227 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 228 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256



bss.cmn.StatusExtended (version 1)

Table 229 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

ProductPrice (version 2)

Table 230 ProductPrice (version 2)

Name		Type	Description
ProductPrice (version 2)		object	Product price details corresponding to a product related to a contract.
	id	string	Unique identifier of a product price. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	External identifier of the product price. Pattern: ^(?=\s*\S).* Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the product price is valid for.
	productOfferingPrice	ProductOfferingPriceRef (version 1)	The references of product offering price.
	priceRow	array of PriceRow (version 1)	The price row.



ProductOfferingPriceRef (version 1)

Table 231 ProductOfferingPriceRef (version 1)

Name		Type	Description
ProductOfferingPriceRef (version 1)		object	The product offering price reference.
	id	string	The ID of the referenced product offering price. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced product offering price. Pattern: ^(?=\s*\S).*\$ Max length: 256

PriceRow (version 1)

Table 232 PriceRow (version 1)

Name		Type	Description
PriceRow (version 1)		object	Price row.
	priceAction	array of PriceAction (version 1)	The price action.
	productOfferingPriceRow	ProductOfferingPriceRowRef (version 1)	The reference of the product offering price row.

PriceAction (version 1)

Table 233 PriceAction (version 1)

Name	Type	Description
PriceAction (version 1)	object	Price action.



Name		Type	Description
	action	ActionRef (version 1)	The reference of the action.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of product price characteristic values. Only if the characteristics need to be personalized.
	actionCharacteristicValueList	array of ActionCharacteristicValue (version 1)	A list of product price action characteristic values. Only if the characteristics need to be personalized.

ActionRef (version 1)

Table 234 ActionRef (version 1)

Name		Type	Description
ActionRef (version 1)		object	Reference of the action.
	id	string	The ID of the referenced action. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external ID of the referenced action. Pattern: ^(?=\s*\S).* Max length: 256

ActionCharacteristicValue (version 1)

Table 235 ActionCharacteristicValue (version 1)

Name		Type	Description
ActionCharacteristicValue (version 1)		object	Action Characteristic value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the Action Characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The Action Characteristic value.
	actionCharacteristicSpecificationUserRef	EntitySpecRef (version 1)	Action Characteristic Specification Use reference.



EntitySpecRef (version 1)

Table 236 EntitySpecRef (version 1)

Name		Type	Description
EntitySpecRef (version 1)		object	Reference to an entity specification.
	id	string	Unique identifier of the specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

ProductOfferingPriceRowRef (version 1)

Table 237 ProductOfferingPriceRowRef (version 1)

Name		Type	Description
ProductOfferingPriceRowRef (version 1)		object	The product offering price row reference.
	id	string	The ID of the referenced product offering price row. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced product offering price row. Pattern: ^(?=\s*\S).*\$ Max length: 256

SharingProvider (version 1)

Table 238 SharingProvider (version 1)

Name		Type	Description
SharingProvider (version 1)		object	Information required for the provider specific parts of a sharing product.



Name		Type	Description
	billingAccount	array of BillingAccountRef (version 1)	List of billing accounts to be shared. Only applicable for products connected to a sharing provider specification with the characteristic must select BA set to true.
	consumerList	array of ConsumerEntry (version 1)	List of consumers to share to.
	billingAccountBucketDeterminationSpecification	array of BillingAccountBucketDeterminationSpecificationRef (version 1)	List of billing accounts and its Bucket Determination Specification to be shared. Only applicable for products connected to a sharing provider specification with the characteristic must select BA set to true.

BillingAccountRef (version 1)

Table 239 BillingAccountRef (version 1)

Name		Type	Description
BillingAccountRef (version 1)		object	Billing Account Reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).* Max length: 256

ConsumerEntry (version 1)

Table 240 ConsumerEntry (version 1)

Name		Type	Description
ConsumerEntry (version 1)		object	The consumer that is consuming the shared provider product.



Name		Type	Description
	externalId	string	Unique identifier of a Consumer Entry in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	id	string	Unique identifier of the consumer entry. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerCustomerId	string	The identifier of the customer that the consumer belongs to. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerCustomerExternalId	string	The external identifier of the customer that the consumer belongs to. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerContractId	string	The identifier of the consumer contract. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	consumerContractExternalId	string	The external identifier of the consumer contract. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the consumer entry is valid for.



BillingAccountBucketDeterminationSpecificationRef (version 1)

Table 241 BillingAccountBucketDeterminationSpecificationRef (version 1)

Name		Type	Description
BillingAccountBucketDeterminationSpecificationRef (version 1)		object	Billing Account Bucket Determination Specification Reference.
	billingAccount	BillingAccountRef (version 1)	Billing account reference.
	bucketDeterminationSpecification	BucketDeterminationSpecificationRef (version 1)	Bucket determination specification.

BucketDeterminationSpecificationRef (version 1)

Table 242 BucketDeterminationSpecificationRef (version 1)

Name		Type	Description
BucketDeterminationSpecificationRef (version 1)		object	Bucket Determination Specification Reference.
	id	string	Unique identifier of the bucket determination specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the bucket determination specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256

SharingConsumer (version 2)

Table 243 SharingConsumer (version 2)

Name	Type	Description
SharingConsumer (version 2)	object	Links the sharing provider that the sharing consumer is consuming from.



Name		Type	Description
	id	string	Unique identifier of a sharing consumer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	providerContract	ContractRef (version 1)	Provider Contract Reference.
	providerProduct	ProductRef (version 1)	Provider Product Reference.
	providerCustomer	CustomerRef (version 1)	Provider Customer Reference.
	consumerListEntry	ConsumerEntryRef (version 1)	Customer List Entry Reference.

ContractRef (version 1)

Table 244 ContractRef (version 1)

Name		Type	Description
ContractRef (version 1)		object	Contract Reference.
	id	string	Identifier of a contract instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the contract for interaction in external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

ProductRef (version 1)

Table 245 ProductRef (version 1)

Name		Type	Description
ProductRef (version 1)		object	Product Reference.



Name		Type	Description
	id	string	ID of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256

CustomerRef (version 1)

Table 246 CustomerRef (version 1)

Name		Type	Description
CustomerRef (version 1)		object	Customer Reference.
	id	string	ID of the customer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External Id of the customer. Pattern: ^(?=\s*\S).*\$ Max length: 256

ConsumerEntryRef (version 1)

Table 247 ConsumerEntryRef (version 1)

Name		Type	Description
ConsumerEntryRef (version 1)		object	Consumer Entry Reference.
	id	string	Unique identifier of the consumer entry instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the consumer entry in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256



BillingAccountRefExt (version 1)

Table 248 BillingAccountRefExt (version 1)

Name		Type	Description
BillingAccountRefExt (version 1)		object	Billing Account Reference extended to include validFor.
	validFor	bss.cmn.TimePeriod (version 1)	The start time to change the billing account reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256

RelatedPartyExtended (version 1)

Table 249 RelatedPartyExtended (version 1)


Name		Type	Description
RelatedPartyExtended (version 1)		object	Related Party Extended.
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: ^(?=\s*\S).*\$ Max length: 256



4.1.4.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.4.4.1 bss.Tmf637ProductInventoryManagement.product Update Response Version 1

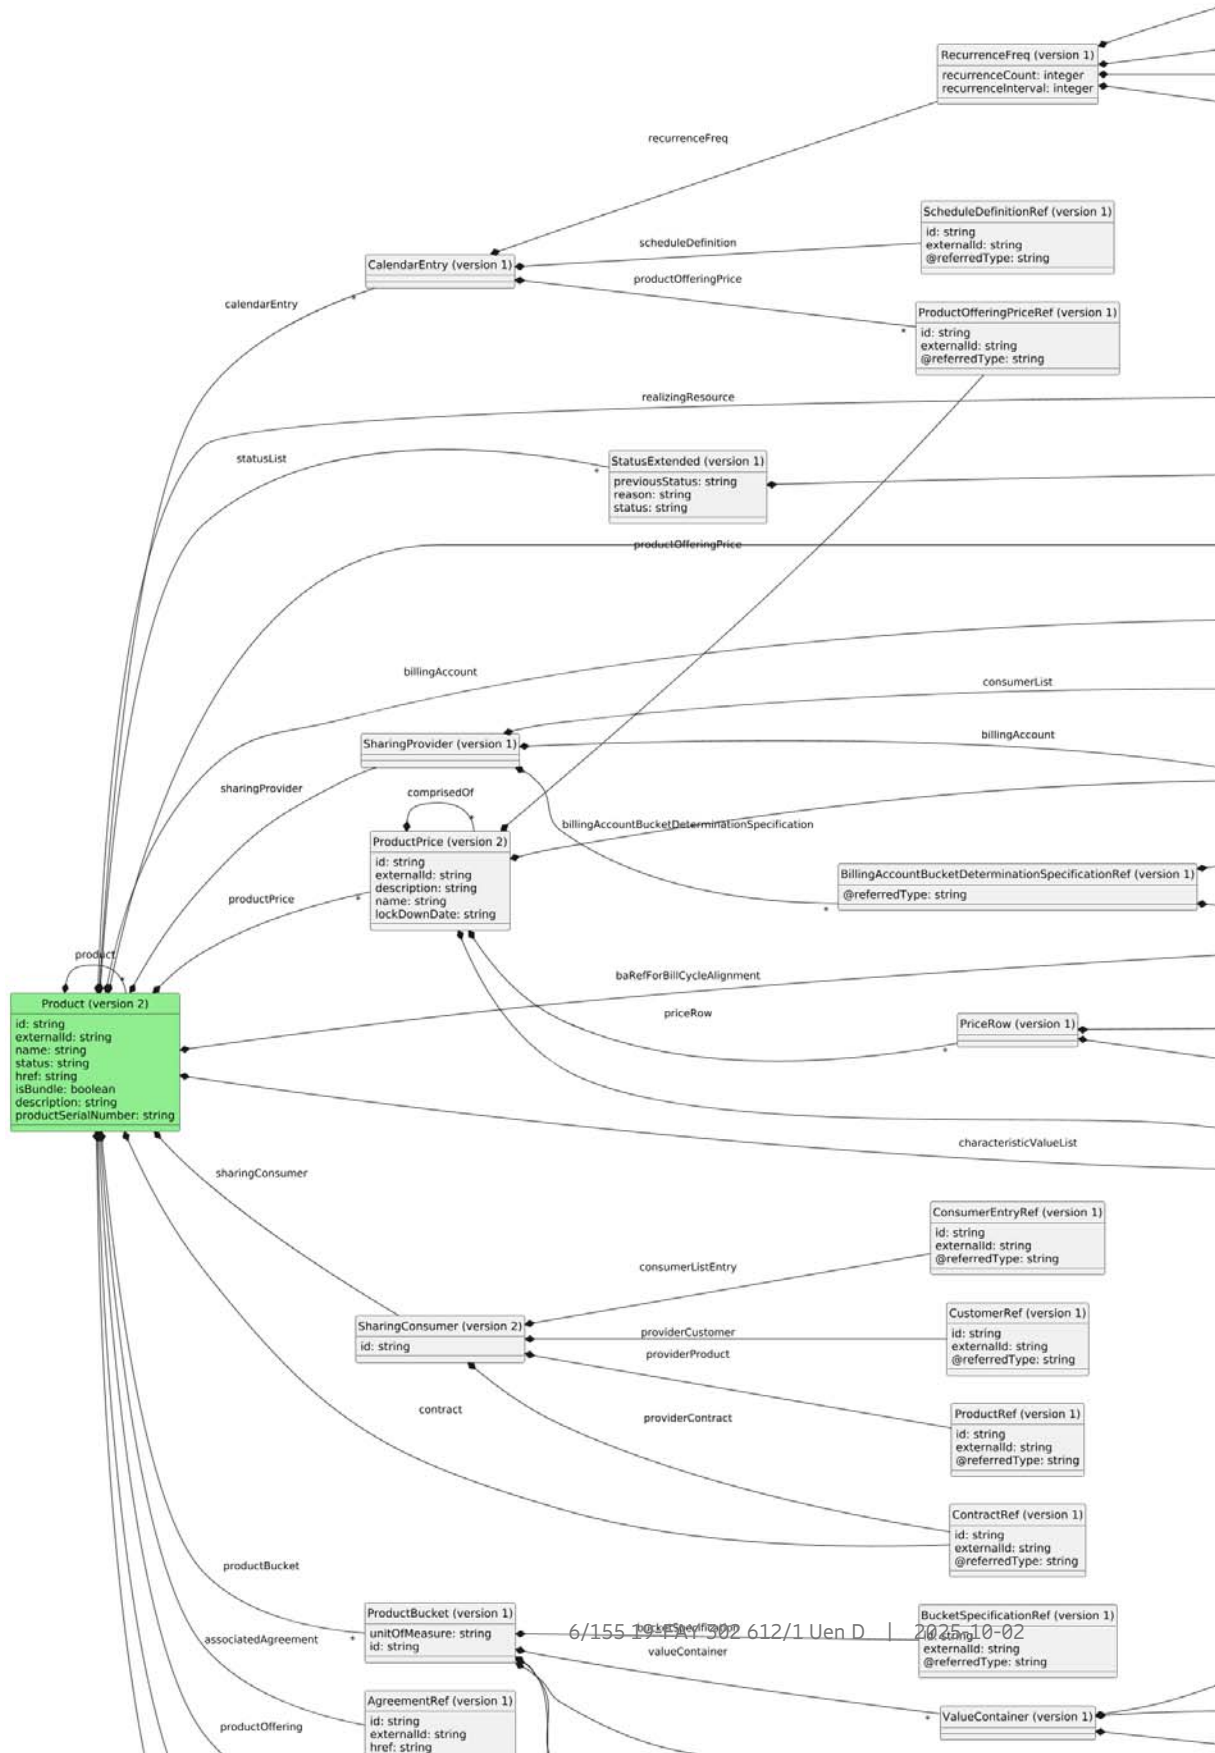



The representation is provided as JSON objects with the following attributes:

Table 250 Product (version 2)

Name	Type	Description
Product (version 2)	object	Product derived from a product offering related to a contract.



Name		Type	Description
	id	string	Unique identifier of a product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the product in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	A word, term, or phrase by which the product is known and distinguished from other products. Not guaranteed to be unique. Max length: 128
	characteristicValueList	array of CharacteristicValue (version 2)	A list of product characteristic values. Only if the characteristics need to be personalized.
	statusList	array of bss.cmn.StatusExtended (version 1)	A list of statuses linked to the product.
	status	string	Status of the product Max length: 256
	productPrice	array of ProductPrice (version 2)	List of product prices.
	product	array of Product (version 2)	References to sub-products in a hierarchical product structure.
	sharingProvider	SharingProvider (version 1)	Information of the provider configuration. Only applicable for provider products.
	sharingConsumer	SharingConsumer (version 2)	The provider whom this product is sharing from. Only applicable for consumer products.
	baRefForBillingCycleAlignment	BillingAccountRef (version 1)	Customer's Billing Account Id for Billing Cycle.
	associatedAgreement	AgreementRef (version 1)	Associated agreement.
	contract	ContractRef (version 1)	Contract.
	billingAccount	BillingAccountRefExt (version 1)	Billing Account used to Invoice the charges from product.
	validFor	bss.cmn.TimePeriod (version 1)	Validity of the Product.



CharacteristicValue (version 2)

Table 251 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

bss.cmn.TimePeriod (version 1)

Table 252 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

bss.cmn.ValueWithUoM (version 1)

Table 253 bss.cmn.ValueWithUoM (version 1)

Name	Type	Description
bss.cmn.ValueWithUoM (version 1)	object	The versions of the value.



Name		Type	Description
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 254 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	value	array of <code>bss.cmn.ValueWithUoM</code> (version 1)	The versions of the value.
	comprisedOf	array of <code>CharacteristicValueNoValidFor</code> (version 1)	Child/Children of the characteristic value, if any.
	characteristicSpecification	<code>SpecCharacteristicRef</code> (version 1)	The spec characteristic specification.

SpecCharacteristicRef (version 1)

Table 255 SpecCharacteristicRef (version 1)

Name		Type	Description
SpecCharacteristicRef (version 1)		object	The spec characteristic reference.



Name		Type	Description
	id	string	The ID of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external id of the referenced spec characteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

bss.cmn.StatusExtended (version 1)

Table 256 bss.cmn.StatusExtended (version 1)

Name		Type	Description
bss.cmn.StatusExtended (version 1)		object	Extended status structure.
	previousStatus	string	The Previous status for the given time period. Max length: 256
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

ProductPrice (version 2)

Table 257 ProductPrice (version 2)

Name	Type	Description
ProductPrice (version 2)	object	Product price details corresponding to a product related to a contract.



Name		Type	Description
	id	string	Unique identifier of a product price. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	External identifier of the product price. Pattern: ^(?=\s*\S).* Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the product price is valid for.
	comprisedOf	array of ProductPrice (version 2)	References to sub-product prices in a hierarchical product price structure.
	characteristicValueList	array of CharacteristicValuePrice (version 2)	A list of product price characteristic values. Only if the characteristics need to be personalized.
	productOfferingPrice	ProductOfferingPriceRef (version 1)	The references of product offering price.
	priceRow	array of PriceRow (version 1)	The price row.
	description	string	Product price description. A narrative that explains in detail the semantics of this product price. Max length: 128
	name	string	A short descriptive name. Max length: 128
	lockDownDate	string	This is the date on which the product price is locked. Format: date-time Pattern: ^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9])) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$



CharacteristicValuePrice (version 2)

Table 258 CharacteristicValuePrice (version 2)

Name		Type	Description
CharacteristicValuePrice (version 2)		object	A value of a Characteristic.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any. Deprecated
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	characteristicSpecification	SpecCharacteristicRef (version 1)	The spec characteristic specification.

ProductOfferingPriceRef (version 1)

Table 259 ProductOfferingPriceRef (version 1)

Name		Type	Description
ProductOfferingPriceRef (version 1)		object	The product offering price reference.
	id	string	The ID of the referenced product offering price. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	The external ID of the referenced product offering price. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128



PriceRow (version 1)

Table 260 PriceRow (version 1)

Name		Type	Description
PriceRow (version 1)		object	Price row.
	priceAction	array of PriceAction (version 1)	The price action.
	productOfferingPriceRow	ProductOfferingPriceRowRef (version 1)	The reference of the product offering price row.

PriceAction (version 1)

Table 261 PriceAction (version 1)

Name		Type	Description
PriceAction (version 1)		object	Price action.
	action	ActionRef (version 1)	The reference of the action.
	characteristicValueList	array of CharacteristicValue (version 2)	A list of product price characteristic values. Only if the characteristics need to be personalized.
	actionCharacteristicValueList	array of ActionCharacteristicValue (version 1)	A list of product price action characteristic values. Only if the characteristics need to be personalized.

ActionRef (version 1)

Table 262 ActionRef (version 1)

Name	Type	Description
ActionRef (version 1)	object	Reference of the action.



Name		Type	Description
	id	string	The ID of the referenced action. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced action. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ActionCharacteristicValue (version 1)

Table 263 ActionCharacteristicValue (version 1)

Name		Type	Description
ActionCharacteristicValue (version 1)		object	Action Characteristic value.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the Action Characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The Action Characteristic value.
	actionCharacteristicSpecificationUseRef	EntitySpecRef (version 1)	Action Characteristic Specification Use reference.

EntitySpecRef (version 1)

Table 264 EntitySpecRef (version 1)

Name	Type	Description
EntitySpecRef (version 1)	object	Reference to an entity specification.



Name		Type	Description
	id	string	Unique identifier of the specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

ProductOfferingPriceRowRef (version 1)

Table 265 ProductOfferingPriceRowRef (version 1)

Name		Type	Description
ProductOfferingPriceRowRef (version 1)		object	The product offering price row reference.
	id	string	The ID of the referenced product offering price row. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced product offering price row. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

SharingProvider (version 1)

Table 266 SharingProvider (version 1)

Name		Type	Description
SharingProvider (version 1)		object	Information required for the provider specific parts of a sharing product.



Name		Type	Description
	billingAccount	array of BillingAccountRef (version 1)	List of billing accounts to be shared. Only applicable for products connected to a sharing provider specification with the characteristic must select BA set to true.
	consumerList	array of ConsumerEntry (version 1)	List of consumers to share to.
	billingAccountBucketDeterminationSpecification	array of BillingAccountBucketDeterminationSpecificationRef (version 1)	List of billing accounts and its Bucket Determination Specification to be shared. Only applicable for products connected to a sharing provider specification with the characteristic must select BA set to true.

BillingAccountRef (version 1)

Table 267 BillingAccountRef (version 1)

Name		Type	Description
BillingAccountRef (version 1)		object	Billing Account Reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128



ConsumerEntry (version 1)

Table 268 ConsumerEntry (version 1)

Name		Type	Description
ConsumerEntry (version 1)		object	The consumer that is consuming the shared provider product.
	externalId	string	Unique identifier of a Consumer Entry in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the consumer entry. Pattern: ^(?=\s*\S).*\$ Max length: 256
	consumerCustomerId	string	The identifier of the customer that the consumer belongs to. Pattern: ^(?=\s*\S).*\$ Max length: 256
	consumerCustomerExternalId	string	The external identifier of the customer that the consumer belongs to. Pattern: ^(?=\s*\S).*\$ Max length: 256
	consumerContractId	string	The identifier of the consumer contract. Pattern: ^(?=\s*\S).*\$ Max length: 256
	consumerContractExternalId	string	The external identifier of the consumer contract. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the consumer entry is valid for.



BillingAccountBucketDeterminationSpecificationRef (version 1)

Table 269 BillingAccountBucketDeterminationSpecificationRef (version 1)

Name		Type	Description
BillingAccountBucketDeterminationSpecificationRef (version 1)		object	Billing Account Bucket Determination Specification Reference.
	billingAccount	BillingAccountRef (version 1)	Billing account reference.
	bucketDeterminationSpecification	BucketDeterminationSpecificationRef (version 1)	Bucket determination specification.
	@referredType	string	Referred Type. Max length: 128

BucketDeterminationSpecificationRef (version 1)

Table 270 BucketDeterminationSpecificationRef (version 1)

Name		Type	Description
BucketDeterminationSpecificationRef (version 1)		object	Bucket Determination Specification Reference.
	id	string	Unique identifier of the bucket determination specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the bucket determination specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	@referredType	string	Referred Type. Max length: 128



SharingConsumer (version 2)

Table 271 SharingConsumer (version 2)

Name		Type	Description
SharingConsumer (version 2)		object	Links the sharing provider that the sharing consumer is consuming from.
	id	string	Unique identifier of a sharing consumer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	providerContract	ContractRef (version 1)	Provider Contract Reference.
	providerProduct	ProductRef (version 1)	Provider Product Reference.
	providerCustomer	CustomerRef (version 1)	Provider Customer Reference.
	consumerListEntry	ConsumerEntryRef (version 1)	Customer List Entry Reference.

ContractRef (version 1)

Table 272 ContractRef (version 1)

Name		Type	Description
ContractRef (version 1)		object	Contract Reference.
	id	string	Identifier of a contract instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the contract for interaction in external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



ProductRef (version 1)

Table 273 ProductRef (version 1)

Name		Type	Description
ProductRef (version 1)		object	Product Reference.
	id	string	ID of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

CustomerRef (version 1)

Table 274 CustomerRef (version 1)

Name		Type	Description
CustomerRef (version 1)		object	Customer Reference.
	id	string	ID of the customer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External Id of the customer. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ConsumerEntryRef (version 1)

Table 275 ConsumerEntryRef (version 1)

Name		Type	Description
ConsumerEntryRef (version 1)		object	Consumer Entry Reference.



Name		Type	Description
	id	string	Unique identifier of the consumer entry instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the consumer entry in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

AgreementRef (version 1)

Table 276 AgreementRef (version 1)

Name		Type	Description
AgreementRef (version 1)		object	Agreement Reference.
	id	string	Unique identifier of the agreement instance. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the agreement in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128



BillingAccountRefExt (version 1)

Table 277 BillingAccountRefExt (version 1)

Name		Type	Description
BillingAccountRefExt (version 1)		object	Billing Account Reference extended to include validFor.
	validFor	bss.cmn.TimePeriod (version 1)	The start time to change the billing account reference.
	id	string	ID of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	ExternalId of the billing account. Pattern: ^(?=\s*\S).*\$ Max length: 256
	href	string	Href to the resource. Max length: 512
	@referredType	string	Referred Type. Max length: 128

CalendarEntry (version 1)

Table 278 CalendarEntry (version 1)

Name		Type	Description
CalendarEntry (version 1)		object	Calendar Entry.
	scheduleDefinition	ScheduleDefinition Ref (version 1)	The reference of a schedule definition.
	productOfferingPrice	array of Product OfferingPriceRef (version 1)	The references of product offering price.
	recurrenceFreq	RecurrenceFreq (version 1)	Recurrence frequency of a schedule definition.



ScheduleDefinitionRef (version 1)

Table 279 ScheduleDefinitionRef (version 1)

Name		Type	Description
ScheduleDefinitionRef (version 1)		object	Schedule Definition Reference.
	id	string	Unique identifier of the schedule definition. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the schedule definition in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	@referredType	string	Referred Type. Max length: 128

RecurrenceFreq (version 1)

Table 280 RecurrenceFreq (version 1)

Name	Type	Description
RecurrenceFreq (version 1)	object	Recurrence frequency of schedule definition.



Name		Type	Description
	recurrenceCount	integer	Recurrence count of a schedule definition. The numeric value must be at least 1. The numeric value must not exceed 9223372036854775806.
	recurrenceInterval	integer	Recurrence interval of a schedule definition. The numeric value must be at least 1. The numeric value must not exceed 9223372036854775806.
	time	TimePredefinedTimeZone (version 1)	Time with predefined time zone.
	weekly	Weekly (version 1)	Recurrence frequency Weekly.
	monthly	Monthly (version 1)	Recurrence frequency monthly.
	yearly	Yearly (version 1)	Recurrence frequency yearly.

TimePredefinedTimeZone (version 1)

Table 281 TimePredefinedTimeZone (version 1)

Name	Type	Description
TimePredefinedTimeZone (version 1)	object	A time with a predefined time zone.



Name		Type	Description
	time	string	This type defines a time value based on the definition found at http://www.w3.org/TR/xmlschema-2/#time. Fractional seconds with three decimals are mandatory. Leap seconds are not supported. Example values are '14:35:05.003'. The latter example is the recommended format. Pattern: <code>^(([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000)?</code>\$
	timeZone	string	This specifies which predefined time zone to be used. Possible values: HOME_TIME_ZONE

Weekly (version 1)

Table 282 Weekly (version 1)

Name		Type	Description
Weekly (version 1)		object	Schedule definition by weekly.
	recurrenceByDay	array of string	Recurrence by weekdays. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY



Monthly (version 1)

Table 283 Monthly (version 1)

Name		Type	Description
Monthly (version 1)		object	Schedule definition by monthly.
	monthDayNumber	array of MonthDay Number (version 1)	Monthly schedule definition by month day number.
	weekdayOfMonth	WeekdayOfMonth (version 1)	Monthly schedule definition by weekday of month.

MonthDayNumber (version 1)

Table 284 MonthDayNumber (version 1)

Name		Type	Description
MonthDayNumber (version 1)		object	List of days of month.
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByMonth Day	integer	Recurrence by month day. The numeric value must be at least 1. The numeric value must not exceed 28.

WeekdayOfMonth (version 1)

Table 285 WeekdayOfMonth (version 1)

Name	Type	Description
WeekdayOfMonth (version 1)	object	Schedule definition by weekday of month.



Name		Type	Description
	recurrenceByDay	string	Recurrence by weekday. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY
	weekNumber	string	Recurrence by week number of the month. Possible values: FIRST SECOND THIRD FOURTH LAST

Yearly (version 1)

Table 286 Yearly (version 1)

Name		Type	Description
Yearly (version 1)		object	Recurrence frequency of schedule definition.
	weekdaysOfYear	WeekdaysOfYear (version 1)	Yearly schedule definition by weekdays of year.
	daysOfMonth	DaysOfMonth (version 1)	Yearly schedule definition by days of month.
	daysOfYear	array of DaysOfYear (version 1)	Yearly schedule definition by days of year.



WeekdaysOfYear (version 1)

Table 287 WeekdaysOfYear (version 1)

Name		Type	Description
WeekdaysOfYear (version 1)		object	Yearly schedule definition by weekdays of year.
	recurrenceByDay	array of string	Recurrence by weekdays. Possible values: MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY SUNDAY
	weekNumber	array of WeekNumber (version 1)	Week number of the year.

WeekNumber (version 1)

Table 288 WeekNumber (version 1)

Name		Type	Description
WeekNumber (version 1)		object	List of week number of the year.
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByWeekNo	integer	Recurrence by week number of the year. The numeric value must be at least 1. The numeric value must not exceed 52.



DaysOfMonth (version 1)

Table 289 DaysOfMonth (version 1)

Name		Type	Description
DaysOfMonth (version 1)		object	Schedule definition by days of month.
	monthDayNumber	array of MonthDay Number (version 1)	Recurrence by month day.
	recurrenceByMonth	array of string	Recurrence by months. Possible values: JANUARY FEBRUARY MARCH APRIL MAY JUNE JULY AUGUST SEPTEMBER OCTOBER NOVEMBER DECEMBER

DaysOfYear (version 1)

Table 290 DaysOfYear (version 1)

Name	Type	Description
DaysOfYear (version 1)	object	Yearly schedule definition by days of year.



Name		Type	Description
	offsetType	string	Offset to specify if day should count from start or end. Possible values: COUNT_FROM_START COUNT_FROM_END
	recurrenceByYearDay	integer	Recurrence by year day. The numeric value must be at least 1. The numeric value must not exceed 366.

ProductOfferingRef (version 1)

Table 291 ProductOfferingRef (version 1)

Name		Type	Description
ProductOfferingRef (version 1)		object	The product offering reference.
	id	string	The ID of the referenced product offering. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	The external ID of the referenced product offering. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	@referredType	string	Referred Type. Max length: 128

Resource (version 2)

Table 292 Resource (version 2)

Name	Type	Description
Resource (version 2)	object	Structure of a logical resource the represent an identification.



Name		Type	Description
	id	string	A unique identifier of a logical resource. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	An external identifier of a logical resource. Pattern: ^(?=\s*\S).*\$ Max length: 256
	characteristicValue List	array of CharacteristicValue (version 2)	A list of the logical resources characteristic values. Only if the characteristics need to be personalized.
	statusList	array of bss.cmn.Status (version 1)	A list of all versions of statuses linked to the resource.
	resourceNumber	string	The complete number to identify the resource. For an MSISDN-DCS (GSM standard 1800) this is CC + NDC + SN. For an MSISDN-PCS (GSM standard PCS 1900) this is CC + NPA + SN. For an IMSI this is MCC + MNC + MSIN. (CC = Country code, NDC = National destination code, NPA = Number planning area, SN = Subscriber number, MCC = Mobile country code, MNC = Mobile network code, MSIN = Mobile subscriber identification number). Max length: 512
	resourceSpecification	ResourceSpecificationRef (version 1)	Resource specification definition.
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the resource is valid for.



bss.cmn.Status (version 1)

Table 293 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

ResourceSpecificationRef (version 1)

Table 294 ResourceSpecificationRef (version 1)

Name		Type	Description
ResourceSpecificationRef (version 1)		object	Resource Specification Reference.
	id	string	Unique identifier of the resource specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the resource specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

ServiceRef (version 1)

Table 295 ServiceRef (version 1)

Name	Type	Description
ServiceRef (version 1)	object	Service Reference.



Name		Type	Description
	id	string	Unique identifier of the resource instance. Pattern: $^(?=\s*\S).*$$ Max length: 256
	@referredType	string	Referred Type. Max length: 128

RelatedPartyExtended (version 1)

Table 296 RelatedPartyExtended (version 1)

Name		Type	Description
RelatedPartyExtended (version 1)		object	Related Party Extended.
	role	string	Role of the related party. Max length: 128
	@referredType	string	Referred Type. Max length: 128
	externalId	string	External identifier of the party or party role. Pattern: $^(?=\s*\S).*$$ Max length: 256
	id	string	Unique identifier of the party or party role. Pattern: $^(?=\s*\S).*$$ Max length: 256
	href	string	Href to the related party. Max length: 512

ProductBucket (version 1)

Table 297 ProductBucket (version 1)

Name		Type	Description
ProductBucket (version 1)		object	Product bucket.



Name		Type	Description
	amount	bss.cmn.Decimal_Sensitive (version 1)	The balance of the Product Bucket.
	reservedAmount	bss.cmn.Decimal_Sensitive (version 1)	The reserved amount on the Product Bucket.
	unitOfMeasure	string	Unit of measure for amounts. Max length: 32
	valueContainer	array of ValueContainer (version 1)	Product bucket value container.
	replenishedAmount	bss.cmn.Decimal_Sensitive (version 1)	The replenished amount of the bucket.
	id	string	Unique identifier of a product bucket. Pattern: ^(?=\s*\S).*\$ Max length: 256
	bucketSpecification	BucketSpecificationRef (version 1)	Bucket Specification Reference.

bss.cmn.Decimal_Sensitive (version 1)

Table 298 bss.cmn.Decimal_Sensitive (version 1)

Name		Type	Description
bss.cmn.Decimal_Sensitive (version 1)		object	Amount representation.
	number	integer	Carrying value. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	decimalPlaces	integer	Number of decimals in the value. The numeric value must be at least 0. The numeric value must not exceed 6.



ValueContainer (version 1)

Table 299 ValueContainer (version 1)

Name		Type	Description
ValueContainer (version 1)		object	Value Container.
	amount	bss.cmn.Decimal_Sensitive (version 1)	The amount of this value container.
	replenishedAmount	bss.cmn.Decimal_Sensitive (version 1)	The replenished amount of the value container.
	validFor	bss.cmn.TimePeriod (version 1)	The validity period of the value container.

BucketSpecificationRef (version 1)

Table 300 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	@referredType	string	Referred Type. Max length: 128



5

Generic Interface Parameters

The following sub-sections describe the elements and their structure in the request and response for Generic Interface Parameters.

5.1

Generic Interface Parameters Request

5.1.1

bss.genericInterfaceParameters Request Version 4

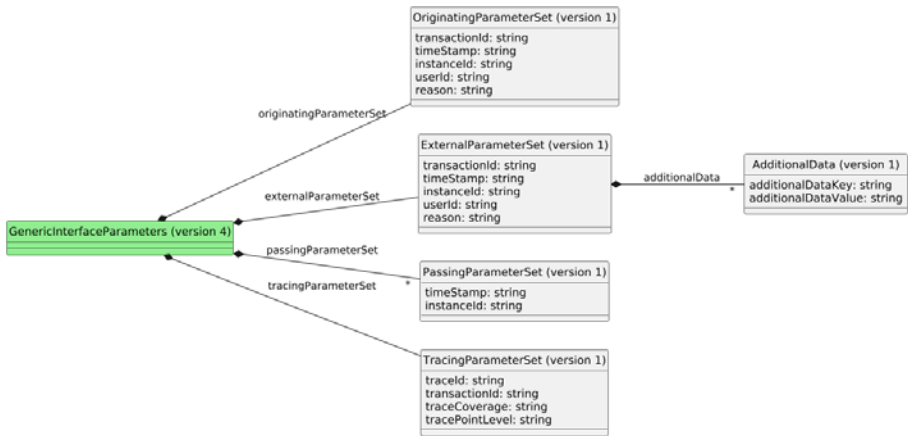


Figure 7 bss.genericInterfaceParameters.request.4 UML representation

The representation is provided as JSON objects with the following attributes:

Table 301 bss.cmn.GenericInterfaceParameters (version 4)

Name	Type	Description
bss.cmn.GenericInterfac eParameters (version 4)	object	The Generic Interface Parameters (GIP) is used for transaction traceability.



Name		Type	Description
	originatingParameterSet	bss.cmn.OriginatingParameterSet (version 1)	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.
	externalParameterSet	bss.cmn.ExternalParameterSet (version 1)	Information received from the external system that initiated the transaction.
	passingParameterSet	array of bss.cmn.PassingParameterSet (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	bss.cmn.TracingParameterSet (version 1)	Tracing Parameter Set.

5.1.1.1

bss.cmn.OriginatingParameterSet (version 1)

Table 302 bss.cmn.OriginatingParameterSet (version 1)

Name	Type	Description
bss.cmn.OriginatingParameterSet (version 1)	object	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.



Name		Type	Description
	transactionId	string	Unique transaction identifier. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	timeStamp	string	The time stamp when the ops was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((0[1-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that created the ops. Max length: 256
	userId	string	User Identification. Provided at login to the instance creating the ops. Max length: 256
	reason	string	Reason for the transaction. Max length: 256

5.1.1.2

bss.cmn.ExternalParameterSet (version 1)

Table 303 bss.cmn.ExternalParameterSet (version 1)

Name	Type	Description
bss.cmn.ExternalParameterSet (version 1)	object	Information received from the external system that initiated the transaction.



Name		Type	Description
	transactionId	string	Transaction Identifier received from external system. Max length: 256
	timeStamp	string	Transaction time stamp received from external system. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01]))((02-(0[1-9] 12)[0-9])) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that sent the transactionId. Max length: 256
	userId	string	User identifier received from external system. Max length: 256
	reason	string	Reason received from external system. Max length: 256
	additionalData	array of <code>bss.cmn.AdditionalData (version 1)</code>	Array of additional data Items from external system.

5.1.1.3

`bss.cmn.AdditionalData (version 1)`

Table 304 `bss.cmn.AdditionalData (version 1)`

Name	Type	Description
<code>bss.cmn.AdditionalData (version 1)</code>	object	A key-value structure data received from external system.



Name		Type	Description
	additionalDataKey	string	key of the additional data from external system. Max length: 256
	additionalDataValue	string	value correspond to the key. Max length: 256

5.1.1.4

bss.cmn.PassingParameterSet (version 1)

Table 305 bss.cmn.PassingParameterSet (version 1)

Name		Type	Description
bss.cmn.PassingParameterSet (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the ppsItem was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02]))-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0])))T(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the entity that created the ppsItem. Max length: 256

5.1.1.5

bss.cmn.TracingParameterSet (version 1)

Table 306 bss.cmn.TracingParameterSet (version 1)

Name		Type	Description
bss.cmn.TracingParameterSet (version 1)		object	Tracing Parameter Set.



Name		Type	Description
	traceId	string	The unique id for the trace job. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	transactionId	string	The unique id for the transaction. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
	tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

5.2 Generic Interface Parameters Response

5.2.1 bss.genericInterfaceParameters Response Version 4

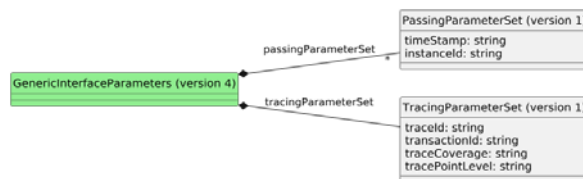


Figure 8 bss.genericInterfaceParameters.response.4 UML representation

The representation is provided as JSON objects with the following attributes:

Table 307 bss.cmn.GenericInterfaceParameters (version 4)

Name	Type	Description
bss.cmn.GenericInterfaceParameters (version 4)	object	The Generic Interface Parameters (GIP) is used for transaction traceability.



Name		Type	Description
	passingParameterSet	array of bss.cmn.PassingParameterSet (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	bss.cmn.TracingParameterSet (version 1)	Tracing Parameter Set.

5.2.1.1

bss.cmn.PassingParameterSet (version 1)

Table 308 bss.cmn.PassingParameterSet (version 1)

Name		Type	Description
bss.cmn.PassingParameterSet (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the ppsItem was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0]))))T(((0[1][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the entity that created the ppsItem. Max length: 256

5.2.1.2

bss.cmn.TracingParameterSet (version 1)

Table 309 bss.cmn.TracingParameterSet (version 1)

Name		Type	Description
bss.cmn.TracingParameterSet (version 1)		object	Tracing Parameter Set.



Name		Type	Description
	traceId	string	The unique id for the trace job. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	transactionId	string	The unique id for the transaction. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
	tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

6 Result Representation

Results are reported through HTTP status codes. JSON objects are provided for requests that reaches the application component. The following tables describe the elements and their structure contained in the result representation.

6.1 bss.errorMessage Response Version 2




Figure 9 bss.errorMessage.response.2 UML representation

The representation is provided as JSON objects with the following attributes:

Table 310 bss.cmn.ErrorMessageExtended (version 2)

Name		Type	Description
bss.cmn.ErrorMessageExtended (version 2)		object	Extended error message structure.
	supplementaryError	array of bss.cmn.SupplementaryError (version 2)	Supplementary Error.
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	httpStatusCode	integer	HTTP status code.



6.1.1 **bss.cmn.SupplementaryError (version 2)**

Table 311 bss.cmn.SupplementaryError (version 2)

Name		Type	Description
bss.cmn.Supplementary Error (version 2)		object	Supplementary error message structure. In case of partial error scenarios, this structure may also include successful responses to show what parts went ok.
	source	string	Source of error. Max length: 256
	action	string	Action causing error. Max length: 256
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	httpStatusCode	integer	HTTP status code.

6.2 **Result Codes**

The supported Error Codes could be found in the 'Error Codes' document.



7 Interface Version Changes

The following sections describe the changes between the interface versions.

7.1 Interface Version 1.0

Table 312 Changes

Resources	Type of Change	Description
N/A	N/A	First version.

7.2 Interface Version 1.1

Table 313 Changes

Resources	Type of Change	Description
All	Add	Added Http Status Code 406 in the list of response code.
All	Remove	Removed http status code 401 and 403 from error messages.

7.3 Interface Version 1.2

Table 314 Changes

Resources	Type of Change	Description
PriceAction	Updated	New attribute - actionCharacteristicValueList.
Product	Remove	Attribute "externalId" removed from "realizingService".

7.4 Interface Version 1.3

Table 315 Changes

Resources	Type of Change	Description
Product	Removed	Removed productPolicyRef attribute.



7.5 Interface Version 1.4

Table 316 Changes

Resources	Type of Change	Description
All	Updated	Change handling of content-type for request/responses operations.

7.6 Interface Version 1.5

Table 317 Changes

Resources	Type of Change	Description
Contract and Consumer Product	Deprecate	Attribute comprisedOf under Product->Price->Characteristics->CharacteristicsValue was deprecated.



Reference List

- [1] [RFC 7231 - Hypertext Transfer Protocol \(HTTP/1.1\): Semantics and Content](#)
- [2] [RFC 7230 - Hypertext Transfer Protocol \(HTTP/1.1\): Message Syntax and Routing](#)
- [3] [RFC 6906 - The 'profile' Link Relation Type](#)
- [4] [RFC 4122 - A Universally Unique Identifier \(UUID\) URN Namespace](#)
- [5] [RFC 3986 - Uniform Resource Identifier \(URI\): Generic Syntax](#)
- [6] [RFC 2818 - HTTP Over TLS](#)
- [7] [RFC 2616 - Hypertext Transfer Protocol -- HTTP/1.1](#)