

BSSF Agreement Management REST Interface 1.7

INTERFACE DESCRIPTION

Copyright

© Ericsson AB 2025. All Rights Reserved. No part of this document may be reproduced in any form without the written permission of the copyright owner.

Disclaimer

The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. Ericsson shall have no liability for any error or damage of any kind resulting from the use of this document.

This information is intended exclusively for demonstration purposes when used in the development of client-side integrations. It may not include definitions for various elements or behaviors that could arise from client-server interactions involving any third-party products, providers, or deployment platforms, whether external or internal to the delivered product.

Trademark List

Ericsson and the Ericsson logotype are the trademarks or registered trademarks of Telefonaktiebolaget LM Ericsson. All other product or service names mentioned in a document on this server are trademarks of their respective companies.



Contents

1	Introduction	1
1.1	Transfer Mechanism	1
1.2	Authentication and Authorization	1
1.3	Compatibility Mechanism	1
1.3.1	HTTP Content Negotiation	1
1.3.2	Product Customization	1
1.3.3	Backward Compatibility	2
2	Syntax Notation	3
2.1	Resource Identifier	3
2.2	HTTP Headers	3
2.3	Resource Representation Profile	4
3	Service	5
3.1	BSSF Agreement Management	5
3.1.1	Description	5
3.2	Service Registry	5
4	Resources	7
4.1	Agreement	7
4.1.1	Create Agreement	7
4.1.2	Delete Agreement	28
4.1.3	Update Agreement	33
5	Generic Interface Parameters	51
5.1	Generic Interface Parameters Request	51
5.1.1	bss.genericInterfaceParameters Request Version 4	51
5.2	Generic Interface Parameters Response	56
5.2.1	bss.genericInterfaceParameters Response Version 4	56
6	Result Representation	59
6.1	bss.errorMessage Response Version 1	59
6.1.1	bss.cmn.ErrorMessage (version 1)	59
6.2	bss.errorMessage Response Version 2	60
6.2.1	bss.cmn.SupplementaryError (version 2)	61
6.3	Result Codes	62
7	Interface Version Changes	63
7.1	Interface Version 1.0	63



7.2	Interface Version 1.1	63
7.3	Interface Version 1.2	63
7.4	Interface Version 1.3	64
7.5	Interface Version 1.4	64
7.6	Interface Version 1.5	64
7.7	Interface Version 1.6	65
7.8	Interface Version 1.7	65
Reference List		67



1 Introduction

Target Groups

The target group for this document is:

— Solution Integrators

1.1 Transfer Mechanism

The transfer mechanism used is HTTPS. Both requests and responses use headers to send information about the message.

The access port is configurable. Clients that use this interface should support a configurable port.

1.2 Authentication and Authorization

Authentication is controlled by the inclusion of a Java Web Token (JWT) in the authorization header of the HTTP message.

1.3 Compatibility Mechanism

The following version mechanisms are used:

1.3.1 HTTP Content Negotiation

HTTP content negotiation uses the profile parameter in the HTTP Accept header to request a certain version of the resource representation. The profile value indicates the JSON schema and version used for the resource representation. If the profile parameter is not passed in the HTTP Accept header, the server returns the latest version of the resource representation.

For operations supporting error response version 1, if error response version is not specified it is assumed to be error response version 1.

1.3.2 Product Customization

Elements and data types that are specific for product customization are marked with PC in the section describing the element or data type. Functions and characteristics of a product customization is not part of the standard delivery. Contact your local Ericsson office for more information regarding ordering and compatibility.



All elements of a PC message are also product customizations when inside such a message. If an element or data type is marked PC within an otherwise standard record, is noted as such in the relevant chapters.

In order to improve readability the following applies in the rest of the document:

- The following applies to functions marked with (PC). The PC-tag is placed in the description.

1.3.3 Backward Compatibility

Json objects name and/or their respective content stated in this document may be changed without any further notice.

Backward compatibility within a major version is only kept for the messages sent over the network.



2 Syntax Notation

This interface uses a generic syntax that is described in the following sections. For a description of the actual values, refer to Resources.

2.1 Resource Identifier

The resource identifier is expressed by a URI with the following format:

```
{serverRoot}/{api}/{resourcePath}
```

```
{scheme:}://{host}[:{port}]/[{deploymentComponent}]{apiName}/{apiVersion}/{resourcePath}
```

Table 1 Server root parameter

Parameter	Description
serverRoot	Is implementation specific
api	Is the name and version of the API.

Table 2 API and resource path parameters

Parameter	Description
scheme	The Application protocol, for example HTTPS.
host	The network address to access the interface and its connected service.
port	The TCP/IP port used for access. If not specified, default ports for the applications are assumed.
deploymentComponent	The name of the deployment component providing the resource.
apiName	The name of the interface.
apiVersion	The version to use
resourcePath	The resource name and a unique ID.

The full URI must be encoded according to RFC3986 before usage.

2.2 HTTP Headers

The interface uses standard HTTP headers. In addition, custom HTTP headers are used with the following syntax:



ERICSSON.<name>:<value>

Accept Header Profile Value

The server accepts the following formats for profile values:

Accept: application/json; application/merge-patch+json;
profile=<profile-URI> <profile-URI>

If no Accept header field is present, then it is assumed that the client accepts all media types.

2.3 Resource Representation Profile

The profile link relation type indicates that a resource representation follows one or more profiles. For more information, refer to [RFC 6906](#).

The profile is identified by a URI with the following syntax:

profile="http://ericsson.com/<domain>.<interface>.<resource>.<operationAndDirection>.<version>.json#"

Table 3 REST Resource Representation Parameters

Parameter	Description
domain	Fixed value: bss
interface	Is the interface name.
resource	Is the resource name.
operationAndDirection	Is the CRUD operation with its direction request and response.
version	Major version of the resource representation.

3 Service

3.1 BSSF Agreement Management

Please read the service documentation available to understand how to use this interface in connection with the service.

3.1.1 Description

BSSF Agreement Management provides the ability to manage agreement.

3.2 Service Registry

The Service Registry is a central repository of available services. Their locations are used by clients to dynamically find the service providers it needs. A service provider registers its services in the registry. Service consumers look up services and service locations.

The services accessed through the interface are the following:

Table 4 Services Exposed in the Service Registry

Service Name	Service Type	Version	Environment	Available Capabilities	Optional Data
BSSF_Agreement_Management	REST	1	Prod		
BSSF_Agreement_Management	REST	1	Prod		secured=true

Note: This chapter is only applicable for Virtualized deployments.





4 Resources

The interface offers access to different resources. Each resource has its own access path and parameters which are described in the following sections.

The referenced representations are available in a ZIP file at the following location:

edw:/alex?FN=BSSFAgreementManagement_v1_7_schemaFile.zip

4.1 Agreement

The Agreement resource represents an agreement instance that governs business entities and governs, or is governed by, other agreement instances.

4.1.1 Create Agreement

Creates an agreement for a given party.

4.1.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- POST {scheme:}://{host}[:{port}]/[deploymentComponent]/bssfAgreementManagement/v1/party/{partyId}/agreement
- POST {scheme:}://{host}[:{port}]/[deploymentComponent]/bssfAgreementManagement/v1/partyExternalId/{partyExternalId}/agreement

Path Parameters

The following table describes the path parameters for the operation:



Table 5 Path Parameters

Name	Type	Description
partyId	string	partyId Identifier. Additional Description: Unique identifier for the party as an individual. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
partyExternalId	string	partyExternalId Identifier. Additional Description: External identifier for the party as an individual. Maxlength: 256 Pattern: ^(?=\s*\S).*\$

4.1.1.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 6 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.bssfAgreementManagement.agreement.createResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfAgreementManagement.agreement.createResponse.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Content-Type		Optional
	One of the following: • application/json;profile="http://ericsson.com/bss.bssfAgreementManagement.agreement.createRequest.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfAgreementManagement.agreement.createRequest.1.json#" • application/json;charset=utf-8 • application/json	-



Header Field Name	Header Field Value	Mandatory/Optional
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.

Table 7 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.



Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: <code>^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$</code>



Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Suppress-Notification	boolean	Optional	The possible values are as follows: true True Do not send NTF Contract Status Change notifications false False Send NTF Contract Status Change notifications If the parameter is not passed, notification is triggered by default. Additional Description: Suppress notification.
ERICSSON.Extended-Response	boolean	Optional	Extends the response to include governed entities that are created. Default is to not extend. The possible values are as follows: true True false False Additional Description: Extended response



Response

HTTP headers available for the response are as follows:

Table 8 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory
	For Status-Code: 201, one of the following: • application/json;profile="http://ericsson.com/bss.bssfAgreementManagement.agreement.createResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfAgreementManagement.agreement.createResponse.1.json#" For Status-Code: 4XX,5XX, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-



Header Field Name	Header Field Value	Mandatory/Optional
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: ^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2} GMT))\$
WWW-Authenticate		Optional Status Code: 401
	<challenge>	-
STANDARD HEADER		

Table 9 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

GURID HEADER CUSTOM HEADER

4.1.1.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.1.1.3.1 bss.bssfAgreementManagement.agreement Create Request Version 1

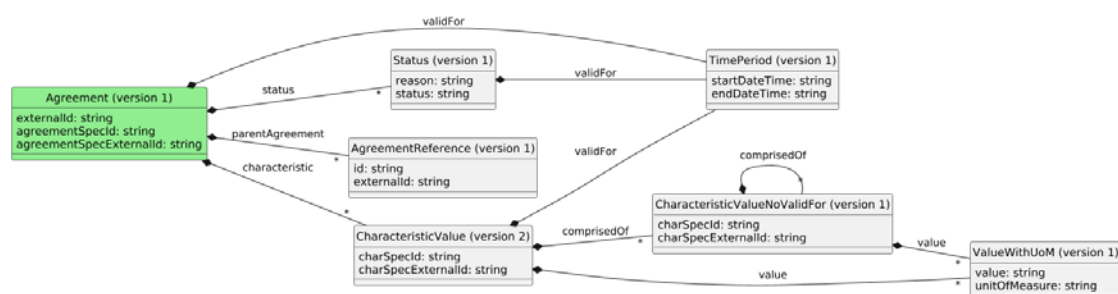


Figure 1 bss.bssfAgreementManagement.agreement.createRequest.1 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfAgreementManagement.agreement.createRequest.1.json#>

The representation is provided as JSON objects with the following attributes:

Table 10 Agreement (version 1)

Name	Type	Description
Agreement (version 1)	object	An Agreement is an entity that governs entities such as Contracts and Billing accounts and is associated to parties.



Name		Type	Description
	externalId	string	Identifier of the agreement instance in an external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	agreementSpecId	string	Unique identifier of an agreement specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	agreementSpecExternalId	string	Identifier of an agreement specification in an external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the agreement is valid for.
	characteristic	array of CharacteristicValue (version 2)	A list of agreement characteristic values. Only if the characteristics need to be personalized.
	status	array of bss.cmn.Status (version 1)	A list of statuses linked to the agreement.
	parentAgreement	array of Agreement Reference (version 1)	References to parent/grandparent agreements.

bss.cmn.TimePeriod (version 1)

Table 11 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

CharacteristicValue (version 2)

Table 12 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.

bss.cmn.ValueWithUoM (version 1)

Table 13 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 14 CharacteristicValueNoValidFor (version 1)

Name	Type	Description
CharacteristicValueNoValidFor (version 1)	object	A value of a Characteristic.



Name		Type	Description
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).* Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).* Max length: 256
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.

bss.cmn.Status (version 1)

Table 15 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

AgreementReference (version 1)

Table 16 AgreementReference (version 1)

Name		Type	Description
AgreementReference (version 1)		object	Agreement Reference.

Name	Type	Description
id	string	Unique identifier of the agreement instance. Pattern: $^(?=\s*\S).*$$ Max length: 256
externalId	string	Identifier of the agreement in an external system. Pattern: $^(?=\s*\S).*$$ Max length: 256

4.1.1.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.1.4.1 bss.bssfAgreementManagement.agreement Create Response Version 1

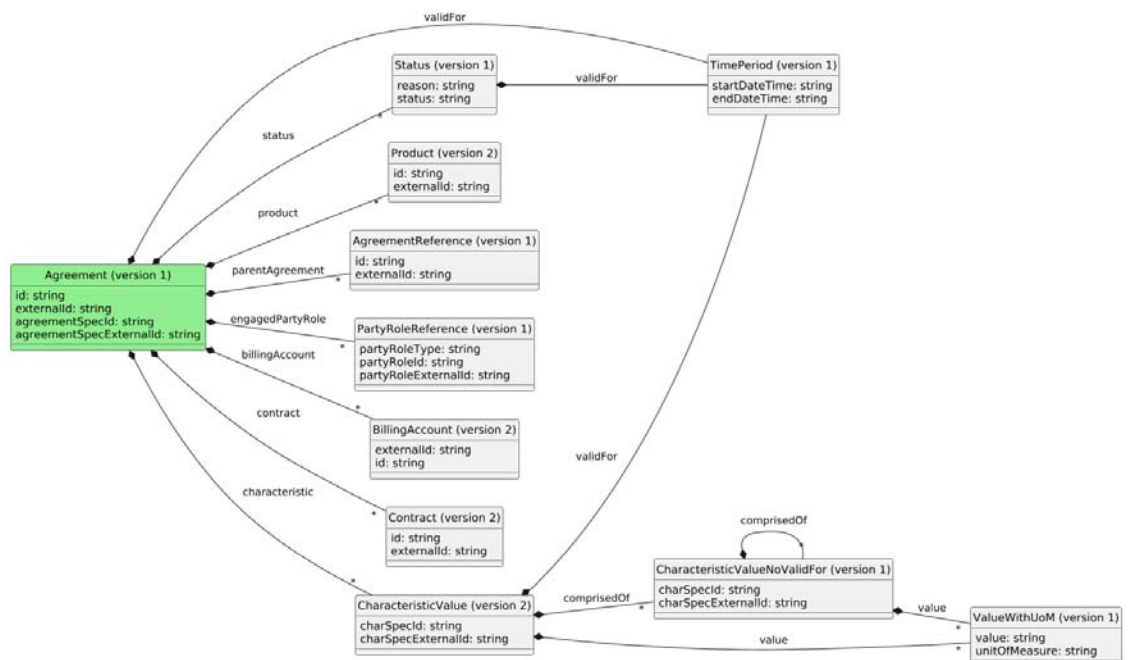


Figure 2 bss.bssfAgreementManagement.agreement.createResponse.1 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfAgreementManagement.agreement.createResponse.1.json#>



The representation is provided as JSON objects with the following attributes:

Table 17 Agreement (version 1)

Name	Type	Description
Agreement (version 1)	object	An Agreement is an entity that governs entities such as Contracts and Billing accounts and is associated to parties.



Name		Type	Description
	id	string	Unique identifier of the agreement instance. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the agreement instance in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	agreementSpecId	string	Unique identifier of an agreement specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	agreementSpecExternalId	string	Identifier of an agreement specification in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the agreement is valid for.
	characteristic	array of CharacteristicValue (version 2)	A list of agreement characteristic values. Only if the characteristics need to be personalized.
	status	array of bss.cmn.Status (version 1)	A list of statuses linked to the agreement.
	engagedPartyRole	array of PartyRoleReference (version 1)	A list of party role references representing the part played by a party in the agreement.
	billingAccount	array of BillingAccount (version 2)	A list of billing accounts that are governed by this agreement instance.
	contract	array of Contract (version 2)	A list of contracts that are governed by this agreement instance.
	product	array of Product (version 2)	A list of products that are governed by this agreement instance.
	parentAgreement	array of AgreementReference (version 1)	References to parent/grandparent agreements.



bss.cmn.TimePeriod (version 1)

Table 18 bss.cmn.TimePeriod (version 1)

Name		Type	Description
bss.cmn.TimePeriod (version 1)		object	StartDateTime must be earlier than EndDateTime.
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>



CharacteristicValue (version 2)

Table 19 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.

bss.cmn.ValueWithUoM (version 1)

Table 20 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32



CharacteristicValueNoValidFor (version 1)

Table 21 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.

bss.cmn.Status (version 1)

Table 22 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



PartyRoleReference (version 1)

Table 23 PartyRoleReference (version 1)

Name		Type	Description
PartyRoleReference (version 1)		object	A reference to a party role.
	partyRoleType	string	The type of the party role. Max length: 128
	partyRoleId	string	Identifier of the party role. Pattern: ^(?=\s*\S).*\$ Max length: 256
	partyRoleExternalId	string	External identifier of the party role. Pattern: ^(?=\s*\S).*\$ Max length: 256

BillingAccount (version 2)

Table 24 BillingAccount (version 2)

Name		Type	Description
BillingAccount (version 2)		object	A billing account accumulates all charges from products and contracts that will be shown on the same invoice or prepaid statement.
	externalId	string	Unique identifier of the account populated by external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	id	string	Unique identifier of the account. Pattern: ^(?=\s*\S).*\$ Max length: 256



Contract (version 2)

Table 25 Contract (version 2)

Name		Type	Description
Contract (version 2)		object	Contract.
	id	string	Unique identifier of the contract. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External identifier of the contract for interaction in external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

Product (version 2)

Table 26 Product (version 2)

Name		Type	Description
Product (version 2)		object	Product derived from a product offering related to a contract.
	id	string	Unique identifier of a product. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the product in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256

AgreementReference (version 1)

Table 27 AgreementReference (version 1)

Name		Type	Description
AgreementReference (version 1)		object	Agreement Reference.



Name		Type	Description
	id	string	Unique identifier of the agreement instance. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	externalId	string	Identifier of the agreement in an external system. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256

4.1.2 Delete Agreement

Deletes an agreement for a given party.

Note: For a delete operation with system wide cascading capabilities, see Update operation and the use of ERICSSON.Cascade-Termination with applicable GRACE period configuration

4.1.2.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- DELETE `{scheme:}/{host}[:{port}]/{deploymentComponent}/bssfAgreementManagement/v1/party/{partyId}/agreement/{agreementId}`
- DELETE `{scheme:}/{host}[:{port}]/{deploymentComponent}/bssfAgreementManagement/v1/partyExternalId/{partyExternalId}/agreementExternalId/{agreementExternalId}`

Path Parameters

The following table describes the path parameters for the operation:

Table 28 Path Parameters

Name	Type	Description
agreementId	string	agreementId Identifier. Additional Description: Unique identifier of the agreement instance. Maxlength: 256 Pattern: <code>^(?=\s*\S).*\$</code>



Name	Type	Description
agreementExternalId	string	agreementExternalId Identifier. Additional Description: Identifier of the agreement instance in an external system. Maxlength: 256 Pattern: ^(?=\s*\S).*
partyId	string	partyId Identifier. Additional Description: Unique identifier for the party as an individual. Maxlength: 256 Pattern: ^(?=\s*\S).*
partyExternalId	string	partyExternalId Identifier. Additional Description: External identifier for the party as an individual. Maxlength: 256 Pattern: ^(?=\s*\S).*

4.1.2.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 29 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.

Table 30 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.



Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: <code>^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$</code>
ERICSSON.Suppress-Notification	boolean	Optional	The possible values are as follows: true True Do not send NTF Contract Status Change notifications false False Send NTF Contract Status Change notifications If the parameter is not passed, notification is triggered by default. Additional



Response

HTTP headers available for the response are as follows:

Table 31 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Optional
	For Status-Code: 204, Content-type header field is not applicable For Status-Code: 4XX,401,5XX,503, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-
X-Content-Type-Options		Optional
	no-sniff	Optional
WWW-Authenticate		Optional Status Code: 401
	<challenge>	-
RESPONSE		



Table 32 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

4.1.3 Update Agreement

Updates an agreement for a given party.



4.1.3.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

- PATCH {scheme:}://{host}[:{port}]/{deploymentComponent}/bssfAgreementManagement/v1/party/{partyId}/agreement/{agreementId}
- PATCH {scheme:}://{host}[:{port}]/{deploymentComponent}/bssfAgreementManagement/v1/partyExternalId/{partyExternalId}/agreementExternalId/{agreementExternalId}

Path Parameters

The following table describes the path parameters for the operation:

Table 33 Path Parameters

Name	Type	Description
agreementId	string	agreementId Identifier. Additional Description: Unique identifier of the agreement instance. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
agreementExternalId	string	agreementExternalId Identifier. Additional Description: Identifier of the agreement instance in an external system. Maxlength: 256 Pattern: ^(?=\s*\S).*\$



Name	Type	Description
partyId	string	partyId Identifier. Additional Description: Unique identifier for the party as an individual. Maxlength: 256 Pattern: ^(?=\s*\S).*
partyExternalId	string	partyExternalId Identifier. Additional Description: External identifier for the party as an individual. Maxlength: 256 Pattern: ^(?=\s*\S).*

4.1.3.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 34 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.bssfAgreementManagement.agreement.updateResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfAgreementManagement.agreement.updateResponse.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Content-Type		Optional
	One of the following: • application/merge-patch+json;profile="http://ericsson.com/bss.bssfAgreementManagement.agreement.updateRequest.1.json#";charset=utf-8 • application/merge-patch+json;profile="http://ericsson.com/bss.bssfAgreementManagement.agreement.updateRequest.1.json#" • application/merge-patch+json; charset=utf-8 • application/merge-patch+json	-



Header Field Name	Header Field Value	Mandatory/Optional
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.

Table 35 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$



Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.



Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Suppress-Notification	boolean	Optional	The possible values are as follows: true True Do not send NTF Contract Status Change notifications false False Send NTF Contract Status Change notifications If the parameter is not passed, notification is triggered by default. Additional Description: Suppress notification.
ERICSSON.Cascade-Termination	boolean	Optional	The possible values are as follows: true True Cascade the TERMINATION status change request of a parent entity to all of its sub entities false False A TERMINATION status change request won't be cascaded If the parameter is not passed, the default behavior is to not cascade the TERMINATION status change request. Additional Description:



Response

HTTP headers available for the response are as follows:

Table 36 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory
	For Status-Code: 200, one of the following: • application/json;profile="http://ericsson.com/bss.bssfAgreementManagement.agreement.updateResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfAgreementManagement.agreement.updateResponse.1.json#" For Status-Code: 4XX,5XX, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-



Header Field Name	Header Field Value	Mandatory/Optional
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2} GMT))\$</code>
WWW-Authenticate		Optional Status Code: 401
	<challenge>	-
STANDARD HEADER		

Table 37 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters
GURID HEADER CUSTOM HEADER			

4.1.3.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.1.3.3.1 bss.bssfAgreementManagement.agreement Update Request Version 1

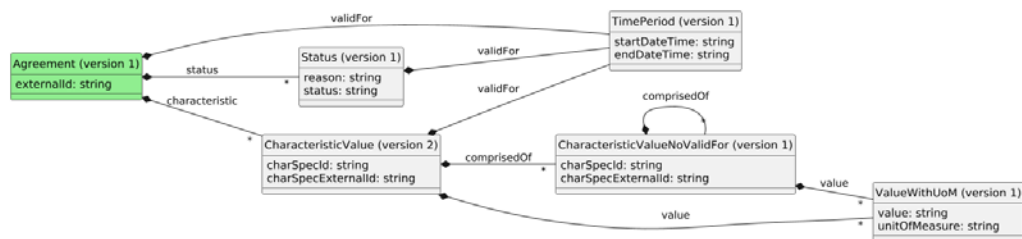


Figure 3 bss.bssfAgreementManagement.agreement.updateRequest.1 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfAgreementManagement.agreement.updateRequest.1.json#>

The representation is provided as JSON objects with the following attributes:

Table 38 Agreement (version 1)

Name	Type	Description
Agreement (version 1)	object	An Agreement is an entity that governs entities such as Contracts and Billing accounts and is associated to parties.



Name		Type	Description
	externalId	string	Identifier of the agreement instance in an external system. Pattern: ^(?=\s*\S).*\$\br/> Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the agreement is valid for.
	characteristic	array of CharacteristicValue (version 2)	A list of agreement characteristic values. Only if the characteristics need to be personalized.
	status	array of bss.cmn.Status (version 1)	A list of statuses linked to the agreement.

bss.cmn.TimePeriod (version 1)

Table 39 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

CharacteristicValue (version 2)

Table 40 CharacteristicValue (version 2)

Name	Type	Description
CharacteristicValue (version 2)	object	A value of a Characteristic.



Name		Type	Description
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.

bss.cmn.ValueWithUoM (version 1)

Table 41 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32

CharacteristicValueNoValidFor (version 1)

Table 42 CharacteristicValueNoValidFor (version 1)

Name	Type	Description
CharacteristicValueNoValidFor (version 1)	object	A value of a Characteristic.



Name		Type	Description
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.

bss.cmn.Status (version 1)

Table 43 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.

4.1.3.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.



4.1.3.4.1

bss.bssfAgreementManagement.agreement Update Response Version 1

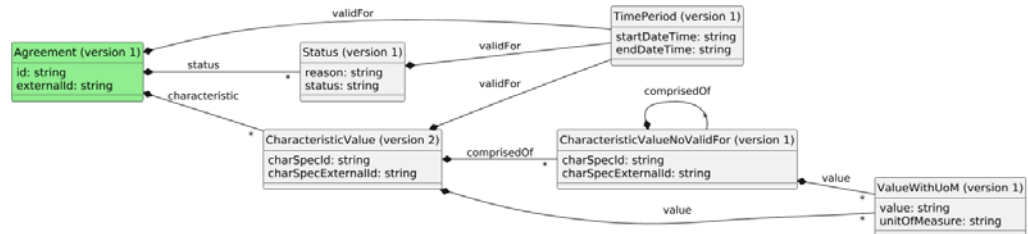


Figure 4 bss.bssfAgreementManagement.agreement.updateResponse.1 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfAgreementManagement.agreement.updateResponse.1.json#>

The representation is provided as JSON objects with the following attributes:

Table 44 Agreement (version 1)

Name		Type	Description
Agreement (version 1)		object	An Agreement is an entity that governs entities such as Contracts and Billing accounts and is associated to parties.
	id	string	Unique identifier of the agreement instance. Pattern: $^(?=\s*\S).*$$ Max length: 256
	externalId	string	Identifier of the agreement instance in an external system. Pattern: $^(?=\s*\S).*$$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the agreement is valid for.
	characteristic	array of CharacteristicValue (version 2)	A list of agreement characteristic values. Only if the characteristics need to be personalized.
	status	array of bss.cmn.Status (version 1)	A list of statuses linked to the agreement.



bss.cmn.TimePeriod (version 1)

Table 45 bss.cmn.TimePeriod (version 1)

Name		Type	Description
bss.cmn.TimePeriod (version 1)		object	StartDateTime must be earlier than EndDateTime.
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>



CharacteristicValue (version 2)

Table 46 CharacteristicValue (version 2)

Name		Type	Description
CharacteristicValue (version 2)		object	A value of a Characteristic.
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	The time period that the characteristic value is valid for.
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.

bss.cmn.ValueWithUoM (version 1)

Table 47 bss.cmn.ValueWithUoM (version 1)

Name		Type	Description
bss.cmn.ValueWithUoM (version 1)		object	The versions of the value.
	value	string	The value. Max length: 256
	unitOfMeasure	string	The unit of measure of the value. Max length: 32



CharacteristicValueNoValidFor (version 1)

Table 48 CharacteristicValueNoValidFor (version 1)

Name		Type	Description
CharacteristicValueNoValidFor (version 1)		object	A value of a Characteristic.
	charSpecId	string	The ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	charSpecExternalId	string	The External ID of the characteristic specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	value	array of bss.cmn.ValueWithUoM (version 1)	The versions of the value.
	comprisedOf	array of CharacteristicValueNoValidFor (version 1)	Child/Children of the characteristic value, if any.

bss.cmn.Status (version 1)

Table 49 bss.cmn.Status (version 1)

Name		Type	Description
bss.cmn.Status (version 1)		object	Structure of one status version element.
	reason	string	The reason for the new status version. Max length: 256
	status	string	The status for the given time period. Max length: 256
	validFor	bss.cmn.TimePeriod (version 1)	Time period where the status is valid.



5 Generic Interface Parameters

The following sub-sections describe the elements and their structure in the request and response for Generic Interface Parameters.

5.1 Generic Interface Parameters Request

5.1.1 bss.genericInterfaceParameters Request Version 4

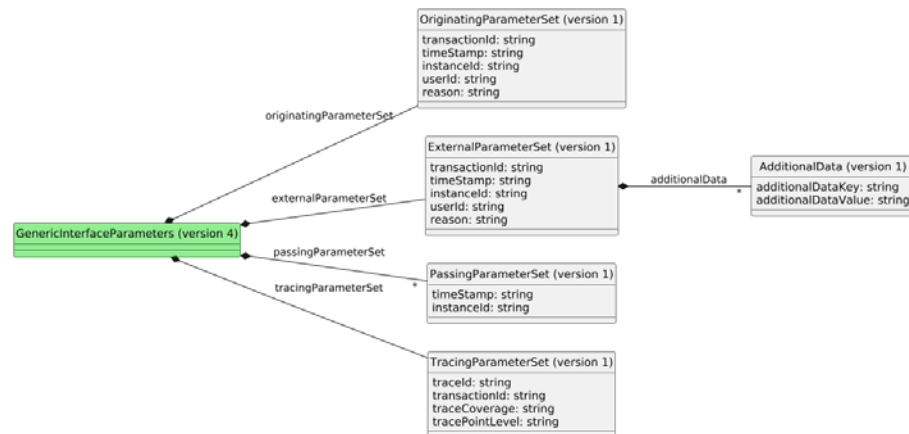


Figure 5 bss.genericInterfaceParameters.request.4 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.genericInterfaceParameters.request.4.json#>

The representation is provided as JSON objects with the following attributes:

Table 50 bss.cmn.GenericInterfaceParameters (version 4)

Name	Type	Description
bss.cmn.GenericInterfaceParameters (version 4)	object	The Generic Interface Parameters (GIP) is used for transaction traceability.



Name		Type	Description
	originatingParameterSet	bss.cmn.OriginatingParameterSet (version 1)	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.
	externalParameterSet	bss.cmn.ExternalParameterSet (version 1)	Information received from the external system that initiated the transaction.
	passingParameterSet	array of bss.cmn.PassingParameterSet (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	bss.cmn.TracingParameterSet (version 1)	Tracing Parameter Set.

5.1.1.1

bss.cmn.OriginatingParameterSet (version 1)

Table 51 bss.cmn.OriginatingParameterSet (version 1)

Name	Type	Description
bss.cmn.OriginatingParameterSet (version 1)	object	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.



Name		Type	Description
	transactionId	string	Unique transaction identifier. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
	timeStamp	string	The time stamp when the ops was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that created the ops. Max length: 256
	userId	string	User Identification. Provided at login to the instance creating the ops. Max length: 256
	reason	string	Reason for the transaction. Max length: 256

5.1.1.2

bss.cmn.ExternalParameterSet (version 1)

Table 52 bss.cmn.ExternalParameterSet (version 1)

Name	Type	Description
bss.cmn.ExternalParameterSet (version 1)	object	Information received from the external system that initiated the transaction.



Name		Type	Description
	transactionId	string	Transaction Identifier received from external system. Max length: 256
	timeStamp	string	Transaction time stamp received from external system. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) (02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that sent the transactionId. Max length: 256
	userId	string	User identifier received from external system. Max length: 256
	reason	string	Reason received from external system. Max length: 256
	additionalData	array of bss.cmn.AdditionalData (version 1)	Array of additional data Items from external system.

5.1.1.3 bss.cmn.AdditionalData (version 1)

Table 53 bss.cmn.AdditionalData (version 1)

Name	Type	Description
bss.cmn.AdditionalData (version 1)	object	A key-value structure data received from external system.



Name		Type	Description
	additionalDataKey	string	key of the additional data from external system. Max length: 256
	additionalDataValue	string	value correspond to the key. Max length: 256

5.1.1.4

bss.cmn.PassingParameterSet (version 1)

Table 54 bss.cmn.PassingParameterSet (version 1)

Name		Type	Description
bss.cmn.PassingParameterSet (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the ppsItem was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02]))-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the entity that created the ppsItem. Max length: 256

5.1.1.5

bss.cmn.TracingParameterSet (version 1)

Table 55 bss.cmn.TracingParameterSet (version 1)

Name		Type	Description
bss.cmn.TracingParameterSet (version 1)		object	Tracing Parameter Set.

Name	Type	Description
traceId	string	The unique id for the trace job. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
transactionId	string	The unique id for the transaction. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

5.2 Generic Interface Parameters Response

5.2.1 bss.genericInterfaceParameters Response Version 4

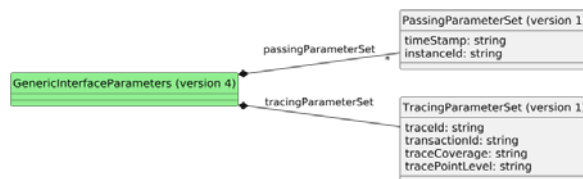


Figure 6 bss.genericInterfaceParameters.response.4 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.genericInterfaceParameters.response.4.json#>

The representation is provided as JSON objects with the following attributes:



Table 56 bss.cmn.GenericInterfaceParameters (version 4)

Name		Type	Description
bss.cmn.GenericInterfaceParameters (version 4)		object	The Generic Interface Parameters (GIP) is used for transaction traceability.
	passingParameterSet	array of bss.cmn.PassingParameterSet (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	bss.cmn.TracingParameterSet (version 1)	Tracing Parameter Set.

5.2.1.1

bss.cmn.PassingParameterSet (version 1)

Table 57 bss.cmn.PassingParameterSet (version 1)

Name		Type	Description
bss.cmn.PassingParameterSet (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the ppsItem was created. Shall adhere to W3 date-time format. Format: date-time Pattern: $\wedge d\{4\}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) (02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T(((01[0-9] 2[0-3]):[0-5])[0-9]:[0-5][0-9]\.[0-9]{3} (24:00:00.000))(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$$
	instanceId	string	Identification of the entity that created the ppsItem. Max length: 256



5.2.1.2 bss.cmn.TracingParameterSet (version 1)

Table 58 bss.cmn.TracingParameterSet (version 1)

Name		Type	Description
bss.cmn.TracingParameterSet (version 1)		object	Tracing Parameter Set.
	traceId	string	The unique id for the trace job. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
	transactionId	string	The unique id for the transaction. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
	traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
	tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

6 Result Representation

Results are reported through HTTP status codes. JSON objects are provided for requests that reaches the application component. The following tables describe the elements and their structure contained in the result representation.

6.1 bss.errorMessage Response Version 1



Figure 7 bss.errorMessage.response.1 UML representation

Applicable profile URI for the representation:

`http://ericsson.com/bss.errorMessage.response.1.json#`

The representation is provided as JSON objects with the following attributes:

Table 59 bss.cmn.ErrorMessageExtended (version 1)

Name		Type	Description
bss.cmn.ErrorMessageExtended (version 1)		object	Error message.
	messages	array of bss.cmn.ErrorMessage (version 1)	Error messages.

6.1.1 bss.cmn.ErrorMessage (version 1)

Table 60 bss.cmn.ErrorMessage (version 1)

Name	Type	Description
bss.cmn.ErrorMessage (version 1)	object	Error message.

Name	Type	Description
action	string	The action. Max length: 256
code	string	The code. Max length: 256
details	string	The details. Max length: 256
message	string	The message. Max length: 256
source	string	The source. Max length: 256

6.2 bss.errorMessage Response Version 2




Figure 8 bss.errorMessage.response.2 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.errorMessage.response.2.json#>

The representation is provided as JSON objects with the following attributes:

Table 61 bss.cmn.ErrorMessageExtended (version 2)

Name	Type	Description
bss.cmn.ErrorMessageExtended (version 2)	object	Extended error message structure.



Name		Type	Description
	supplementaryError	array of bss.cmn.SupplementaryError (version 2)	Supplementary Error.
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	statusCode	integer	HTTP status code.

6.2.1

bss.cmn.SupplementaryError (version 2)

Table 62 bss.cmn.SupplementaryError (version 2)

Name	Type	Description
bss.cmn.SupplementaryError (version 2)	object	Supplementary error message structure. In case of partial error scenarios, this structure may also include successful responses to show what parts went ok.



Name		Type	Description
	source	string	Source of error. Max length: 256
	action	string	Action causing error. Max length: 256
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	statusCode	integer	HTTP status code.

6.3 Result Codes

The supported Error Codes could be found in the 'Error Codes' document.



7 Interface Version Changes

The following sections describe the changes between the interface versions.

7.1 Interface Version 1.0

Table 63 Changes

Resources	Type of Change	Description
N/A	Initial version.	Initial version.

7.2 Interface Version 1.1

Table 64 Changes

Resources	Type of Change	Description
HTTP request header	Added ERICSSON.Suppress-Notification	Added ERICSSON.Suppress-Notification in customized HTTP request headers

7.3 Interface Version 1.2

Table 65 Changes

Resources	Type of Change	Description
Error message structure version 1.	Deprecated	Deprecated attributes: httpStatusCodeDescription, errorMessage, errorDetails.
Error message structure version 2.	New	New attributes: code, reason, message.



7.4 Interface Version 1.3

Table 66 Changes

Resources	Type of Change	Description
Agreement	Added	New attribute engagedPartyRole in response body. New attribute billingAccount in response body. New attribute contract in response body New attribute product in response body New header field ERICSSON.Extended-Response in Customized HTTP request headers for Create Agreement. New header field ERICSSON.Cascade-Termination in Customized HTTP request headers for Update Agreement.

7.5 Interface Version 1.4

Table 67 Changes

Resources	Type of Change	Description
bss.cmn.Status	Data type extended	Data type for status increased from 32 to 256 characters.

7.6 Interface Version 1.5

Table 68 Changes

Resources	Type of Change	Description
partyRoleType	Changed string length	Changed attribute partyRoleType string length to 128.



7.7 Interface Version 1.6

Table 69 Changes

Resources	Type of Change	Description
All	Added	Added Retry-After header for http status code 503 response. Added ERICSSON.Global-Unique-Request-Id header for all responses. Added http status code 503 for all responses.

7.8 Interface Version 1.7

Table 70 Changes

Resources	Type of Change	Description
All	Updated	Change handling of content-type for request/responses operations.





Reference List

- [1] [RFC 7231 - Hypertext Transfer Protocol \(HTTP/1.1\): Semantics and Content](#)
- [2] [RFC 7230 - Hypertext Transfer Protocol \(HTTP/1.1\): Message Syntax and Routing](#)
- [3] [RFC 6906 - The 'profile' Link Relation Type](#)
- [4] [RFC 4122 - A Universally Unique Identifier \(UUID\) URN Namespace](#)
- [5] [RFC 3986 - Uniform Resource Identifier \(URI\): Generic Syntax](#)
- [6] [RFC 2818 - HTTP Over TLS](#)
- [7] [RFC 2616 - Hypertext Transfer Protocol -- HTTP/1.1](#)