

BSSF Product Catalog Integration REST Interface 1.5

INTERFACE DESCRIPTION

Copyright

© Ericsson AB 2026. All Rights Reserved. No part of this document may be reproduced in any form without the written permission of the copyright owner.

Disclaimer

The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. Ericsson shall have no liability for any error or damage of any kind resulting from the use of this document.

This information is intended exclusively for demonstration purposes when used in the development of client-side integrations. It may not include definitions for various elements or behaviors that could arise from client-server interactions involving any third-party products, providers, or deployment platforms, whether external or internal to the delivered product.

Trademark List

Ericsson and the Ericsson logotype are the trademarks or registered trademarks of Telefonaktiebolaget LM Ericsson. All other product or service names mentioned in a document on this server are trademarks of their respective companies.



Contents

1	Introduction	1
1.1	Transfer Mechanism	1
1.2	Authentication and Authorization	1
1.3	Compatibility Mechanism	1
1.3.1	HTTP Content Negotiation	1
1.3.2	Product Customization	1
1.3.3	Backward Compatibility	2
2	Syntax Notation	3
2.1	Resource Identifier	3
2.2	HTTP Headers	3
2.3	Resource Representation Profile	4
3	Service	5
3.1	BSSF Product Catalog Integration	5
3.1.1	Description	5
4	Resources	7
4.1	ProductOffering	7
4.1.1	Create ProductOffering from template	7
4.1.2	Read ProductOffering	42
4.1.3	Update ProductOffering	67
5	Generic Interface Parameters	105
5.1	Generic Interface Parameters Request	105
5.1.1	bss.genericInterfaceParameters Request Version 4	105
5.2	Generic Interface Parameters Response	110
5.2.1	bss.genericInterfaceParameters Response Version 4	110
6	Result Representation	113
6.1	bss.errorMessage Response Version 2	113
6.1.1	bss.cmn.SupplementaryError (version 2)	114
6.2	Result Codes	114
7	Interface Version Changes	115
7.1	Interface Version 1.0	115
7.2	Interface Version 1.1	115
7.3	Interface Version 1.2	115
7.4	Interface Version 1.3	115



7.5	Interface Version 1.4	116
	Reference List	117



1 Introduction

Target Groups

The target group for this document is:

— Solution Integrators

1.1 Transfer Mechanism

The transfer mechanism used is HTTPS. Both requests and responses use headers to send information about the message.

The access port is configurable. Clients that use this interface should support a configurable port.

1.2 Authentication and Authorization

Authentication is controlled by the inclusion of a Java Web Token (JWT) in the authorization header of the HTTP message.

1.3 Compatibility Mechanism

The following version mechanisms are used:

1.3.1 HTTP Content Negotiation

HTTP content negotiation uses the profile parameter in the HTTP Accept header to request a certain version of the resource representation. The profile value indicates the JSON schema and version used for the resource representation. If the profile parameter is not passed in the HTTP Accept header, the server returns the latest version of the resource representation.

For operations supporting error response version 1, if error response version is not specified it is assumed to be error response version 1.

1.3.2 Product Customization

Elements and data types that are specific for product customization are marked with PC in the section describing the element or data type. Functions and characteristics of a product customization is not part of the standard delivery. Contact your local Ericsson office for more information regarding ordering and compatibility.



All elements of a PC message are also product customizations when inside such a message. If an element or data type is marked PC within an otherwise standard record, is noted as such in the relevant chapters.

In order to improve readability the following applies in the rest of the document:

- The following applies to functions marked with (PC). The PC-tag is placed in the description.

1.3.3 **Backward Compatibility**

Json objects name and/or their respective content stated in this document may be changed without any further notice.

Backward compatibility within a major version is only kept for the messages sent over the network.



2 Syntax Notation

This interface uses a generic syntax that is described in the following sections. For a description of the actual values, refer to Resources .

2.1 Resource Identifier

The resource identifier is expressed by a URI with the following format:

```
{serverRoot}/{api}/{resourcePath}
```

```
{scheme:}://{host}[:{port}]/[{deploymentComponent}]{apiName}/{apiVersion}/{resourcePath}
```

Table 1 Server root parameter

Parameter	Description
serverRoot	Is implementation specific
api	Is the name and version of the API.

Table 2 API and resource path parameters

Parameter	Description
scheme	The Application protocol, for example HTTPS.
host	The network address to access the interface and its connected service.
port	The TCP/IP port used for access. If not specified, default ports for the applications are assumed.
deploymentComponent	The name of the deployment component providing the resource.
apiName	The name of the interface.
apiVersion	The version to use
resourcePath	The resource name and a unique ID.

The full URI must be encoded according to RFC3986 before usage.

2.2 HTTP Headers

The interface uses standard HTTP headers. In addition, custom HTTP headers are used with the following syntax:



ERICSSON.<name>:<value>

Accept Header Profile Value

The server accepts the following formats for profile values:

Accept: application/json; application/merge-patch+json;
profile=<profile-URI> <profile-URI>

If no Accept header field is present, then it is assumed that the client accepts all media types.

2.3 Resource Representation Profile

The profile link relation type indicates that a resource representation follows one or more profiles. For more information, refer to [RFC 6906](#).

The profile is identified by a URI with the following syntax:

profile="http://ericsson.com/<domain>.<interface>.<resource>.<operationAndDirection>.<version>.json#"

Table 3 REST Resource Representation Parameters

Parameter	Description
domain	Fixed value: bss
interface	Is the interface name.
resource	Is the resource name.
operationAndDirection	Is the CRUD operation with its direction request and response.
version	Major version of the resource representation.



3 Service

3.1 BSSF Product Catalog Integration

Please read the service documentation available to understand how to use this interface in connection with the service.

3.1.1 Description

Product Catalog Integration provides the ability necessary to access Product Offering templates and Product Offerings.





4 Resources

The interface offers access to different resources. Each resource has its own access path and parameters which are described in the following sections.

The referenced representations are available in a ZIP file at the following location:

edw:/alex?FN=BSSFProductCatalogIntegration_v1_5_schemaFile.zip

4.1 ProductOffering

A product offering describes the possible characteristics of a product offering price.

4.1.1 Create ProductOffering from template

Create a ProductOffering based on a ProductOfferingTemplate.

4.1.1.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:

— POST {scheme:}://{host}[:{port}]/eric-bss-rmca-app/bssfProductCatalogIntegration/v1/productOffering

4.1.1.2 HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 4 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional



Header Field Name	Header Field Value	Mandatory/Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.createResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.createResponse.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Content-Type		Mandatory
	One of the following: • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.createRequest.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.createRequest.1.json#" • application/json;charset=utf-8 • application/json	-



Header Field Name	Header Field Value	Mandatory/Optional
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 5 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$

Response

HTTP headers available for the response are as follows:



Table 6 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 201, one of the following: • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.createResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.createResponse.1.json#" For Status-Code: 4XX,5XX, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: ^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2} GMT))\$



Table 7 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

4.1.1.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.1.1.3.1 bss.bssfProductCatalogIntegration.productOffering Create Request Version 1

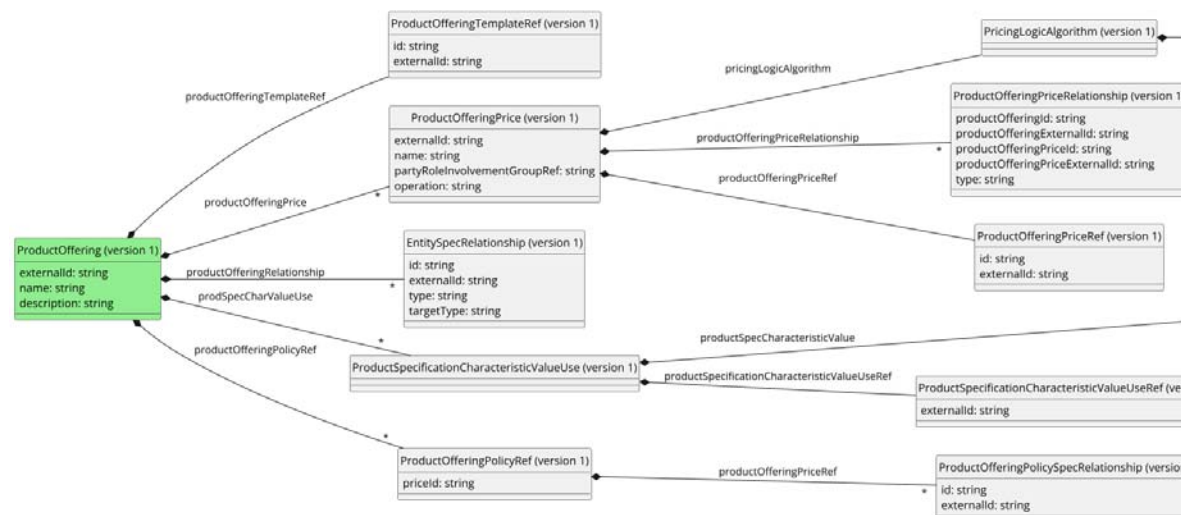


Figure 1 bss.bssfProductCatalogIntegration.productOffering.createRequest.1 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.createRequest.1.json#>

The representation is provided as JSON objects with the following attributes:

Table 8 ProductOffering (version 1)

Name	Type	Description
ProductOffering (version 1)	object	Data structure for product offering.



Name		Type	Description
	productOfferingPrice	array of ProductOfferingPrice (version 1)	List of all productOfferingPrice linked to this productOffering.
	productOfferingPolicyRef	array of ProductOfferingPolicyRef (version 1)	List of all productOfferingPolicyRef linked to this productOffering.
	productOfferingRelationship	array of EntitySpecRelationship (version 1)	List of all product offerings linked to this productOffering in case of a productOffering linked to another productOffering with a relation.
	prodSpecCharacteristicValueUse	array of ProductSpecificationCharacteristicValueUse (version 1)	List of all product specification characteristic value uses for this productOffering.
	productOfferingTemplateRef	ProductOfferingTemplateRef (version 1)	Reference to the Product offering template.
	externalId	string	Identifier of the specification in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	name	string	Name given to this specification. Not guaranteed to be unique. Max length: 256
	description	string	Description of this specification. Max length: 512

ProductOfferingPrice (version 1)

Table 9 ProductOfferingPrice (version 1)

Name	Type	Description
ProductOfferingPrice (version 1)	object	Product offering price.



Name		Type	Description
	externalId	string	Identifier of the product offering price in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	name	string	Name given to this product offering price. Not guaranteed to be unique. Max length: 256
	pricingLogicAlgorithm	PricingLogicAlgorithm (version 1)	The Pricing Logic Algorithm of the product offering price.
	productOfferingPriceRelationship	array of ProductOfferingPriceRelationship (version 1)	Product offering price relationship.
	partyRoleInvolvementGroupRef	string	Identifier of the party role involvement group in an external system. Pattern: <code>^(?=\s*\S).* ^</code> Max length: 256
	operation	string	The operation type Possible values: CREATE UPDATE
	productOfferingPriceRef	ProductOfferingPriceRef (version 1)	Reference to a product offering price.

PricingLogicAlgorithm (version 1)

Table 10 PricingLogicAlgorithm (version 1)

Name		Type	Description
PricingLogicAlgorithm (version 1)		object	Represents a pricing logic algorithm.
	productOfferingPriceRow	array of ProductOfferingPriceRow (version 1)	An array of productOfferingPriceRows in the pricingLogicAlgorithm.



ProductOfferingPriceRow (version 1)

Table 11 ProductOfferingPriceRow (version 1)

Name		Type	Description
ProductOfferingPriceRow (version 1)		object	Product offering price row includes the actions (and possibly also conditions) for a specific row.
	name	string	Name given to this product offering price row. Not guaranteed to be unique. Max length: 256
	action	array of Action (version 1)	The actions included in this product offering price row.
	productOfferingPriceRowRef	ProductOfferingPriceRowRef (version 1)	Reference to ProductOffering Price.

Action (version 1)

Table 12 Action (version 1)

Name		Type	Description
Action (version 1)		object	Action structure.
	actionRef	ActionRef (version 1)	Reference to the action.
	actionCharacteristicSpecificationUse	array of ActionCharacteristicSpecificationUse (version 1)	A list of product offering price specification characteristic uses.

ActionRef (version 1)

Table 13 ActionRef (version 1)

Name	Type	Description
ActionRef (version 1)	object	Reference of the action.



Name		Type	Description
	id	string	The ID of the referenced action. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced action. Pattern: ^(?=\s*\S).*\$ Max length: 256

ActionCharacteristicSpecificationUse (version 1)

Table 14 ActionCharacteristicSpecificationUse (version 1)

Name		Type	Description
ActionCharacteristicSpecificationUse (version 1)		object	Action Characteristic Specification Use structure.
	actionCharacteristicSpecificationUseRef	ActionCharacteristicSpecificationUseRef (version 1)	Reference to the action characteristic specification use template.
	actionCharacteristicSpecificationValueUse	array of ActionCharacteristicSpecificationValueUse (version 1)	Characteristic Specification Value Use.

ActionCharacteristicSpecificationUseRef (version 1)

Table 15 ActionCharacteristicSpecificationUseRef (version 1)

Name		Type	Description
ActionCharacteristicSpecificationUseRef (version 1)		object	The action characteristic specification use reference.



Name		Type	Description
	id	string	The ID of the referenced action characteristic specification use. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced action characteristic specification use. Pattern: ^(?=\s*\S).*\$ Max length: 256

ActionCharacteristicSpecificationValueUse (version 1)

Table 16 ActionCharacteristicSpecificationValueUse (version 1)

Name		Type	Description
ActionCharacteristicSpecificationValueUse (version 1)		object	Action Characteristic Specification Value Use structure.
	value	string	The value. Max length: 256
	valueReference	Reference (version 1)	A reference to a value that the characteristic can take on.
	unitOfMeasure	string	The Unit of unitOfMeasure. Max length: 256

Reference (version 1)

Table 17 Reference (version 1)

Name	Type	Description
Reference (version 1)	object	Reference structure.



Name		Type	Description
	id	string	Unique identifier of the target. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the target in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	targetType	string	The type of the target. Max length: 256
	next	Reference (version 1)	Next step in the chain.

ProductOfferingPriceRowRef (version 1)

Table 18 ProductOfferingPriceRowRef (version 1)

Name		Type	Description
ProductOfferingPriceRowRef (version 1)		object	The product offering price row reference.
	id	string	The ID of the referenced product offering price row. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced product offering price row. Pattern: ^(?=\s*\S).*\$ Max length: 256

ProductOfferingPriceRelationship (version 1)

Table 19 ProductOfferingPriceRelationship (version 1)

Name		Type	Description
ProductOfferingPriceRelationship (version 1)		object	Product offering price relationship.



Name		Type	Description
	productOfferingId	string	Unique identifier of the product offering. Pattern: ^(?=\s*\S).* Max length: 256
	productOfferingExternalId	string	Identifier of the product offering in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	productOfferingPriceId	string	Unique identifier of the product offering price. Pattern: ^(?=\s*\S).* Max length: 256
	productOfferingPriceExternalId	string	Identifier of the product offering price in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	type	string	Type of relationship. Max length: 256

ProductOfferingPriceRef (version 1)

Table 20 ProductOfferingPriceRef (version 1)

Name	Type	Description
ProductOfferingPriceRef (version 1)	object	The product offering price reference.



Name		Type	Description
	id	string	The ID of the referenced product offering price. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced product offering price. Pattern: ^(?=\s*\S).*\$ Max length: 256

ProductOfferingPolicyRef (version 1)

Table 21 ProductOfferingPolicyRef (version 1)

Name		Type	Description
ProductOfferingPolicyRef (version 1)		object	Product offering policy ref structure.
	priceId	string	The price id. Max length: 256
	productOfferingPriceRef	array of ProductOfferingPolicySpecRelationship (version 1)	Array of references to the related product offering price within the product offering

ProductOfferingPolicySpecRelationship (version 1)

Table 22 ProductOfferingPolicySpecRelationship (version 1)

Name		Type	Description
ProductOfferingPolicySpecRelationship (version 1)		object	An relationship between/among specifications.
	id	string	Id of the specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External id of the specification. Pattern: ^(?=\s*\S).*\$ Max length: 256



EntitySpecRelationship (version 1)

Table 23 EntitySpecRelationship (version 1)

Name		Type	Description
EntitySpecRelationship (version 1)		object	An relationship between/among specifications.
	id	string	Id of the target specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External id of the target specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	type	string	Type of relationship. Max length: 256
	targetType	string	The type of target specification. Max length: 256

ProductSpecificationCharacteristicValueUse (version 1)

Table 24 ProductSpecificationCharacteristicValueUse (version 1)

Name		Type	Description
ProductSpecificationCharacteristicValueUse (version 1)		object	This is a SpecCharacteristicUse for the product offering.
	productSpecCharacteristicValue	array of SpecCharacteristicValue (version 1)	An array of number or text values that are available to use for this SpecCharacteristic.
	productSpecificationCharacteristicValueUseRef	ProductSpecificationCharacteristicValueUseRef (version 1)	A reference to a product specification characteristic value.



SpecCharacteristicValue (version 1)

Table 25 SpecCharacteristicValue (version 1)

Name		Type	Description
SpecCharacteristicValue (version 1)		object	A number or text that can be assigned to a SpecCharacteristic.
	isDefault	boolean	Indicates if the value is the default value for a characteristic.
	value	string	A discrete value that the characteristic can take on. Max length: 256
	valueReference	Reference (version 1)	A reference to a value that the characteristic can take on.
	unitOfMeasure	string	The unit in which the characteristicSpecValue is measured, such as KB, MB, Mins, Kgm etc. Max length: 256

ProductSpecificationCharacteristicValueUseRef (version 1)

Table 26 ProductSpecificationCharacteristicValueUseRef (version 1)

Name		Type	Description
ProductSpecificationCharacteristicValueUseRef (version 1)		object	This is a reference for the product offering.
	externalId	string	ID of the applied partner settlement rate. Pattern: ^(?=\s*\S).* Max length: 256

ProductOfferingTemplateRef (version 1)

Table 27 ProductOfferingTemplateRef (version 1)

Name		Type	Description
ProductOfferingTemplateRef (version 1)		object	The product offering template reference.



Name		Type	Description
	id	string	The ID of the referenced product offering template. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external ID of the referenced product offering template. Pattern: <code>^(?=\s*\S).*</code> Max length: 256

4.1.1.4 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.



4.1.1.4.1

bss.bssfProductCatalogIntegration.productOffering Create Response Version 1

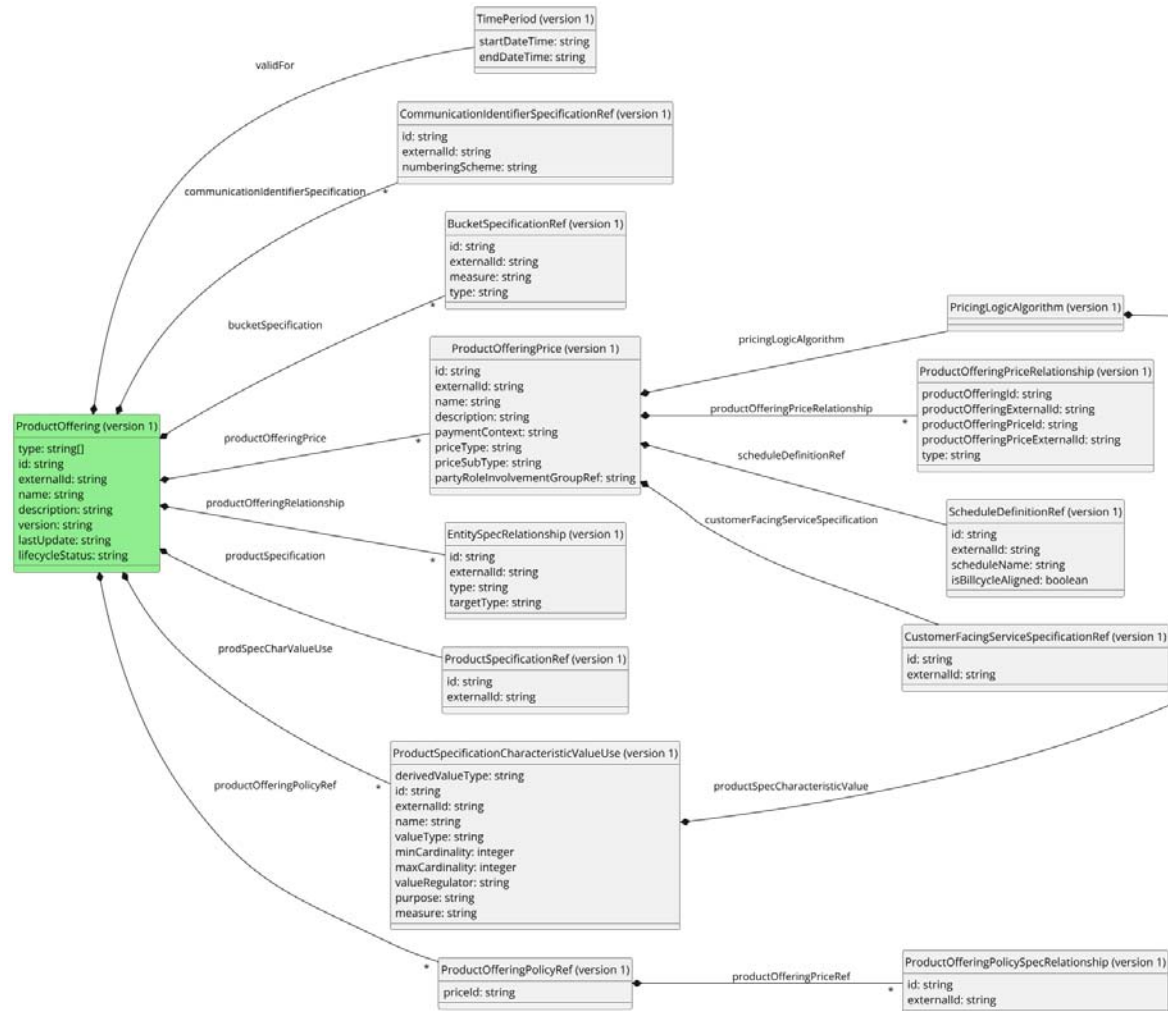


Figure 2 bss.bssfProductCatalogIntegration.productOffering.createResponse.1 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.createResponse.1.json#>

The representation is provided as JSON objects with the following attributes:

Table 28 ProductOffering (version 1)

Name	Type	Description
ProductOffering (version 1)	object	Data structure for product offering.



Name		Type	Description
	type	array of string	This is list of types that are applicable for this productOffering. Possible values: BASE DISCOUNT BUNDLE CUMULATIVE_ORDER_DISCOUNT SINGLE_ORDER_DISCOUNT LOAN SHARING_PROVIDER SHARING_CONSUMER EXCHANGE TEMPLATE
	productOfferingPrice	array of ProductOfferingPrice (version 1)	List of all productOfferingPrice linked to this productOffering.
	productOfferingPolicyRef	array of ProductOfferingPolicyRef (version 1)	List of all productOfferingPolicyRef linked to this productOffering.
	productOfferingRelationship	array of EntitySpecRelationship (version 1)	List of all product offerings linked to this productOffering in case of a productOffering linked to another productOffering with a relation.
	prodSpecCharValueUse	array of ProductSpecificationCharacteristicValueUse (version 1)	List of all product specification characteristic value uses for this productOffering.
	productSpecification	ProductSpecificationRef (version 1)	Reference to the product specification for this product offering.
	communicationIdentifierSpecification	array of CommunicationIdentifierSpecificationRef (version 1)	The list of communication identifier specifications associated with this product offering
	bucketSpecification	array of BucketSpecificationRef (version 1)	The list of bucket specifications associated with this product offering
	id	string	Unique identifier of the specification. Pattern: ^(?=\s*\S).*



ProductOfferingPrice (version 1)

Table 29 ProductOfferingPrice (version 1)

Name	Type	Description
ProductOfferingPrice (version 1)	object	Product offering price.



Name		Type	Description
	id	string	Unique identifier of the product offering price. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the product offering price in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	Name given to this product offering price. Not guaranteed to be unique. Max length: 256
	description	string	Description of this product offering price. Max length: 256
	paymentContext	string	The payment context. Possible values: GENERIC PREPAID POSTPAID
	priceType	string	The price type Possible values: USAGE ONETIME RECURRING DISCOUNT REFILL PROMOTION EXCHANGE_PRODUCT ONE_TIME_DISCOUNT STATUS_CHANGE
	priceSubType	string	The price subtype Max length: 128
	pricingLogicAlgorithm	PricingLogicAlgorithm (version 1)	The Pricing Logic Algorithm of the product offering price.
	productOfferingPriceRelationship	array of ProductOfferingPriceRelationships	Product offering price relationship.



PricingLogicAlgorithm (version 1)

Table 30 PricingLogicAlgorithm (version 1)

Name		Type	Description
PricingLogicAlgorithm (version 1)		object	Represents a pricing logic algorithm.
	productOfferingPriceRow	array of Product OfferingPriceRow (version 1)	An array of productOfferingPriceRows in the pricingLogicAlgorithm.

ProductOfferingPriceRow (version 1)

Table 31 ProductOfferingPriceRow (version 1)

Name		Type	Description
ProductOfferingPriceRow (version 1)		object	Product offering price row includes the actions (and possibly also conditions) for a specific row.



Name		Type	Description
	id	string	Unique identifier of the product offering price row. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the product offering price row in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	Name given to this product offering price row. Not guaranteed to be unique. Max length: 256
	order	integer	The order of running evaluating the product offering price row. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	action	array of Action (version 1)	The actions included in this product offering price row.

Action (version 1)

Table 32 Action (version 1)

Name	Type	Description
Action (version 1)	object	Action structure.



Name		Type	Description
	id	string	Unique identifier of the action. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the action in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	name	string	Name given to this action. Not guaranteed to be unique. Max length: 256
	type	string	The type of this action. Max length: 256
	actionCharacteristicSpecificationUse	array of ActionCharacteristicSpecificationUse (version 1)	A list of product offering price specification characteristic uses.

ActionCharacteristicSpecificationUse (version 1)

Table 33 ActionCharacteristicSpecificationUse (version 1)

Name	Type	Description
ActionCharacteristicSpecificationUse (version 1)	object	Action Characteristic Specification Use structure.



Name		Type	Description
	id	string	Unique identifier of the action characteristic specification use. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	Identifier of the action characteristic specification use in an external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	name	string	Name given to this action characteristic specification use . Not guaranteed to be unique. Max length: 256
	measure	string	This is used to set the measure of the characteristic values, such as Data or weight or length etc. The UnitOfMeasure at characteristicValue then has actual UOM such as KB, MB or MG, KG, etc. Max length: 256
	actionCharacteristicSpecificationValueUse	array of ActionCharacteristicSpecificationValueUse (version 1)	Characteristic Specification Value Use.
	actionCharacteristicSpecificationType	string	This is the action characteristic type, such as price, productBucketRef etc Max length: 256
	actionCharacteristicSpecificationValueType	string	This is the action characteristic value type, such as string, boolean etc Max length: 256



ActionCharacteristicSpecificationValueUse (version 1)

Table 34 ActionCharacteristicSpecificationValueUse (version 1)

Name		Type	Description
ActionCharacteristicSpecificationValueUse (version 1)		object	Action Characteristic Specification Value Use structure.
	value	string	The value. Max length: 256
	valueReference	Reference (version 1)	A reference to a value that the characteristic can take on.
	unitOfMeasure	string	The Unit of unitOfMeasure. Max length: 256

Reference (version 1)

Table 35 Reference (version 1)

Name		Type	Description
Reference (version 1)		object	Reference structure.
	id	string	Unique identifier of the target. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the target in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	targetType	string	The type of the target. Max length: 256
	next	Reference (version 1)	Next step in the chain.

ProductOfferingPriceRelationship (version 1)

Table 36 ProductOfferingPriceRelationship (version 1)

Name		Type	Description
ProductOfferingPriceRelationship (version 1)		object	Product offering price relationship.



Name		Type	Description
	productOfferingId	string	Unique identifier of the product offering. Pattern: ^(?=\s*\S).*\$ Max length: 256
	productOfferingExternalId	string	Identifier of the product offering in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	productOfferingPriceId	string	Unique identifier of the product offering price. Pattern: ^(?=\s*\S).*\$ Max length: 256
	productOfferingPriceExternalId	string	Identifier of the product offering price in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	type	string	Type of relationship. Max length: 256

ScheduleDefinitionRef (version 1)

Table 37 ScheduleDefinitionRef (version 1)

Name	Type	Description
ScheduleDefinitionRef (version 1)	object	Schedule Definition Reference.



Name		Type	Description
	id	string	Unique identifier of the schedule definition. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the schedule definition in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	scheduleName	string	Name of the schedule definition. Not guaranteed to be unique. Max length: 256
	isBillcycleAligned	boolean	Indicates if the schedule definition is bill cycle aligned or not.

CustomerFacingServiceSpecificationRef (version 1)

Table 38 CustomerFacingServiceSpecificationRef (version 1)

Name		Type	Description
CustomerFacingServiceSpecificationRef (version 1)		object	The customer service specification reference.
	id	string	The ID of the referenced customer service specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced customer service specification. Pattern: ^(?=\s*\S).*\$ Max length: 256



ProductOfferingPolicyRef (version 1)

Table 39 ProductOfferingPolicyRef (version 1)

Name		Type	Description
ProductOfferingPolicyRef (version 1)		object	Product offering policy ref structure.
	priceId	string	The price id. Max length: 256
	productOfferingPriceRef	array of ProductOfferingPolicySpecRelationship (version 1)	Array of references to the related product offering price within the product offering

ProductOfferingPolicySpecRelationship (version 1)

Table 40 ProductOfferingPolicySpecRelationship (version 1)

Name		Type	Description
ProductOfferingPolicySpecRelationship (version 1)		object	An relationship between/among specifications.
	id	string	Id of the specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External id of the specification. Pattern: ^(?=\s*\S).*\$ Max length: 256

EntitySpecRelationship (version 1)

Table 41 EntitySpecRelationship (version 1)

Name		Type	Description
EntitySpecRelationship (version 1)		object	An relationship between/among specifications.



Name		Type	Description
	id	string	Id of the target specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	External id of the target specification. Pattern: ^(?=\s*\S).* Max length: 256
	type	string	Type of relationship. Max length: 256
	targetType	string	The type of target specification. Max length: 256

ProductSpecificationCharacteristicValueUse (version 1)

Table 42 ProductSpecificationCharacteristicValueUse (version 1)

Name	Type	Description
ProductSpecificationCharacteristicValueUse (version 1)	object	This is a SpecCharacteristicUse for the product offering.



Name		Type	Description
	productSpecCharacteristicValue	array of SpecCharacteristicValue (version 1)	An array of number or text values that are available to use for this SpecCharacteristic.
	derivedValueType	string	Derived value type. Max length: 256
	id	string	Unique identifier of this SpecCharacteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the SpecCharacteristic in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	Name given to this SpecCharacteristic. Not guaranteed to be unique. Max length: 256
	valueType	string	A kind of value that the characteristic can take on, such as numeric, text and so forth. Max length: 256
	minCardinality	integer	The minimum number of instances a CharacteristicValue can take on. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	maxCardinality	integer	The maximum number of instances a CharacteristicValue can take on. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	valueRegulator	string	The valueRegulator. Possible values: MUST_BE_PERSONALIZED



SpecCharacteristicValue (version 1)

Table 43 SpecCharacteristicValue (version 1)

Name		Type	Description
SpecCharacteristicValue (version 1)		object	A number or text that can be assigned to a SpecCharacteristic.
	isDefault	boolean	Indicates if the value is the default value for a characteristic.
	value	string	A discrete value that the characteristic can take on. Max length: 256
	valueReference	Reference (version 1)	A reference to a value that the characteristic can take on.
	unitOfMeasure	string	The unit in which the characteristicSpecValue is measured, such as KB, MB, Mins, Kgm etc. Max length: 256
	valueFrom	string	The low range value that a characteristic can take on. Max length: 256
	valueTo	string	The upper range value a characteristic that can take on. Max length: 256

ProductSpecificationRef (version 1)

Table 44 ProductSpecificationRef (version 1)

Name	Type	Description
ProductSpecificationRef (version 1)	object	The Product Specification reference.



Name		Type	Description
	id	string	The ID of the referenced ProductSpecification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced ProductSpecification. Pattern: ^(?=\s*\S).*\$ Max length: 256

CommunicationIdentifierSpecificationRef (version 1)

Table 45 CommunicationIdentifierSpecificationRef (version 1)

Name		Type	Description
CommunicationIdentifierSpecificationRef (version 1)		object	The communication identifier specification reference.
	id	string	The ID of the referenced communication identifier specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced communication identifier specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	numberingScheme	string	Numbering scheme used for this communication identifier specification like E.164 etc. Max length: 256



BucketSpecificationRef (version 1)

Table 46 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: <code>^(?=\s*\S).*\$</code> Max length: 256
	measure	string	The thing that is measured using the bucket, like money, length, data, volume, duration etc. Max length: 256
	type	string	The type of bucket specification. Possible values: PRODUCT_ACCOUNT PRODUCT_COUNTER SHARING_LIMIT AGGREGATE_ACCOUNT AGGREGATE_COUNTER

bss.cmn.TimePeriod (version 1)

Table 47 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>

4.1.2 Read ProductOffering

Retrieves ProductOffering information.

4.1.2.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:



— GET {scheme:}://{host}[:{port}]/eric-bss-rmca-app/bssfProductCatalogIntegration/v1/productOffering

Query Parameters

The following table describes the query parameters for the operation:

Table 48 Query Parameters

Name	Type	Description
id	string	Product Offering Id. Additional Description: Unique identifier of the specification. Maxlength: 256 Pattern: ^(?=\s*\S).*
externalId	string	Product Offering External ID. Additional Description: Identifier of the specification in an external system. Maxlength: 256 Pattern: ^(?=\s*\S).*
version	string	Product Offering Version. Additional Description: Entity specification version. Maxlength: 128



Name	Type	Description
validAt	string	Product Offering Validity. Additional Description: This type defines a dateTime value. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. No validation of leap year is done in the schema so YYYY-02-29 is regarded as a valid date in the pattern. Only year values >= 0000 are allowed. Fractional seconds with three decimals are also mandatory. Leap seconds are not supported. Timezone information is mandatory. Valid UTC offsets are -12:00 to +14:00. The value '9999-12-31T12:00:00.001+00:00' represents infinity (no end date and time). The value '0001-01-01T12:00:00.001+00:00' represents Beginning of time (no start date and time). Example values are '2014-03-18T14:35:05.003Z' and 2014-03-18T14:35:05.003+01:00. The latter example is the recommended format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T(((0[1][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00))-((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
type	string	Retrieves Product Offerings of a specific type.



4.1.2.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:

Table 49 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.readResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.readResponse.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 50 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:

Table 51 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.readResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.readResponse.1.json#" For Status-Code: 4XX,5XX, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2} GMT))\$</code>



Table 52 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

4.1.2.3 Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.



4.1.2.3.1

bss.bssfProductCatalogIntegration.productOffering Read Response Version 1

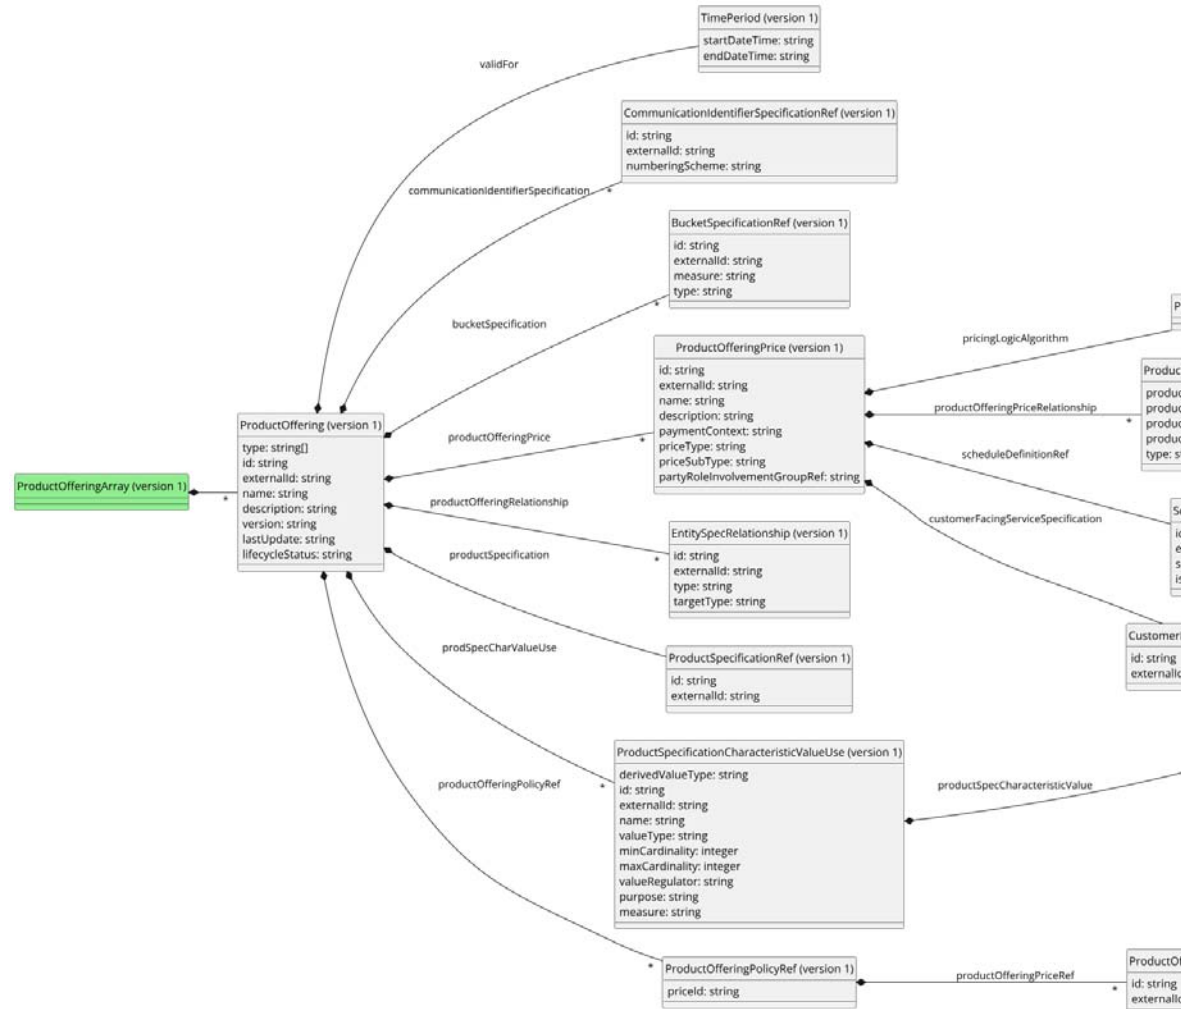


Figure 3 bss.bssfProductCatalogIntegration.productOffering.readResponse.1 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.readResponse.1.json#>

The representation is provided as JSON objects with the following attributes:

Table 53 ProductOfferingArray (version 1)

Name	Type	Description
ProductOfferingArray (version 1)	array of ProductOffering (version 1)	A product offering array representing multiple instances.



ProductOffering (version 1)

Table 54 ProductOffering (version 1)

Name	Type	Description
ProductOffering (version 1)	object	Data structure for product offering.



Name		Type	Description
	type	array of string	This is list of types that are applicable for this productOffering. Possible values: BASE DISCOUNT BUNDLE CUMULATIVE_ORDER_DISCOUNT SINGLE_ORDER_DISCOUNT LOAN SHARING_PROVIDER SHARING_CONSUMER EXCHANGE TEMPLATE
	productOfferingPrice	array of ProductOfferingPrice (version 1)	List of all productOfferingPrice linked to this productOffering.
	productOfferingPolicyRef	array of ProductOfferingPolicyRef (version 1)	List of all productOfferingPolicyRef linked to this productOffering.
	productOfferingRelationship	array of EntitySpecRelationship (version 1)	List of all product offerings linked to this productOffering in case of a productOffering linked to another productOffering with a relation.
	prodSpecCharacteristicValueUse	array of ProductSpecificationCharacteristicValueUse (version 1)	List of all product specification characteristic value uses for this productOffering.
	productSpecificationRef	ProductSpecificationRef (version 1)	Reference to the product specification for this product offering.
	communicationIdentifierSpecification	array of CommunicationIdentifierSpecificationRef (version 1)	The list of communication identifier specifications associated with this product offering
	bucketSpecification	array of BucketSpecificationRef (version 1)	The list of bucket specifications associated with this product offering
	id	string	Unique identifier of the specification. Pattern: ^(?=\s*\S).*



ProductOfferingPrice (version 1)

Table 55 ProductOfferingPrice (version 1)

Name	Type	Description
ProductOfferingPrice (version 1)	object	Product offering price.



Name		Type	Description
	id	string	Unique identifier of the product offering price. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the product offering price in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	name	string	Name given to this product offering price. Not guaranteed to be unique. Max length: 256
	description	string	Description of this product offering price. Max length: 256
	paymentContext	string	The payment context. Possible values: GENERIC PREPAID POSTPAID
	priceType	string	The price type Possible values: USAGE ONETIME RECURRING DISCOUNT REFILL PROMOTION EXCHANGE_PRODUCT ONE_TIME_DISCOUNT STATUS_CHANGE
	priceSubType	string	The price subtype Max length: 128
	pricingLogicAlgorithm	PricingLogicAlgorithm (version 1)	The Pricing Logic Algorithm of the product offering price.
	productOfferingPriceRelationship	array of ProductOfferingPriceRelationships	Product offering price relationship.



PricingLogicAlgorithm (version 1)

Table 56 PricingLogicAlgorithm (version 1)

Name		Type	Description
PricingLogicAlgorithm (version 1)		object	Represents a pricing logic algorithm.
	productOfferingPriceRow	array of Product OfferingPriceRow (version 1)	An array of productOfferingPriceRows in the pricingLogicAlgorithm.

ProductOfferingPriceRow (version 1)

Table 57 ProductOfferingPriceRow (version 1)

Name		Type	Description
ProductOfferingPriceRow (version 1)		object	Product offering price row includes the actions (and possibly also conditions) for a specific row.



Name		Type	Description
	id	string	Unique identifier of the product offering price row. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the product offering price row in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	name	string	Name given to this product offering price row. Not guaranteed to be unique. Max length: 256
	order	integer	The order of running evaluating the product offering price row. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	action	array of Action (version 1)	The actions included in this product offering price row.

Action (version 1)

Table 58 Action (version 1)

Name	Type	Description
Action (version 1)	object	Action structure.



Name		Type	Description
	id	string	Unique identifier of the action. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the action in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	Name given to this action. Not guaranteed to be unique. Max length: 256
	type	string	The type of this action. Max length: 256
	actionCharacteristicSpecificationUse	array of ActionCharacteristicSpecificationUse (version 1)	A list of product offering price specification characteristic uses.

ActionCharacteristicSpecificationUse (version 1)

Table 59 ActionCharacteristicSpecificationUse (version 1)

Name	Type	Description
ActionCharacteristicSpecificationUse (version 1)	object	Action Characteristic Specification Use structure.



Name		Type	Description
	id	string	Unique identifier of the action characteristic specification use. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the action characteristic specification use in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	name	string	Name given to this action characteristic specification use . Not guaranteed to be unique. Max length: 256
	measure	string	This is used to set the measure of the characteristic values, such as Data or weight or length etc. The UnitOfMeasure at characteristicValue then has actual UOM such as KB, MB or MG, KG, etc. Max length: 256
	actionCharacteristicSpecificationValueUse	array of ActionCharacteristicSpecificationValueUse (version 1)	Characteristic Specification Value Use.
	actionCharacteristicSpecificationType	string	This is the action characteristic type, such as price, productBucketRef etc Max length: 256
	actionCharacteristicSpecificationValueType	string	This is the action characteristic value type, such as string, boolean etc Max length: 256



ActionCharacteristicSpecificationValueUse (version 1)

Table 60 ActionCharacteristicSpecificationValueUse (version 1)

Name		Type	Description
ActionCharacteristicSpecificationValueUse (version 1)		object	Action Characteristic Specification Value Use structure.
	value	string	The value. Max length: 256
	valueReference	Reference (version 1)	A reference to a value that the characteristic can take on.
	unitOfMeasure	string	The Unit of unitOfMeasure. Max length: 256

Reference (version 1)

Table 61 Reference (version 1)

Name		Type	Description
Reference (version 1)		object	Reference structure.
	id	string	Unique identifier of the target. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	Identifier of the target in an external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	targetType	string	The type of the target. Max length: 256
	next	Reference (version 1)	Next step in the chain.

ProductOfferingPriceRelationship (version 1)

Table 62 ProductOfferingPriceRelationship (version 1)

Name		Type	Description
ProductOfferingPriceRelationship (version 1)		object	Product offering price relationship.



Name		Type	Description
	productOfferingId	string	Unique identifier of the product offering. Pattern: ^(?=\s*\S).* Max length: 256
	productOfferingExternalId	string	Identifier of the product offering in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	productOfferingPriceId	string	Unique identifier of the product offering price. Pattern: ^(?=\s*\S).* Max length: 256
	productOfferingPriceExternalId	string	Identifier of the product offering price in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	type	string	Type of relationship. Max length: 256

ScheduleDefinitionRef (version 1)

Table 63 ScheduleDefinitionRef (version 1)

Name	Type	Description
ScheduleDefinitionRef (version 1)	object	Schedule Definition Reference.



Name		Type	Description
	id	string	Unique identifier of the schedule definition. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the schedule definition in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	scheduleName	string	Name of the schedule definition. Not guaranteed to be unique. Max length: 256
	isBillcycleAligned	boolean	Indicates if the schedule definition is bill cycle aligned or not.

CustomerFacingServiceSpecificationRef (version 1)

Table 64 CustomerFacingServiceSpecificationRef (version 1)

Name		Type	Description
CustomerFacingServiceSpecificationRef (version 1)		object	The customer service specification reference.
	id	string	The ID of the referenced customer service specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external ID of the referenced customer service specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256



ProductOfferingPolicyRef (version 1)

Table 65 ProductOfferingPolicyRef (version 1)

Name		Type	Description
ProductOfferingPolicyRef (version 1)		object	Product offering policy ref structure.
	priceId	string	The price id. Max length: 256
	productOfferingPriceRef	array of ProductOfferingPolicySpecRelationship (version 1)	Array of references to the related product offering price within the product offering

ProductOfferingPolicySpecRelationship (version 1)

Table 66 ProductOfferingPolicySpecRelationship (version 1)

Name		Type	Description
ProductOfferingPolicySpecRelationship (version 1)		object	An relationship between/among specifications.
	id	string	Id of the specification. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	External id of the specification. Pattern: ^(?=\s*\S).* Max length: 256

EntitySpecRelationship (version 1)

Table 67 EntitySpecRelationship (version 1)

Name		Type	Description
EntitySpecRelationship (version 1)		object	An relationship between/among specifications.



Name		Type	Description
	id	string	Id of the target specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	External id of the target specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	type	string	Type of relationship. Max length: 256
	targetType	string	The type of target specification. Max length: 256

ProductSpecificationCharacteristicValueUse (version 1)

Table 68 ProductSpecificationCharacteristicValueUse (version 1)

Name	Type	Description
ProductSpecificationCharacteristicValueUse (version 1)	object	This is a SpecCharacteristicUse for the product offering.



Name		Type	Description
	productSpecCharacteristicValue	array of SpecCharacteristicValue (version 1)	An array of number or text values that are available to use for this SpecCharacteristic.
	derivedValueType	string	Derived value type. Max length: 256
	id	string	Unique identifier of this SpecCharacteristic. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the SpecCharacteristic in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	Name given to this SpecCharacteristic. Not guaranteed to be unique. Max length: 256
	valueType	string	A kind of value that the characteristic can take on, such as numeric, text and so forth. Max length: 256
	minCardinality	integer	The minimum number of instances a CharacteristicValue can take on. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	maxCardinality	integer	The maximum number of instances a CharacteristicValue can take on. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	valueRegulator	string	The valueRegulator. Possible values: MUST_BE_PERSONALIZED



SpecCharacteristicValue (version 1)

Table 69 SpecCharacteristicValue (version 1)

Name		Type	Description
SpecCharacteristicValue (version 1)		object	A number or text that can be assigned to a SpecCharacteristic.
	isDefault	boolean	Indicates if the value is the default value for a characteristic.
	value	string	A discrete value that the characteristic can take on. Max length: 256
	valueReference	Reference (version 1)	A reference to a value that the characteristic can take on.
	unitOfMeasure	string	The unit in which the characteristicSpecValue is measured, such as KB, MB, Mins, Kgm etc. Max length: 256
	valueFrom	string	The low range value that a characteristic can take on. Max length: 256
	valueTo	string	The upper range value a characteristic that can take on. Max length: 256

ProductSpecificationRef (version 1)

Table 70 ProductSpecificationRef (version 1)

Name	Type	Description
ProductSpecificationRef (version 1)	object	The Product Specification reference.



Name		Type	Description
	id	string	The ID of the referenced ProductSpecification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced ProductSpecification. Pattern: ^(?=\s*\S).*\$ Max length: 256

CommunicationIdentifierSpecificationRef (version 1)

Table 71 CommunicationIdentifierSpecificationRef (version 1)

Name		Type	Description
CommunicationIdentifierSpecificationRef (version 1)		object	The communication identifier specification reference.
	id	string	The ID of the referenced communication identifier specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced communication identifier specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	numberingScheme	string	Numbering scheme used for this communication identifier specification like E.164 etc. Max length: 256



BucketSpecificationRef (version 1)

Table 72 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	measure	string	The thing that is measured using the bucket, like money, length, data, volume, duration etc. Max length: 256
	type	string	The type of bucket specification. Possible values: PRODUCT_ACCOUNT PRODUCT_COUNTER SHARING_LIMIT AGGREGATE_ACCOUNT AGGREGATE_COUNTER

bss.cmn.TimePeriod (version 1)

Table 73 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30))))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30))))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

4.1.3 Update ProductOffering

Update a product offering.

4.1.3.1 Operations

The following HTTP methods and URIs are applicable to perform the operation:



- PATCH {scheme:}://{host}[:{port}]/eric-bss-rmca-app/bssfProductCatalogIntegration/v1/productOffering/{id}/version/{version}
- PATCH {scheme:}://{host}[:{port}]/eric-bss-rmca-app/bssfProductCatalogIntegration/v1/productOfferingExternalId/{externalId}/version/{version}

Path Parameters

The following table describes the path parameters for the operation:

Table 74 Path Parameters

Name	Type	Description
id	string	Product Offering Id. Additional Description: Unique identifier of the specification. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
externalId	string	Product Offering External ID. Additional Description: Identifier of the specification in an external system. Maxlength: 256 Pattern: ^(?=\s*\S).*\$
version	string	Product Offering Version. Additional Description: Entity specification version. Maxlength: 128

4.1.3.2

HTTP Headers

The following standard and custom HTTP headers are supported.

Request

HTTP headers available for the request are as follows:



Table 75 Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Accept		Optional
	A non-empty subset of the following: • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.updateResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.updateResponse.1.json#" • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#" • application/json;charset=utf-8 • application/json	-
Content-Type		Mandatory
	One of the following: • application/merge-patch+json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.updateRequest.1.json#";charset=utf-8 • application/merge-patch+json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.updateRequest.1.json#" • application/merge-patch+json;charset=utf-8 • application/merge-patch+json	-



Header Field Name	Header Field Value	Mandatory/Optional
Authorization		Optional by default
	Bearer <token>	Mandatory If Authentication and Authorization is active then this parameter is mandatory.



Table 76 Customized Request HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Global-Unique-Request-Id	String	Optional	Global Unique Request ID, represents identifier for duplicate detection. If not included, a retransmission of an identical request will cause a new create/update. This type represents a Universal Unique Identifier (UUID). The string representation is according to the definition in RFC 4122. Example value 'd616d31a-06ed-47ab-9e06-7d5c830a2b0c'. Pattern: ^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}\$
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP Compressed bss.genericInterfaceParameters.request.4.json	Optional	Generic Interface Parameters.

Response

HTTP headers available for the response are as follows:



Table 77 Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional
Content-Type		Mandatory



Header Field Name	Header Field Value	Mandatory/Optional
	For Status-Code: 200, one of the following: • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.updateResponse.1.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.updateResponse.1.json#" For Status-Code: 4XX,5XX, one of the following: • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#";charset=utf-8 • application/json;profile="http://ericsson.com/bss.errorMessage.response.2.json#"	-
Retry-After	String	Indicates an expected wait time before making a retry, as delay in seconds or HTTP-date format. Example value 'Fri, 31 Dec 1999 23:59:59 GMT' as in http-date format or '60' as delay in seconds. Optional Status Code: 503 Pattern: <code>^(([0-9]{1,8}) ((Mon Tue Wed Thu Fri Sat Sun), ([0-3][0-9]) (Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec) ([0-9]{4}) ([01][0-9] 2[0-3])(:[0-5][0-9]){2} GMT))\$</code>

Table 78 Customized Response HTTP Headers

Header Field Name	Header Field Value	Mandatory/Optional	Description
ERICSSON.Generic-Interface-Parameters	BASE64 encoded and GZIP compressed bss.genericInterfaceParameters.response.4.json	Optional	Generic Interface Parameters

4.1.3.3 Resource Representation - Request

The following images and tables describe the elements and their structure contained in the resource representation request.

4.1.3.3.1 bss.bssfProductCatalogIntegration.productOffering Update Request Version 1

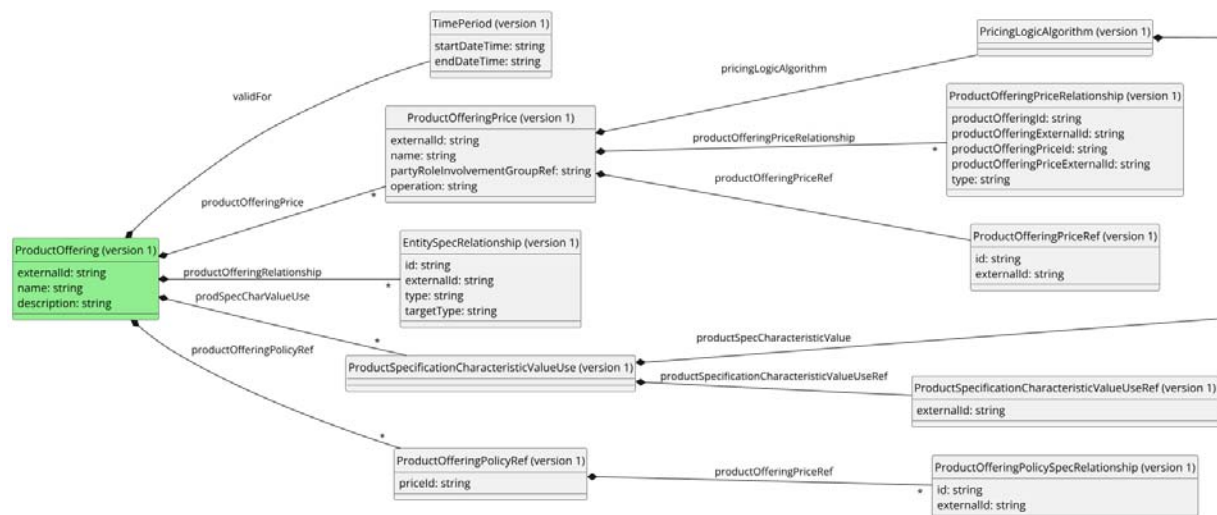


Figure 4 bss.bssfProductCatalogIntegration.productOffering.updateRequest.1 UML representation

Applicable profile URI for the representation:

```
http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.updateRequest.1.json#
```

The representation is provided as JSON objects with the following attributes:

Table 79 ProductOffering (version 1)

Name	Type	Description
ProductOffering (version 1)	object	Data structure for product offering.



Name		Type	Description
	productOfferingPrice	array of ProductOfferingPrice (version 1)	List of all productOfferingPrice linked to this productOffering.
	productOfferingPolicyRef	array of ProductOfferingPolicyRef (version 1)	List of all productOfferingPolicyRef linked to this productOffering.
	productOfferingRelationship	array of EntitySpecRelationship (version 1)	List of all product offerings linked to this productOffering in case of a productOffering linked to another productOffering with a relation.
	prodSpecCharacteristicValueUse	array of ProductSpecificationCharacteristicValueUse (version 1)	List of all product specification characteristic value uses for this productOffering.
	externalId	string	Identifier of the specification in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	Name given to this specification. Not guaranteed to be unique. Max length: 256
	description	string	Description of this specification. Max length: 512
	validFor	bss.cmn.TimePeriod (version 1)	The period for which this specification is valid.

ProductOfferingPrice (version 1)

Table 80 ProductOfferingPrice (version 1)

Name	Type	Description
ProductOfferingPrice (version 1)	object	Product offering price.



Name		Type	Description
	externalId	string	Identifier of the product offering price in an external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	name	string	Name given to this product offering price. Not guaranteed to be unique. Max length: 256
	pricingLogicAlgorithm	PricingLogicAlgorithm (version 1)	The Pricing Logic Algorithm of the product offering price.
	productOfferingPriceRelationship	array of ProductOfferingPriceRelationship (version 1)	Product offering price relationship.
	partyRoleInvolvementGroupRef	string	Identifier of the party role involvement group in an external system. Pattern: ^(?=\s*\S).*\$ ^\$\br/>Max length: 256
	operation	string	The operation type Possible values: CREATE UPDATE
	productOfferingPriceRef	ProductOfferingPriceRef (version 1)	Reference to a product offering price.

PricingLogicAlgorithm (version 1)

Table 81 PricingLogicAlgorithm (version 1)

Name		Type	Description
PricingLogicAlgorithm (version 1)		object	Represents a pricing logic algorithm.
	productOfferingPriceRow	array of ProductOfferingPriceRow (version 1)	An array of productOfferingPriceRows in the pricingLogicAlgorithm.



ProductOfferingPriceRow (version 1)

Table 82 ProductOfferingPriceRow (version 1)

Name		Type	Description
ProductOfferingPriceRow (version 1)		object	Product offering price row includes the actions (and possibly also conditions) for a specific row.
	name	string	Name given to this product offering price row. Not guaranteed to be unique. Max length: 256
	action	array of Action (version 1)	The actions included in this product offering price row.
	productOfferingPriceRowRef	ProductOfferingPriceRowRef (version 1)	Reference to ProductOffering Price.

Action (version 1)

Table 83 Action (version 1)

Name		Type	Description
Action (version 1)		object	Action structure.
	actionRef	ActionRef (version 1)	Reference to the action.
	actionCharacteristicSpecificationUse	array of ActionCharacteristicSpecificationUse (version 1)	A list of product offering price specification characteristic uses.

ActionRef (version 1)

Table 84 ActionRef (version 1)

Name	Type	Description
ActionRef (version 1)	object	Reference of the action.



Name		Type	Description
	id	string	The ID of the referenced action. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	The external ID of the referenced action. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256

ActionCharacteristicSpecificationUse (version 1)

Table 85 ActionCharacteristicSpecificationUse (version 1)

Name		Type	Description
ActionCharacteristicSpecificationUse (version 1)		object	Action Characteristic Specification Use structure.
	actionCharacteristicSpecificationUseRef	ActionCharacteristicSpecificationUseRef (version 1)	Reference to the action characteristic specification use template.
	actionCharacteristicSpecificationValueUse	array of ActionCharacteristicSpecificationValueUse (version 1)	Characteristic Specification Value Use.

ActionCharacteristicSpecificationUseRef (version 1)

Table 86 ActionCharacteristicSpecificationUseRef (version 1)

Name		Type	Description
ActionCharacteristicSpecificationUseRef (version 1)		object	The action characteristic specification use reference.



Name		Type	Description
	id	string	The ID of the referenced action characteristic specification use. Pattern: $^(?=\backslash s*\backslash S).*\$$ Max length: 256
	externalId	string	The external ID of the referenced action characteristic specification use. Pattern: $^(?=\backslash s*\backslash S).*\$$ Max length: 256

ActionCharacteristicSpecificationValueUse (version 1)

Table 87 ActionCharacteristicSpecificationValueUse (version 1)

Name		Type	Description
ActionCharacteristicSpecificationValueUse (version 1)		object	Action Characteristic Specification Value Use structure.
	value	string	The value. Max length: 256
	valueReference	Reference (version 1)	A reference to a value that the characteristic can take on.
	unitOfMeasure	string	The Unit of unitOfMeasure. Max length: 256

Reference (version 1)

Table 88 Reference (version 1)

Name	Type	Description
Reference (version 1)	object	Reference structure.



Name		Type	Description
	id	string	Unique identifier of the target. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the target in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	targetType	string	The type of the target. Max length: 256
	next	Reference (version 1)	Next step in the chain.

ProductOfferingPriceRowRef (version 1)

Table 89 ProductOfferingPriceRowRef (version 1)

Name		Type	Description
ProductOfferingPriceRowRef (version 1)		object	The product offering price row reference.
	id	string	The ID of the referenced product offering price row. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced product offering price row. Pattern: ^(?=\s*\S).*\$ Max length: 256

ProductOfferingPriceRelationship (version 1)

Table 90 ProductOfferingPriceRelationship (version 1)

Name		Type	Description
ProductOfferingPriceRelationship (version 1)		object	Product offering price relationship.



Name		Type	Description
	productOfferingId	string	Unique identifier of the product offering. Pattern: ^(?=\s*\S).*\$ Max length: 256
	productOfferingExternalId	string	Identifier of the product offering in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	productOfferingPriceId	string	Unique identifier of the product offering price. Pattern: ^(?=\s*\S).*\$ Max length: 256
	productOfferingPriceExternalId	string	Identifier of the product offering price in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	type	string	Type of relationship. Max length: 256

ProductOfferingPriceRef (version 1)

Table 91 ProductOfferingPriceRef (version 1)

Name	Type	Description
ProductOfferingPriceRef (version 1)	object	The product offering price reference.



Name		Type	Description
	id	string	The ID of the referenced product offering price. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced product offering price. Pattern: ^(?=\s*\S).*\$ Max length: 256

ProductOfferingPolicyRef (version 1)

Table 92 ProductOfferingPolicyRef (version 1)

Name		Type	Description
ProductOfferingPolicyRef (version 1)		object	Product offering policy ref structure.
	priceId	string	The price id. Max length: 256
	productOfferingPriceRef	array of ProductOfferingPolicySpecRelationship (version 1)	Array of references to the related product offering price within the product offering

ProductOfferingPolicySpecRelationship (version 1)

Table 93 ProductOfferingPolicySpecRelationship (version 1)

Name		Type	Description
ProductOfferingPolicySpecRelationship (version 1)		object	An relationship between/among specifications.
	id	string	Id of the specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External id of the specification. Pattern: ^(?=\s*\S).*\$ Max length: 256



EntitySpecRelationship (version 1)

Table 94 EntitySpecRelationship (version 1)

Name		Type	Description
EntitySpecRelationship (version 1)		object	An relationship between/among specifications.
	id	string	Id of the target specification. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256
	externalId	string	External id of the target specification. Pattern: $^{(?=\backslash s*\backslash S)}.*\$$ Max length: 256
	type	string	Type of relationship. Max length: 256
	targetType	string	The type of target specification. Max length: 256

ProductSpecificationCharacteristicValueUse (version 1)

Table 95 ProductSpecificationCharacteristicValueUse (version 1)

Name		Type	Description
ProductSpecificationCharacteristicValueUse (version 1)		object	This is a SpecCharacteristicUse for the product offering.
	productSpecCharacteristicValue	array of SpecCharacteristicValue (version 1)	An array of number or text values that are available to use for this SpecCharacteristic.
	productSpecificationCharacteristicValueUseRef	ProductSpecificationCharacteristicValueUseRef (version 1)	A reference to a product specification characteristic value.



SpecCharacteristicValue (version 1)

Table 96 SpecCharacteristicValue (version 1)

Name		Type	Description
SpecCharacteristicValue (version 1)		object	A number or text that can be assigned to a SpecCharacteristic.
	isDefault	boolean	Indicates if the value is the default value for a characteristic.
	value	string	A discrete value that the characteristic can take on. Max length: 256
	valueReference	Reference (version 1)	A reference to a value that the characteristic can take on.
	unitOfMeasure	string	The unit in which the characteristicSpecValue is measured, such as KB, MB, Mins, Kgm etc. Max length: 256

ProductSpecificationCharacteristicValueUseRef (version 1)

Table 97 ProductSpecificationCharacteristicValueUseRef (version 1)

Name		Type	Description
ProductSpecificationCharacteristicValueUseRef (version 1)		object	This is a reference for the product offering.
	externalId	string	ID of the applied partner settlement rate. Pattern: ^(?=\s*\S).* Max length: 256

bss.cmn.TimePeriod (version 1)

Table 98 bss.cmn.TimePeriod (version 1)

Name		Type	Description
bss.cmn.TimePeriod (version 1)		object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>

4.1.3.4

Resource Representation - Response

The following images and tables describe the elements and their structure contained in the resource representation response.

4.1.3.4.1

bss.bssfProductCatalogIntegration.productOffering Update Response Version 1

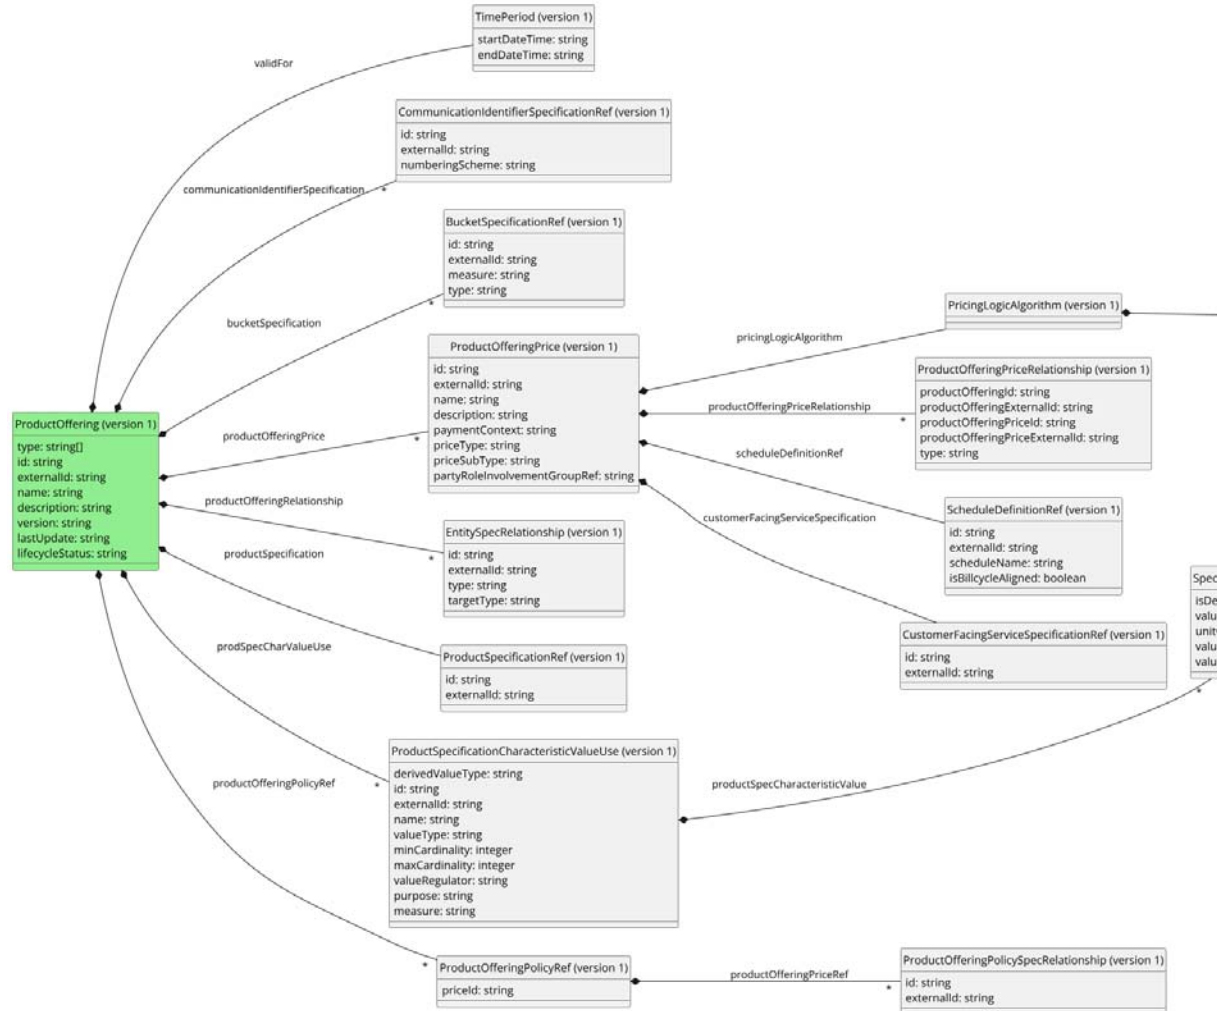


Figure 5 bss.bssfProductCatalogIntegration.productOffering.updateResponse.1 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.bssfProductCatalogIntegration.productOffering.updateResponse.1.json#>

The representation is provided as JSON objects with the following attributes:

Table 99 ProductOffering (version 1)

Name	Type	Description
ProductOffering (version 1)	object	Data structure for product offering.



Name		Type	Description
	type	array of string	This is list of types that are applicable for this productOffering. Possible values: BASE DISCOUNT BUNDLE CUMULATIVE_ORDER_DISCOUNT SINGLE_ORDER_DISCOUNT LOAN SHARING_PROVIDER SHARING_CONSUMER EXCHANGE TEMPLATE
	productOfferingPrice	array of ProductOfferingPrice (version 1)	List of all productOfferingPrice linked to this productOffering.
	productOfferingPolicyRef	array of ProductOfferingPolicyRef (version 1)	List of all productOfferingPolicyRef linked to this productOffering.
	productOfferingRelationship	array of EntitySpecRelationship (version 1)	List of all product offerings linked to this productOffering in case of a productOffering linked to another productOffering with a relation.
	prodSpecCharacteristicValueUse	array of ProductSpecificationCharacteristicValueUse (version 1)	List of all product specification characteristic value uses for this productOffering.
	productSpecificationRef	ProductSpecificationRef (version 1)	Reference to the product specification for this product offering.
	communicationIdentifierSpecification	array of CommunicationIdentifierSpecificationRef (version 1)	The list of communication identifier specifications associated with this product offering
	bucketSpecification	array of BucketSpecificationRef (version 1)	The list of bucket specifications associated with this product offering
	id	string	Unique identifier of the specification. Pattern: ^(?=\s*\S).*



ProductOfferingPrice (version 1)

Table 100 ProductOfferingPrice (version 1)

Name	Type	Description
ProductOfferingPrice (version 1)	object	Product offering price.



Name		Type	Description
	id	string	Unique identifier of the product offering price. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the product offering price in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	name	string	Name given to this product offering price. Not guaranteed to be unique. Max length: 256
	description	string	Description of this product offering price. Max length: 256
	paymentContext	string	The payment context. Possible values: GENERIC PREPAID POSTPAID
	priceType	string	The price type Possible values: USAGE ONETIME RECURRING DISCOUNT REFILL PROMOTION EXCHANGE_PRODUCT ONE_TIME_DISCOUNT STATUS_CHANGE
	priceSubType	string	The price subtype Max length: 128
	pricingLogicAlgorithm	PricingLogicAlgorithm (version 1)	The Pricing Logic Algorithm of the product offering price.
	productOfferingPriceRelationship	array of ProductOfferingPriceRelationships	Product offering price relationship.



PricingLogicAlgorithm (version 1)

Table 101 PricingLogicAlgorithm (version 1)

Name		Type	Description
PricingLogicAlgorithm (version 1)		object	Represents a pricing logic algorithm.
	productOfferingPriceRow	array of Product OfferingPriceRow (version 1)	An array of productOfferingPriceRows in the pricingLogicAlgorithm.

ProductOfferingPriceRow (version 1)

Table 102 ProductOfferingPriceRow (version 1)

Name		Type	Description
ProductOfferingPriceRow (version 1)		object	Product offering price row includes the actions (and possibly also conditions) for a specific row.



Name		Type	Description
	id	string	Unique identifier of the product offering price row. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the product offering price row in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	name	string	Name given to this product offering price row. Not guaranteed to be unique. Max length: 256
	order	integer	The order of running evaluating the product offering price row. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	action	array of Action (version 1)	The actions included in this product offering price row.

Action (version 1)

Table 103 Action (version 1)

Name	Type	Description
Action (version 1)	object	Action structure.



Name		Type	Description
	id	string	Unique identifier of the action. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	Identifier of the action in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	name	string	Name given to this action. Not guaranteed to be unique. Max length: 256
	type	string	The type of this action. Max length: 256
	actionCharacteristicSpecificationUse	array of ActionCharacteristicSpecificationUse (version 1)	A list of product offering price specification characteristic uses.

ActionCharacteristicSpecificationUse (version 1)

Table 104 ActionCharacteristicSpecificationUse (version 1)

Name	Type	Description
ActionCharacteristicSpecificationUse (version 1)	object	Action Characteristic Specification Use structure.



Name		Type	Description
	id	string	Unique identifier of the action characteristic specification use. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the action characteristic specification use in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	name	string	Name given to this action characteristic specification use . Not guaranteed to be unique. Max length: 256
	measure	string	This is used to set the measure of the characteristic values, such as Data or weight or length etc. The UnitOfMeasure at characteristicValue then has actual UOM such as KB, MB or MG, KG, etc. Max length: 256
	actionCharacteristicSpecificationValueUse	array of ActionCharacteristicSpecificationValueUse (version 1)	Characteristic Specification Value Use.
	actionCharacteristicSpecificationType	string	This is the action characteristic type, such as price, productBucketRef etc Max length: 256
	actionCharacteristicSpecificationValueType	string	This is the action characteristic value type, such as string, boolean etc Max length: 256



ActionCharacteristicSpecificationValueUse (version 1)

Table 105 ActionCharacteristicSpecificationValueUse (version 1)

Name		Type	Description
ActionCharacteristicSpecificationValueUse (version 1)		object	Action Characteristic Specification Value Use structure.
	value	string	The value. Max length: 256
	valueReference	Reference (version 1)	A reference to a value that the characteristic can take on.
	unitOfMeasure	string	The Unit of unitOfMeasure. Max length: 256

Reference (version 1)

Table 106 Reference (version 1)

Name		Type	Description
Reference (version 1)		object	Reference structure.
	id	string	Unique identifier of the target. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	Identifier of the target in an external system. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	targetType	string	The type of the target. Max length: 256
	next	Reference (version 1)	Next step in the chain.

ProductOfferingPriceRelationship (version 1)

Table 107 ProductOfferingPriceRelationship (version 1)

Name		Type	Description
ProductOfferingPriceRelationship (version 1)		object	Product offering price relationship.



Name		Type	Description
	productOfferingId	string	Unique identifier of the product offering. Pattern: ^(?=\s*\S).*\$ Max length: 256
	productOfferingExternalId	string	Identifier of the product offering in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	productOfferingPriceId	string	Unique identifier of the product offering price. Pattern: ^(?=\s*\S).*\$ Max length: 256
	productOfferingPriceExternalId	string	Identifier of the product offering price in an external system. Pattern: ^(?=\s*\S).*\$ Max length: 256
	type	string	Type of relationship. Max length: 256

ScheduleDefinitionRef (version 1)

Table 108 ScheduleDefinitionRef (version 1)

Name	Type	Description
ScheduleDefinitionRef (version 1)	object	Schedule Definition Reference.



Name		Type	Description
	id	string	Unique identifier of the schedule definition. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	Identifier of the schedule definition in an external system. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	scheduleName	string	Name of the schedule definition. Not guaranteed to be unique. Max length: 256
	isBillcycleAligned	boolean	Indicates if the schedule definition is bill cycle aligned or not.

CustomerFacingServiceSpecificationRef (version 1)

Table 109 CustomerFacingServiceSpecificationRef (version 1)

Name		Type	Description
CustomerFacingServiceSpecificationRef (version 1)		object	The customer service specification reference.
	id	string	The ID of the referenced customer service specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256
	externalId	string	The external ID of the referenced customer service specification. Pattern: <code>^(?=\s*\S).*</code> Max length: 256



ProductOfferingPolicyRef (version 1)

Table 110 ProductOfferingPolicyRef (version 1)

Name		Type	Description
ProductOfferingPolicyRef (version 1)		object	Product offering policy ref structure.
	priceId	string	The price id. Max length: 256
	productOfferingPriceRef	array of ProductOfferingPolicySpecRelationship (version 1)	Array of references to the related product offering price within the product offering

ProductOfferingPolicySpecRelationship (version 1)

Table 111 ProductOfferingPolicySpecRelationship (version 1)

Name		Type	Description
ProductOfferingPolicySpecRelationship (version 1)		object	An relationship between/among specifications.
	id	string	Id of the specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External id of the specification. Pattern: ^(?=\s*\S).*\$ Max length: 256

EntitySpecRelationship (version 1)

Table 112 EntitySpecRelationship (version 1)

Name		Type	Description
EntitySpecRelationship (version 1)		object	An relationship between/among specifications.



Name		Type	Description
	id	string	Id of the target specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	External id of the target specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	type	string	Type of relationship. Max length: 256
	targetType	string	The type of target specification. Max length: 256

ProductSpecificationCharacteristicValueUse (version 1)

Table 113 ProductSpecificationCharacteristicValueUse (version 1)

Name	Type	Description
ProductSpecificationCharacteristicValueUse (version 1)	object	This is a SpecCharacteristicUse for the product offering.



Name		Type	Description
	productSpecCharacteristicValue	array of SpecCharacteristicValue (version 1)	An array of number or text values that are available to use for this SpecCharacteristic.
	derivedValueType	string	Derived value type. Max length: 256
	id	string	Unique identifier of this SpecCharacteristic. Pattern: ^(?=\s*\S).* Max length: 256
	externalId	string	Identifier of the SpecCharacteristic in an external system. Pattern: ^(?=\s*\S).* Max length: 256
	name	string	Name given to this SpecCharacteristic. Not guaranteed to be unique. Max length: 256
	valueType	string	A kind of value that the characteristic can take on, such as numeric, text and so forth. Max length: 256
	minCardinality	integer	The minimum number of instances a CharacteristicValue can take on. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	maxCardinality	integer	The maximum number of instances a CharacteristicValue can take on. The numeric value must be at least -9223372036854775807. The numeric value must not exceed 9223372036854775806.
	valueRegulator	string	The valueRegulator. Possible values: MUST_BE_PERSONALIZED



SpecCharacteristicValue (version 1)

Table 114 SpecCharacteristicValue (version 1)

Name		Type	Description
SpecCharacteristicValue (version 1)		object	A number or text that can be assigned to a SpecCharacteristic.
	isDefault	boolean	Indicates if the value is the default value for a characteristic.
	value	string	A discrete value that the characteristic can take on. Max length: 256
	valueReference	Reference (version 1)	A reference to a value that the characteristic can take on.
	unitOfMeasure	string	The unit in which the characteristicSpecValue is measured, such as KB, MB, Mins, Kgm etc. Max length: 256
	valueFrom	string	The low range value that a characteristic can take on. Max length: 256
	valueTo	string	The upper range value a characteristic that can take on. Max length: 256

ProductSpecificationRef (version 1)

Table 115 ProductSpecificationRef (version 1)

Name	Type	Description
ProductSpecificationRef (version 1)	object	The Product Specification reference.



Name		Type	Description
	id	string	The ID of the referenced ProductSpecification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced ProductSpecification. Pattern: ^(?=\s*\S).*\$ Max length: 256

CommunicationIdentifierSpecificationRef (version 1)

Table 116 CommunicationIdentifierSpecificationRef (version 1)

Name		Type	Description
CommunicationIdentifierSpecificationRef (version 1)		object	The communication identifier specification reference.
	id	string	The ID of the referenced communication identifier specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	externalId	string	The external ID of the referenced communication identifier specification. Pattern: ^(?=\s*\S).*\$ Max length: 256
	numberingScheme	string	Numbering scheme used for this communication identifier specification like E.164 etc. Max length: 256



BucketSpecificationRef (version 1)

Table 117 BucketSpecificationRef (version 1)

Name		Type	Description
BucketSpecificationRef (version 1)		object	The bucket specification reference.
	id	string	The ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	externalId	string	The external ID of the referenced bucket specification. Pattern: ^(?=\s*\S).*\$\br/>Max length: 256
	measure	string	The thing that is measured using the bucket, like money, length, data, volume, duration etc. Max length: 256
	type	string	The type of bucket specification. Possible values: PRODUCT_ACCOUNT PRODUCT_COUNTER SHARING_LIMIT AGGREGATE_ACCOUNT AGGREGATE_COUNTER

bss.cmn.TimePeriod (version 1)

Table 118 bss.cmn.TimePeriod (version 1)

Name	Type	Description
bss.cmn.TimePeriod (version 1)	object	StartDateTime must be earlier than EndDateTime.



Name		Type	Description
	startDateTime	string	Start dateTime of the time period. The value is inclusive, including the starting point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>
	endDateTime	string	End dateTime of the time period. The value is exclusive, excluding the ending point of the interval. The pattern is based on the definition found at http://www.w3.org/TR/xmlschema-2/#dateTime. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) ((02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -(0[0-9] 1[0-1]):[0-5][0-9] 12:00)))\$</code>





5 Generic Interface Parameters

The following sub-sections describe the elements and their structure in the request and response for Generic Interface Parameters.

5.1 Generic Interface Parameters Request

5.1.1 bss.genericInterfaceParameters Request Version 4

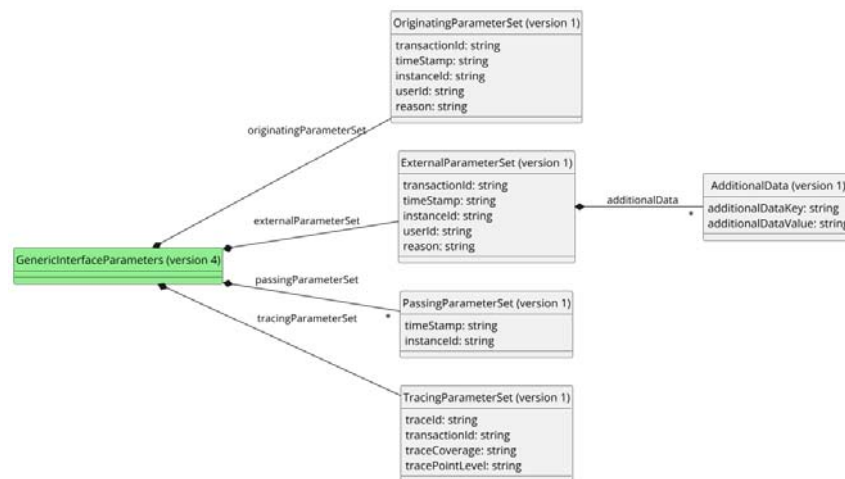


Figure 6 bss.genericInterfaceParameters.request.4 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.genericInterfaceParameters.request.4.json#>

The representation is provided as JSON objects with the following attributes:

Table 119 bss.cmn.GenericInterfaceParameters (version 4)

Name	Type	Description
bss.cmn.GenericInterfaceParameters (version 4)	object	The Generic Interface Parameters (GIP) is used for transaction traceability.



Name		Type	Description
	originatingParameterSet	bss.cmn.OriginatingParameterSet (version 1)	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.
	externalParameterSet	bss.cmn.ExternalParameterSet (version 1)	Information received from the external system that initiated the transaction.
	passingParameterSet	array of bss.cmn.PassingParameterSet (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	bss.cmn.TracingParameterSet (version 1)	Tracing Parameter Set.

5.1.1.1

bss.cmn.OriginatingParameterSet (version 1)

Table 120 bss.cmn.OriginatingParameterSet (version 1)

Name	Type	Description
bss.cmn.OriginatingParameterSet (version 1)	object	Transaction Originating Parameter Set. Identification of the transaction. Identification of the instance that created the ops.



Name		Type	Description
	transactionId	string	Unique transaction identifier. Pattern: <code>^[a-fA-F0-9]{8}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{4}-?[a-fA-F0-9]{12}\$</code>
	timeStamp	string	The time stamp when the ops was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) ((02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((0[1-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z (\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that created the ops. Max length: 256
	userId	string	User Identification. Provided at login to the instance creating the ops. Max length: 256
	reason	string	Reason for the transaction. Max length: 256

5.1.1.2

bss.cmn.ExternalParameterSet (version 1)

Table 121 bss.cmn.ExternalParameterSet (version 1)

Name	Type	Description
bss.cmn.ExternalParameterSet (version 1)	object	Information received from the external system that initiated the transaction.



Name		Type	Description
	transactionId	string	Transaction Identifier received from external system. Max length: 256
	timeStamp	string	Transaction time stamp received from external system. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01]))((02-(0[1-9] 12)[0-9])) ((0[469] 11)-(0[1-9] 12)[0-9] 30)))T((([01][0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the instance that sent the transactionId. Max length: 256
	userId	string	User identifier received from external system. Max length: 256
	reason	string	Reason received from external system. Max length: 256
	additionalData	array of bss.cmn.AdditionalData (version 1)	Array of additional data Items from external system.

5.1.1.3

bss.cmn.AdditionalData (version 1)

Table 122 bss.cmn.AdditionalData (version 1)

Name	Type	Description
bss.cmn.AdditionalData (version 1)	object	A key-value structure data received from external system.



Name		Type	Description
	additionalDataKey	string	key of the additional data from external system. Max length: 256
	additionalDataValue	string	value correspond to the key. Max length: 256

5.1.1.4 **bss.cmn.PassingParameterSet (version 1)**

Table 123 **bss.cmn.PassingParameterSet (version 1)**

Name		Type	Description
bss.cmn.PassingParameterSet (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the ppsItem was created. Shall adhere to W3 date-time format. Format: date-time Pattern: <code>^\d{4}-(((0[13578] 1[02])-(0[1-9] [12][0-9] 3[01])) (02-(0[1-9] [12][0-9])) ((0[469] 11)-(0[1-9] [12][0-9] 3[0])))T(((01[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \\+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$</code>
	instanceId	string	Identification of the entity that created the ppsItem. Max length: 256

5.1.1.5 **bss.cmn.TracingParameterSet (version 1)**

Table 124 **bss.cmn.TracingParameterSet (version 1)**

Name		Type	Description
bss.cmn.TracingParameterSet (version 1)		object	Tracing Parameter Set.

Name	Type	Description
traceId	string	The unique id for the trace job. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
transactionId	string	The unique id for the transaction. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

5.2 Generic Interface Parameters Response

5.2.1 bss.genericInterfaceParameters Response Version 4

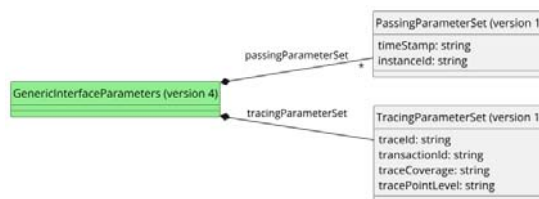


Figure 7 bss.genericInterfaceParameters.response.4 UML representation

Applicable profile URI for the representation:

<http://ericsson.com/bss.genericInterfaceParameters.response.4.json#>

The representation is provided as JSON objects with the following attributes:



Table 125 bss.cmn.GenericInterfaceParameters (version 4)

Name		Type	Description
bss.cmn.GenericInterfaceParameters (version 4)		object	The Generic Interface Parameters (GIP) is used for transaction traceability.
	passingParameterSet	array of bss.cmn.PassingParameterSet (version 1)	Transaction Passing Parameter Set.
	tracingParameterSet	bss.cmn.TracingParameterSet (version 1)	Tracing Parameter Set.

5.2.1.1

bss.cmn.PassingParameterSet (version 1)

Table 126 bss.cmn.PassingParameterSet (version 1)

Name		Type	Description
bss.cmn.PassingParameterSet (version 1)		object	Identification of an instance where the transaction has passed.
	timeStamp	string	Time stamp at which the ppsItem was created. Shall adhere to W3 date-time format. Format: date-time Pattern: $\wedge d\{4\}-(((0[13578] 1[02])-(0[1-9] 12)[0-9] 3[01])) (02-(0[1-9] 12)[0-9]) ((0[469] 11)-(0[1-9] 12)[0-9] 30))T(((01)[0-9] 2[0-3]):[0-5][0-9]:[0-5][0-9]\.[0-9]{3}) (24:00:00.000))(Z \+((0[0-9] 1[0-3]):[0-5][0-9] 14:00) -((0[0-9] 1[0-1]):[0-5][0-9] 12:00))\$$
	instanceId	string	Identification of the entity that created the ppsItem. Max length: 256



5.2.1.2 bss.cmn.TracingParameterSet (version 1)

Table 127 bss.cmn.TracingParameterSet (version 1)

Name		Type	Description
bss.cmn.TracingParameterSet (version 1)		object	Tracing Parameter Set.
	traceId	string	The unique id for the trace job. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
	transactionId	string	The unique id for the transaction. Pattern: <code>^[a-zA-F0-9]{8}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{4}-?[a-zA-F0-9]{12}\$</code>
	traceCoverage	string	The trace coverage indicator. Local or Global. Max length: 256
	tracePointLevel	string	The level of trace points to include in the trace. 0 means External trace points, 1 means External and internal trace points. Max length: 256

6 Result Representation

Results are reported through HTTP status codes. JSON objects are provided for requests that reaches the application component. The following tables describe the elements and their structure contained in the result representation.

6.1 `bss.errorMessage` Response Version 2



Figure 8 `bss.errorMessage.response.2` UML representation

Applicable profile URI for the representation:

`http://ericsson.com/bss.errorMessage.response.2.json#`

The representation is provided as JSON objects with the following attributes:

Table 128 `bss.cmn.ErrorMessageExtended (version 2)`

Name		Type	Description
<code>bss.cmn.ErrorMessageExtended (version 2)</code>		object	Extended error message structure.
	<code>supplementaryError</code>	array of <code>bss.cmn.SupplementaryError (version 2)</code>	Supplementary Error.
	<code>code</code>	string	Application related code (as defined in the API or from a common list). Max length: 256
	<code>reason</code>	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	<code>message</code>	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	<code>httpStatusCode</code>	integer	HTTP status code.



6.1.1 bss.cmn.SupplementaryError (version 2)

Table 129 bss.cmn.SupplementaryError (version 2)

Name		Type	Description
bss.cmn.Supplementary Error (version 2)		object	Supplementary error message structure. In case of partial error scenarios, this structure may also include successful responses to show what parts went ok.
	source	string	Source of error. Max length: 256
	action	string	Action causing error. Max length: 256
	code	string	Application related code (as defined in the API or from a common list). Max length: 256
	reason	string	Text that explains the reason for error. This can be shown to a client user. Max length: 256
	message	string	Text that provide more details and corrective actions related to the error. This can be shown to a client user. Max length: 256
	httpStatusCode	integer	HTTP status code.

6.2 Result Codes

The supported Error Codes could be found in the 'Error Codes' document.



7 Interface Version Changes

The following sections describe the changes between the interface versions.

7.1 Interface Version 1.0

Table 130 Changes

Resources	Type of Change	Description
N/A	Document created.	First version of the protocol.

7.2 Interface Version 1.1

Table 131 Changes

Resources	Type of Change	Description
All	Updated	Change handling of content-type for request/responses operations.

7.3 Interface Version 1.2

Table 132 Changes

Resources	Type of Change	Description
ProductOffering	Add.	Update operation added.

7.4 Interface Version 1.3

Table 133 Changes

Resources	Type of Change	Description
ProductOffering	Update.	Allow attribute partyRoleInvolvementGroupRef to have empty string.



7.5 Interface Version 1.4

Table 134 Changes

Resources	Type of Change	Description
All POST and PATCH operations	Change	Set to Mandatory Content-Type for all POST and PATCH requests.



Reference List

- [1] [RFC 7231 - Hypertext Transfer Protocol \(HTTP/1.1\): Semantics and Content](#)
- [2] [RFC 7230 - Hypertext Transfer Protocol \(HTTP/1.1\): Message Syntax and Routing](#)
- [3] [RFC 6906 - The 'profile' Link Relation Type](#)
- [4] [RFC 4122 - A Universally Unique Identifier \(UUID\) URN Namespace](#)
- [5] [RFC 3986 - Uniform Resource Identifier \(URI\): Generic Syntax](#)
- [6] [RFC 2818 - HTTP Over TLS](#)
- [7] [RFC 2616 - Hypertext Transfer Protocol -- HTTP/1.1](#)