


Chapter 1

Java Intro

(1991) → discovered

Types:

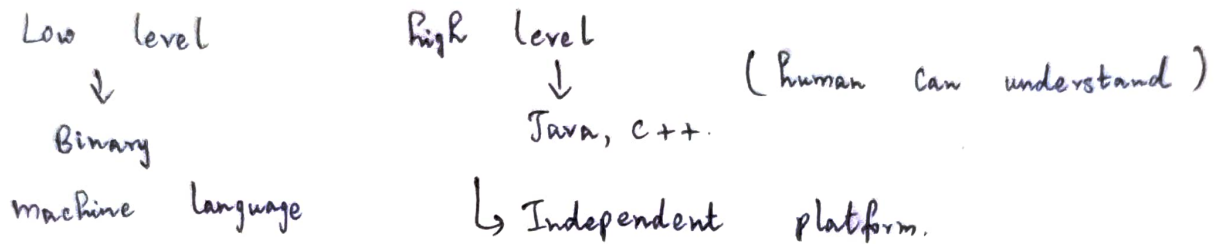

It's a high-level language. (OOP)

class based programming language

[Java save as
(Javac) → class file]

JVM (Java virtual machine)

Cross platform language.

Principle "Write Once, Run Anywhere" (WORA)

Secure platform.

Java (25+ Yr old)

Interpreter → line by line checker.

Compiler → Checks the syntax errors.

Run time error → whole output

Compile time error - syntax error

JRE - Java Runtime environment

JDK - Java development kit.

JIT - Just in Time (for speed)

(Collection of lib etc)
gives the

Given output by compile the code completely (JVM) → final outcome.

JRE → gives the lib to run the program.

Interg

(.class file) → Byte code (only understand by the Computer)

magic code - "CAFEBABE" [Secret Code for java files]

Structure of Java.

It distinguishes between uppercase & lower case MyClass ≠ myclass

Class name starts with Upper case

Syntax Rule:

Float - User friendly datatype

↳ statement end with (;) ↳ define the blocks of code { }

(Container)

Variable - hold the value (ex: bottle) data type - values (ex: water)

Types:

Primitive data type

Non-Primitive data type.

Byte - 1 Byte

Short - 2 Byte

int - 4 Byte

long - 8 Byte

float - 4 Byte

double - 8 Byte

Char - 2 Byte.

Boolean - 1 Bit (T/F)

String - sequence of character (text)

Array - collection of similar obj

Class - Blueprint to create object

Object - Instance of a class

Interface - Contract that a class must follow.

Declaring ~

dataType Variable Name = value

Local variable

Instance variable

Static variable

} Types of variables

Instance - Copies


Static = access the variable without object

Boolean is Passed → variable name

Type Casting

Convert one data type into another.

store a value of one data

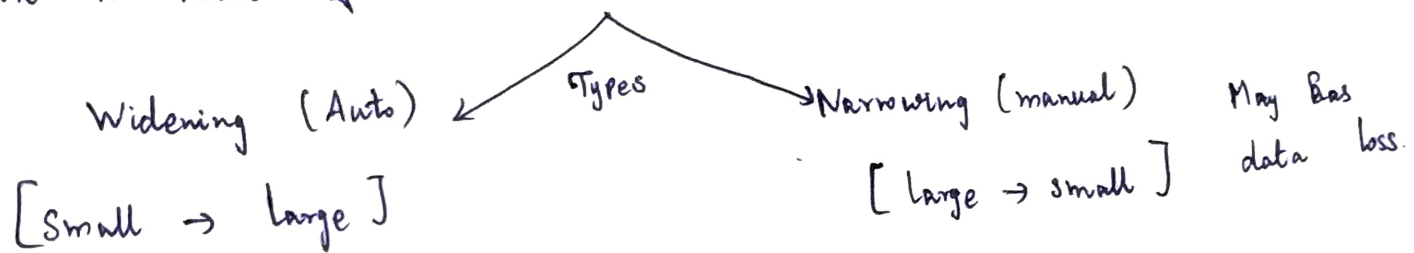

util - package

Scanner - User input.