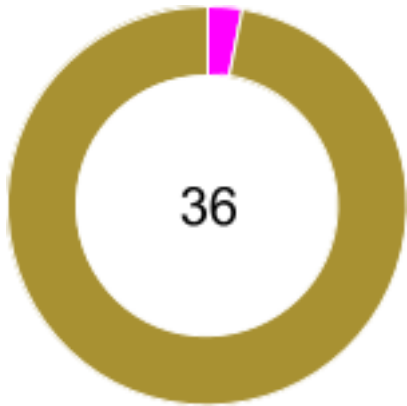
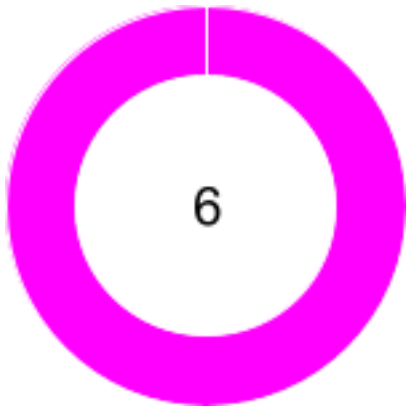


Specific_Debit_Regression_Report

11 Jun 2023, 04:03:28

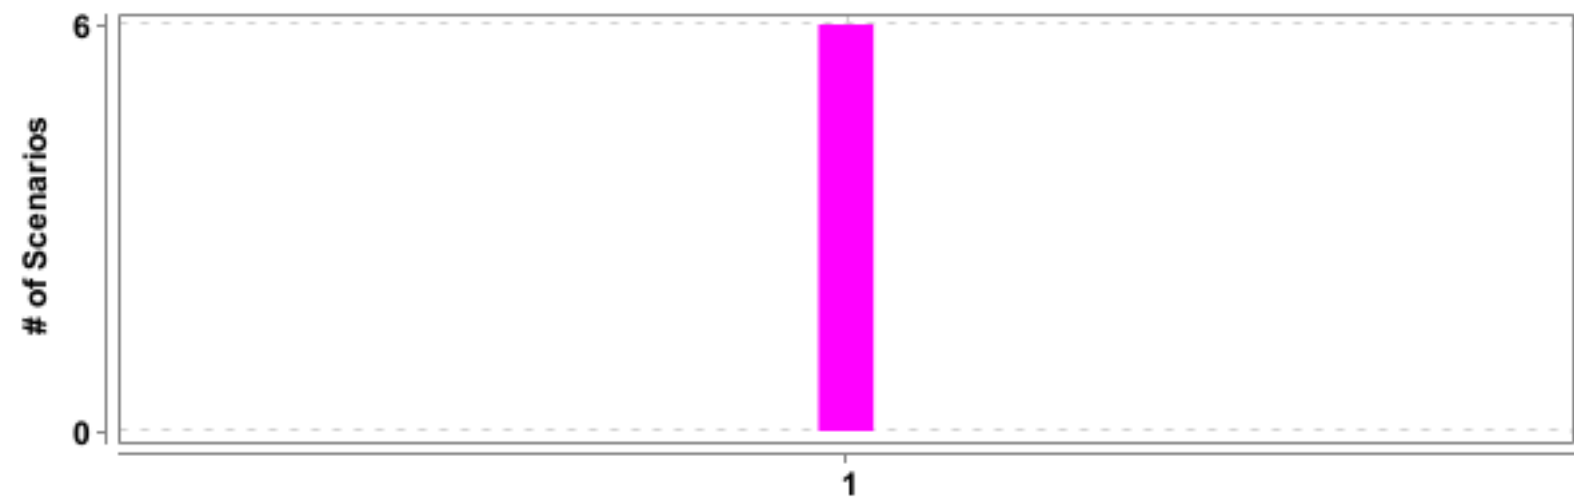
Start : Jun 11, 4:01:36.570 am	End : Jun 11, 4:03:26.937 am	Duration : 1 m 50.367 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 6 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 35



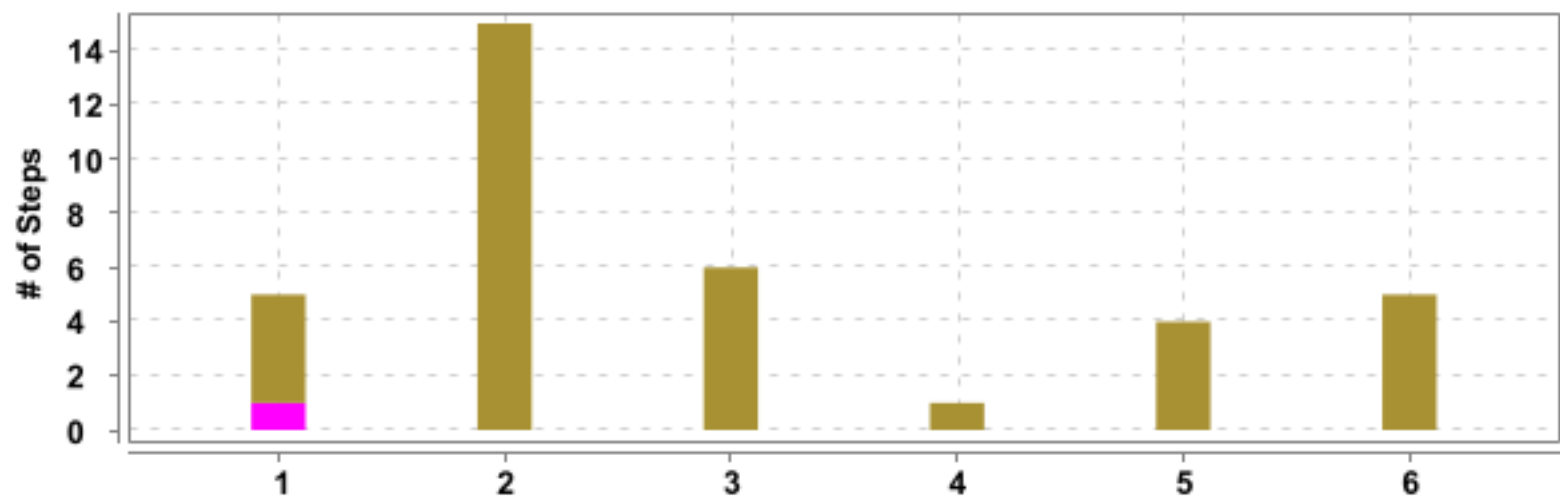
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Specific Debit</u>	1 m 50.367 s	6	0	6	0	36	0	1	35

#	Feature Name	Scenario Name
1	<u>Specific Debit</u>	<u>Successful login</u>
2		<u>Add Specific Debit</u>
3		<u>Add Specific Debit without filling in fields</u>
4		<u>Action Date</u>
5		<u>Check Submitted</u>
6		<u>Delete Specific Debit</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@SuccessfulScenario	2	0	2	0	1	0	1	0
@Done	6	0	6	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>Specific Debit</u>	6	0	6	0	1 m 50.367 s

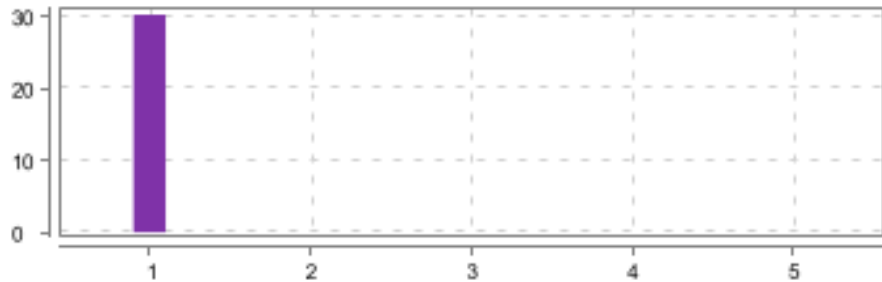



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Specific Debit	Successful login	5	0	1	4	34.015 s
2		Add Specific Debit	15	0	0	15	1 m 15.960 s
3		Add Specific Debit without filling in fields	6	0	0	6	0.045 s
4		Action Date	1	0	0	1	0.030 s
5		Check Submitted	4	0	0	4	0.020 s
6		Delete Specific Debit	5	0	0	5	0.030 s

Specific Debit

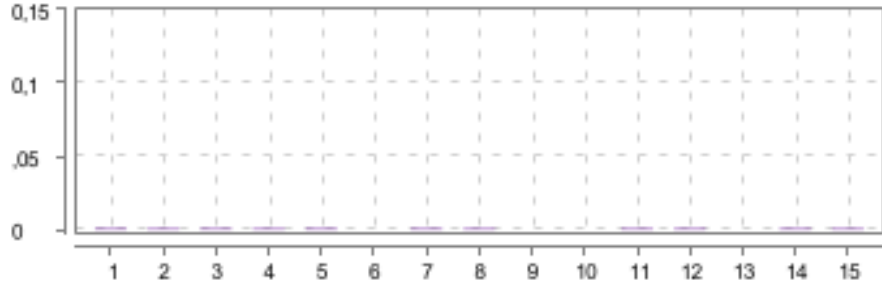

FAILED	DURATION - 1 m 50.367 s	Scenarios		Steps	
/ 4:01:36.570 am // 4:03:26.937 am /		Total - 6	6	Total - 36	36
		Pass - 0		Pass - 0	
		Fail - 6		Fail - 1	
		Skip - 0		Skip - 35	

Successful login

<div>FAILED</div> <div>DURATION - 34.015 s</div>			Steps	
/ 4:01:36.575 am // 4:02:10.590 am /			Total - 5	
Specific Debit			Pass - 0	
@SuccessfulScenario @Done			Fail - 1	
			Skip - 4	

#	Step / Hook Details	Status	Duration
	BEFORE - com.mobilife.automation.glue.StepDefinition.setUp(io.cucumber.java.Scenario)	PASSED	0.001 s
	Successful login		
1	Given I am on the login page	FAILED	30.214 s
	junit.framework.ComparisonFailure: expected:<...tratusolvecloud.com/[UserManagement/login/]> but was:<...tratusolvecloud.com/[]> at junit.framework.Assert.assertEquals(Assert.java:100) at junit.framework.Assert.assertEquals(Assert.java:107) at junit.framework.TestCase.assertEquals(TestCase.java:260) at com.mobilife.automation.glue.StepDefinition.iAmOnTheLoginPage(StepDefinition.java:141) at ?.I am on the login page(file:///C:/Users/ymxab/Documents/Software%20Engineering/MobiLife%20Regrassion/src/main/resources/features/SpecificDebit.feature:11) * Not displayable characters are replaced by '?'. 		
2	When I enter my valid username and password		
3	And click the "Login" button		
4	Then I should be redirected to the homepage		
5	And see a welcome message with my "Welcome"		

Add Specific Debit

<div>FAILED</div> <div>DURATION - 1 m 15.960 s</div>			<div>Steps</div> <div>Total - 15</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 15</div>	
/ 4:02:10.673 am // 4:03:26.633 am /				
Specific Debit				
@SuccessfulScenario @Done				

#	Step / Hook Details	Status	Duration
	BEFORE - com.mobilife.automation.glue.StepDefinition.initializeObjects() <pre> org.springframework.jdbc CannotGetJdbcConnectionException: Failed to obtain JDBC Connection at org.springframework.jdbc.datasource.DataSourceUtils.getConnection(DataSourceUtils.java:83) at org.springframework.jdbc.core.JdbcTemplate.execute(JdbcTemplate.java:646) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:713) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:744) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:757) at org.springframework.jdbc.core.JdbcTemplate.queryForObject(JdbcTemplate.java:886) at com.mobilife.automation.glue.StepDefinition.initializeObjects(StepDefinition.java:100) Caused by: com.mysql.cj.jdbc.exceptions.CommunicationsException: Communications link failure The last packet sent successfully to the server was 0 milliseconds ago. The driver has not received any packets from the server. at com.mysql.cj.jdbc.exceptions.SQLExceptionsMapping.createCommunicationsException(SQLException.java:175) at com.mysql.cj.jdbc.exceptions.SQLExceptionsMapping.translateException(SQLExceptionsMapping.java:64) at com.mysql.cj.jdbc.ConnectionImpl.createNewIO(ConnectionImpl.java:825) at com.mysql.cj.jdbc.ConnectionImpl.<init>(ConnectionImpl.java:446) at com.mysql.cj.jdbc.ConnectionImpl.getInstance(ConnectionImpl.java:239) at com.mysql.cj.jdbc.NonRegisteringDriver.connect(NonRegisteringDriver.java:188) at java.sql/java.sql.DriverManager.getConnection(DriverManager.java:683) at java.sql/java.sql.DriverManager.getConnection(DriverManager.java:191) at org.springframework.jdbc.datasource.DriverManagerDataSource.getConnectionFromDriverManager(DriverManagerDataSource.java:155) at org.springframework.jdbc.datasource.DriverManagerDataSource.getConnectionFromDriver(DriverManagerDataSource.java:146) at org.springframework.jdbc.datasource.AbstractDriverBasedDataSource.getConnectionFromDriver(AbstractDriverBasedDataSource. java:205) at org.springframework.jdbc.datasource.AbstractDriverBasedDataSource.getConnection(AbstractDriverBasedDataSource.java:169) at org.springframework.jdbc.datasource.DataSourceUtils.fetchConnection(DataSourceUtils.java:159) at org.springframework.jdbc.datasource.DataSourceUtils.doGetConnection(DataSourceUtils.java:117) at org.springframework.jdbc.datasource.DataSourceUtils.getConnection(DataSourceUtils.java:80) at org.springframework.jdbc.core.JdbcTemplate.execute(JdbcTemplate.java:646) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:713) </pre>	FAILED	1 m 15.857 s

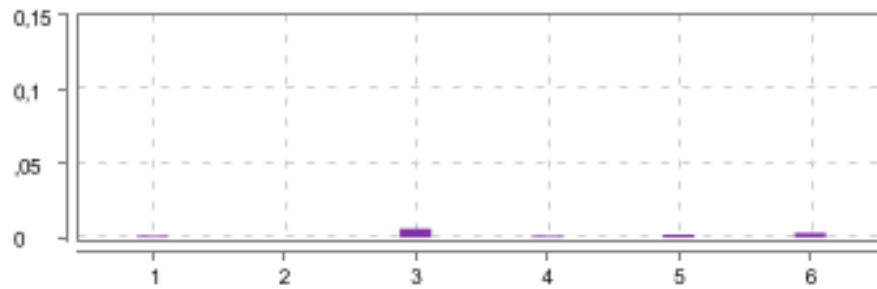

#	Step / Hook Details	Status	Duration
	at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:744) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:757) at org.springframework.jdbc.core.JdbcTemplate.queryForObject(JdbcTemplate.java:886) at com.mobilife.automation.glue.StepDefinition.initializeObjects(StepDefinition.java:100) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)		

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55) Caused by: com.mysql.cj.exceptions.CJCommunicationsException: Communications link failure The last packet sent successfully to the server was 0 milliseconds ago. The driver has not received any packets from the server. at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:62) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:105) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:150) at com.mysql.cj.exceptions.ExceptionFactory.createCommunicationsException(ExceptionFactory.java:166) at com.mysql.cj.protocol.a.NativeProtocol.negotiateSSLConnection(NativeProtocol.java:379) at com.mysql.cj.protocol.a.NativeAuthenticationProvider.connect(NativeAuthenticationProvider.java:206) at com.mysql.cj.protocol.a.NativeProtocol.connect(NativeProtocol.java:1430) at com.mysql.cj.NativeSession.connect(NativeSession.java:134) at com.mysql.cj.jdbc.ConnectionImpl.connectOneTryOnly(ConnectionImpl.java:945) at com.mysql.cj.jdbc.ConnectionImpl.createNewIO(ConnectionImpl.java:815) ... 66 more Caused by: java.net.SocketException: An established connection was aborted by the software in your host machine at java.base/sun.nio.ch.NioSocketImpl.implRead(NioSocketImpl.java:315) at java.base/sun.nio.ch.NioSocketImpl.read(NioSocketImpl.java:340) at java.base/sun.nio.ch.NioSocketImpl\$1.read(NioSocketImpl.java:789) at java.base/java.net.Socket\$SocketInputStream.read(Socket.java:1025) at java.base/sun.security.ssl.SSLSocketInputRecord.read(SSLSocketInputRecord.java:483) at java.base/sun.security.ssl.SSLSocketInputRecord.readHeader(SSLSocketInputRecord.java:477) at java.base/sun.security.ssl.SSLSocketInputRecord.decode(SSLSocketInputRecord.java:160) at java.base/sun.security.ssl.SSLTransport.decode(SSLTransport.java:111) at java.base/sun.security.ssl.SSLSocketImpl.decode(SSLSocketImpl.java:1506) at java.base/sun.security.ssl.SSLSocketImpl.readHandshakeRecord(SSLSocketImpl.java:1421) at java.base/sun.security.ssl.SSLSocketImpl.startHandshake(SSLSocketImpl.java:455) at java.base/sun.security.ssl.SSLSocketImpl.startHandshake(SSLSocketImpl.java:426) at com.mysql.cj.protocol.ExportControlled.performTlsHandshake(ExportControlled.java:347) at com.mysql.cj.protocol.StandardSocketFactory.performTlsHandshake(StandardSocketFactory.java:191) </p>		

#	Step / Hook Details	Status	Duration
	at com.mysql.cj.protocol.a.NativeSocketConnection.performTlsHandshake(NativeSocketConnection.java:101) at com.mysql.cj.protocol.a.NativeProtocol.negotiateSSLConnection(NativeProtocol.java:370)		
	BEFORE - com.mobilife.automation.glue.StepDefinition.setUp(io.cucumber.java.Scenario) Add Specific Debit	PASSED	0.002 s
1	Given I am on Specific Debit Tab	SKIPPED	0.001 s
2	When I Add a Specific Debit	SKIPPED	0.001 s
3	Then Specific Debit Details window appears	SKIPPED	0.001 s
4	Then Find the policy	SKIPPED	0.001 s
5	Then the policy is "Selected"	SKIPPED	0.001 s
6	Then Policy number filed is populated	SKIPPED	0.000 s
7	And Policy number is uneditable	SKIPPED	0.001 s
8	And Collection Method Should be "SSVS"	SKIPPED	0.001 s
9	And Premium Month date picker translates to MM/YY	SKIPPED	0.000 s
10	And The Amount is automatically populated	SKIPPED	0.000 s
11	And Matches the current Nett Premium	SKIPPED	0.001 s
12	And Nett Premium cannot be negative	SKIPPED	0.001 s
13	Then Enter Action Date	SKIPPED	0.000 s
14	Then Click Save	SKIPPED	0.001 s
15	And If it's after "14:30" Mobility will show an error text	SKIPPED	0.001 s
	AFTER - com.mobilife.automation.glue.StepDefinition.cleanUpScenario() org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=114.0.5735.110) Build info: version: '4.9.1', revision: 'eb2032df7f' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [c037564a8919a5dbcf996d020ec34c47, findElement {using=css selector, value=div[id='SpecificDebitModal'] div[class='modal-content']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.110, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\lymxab\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:62100}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62100/devtoo..., se:cdpVersion: 114.0.5735.110, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: c037564a8919a5dbcf996d020ec34c47 at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)	FAILED	0.072 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy43.isDisplayed(Unknown Source) at com.mobilife.automation.glue.StepDefinition.cleanUpScenario(StepDefinition.java:639) </pre>		

Add Specific Debit without filling in fields

FAILED	DURATION - 0.045 s		<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 6</div>	
/ 4:03:26.672 am // 4:03:26.717 am /				
Specific Debit				
@Done				

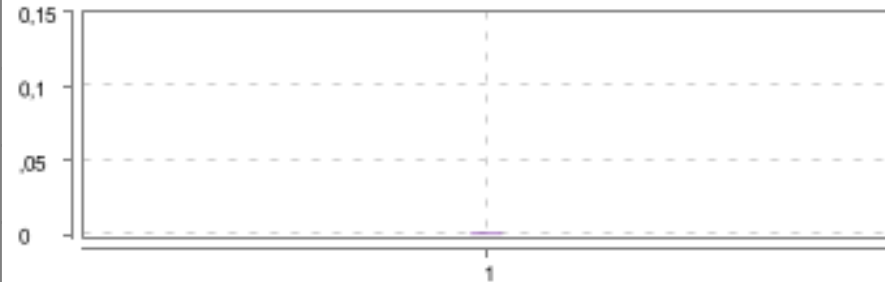

#	Step / Hook Details	Status	Duration
	BEFORE - com.mobilife.automation.glue.StepDefinition.initializeObjects() <pre> org.springframework.jdbcCannotGetJdbcConnectionException: Failed to obtain JDBC Connection at org.springframework.jdbc.datasource.DataSourceUtils.getConnection(DataSourceUtils.java:83) at org.springframework.jdbc.core.JdbcTemplate.execute(JdbcTemplate.java:646) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:713) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:744) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:757) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:815) at com.mobilife.automation.glue.StepDefinition.initializeObjects(StepDefinition.java:99) Caused by: com.mysql.cj.jdbc.exceptions.CommunicationsException: Communications link failure The last packet sent successfully to the server was 0 milliseconds ago. The driver has not received any packets from the server. at com.mysql.cj.jdbc.exceptions.SQLError.createCommunicationsException(SQLError.java:175) at com.mysql.cj.jdbc.exceptions.SQLExceptionsMapping.translateException(SQLExceptionsMapping.java:64) at com.mysql.cj.jdbc.ConnectionImpl.createNewIO(ConnectionImpl.java:825) </pre>	FAILED	0.010 s

#	Step / Hook Details	Status	Duration
	<p>at com.mysql.cj.jdbc.ConnectionImpl.<init>(ConnectionImpl.java:446)</p> <p>at com.mysql.cj.jdbc.ConnectionImpl.getInstance(ConnectionImpl.java:239)</p> <p>at com.mysql.cj.jdbc.NonRegisteringDriver.connect(NonRegisteringDriver.java:188)</p> <p>at java.sql/java.sql.DriverManager.getConnection(DriverManager.java:683)</p> <p>at java.sql/java.sql.DriverManager.getConnection(DriverManager.java:191)</p> <p>at org.springframework.jdbc.datasource.DriverManagerDataSource.getConnectionFromDriverManager(DriverManagerDataSource.java:155)</p> <p>at org.springframework.jdbc.datasource.DriverManagerDataSource.getConnectionFromDriver(DriverManagerDataSource.java:146)</p> <p>at org.springframework.jdbc.datasource.AbstractDriverBasedDataSource.getConnectionFromDriver(AbstractDriverBasedDataSource.java:205)</p> <p>at org.springframework.jdbc.datasource.AbstractDriverBasedDataSource.getConnection(AbstractDriverBasedDataSource.java:169)</p> <p>at org.springframework.jdbc.datasource.DataSourceUtils.fetchConnection(DataSourceUtils.java:159)</p> <p>at org.springframework.jdbc.datasource.DataSourceUtils.doGetConnection(DataSourceUtils.java:117)</p> <p>at org.springframework.jdbc.datasource.DataSourceUtils.getConnection(DataSourceUtils.java:80)</p> <p>at org.springframework.jdbc.core.JdbcTemplate.execute(JdbcTemplate.java:646)</p> <p>at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:713)</p> <p>at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:744)</p> <p>at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:757)</p> <p>at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:815)</p> <p>at com.mobilife.automation.glue.StepDefinition.initializeObjects(StepDefinition.java:99)</p> <p>at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104)</p> <p>at java.base/java.lang.reflect.Method.invoke(Method.java:578)</p> <p>at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)</p> <p>at io.cucumber.java.Invoker.invoke(Invoker.java:24)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)</p> <p>at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)</p> <p>at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:56)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:78)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)</p> <p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p>		

#	Step / Hook Details	Status	Duration
	<p> at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55) Caused by: com.mysql.cj.exceptions.CJCommunicationsException: Communications link failure The last packet sent successfully to the server was 0 milliseconds ago. The driver has not received any packets from the server. at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:62) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:105) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:150) at com.mysql.cj.exceptions.ExceptionFactory.createCommunicationsException(ExceptionFactory.java:166) at com.mysql.cj.protocol.a.NativeSocketConnection.connect(NativeSocketConnection.java:89) at com.mysql.cj.NativeSession.connect(NativeSession.java:121) at com.mysql.cj.jdbc.ConnectionImpl.connectOneTryOnly(ConnectionImpl.java:945) at com.mysql.cj.jdbc.ConnectionImpl.createNewIO(ConnectionImpl.java:815) ... 66 more Caused by: java.net.UnknownHostException: The requested name is valid, but no data of the requested type was found (mobility-qa.mysql.database.azure.com) </p>		

#	Step / Hook Details	Status	Duration
	at java.base/java.net.Inet6AddressImpl.lookupAllHostAddr(Native Method) at java.base/java.net.Inet6AddressImpl.lookupAllHostAddr(Inet6AddressImpl.java:52) at java.base/java.net.InetAddress\$PlatformResolver.lookupByName(InetAddress.java:1061) at java.base/java.net.InetAddress.getAddressesFromNameService(InetAddress.java:1683) at java.base/java.net.InetAddress\$NameServiceAddresses.get(InetAddress.java:1004) at java.base/java.net.InetAddress.getAllByName0(InetAddress.java:1673) at java.base/java.net.InetAddress.getAllByName(InetAddress.java:1533) at com.mysql.cj.protocol.StandardSocketFactory.connect(StandardSocketFactory.java:130) at com.mysql.cj.protocol.a.NativeSocketConnection.connect(NativeSocketConnection.java:63)		
	BEFORE - com.mobilife.automation.glue.StepDefinition.setUp(io.cucumber.java.Scenario)	PASSED	0.003 s
	Add Specific Debit without filling in fields		
1	When I Add a Specific Debit	SKIPPED	0.001 s
2	Then Specific Debit Details window appears	SKIPPED	0.000 s
3	And Find the policy	SKIPPED	0.006 s
4	Then the policy is "Selected"	SKIPPED	0.001 s
5	And Click Save	SKIPPED	0.002 s
6	Then Error message will show below the empty textboxes	SKIPPED	0.003 s

Action Date

FAILED	DURATION - 0.030 s		Steps Total - 1 Pass - 0 Fail - 0 Skip - 1	
/ 4:03:26.780 am // 4:03:26.810 am /				
Specific Debit				
@Done				

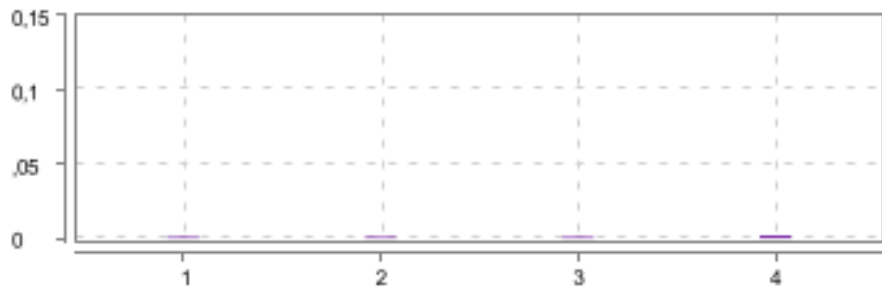

#	Step / Hook Details	Status	Duration
	BEFORE - com.mobilife.automation.glue.StepDefinition.initializeObjects()	FAILED	0.019 s
	org.springframework.jdbcCannotGetJdbcConnectionException: Failed to obtain JDBC Connection at org.springframework.jdbc.datasource.DataSourceUtils.getConnection(DataSourceUtils.java:83) at org.springframework.jdbc.core.JdbcTemplate.execute(JdbcTemplate.java:646) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:713) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:744) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:757)		

#	Step / Hook Details	Status	Duration
	<p>at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:815)</p> <p>at com.mobilife.automation.glue.StepDefinition.initializeObjects(StepDefinition.java:99)</p> <p>Caused by: com.mysql.cj.jdbc.exceptions.CommunicationsException: Communications link failure The last packet sent successfully to the server was 0 milliseconds ago. The driver has not received any packets from the server.</p> <p>at com.mysql.cj.jdbc.exceptions.SQLException.createCommunicationsException(SQLException.java:175)</p> <p>at com.mysql.cj.jdbc.exceptions.SQLExceptionsMapping.translateException(SQLExceptionsMapping.java:64)</p> <p>at com.mysql.cj.jdbc.ConnectionImpl.createNewIO(ConnectionImpl.java:825)</p> <p>at com.mysql.cj.jdbc.ConnectionImpl.<init>(ConnectionImpl.java:446)</p> <p>at com.mysql.cj.jdbc.ConnectionImpl.getInstance(ConnectionImpl.java:239)</p> <p>at com.mysql.cj.jdbc.NonRegisteringDriver.connect(NonRegisteringDriver.java:188)</p> <p>at java.sql/java.sql.DriverManager.getConnection(DriverManager.java:683)</p> <p>at java.sql/java.sql.DriverManager.getConnection(DriverManager.java:191)</p> <p>at org.springframework.jdbc.datasource.DriverManagerDataSource.getConnectionFromDriverManager(DriverManagerDataSource.java:155)</p> <p>at org.springframework.jdbc.datasource.DriverManagerDataSource.getConnectionFromDriver(DriverManagerDataSource.java:146)</p> <p>at org.springframework.jdbc.datasource.AbstractDriverBasedDataSource.getConnectionFromDriver(AbstractDriverBasedDataSource.java:205)</p> <p>at org.springframework.jdbc.datasource.AbstractDriverBasedDataSource.getConnection(AbstractDriverBasedDataSource.java:169)</p> <p>at org.springframework.jdbc.datasource.DataSourceUtils.fetchConnection(DataSourceUtils.java:159)</p> <p>at org.springframework.jdbc.datasource.DataSourceUtils.doGetConnection(DataSourceUtils.java:117)</p> <p>at org.springframework.jdbc.datasource.DataSourceUtils.getConnection(DataSourceUtils.java:80)</p> <p>at org.springframework.jdbc.core.JdbcTemplate.execute(JdbcTemplate.java:646)</p> <p>at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:713)</p> <p>at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:744)</p> <p>at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:757)</p> <p>at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:815)</p> <p>at com.mobilife.automation.glue.StepDefinition.initializeObjects(StepDefinition.java:99)</p> <p>at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104)</p> <p>at java.base/java.lang.reflect.Method.invoke(Method.java:578)</p> <p>at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)</p> <p>at io.cucumber.java.Invoker.invoke(Invoker.java:24)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)</p> <p>at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)</p> <p>at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:56)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:78)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)</p>		

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55) Caused by: com.mysql.cj.exceptions.CJCommunicationsException: Communications link failure The last packet sent successfully to the server was 0 milliseconds ago. The driver has not received any packets from the server. at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:62) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:105) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:150) </p>		

#	Step / Hook Details	Status	Duration
	at com.mysql.cj.exceptions.ExceptionFactory.createCommunicationsException(ExceptionFactory.java:166) at com.mysql.cj.protocol.a.NativeSocketConnection.connect(NativeSocketConnection.java:89) at com.mysql.cj.NativeSession.connect(NativeSession.java:121) at com.mysql.cj.jdbc.ConnectionImpl.connectOneTryOnly(ConnectionImpl.java:945) at com.mysql.cj.jdbc.ConnectionImpl.createNewIO(ConnectionImpl.java:815) ... 66 more Caused by: java.net.UnknownHostException: mobility-qa.mysql.database.azure.com at java.base/java.net.InetAddress\$CachedAddresses.get(InetAddress.java:953) at java.base/java.net.InetAddress.getAllByName0(InetAddress.java:1673) at java.base/java.net.InetAddress.getAllByName(InetAddress.java:1533) at com.mysql.cj.protocol.StandardSocketFactory.connect(StandardSocketFactory.java:130) at com.mysql.cj.protocol.a.NativeSocketConnection.connect(NativeSocketConnection.java:63)		
	BEFORE - com.mobilife.automation.glue.StepDefinition.setUp(io.cucumber.java.Scenario)	PASSED	0.001 s
	Action Date		
1	Then Enter Action Date	SKIPPED	0.001 s

Check Submitted

FAILED	DURATION - 0.020 s		Steps Total - 4 Pass - 0 Fail - 0 Skip - 4	
/ 4:03:26.852 am // 4:03:26.872 am /				
Specific Debit				
@Done				

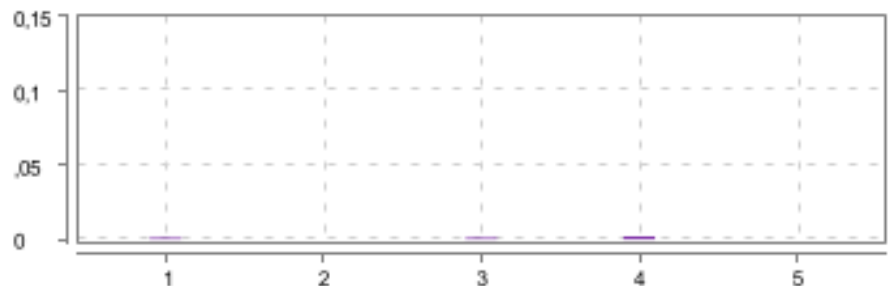

#	Step / Hook Details	Status	Duration
	BEFORE - com.mobilife.automation.glue.StepDefinition.initializeObjects()	FAILED	0.007 s
	org.springframework.jdbcCannotGetJdbcConnectionException: Failed to obtain JDBC Connection at org.springframework.jdbc.datasource.DataSourceUtils.getConnection(DataSourceUtils.java:83) at org.springframework.jdbc.core.JdbcTemplate.execute(JdbcTemplate.java:646) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:713) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:744) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:757) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:815) at com.mobilife.automation.glue.StepDefinition.initializeObjects(StepDefinition.java:99) Caused by: com.mysql.cj.jdbc.exceptions.CommunicationsException: Communications link failure The last packet sent successfully to the server was 0 milliseconds ago. The driver has not received any packets from the server.		

#	Step / Hook Details	Status	Duration
	at com.mysql.cj.jdbc.exceptions.SQLException.createCommunicationsException(SQLException.java:175) at com.mysql.cj.jdbc.exceptions.SQLExceptionsMapping.translateException(SQLExceptionsMapping.java:64) at com.mysql.cj.jdbc.ConnectionImpl.createNewIO(ConnectionImpl.java:825) at com.mysql.cj.jdbc.ConnectionImpl.<init>(ConnectionImpl.java:446) at com.mysql.cj.jdbc.ConnectionImpl.getInstance(ConnectionImpl.java:239) at com.mysql.cj.jdbc.NonRegisteringDriver.connect(NonRegisteringDriver.java:188) at java.sql/java.sql.DriverManager.getConnection(DriverManager.java:683) at java.sql/java.sql.DriverManager.getConnection(DriverManager.java:191) at org.springframework.jdbc.datasource.DriverManagerDataSource.getConnectionFromDriverManager(DriverManagerDataSource.java:155) at org.springframework.jdbc.datasource.DriverManagerDataSource.getConnectionFromDriver(DriverManagerDataSource.java:146) at org.springframework.jdbc.datasource.AbstractDriverBasedDataSource.getConnectionFromDriver(AbstractDriverBasedDataSource.java:205) at org.springframework.jdbc.datasource.AbstractDriverBasedDataSource.getConnection(AbstractDriverBasedDataSource.java:169) at org.springframework.jdbc.datasource.DataSourceUtils.fetchConnection(DataSourceUtils.java:159) at org.springframework.jdbc.datasource.DataSourceUtils.doGetConnection(DataSourceUtils.java:117) at org.springframework.jdbc.datasource.DataSourceUtils.getConnection(DataSourceUtils.java:80) at org.springframework.jdbc.core.JdbcTemplate.execute(JdbcTemplate.java:646) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:713) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:744) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:757) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:815) at com.mobilife.automation.glue.StepDefinition.initializeObjects(StepDefinition.java:99) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55) Caused by: com.mysql.cj.exceptions.CJCommunicationsException: Communications link failure The last packet sent successfully to the server was 0 milliseconds ago. The driver has not received any packets from the server. at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:62) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:105) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:150) at com.mysql.cj.exceptions.ExceptionFactory.createCommunicationsException(ExceptionFactory.java:166) at com.mysql.cj.protocol.a.NativeSocketConnection.connect(NativeSocketConnection.java:89) at com.mysql.cj.NativeSession.connect(NativeSession.java:121) at com.mysql.cj.jdbc.ConnectionImpl.connectOneTryOnly(ConnectionImpl.java:945) </p>		

#	Step / Hook Details	Status	Duration
	at com.mysql.cj.jdbc.ConnectionImpl.createNewIO(ConnectionImpl.java:815) ... 66 more Caused by: java.net.UnknownHostException: mobility-qa.mysql.database.azure.com at java.base/java.net.InetAddress\$CachedAddresses.get(InetAddress.java:953) at java.base/java.net.InetAddress.getAllByName0(InetAddress.java:1673) at java.base/java.net.InetAddress.getAllByName(InetAddress.java:1533) at com.mysql.cj.protocol.StandardSocketFactory.connect(StandardSocketFactory.java:130) at com.mysql.cj.protocol.a.NativeSocketConnection.connect(NativeSocketConnection.java:63)		
	BEFORE - com.mobilife.automation.glue.StepDefinition.setUp(io.cucumber.java.Scenario)	PASSED	0.002 s
	Check Submitted		
1	When Submitted checkbox empty(no tick) before the linked collection item is Submitted	SKIPPED	0.001 s
2	And Cannot tick Submitted checkbox	SKIPPED	0.001 s
3	And Can add notes	SKIPPED	0.001 s
4	Then Submitted checkbox ticked after the linked collection item is submitted	SKIPPED	0.002 s

Delete Specific Debit

FAILED	DURATION - 0.030 s		Steps Total - 5 Pass - 0 Fail - 0 Skip - 5	
/ 4:03:26.907 am // 4:03:26.937 am /				
Specific Debit				
@Done				

#	Step / Hook Details	Status	Duration
	BEFORE - com.mobilife.automation.glue.StepDefinition.initializeObjects()	FAILED	0.007 s
	org.springframework.jdbcCannotGetJdbcConnectionException: Failed to obtain JDBC Connection at org.springframework.jdbc.datasource.DataSourceUtils.getConnection(DataSourceUtils.java:83) at org.springframework.jdbc.core.JdbcTemplate.execute(JdbcTemplate.java:646) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:713) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:744) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:757) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:815) at com.mobilife.automation.glue.StepDefinition.initializeObjects(StepDefinition.java:99) Caused by: com.mysql.cj.jdbc.exceptions.CommunicationsException: Communications link failure The last packet sent successfully to the server was 0 milliseconds ago. The driver has not received any packets from the server. at com.mysql.cj.jdbc.exceptions.SQLError.createCommunicationsException(SQLError.java:175)		

#	Step / Hook Details	Status	Duration
	at com.mysql.cj.jdbc.exceptions.SQLExceptionsMapping.translateException(SQLExceptionsMapping.java:64) at com.mysql.cj.jdbc.ConnectionImpl.createNewIO(ConnectionImpl.java:825) at com.mysql.cj.jdbc.ConnectionImpl.<init>(ConnectionImpl.java:446) at com.mysql.cj.jdbc.ConnectionImpl.getInstance(ConnectionImpl.java:239) at com.mysql.cj.jdbc.NonRegisteringDriver.connect(NonRegisteringDriver.java:188) at java.sql/java.sql.DriverManager.getConnection(DriverManager.java:683) at java.sql/java.sql.DriverManager.getConnection(DriverManager.java:191) at org.springframework.jdbc.datasource.DriverManagerDataSource.getConnectionFromDriverManager(DriverManagerDataSource.java:155) at org.springframework.jdbc.datasource.DriverManagerDataSource.getConnectionFromDriver(DriverManagerDataSource.java:146) at org.springframework.jdbc.datasource.AbstractDriverBasedDataSource.getConnectionFromDriver(AbstractDriverBasedDataSource.java:205) at org.springframework.jdbc.datasource.AbstractDriverBasedDataSource.getConnection(AbstractDriverBasedDataSource.java:169) at org.springframework.jdbc.datasource.DataSourceUtils.fetchConnection(DataSourceUtils.java:159) at org.springframework.jdbc.datasource.DataSourceUtils.doGetConnection(DataSourceUtils.java:117) at org.springframework.jdbc.datasource.DataSourceUtils.getConnection(DataSourceUtils.java:80) at org.springframework.jdbc.core.JdbcTemplate.execute(JdbcTemplate.java:646) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:713) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:744) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:757) at org.springframework.jdbc.core.JdbcTemplate.query(JdbcTemplate.java:815) at com.mobilife.automation.glue.StepDefinition.initializeObjects(StepDefinition.java:99) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:578) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)		

#	Step / Hook Details	Status	Duration
	<p> at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55) Caused by: com.mysql.cj.exceptions.CJCommunicationsException: Communications link failure The last packet sent successfully to the server was 0 milliseconds ago. The driver has not received any packets from the server. at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:62) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:105) at com.mysql.cj.exceptions.ExceptionFactory.createException(ExceptionFactory.java:150) at com.mysql.cj.exceptions.ExceptionFactory.createCommunicationsException(ExceptionFactory.java:166) at com.mysql.cj.protocol.a.NativeSocketConnection.connect(NativeSocketConnection.java:89) at com.mysql.cj.NativeSession.connect(NativeSession.java:121) at com.mysql.cj.jdbc.ConnectionImpl.connectOneTryOnly(ConnectionImpl.java:945) at com.mysql.cj.jdbc.ConnectionImpl.createNewIO(ConnectionImpl.java:815) </p>		

#	Step / Hook Details	Status	Duration
	... 66 more Caused by: java.net.UnknownHostException: mobility-qa.mysql.database.azure.com at java.base/java.net.InetAddress\$CachedAddresses.get(InetAddress.java:953) at java.base/java.net.InetAddress.getAllByName0(InetAddress.java:1673) at java.base/java.net.InetAddress.getAllByName(InetAddress.java:1533) at com.mysql.cj.protocol.StandardSocketFactory.connect(StandardSocketFactory.java:130) at com.mysql.cj.protocol.a.NativeSocketConnection.connect(NativeSocketConnection.java:63)		
	BEFORE - com.mobilife.automation.glue.StepDefinition.setUp(io.cucumber.java.Scenario) Delete Specific Debit org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=114.0.5735.110) Build info: version: '4.9.1', revision: 'eb2032df7f' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '20.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [c037564a8919a5dbcf996d020ec34c47, findElement {using=xpath, value=//button[@type='button']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.110, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\ymxab\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:62100}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62100/devtoo..., se:cdpVersion: 114.0.5735.110, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: c037564a8919a5dbcf996d020ec34c47 at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy43.click(Unknown Source) at com.mobilife.automation.glue.StepDefinition.setUp(StepDefinition.java:127)	FAILED	0.010 s
1	When Allow Edit Specific Debit before Submission	SKIPPED	0.001 s
2	And delete a saved specific debit before it has been submitted	SKIPPED	0.000 s
3	Then deleting a Specific Debit the 'Deleted' column in the database table gets populated	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
4	And Deny Edit Specific Debit after Submission	SKIPPED	0.002 s
5	Then Cannot delete a specific debit after it has been submitted	SKIPPED	0.000 s