


attacker won't create a container that contains seccomp security context



can't use seccomp cause etcd is in master node

May need etcd encryption key (accessible on master node fs)

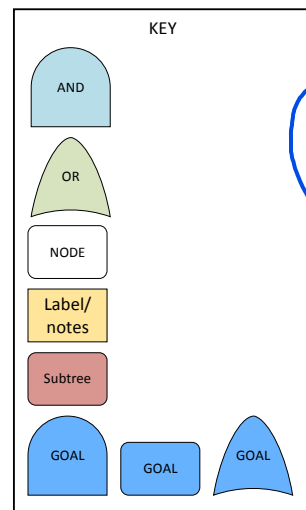