

# Verifying Featured Transition Systems using Variability Parity Games

Sjef van Loo

June 20, 2019

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Verifying transition systems</b>	<b>2</b>
2.1	Featured transition systems . . . . .	3
2.2	FTS verification question . . . . .	4
<b>3</b>	<b>Verification using parity games</b>	<b>4</b>
3.1	Parity games . . . . .	5
3.2	Creating parity games . . . . .	6
3.3	FTSs and parity games . . . . .	8
<b>4</b>	<b>Featured parity games</b>	<b>8</b>
4.1	Creating featured parity games . . . . .	9
4.2	FTS verification using FPG . . . . .	11
<b>5</b>	<b>Variability parity games</b>	<b>13</b>
5.1	Creating variability parity games . . . . .	14
5.2	FTS verification using VPG . . . . .	14
<b>6</b>	<b>Solving variability parity games</b>	<b>17</b>
6.1	Unified parity game . . . . .	17
6.1.1	Representing unified parity games . . . . .	17
6.2	Recursive algorithm . . . . .	17
6.2.1	Original Zielonka’s recursive algorithm . . . . .	17
6.2.2	Recursive algorithm for unified VPGs . . . . .	19

## 1 Introduction

Model verification techniques can be used to improve the quality of software. These techniques require the behaviour of the software to be modelled, after which the model can be checked to verify that it behaves conforming to some requirement. Different languages are proposed and well studied to express these requirements, examples are LTL, CTL, CTL\* and  $\mu$ -calculus (TODO: cite). Once the behaviour is modelled and the requirement is expressed in some language we can use modal checking techniques to determine if the model satisfies the requirement.

These techniques are well suited to model and verify the behaviour of a single software product. However software systems can be designed to have certain parts enabled or disabled. This gives rise to many software products that all behave very similar but not identical, such a collection is often called a *product family*. The differences between the products in a product family is called the *variability* of the family. A family can be verified by using the above mentioned techniques to verify every single product independently. However

this approach does not use the similarities in behaviour of these different products, an approach that would make use of the similarities could potentially be a lot more efficient.

*Labelled transition systems* (LTSs) are often used to model the behaviour of a system, while it can model behaviour well it can't model variability. Efforts to also model variability include I/O automata, modal transition systems and *featured transition systems* (FTSs) (TODO: cite). Specifically the latter is well suited to model all the different behaviours of the software products as well as the variability of the entire system in a single model.

Efforts have been made to verify requirements for entire FTSs, as well as to be able to reason about features. Notable contributions are fLTL, fCTL and fNuSMV (TODO: cite). However, as far as we know, there is no technique to verify an FTS against a  $\mu$ -calculus formula. Since the modal  $\mu$ -calculus is very expressive, it subsumes other temporal logics like LTL, CTL and CTL\*, this is desired. In this thesis we will introduce a technique to do this. We first look at LTSs, the modal  $\mu$ -calculus and FTSs. Next we will look at an existing technique to verify an LTS, namely solving *parity games*, as well as show how this technique can be used to verify an FTS by verifying every software product it describes independently. An extension to this technique is then proposed, namely solving *variability parity games*. We will formally define variability parity games and prove that solving them can be used to verify FTSs.

## 2 Verifying transition systems

We first look at labelled transition systems (LTSs) and the modal  $\mu$ -calculus and what it means to verify an LTS. The definitions below are derived from [1].

**Definition 2.1.** A labelled transition system (LTS) is a tuple  $M = (S, Act, trans, s_0)$ , where:

- $S$  is a set of states,
- $Act$  a set of actions,
- $trans \subseteq S \times Act \times S$  is the transition relation with  $(s, a, s') \in trans$  denoted by  $s \xrightarrow{a} s'$ ,
- $s_0 \in S$  is the initial state.

Consider the example in figure 1 (directly taken from [2]) of a coffee machine where we have two actions: ins (insert coin) and std (get standard sized coffee).




Figure 1: Coffee machine LTS  $C$

**Definition 2.2.** A modal  $\mu$ -calculus formula over the set of actions  $Act$  and a set of variables  $\mathcal{X}$  is defined by

$$\varphi = \top \mid \perp \mid X \mid \varphi \vee \varphi \mid \varphi \wedge \varphi \mid \langle a \rangle \varphi \mid [a] \varphi \mid \mu X. \varphi \mid \nu X. \varphi$$

with  $a \in Act$  and  $X \in \mathcal{X}$ .

We don't include negations in the language because negations can be pushed inside to the propositions, ie. the  $\top$  and  $\perp$  elements.

The modal  $\mu$ -calculus contains boolean constants  $\top$  and  $\perp$ , propositional operators  $\vee$  and  $\wedge$ , modal operators  $\langle \rangle$  and  $[]$  and fixpoint operators  $\mu$  and  $\nu$ . A formula is closed when variables only occur in the scope of a fixpoint operator for that variable.

A modal  $\mu$ -calculus formula can be interpreted with an LTS, this results in a set of states for which the formula holds.

**Definition 2.3.** For LTS  $(S, Act, trans, s_0)$  we inductively define the interpretation of a modal  $\mu$ -calculus formula  $\varphi$ , notation  $\llbracket \varphi \rrbracket^\eta$ , where  $\eta : \mathcal{X} \rightarrow \mathcal{P}(S)$  is a logical variable valuation, as a set of states where  $\varphi$  is valid, by:

$$\begin{aligned}
\llbracket \top \rrbracket^\eta &= S \\
\llbracket \perp \rrbracket^\eta &= \emptyset \\
\llbracket \varphi_1 \wedge \varphi_2 \rrbracket^\eta &= \llbracket \varphi_1 \rrbracket^\eta \cap \llbracket \varphi_2 \rrbracket^\eta \\
\llbracket \varphi_1 \vee \varphi_2 \rrbracket^\eta &= \llbracket \varphi_1 \rrbracket^\eta \cup \llbracket \varphi_2 \rrbracket^\eta \\
\llbracket \langle a \rangle \varphi \rrbracket^\eta &= \{s \in S \mid \exists s' \in S s \xrightarrow{a} s' \wedge s' \in \llbracket \varphi \rrbracket^\eta\} \\
\llbracket [a] \varphi \rrbracket^\eta &= \{s \in S \mid \forall s' \in S s \xrightarrow{a} s' \implies s' \in \llbracket \varphi \rrbracket^\eta\} \\
\llbracket \mu X. \varphi \rrbracket^\eta &= \bigcap_{f \subseteq S} \{f \mid f = \llbracket \varphi \rrbracket^{\eta[X:=f]}\} \\
\llbracket \nu X. \varphi \rrbracket^\eta &= \bigcup_{f \subseteq S} \{f \mid f = \llbracket \varphi \rrbracket^{\eta[X:=f]}\} \\
\llbracket X \rrbracket^\eta &= \eta(X)
\end{aligned}$$

Given closed formula  $\varphi$ , LTS  $M = (S, Act, trans, s_0)$  and  $s \in S$  iff  $s \in \llbracket \varphi \rrbracket^\eta$  for  $M$  we say that formula  $\varphi$  holds for  $M$  in state  $s$  and write  $(M, s) \models \varphi$ . If formula  $\varphi$  holds for  $M$  in the initial state we say that formula  $\varphi$  holds for  $M$  and write  $M \models \varphi$ .

Again consider the coffee machine example (figure 1) and formula  $\varphi = \nu X. \mu Y. ([ins]Y \wedge [std]X)$  (taken from [2]) which states that action *std* must occur infinitely often over all runs. Obviously this holds for the coffee machine, therefore we have  $C \models \varphi$ .

## 2.1 Featured transition systems

A *featured transition system* (FTS) extends the LTS definition to express variability. It does so by introducing *features* and *products* into the definition. Features are options that can be enabled or disabled for the system. A product is a feature assignments, ie. a set of features that is enabled for that product. Not all products are valid, some features might be mutually exclusive while others features might always be required. To express the relation between features one can use feature diagrams as explained in [3]. Feature diagrams offer a nice way of expressing which feature assignments are valid, however for simplicity we will represent the collection of valid products simply with a set of feature assignments. Finally FTSs guard every transition with a boolean expression over the set of features.

**Definition 2.4.** [3] A *featured transition system* (FTS) is a tuple  $M = (S, Act, trans, s_0, N, P, \gamma)$ , where:

- $S, Act, trans, s_0$  are defined as in an LTS,
- $N$  is a non-empty set of features,
- $P \subseteq \mathcal{P}(N)$  is a non-empty set of products, ie. feature assignments, that are valid,
- $\gamma : trans \rightarrow \mathbb{B}(N)$  is a total function, labelling each transition with a boolean expression over the features. A product  $p \in \mathcal{P}(N)$  satisfying the boolean expression of transition  $t$  is denoted by  $p \models \gamma(t)$ . The boolean expression that is satisfied by any feature assignment is denoted by  $\top$ , ie  $p \models \top$  for any  $p$ .

A transition  $s \xrightarrow{a} s'$  and  $\gamma(s, a, s') = f$  is denoted by  $s \xrightarrow{a|f} s'$ .

Consider the example in figure 2 (directly taken from [2]) which shows an FTS for a coffee machine. For this example we have two features  $N = \{\$, \epsilon\}$  and two valid products  $P = \{\{\$\}, \{\epsilon\}\}$ .

An FTS expresses the behaviour of multiple products, we can derive the behaviour of a single product by simply removing all the transitions from the FTS for which the product doesn't satisfy the feature expression guarding the transition. We call this a *projection*.

**Definition 2.5.** [3] The *projection* of an FTS  $M = (S, Act, trans, s_0, N, P, \gamma)$  to a product  $p \in P$ , noted  $M|_p$ , is the LTS  $M' = (S, Act, trans', s_0)$ , where  $trans' = \{t \in trans \mid p \models \gamma(t)\}$ .

The coffee machine example can be projected to its two products, which results in the LTSs in figure 3.

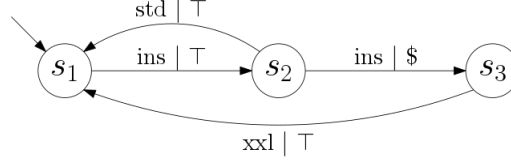


Figure 2: Coffee machine FTS  $C$

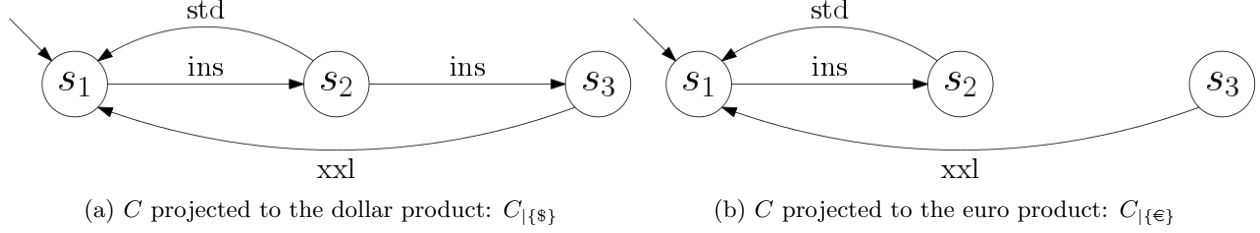


Figure 3: Projections of the coffee machine FTS

## 2.2 FTS verification question

When verifying an FTS against a modal  $\mu$ -calculus formula  $\varphi$ , we are trying to answer the question: For which products in the FTS does its projection satisfy  $\varphi$ ? Formally, given FTS  $M = (S, Act, trans, s_0, N, P, \gamma)$  and modal  $\mu$ -calculus formula  $\varphi$  we want to find  $P_s \subseteq P$  such that:

- for every  $p \in P_s$  we have  $M|_p \models \varphi$  and
- for every  $p \in P \setminus P_s$  we have  $M|_p \not\models \varphi$ .

Furthermore a counterexample for every  $p \in P \setminus P_s$  is preferred.

## 3 Verification using parity games

Verifying LTSs against a modal  $\mu$ -calculus formula can be done by solving a *parity game*. This is done by translating an LTS in combination with a formula to a parity game, the solution of the parity game provides the information needed to conclude if the model satisfies the formula. This relation is depicted in figure 4. This technique is well known and well studied, in this section we will first look at parity games, the translation from LTS and formula to a parity game and finally what we can do with this technique to verify FTS.

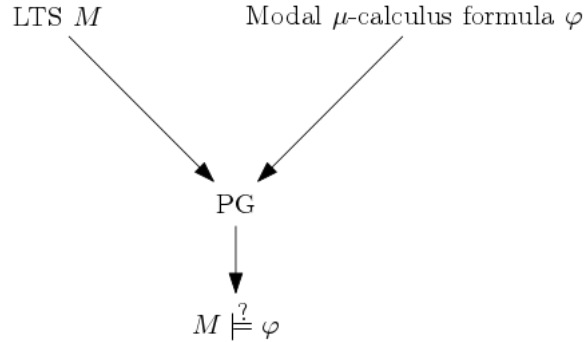


Figure 4: LTS verification using PG

### 3.1 Parity games

**Definition 3.1.** [4] A parity game (PG) is a tuple  $(V, V_0, V_1, E, \Omega)$ , where:

- $V = V_0 \cup V_1$  and  $V_0 \cap V_1 = \emptyset$ ,
- $V_0$  is the set of vertices owned by player 0,
- $V_1$  is the set of vertices owned by player 1,
- $E \subseteq V \times V$  is the edge relation,
- $\Omega : V \rightarrow \mathbb{N}$  is a priority assignment.

A parity game is played by players 0 and 1. We write  $\alpha \in \{0, 1\}$  to denote an arbitrary player. We write  $\bar{\alpha}$  to denote  $\alpha$ 's opponent, ie.  $\bar{0} = 1$  and  $\bar{1} = 0$ .

A play starts with placing a token on vertex  $v \in V$ . Player  $\alpha$  moves the token if the token is on a vertex owned by  $\alpha$ , ie.  $v \in V_\alpha$ . The token can be moved to  $w \in V$ , with  $(v, w) \in E$ . A series of moves results in a sequence of vertices, called a path. For path  $\pi$  we write  $\pi_i$  to denote the  $i^{\text{th}}$  vertex in path  $\pi$ . A play ends when the token is on vertex  $v \in V_\alpha$  and  $\alpha$  can't move the token anywhere, in this case player  $\bar{\alpha}$  wins the play. If the play results in an infinite path  $\pi$  then we determine the highest priority that occurs infinitely often in this path, formally

$$\max\{p \mid \forall_j \exists_i j < i \wedge p = \Omega(\pi_i)\}$$

If the highest priority is odd then player 1 wins, if it is even player 0 wins.




Figure 5: Parity game example

Figure 5 shows an example of a parity game. We usually depict the vertices owned by player 0 by diamonds and vertices owned by player 1 by boxes, the priority is depicted inside the vertices. If the game starts by placing a token on  $v_1$  we can consider the following exemplary paths:

- $\pi = v_1 v_3 v_5$  is won by player 1 since player 0 can't move at  $v_5$ .
- $\pi = (v_1 v_2)^\omega$  is won by player 1 since the highest priority occurring infinitely often is 3.
- $\pi = v_1 v_3 (v_4)^\omega$  is won by player 0 since the highest priority occurring infinitely often is 0.

A strategy for player  $\alpha$  is a function  $\sigma : V^* V_\alpha \rightarrow V$  that maps a path ending in a vertex owned by player  $\alpha$  to the next vertex. Parity games are positionally determined [4], therefore a strategy  $\sigma : V_\alpha \rightarrow V$  that maps the current vertex to the next vertex is sufficient.

A strategy  $\sigma$  for player  $\alpha$  is winning from vertex  $v$  iff any play that results from following  $\sigma$  results in a win for player  $\alpha$ . The graph can be divided in two partitions  $W_0 \subseteq V$  and  $W_1 \subseteq V$ , called winning sets. Iff  $v \in W_\alpha$  then player  $\alpha$  has a winnigns strategy from  $v$ . Every vertex in the graph is either in  $W_0$  or  $W_1$  [4]. Furthermore finite parity games are decidable [4].

### 3.2 Creating parity games

A parity game can be created from a combination of an LTS and a modal  $\mu$ -calculus formula. To do this we introduce some auxiliary definitions regarding the modal  $\mu$ -calculus.

First we introduce the notion of unfolding, a fixpoint formula  $\mu X.\varphi$  can be unfolded resulting in formula  $\varphi$  where every occurrence of  $X$  is replaced by  $\mu X.\varphi$ , denoted by  $\varphi[X := \mu X.\varphi]$ . A fixpoint formula is equivalent to its unfolding [4], ie. for some LTS  $\llbracket \mu X.\varphi \rrbracket^\eta = \llbracket \varphi[X := \mu X.\varphi] \rrbracket^\eta$ . The same holds for the fixpoint operator  $\nu$ .

Next we define the Fischer-Ladner closure for a closed  $\mu$ -calculus formula [5, 6]. The Fischer-Ladner closure of  $\varphi$  is the set  $FL(\varphi)$  of closed formula's containing at least  $\varphi$ . Furthermore for every formula  $\psi$  in  $FL(\varphi)$  it holds that for every direct subformula  $\psi'$  of  $\psi$  there is a formula in  $FL(\varphi)$  that is equivalent to  $\psi'$ .

**Definition 3.2.** *The Fischer-Ladner closure of closed  $\mu$ -calculus formula  $\varphi$  is the smallest set  $FL(\varphi)$  satisfying the following constraints:*

- $\varphi \in FL(\varphi)$ ,
- if  $\varphi_1 \vee \varphi_2 \in FL(\varphi)$  then  $\varphi_1, \varphi_2 \in FL(\varphi)$ ,
- if  $\varphi_1 \wedge \varphi_2 \in FL(\varphi)$  then  $\varphi_1, \varphi_2 \in FL(\varphi)$ ,
- if  $\langle a \rangle \varphi' \in FL(\varphi)$  then  $\varphi' \in FL(\varphi)$ ,
- if  $[a] \varphi' \in FL(\varphi)$  then  $\varphi' \in FL(\varphi)$ ,
- if  $\mu X.\varphi' \in FL(\varphi)$  then  $\varphi'[X := \mu X.\varphi'] \in FL(\varphi)$  and
- if  $\nu X.\varphi' \in FL(\varphi)$  then  $\varphi'[X := \nu X.\varphi'] \in FL(\varphi)$ .

Finally we define alternating depth.

**Definition 3.3.** [4] *The dependency order on bound variables of  $\varphi$  is the smallest partial order such that  $X \leq_\varphi Y$  if  $X$  occurs free in  $\sigma Y.\psi$ . The alternation depth of a  $\mu$ -variable  $X$  in formula  $\varphi$  is the maximal length of a chain  $X_1 \leq_\varphi \dots \leq_\varphi X_n$  where  $X = X_1$ , variables  $X_1, X_3, \dots$  are  $\mu$ -variables and variables  $X_2, X_4, \dots$  are  $\nu$ -variables. The alternation depth of a  $\nu$ -variable is defined similarly. The alternation depth of formula  $\varphi$ , denoted  $\text{adepth}(\varphi)$ , is the maximum of the alternation depths of the variables bound in  $\varphi$ , or zero if there are no fixpoints.*

Consider the example formula  $\varphi = \nu X.\mu Y.([ins]Y \wedge [std]X)$  which states that for an LTS with  $Act = \{ins, std\}$  the action  $std$  must occur infinitely often over all runs. Since  $X$  occurs free in  $\mu Y.([ins]Y \wedge [std]X)$  we have  $\text{adepth}(Y) = 1$  and  $\text{adepth}(X) = 2$ . As shown in [4] it holds that formula  $\mu X.\psi$  has the same alternation depth as its unfolding  $\psi[X := \mu X.\psi]$ . Similarly for the greatest fixpoint.

We can now define the transformation from an LTS and a formula to a parity game.

**Definition 3.4.** [4] *LTS2PG( $M, \varphi$ ) converts LTS  $M = (S, Act, trans, s_0)$  and closed formula  $\varphi$  to a PG  $(V, V_0, V_1, E, \Omega)$ .*

*A vertex in the parity game is represented by a pair  $(s, \psi)$  where  $s \in S$  and  $\psi$  is a modal  $\mu$ -calculus formula. We will create a vertex for every state with every formula in the Fischer-Ladner closure of  $\varphi$ . We define the set of vertices:*

$$V = S \times FL(\varphi)$$

*We create the parity game with the smallest set  $E$  such that:*

- $V = V_0 \cup V_1$ ,
- $V_0 \cap V_1 = \emptyset$  and
- for every  $v = (s, \psi) \in V$  we have:
  - If  $\psi = \top$  then  $v \in V_1$ .
  - If  $\psi = \perp$  then  $v \in V_0$ .

- If  $\psi = \psi_1 \vee \psi_2$  then:
  - $v \in V_0$ ,
  - $(v, (s, \psi_1)) \in E$  and
  - $(v, (s, \psi_2)) \in E$ .
- If  $\psi = \psi_1 \wedge \psi_2$  then:
  - $v \in V_1$ ,
  - $(v, (s, \psi_1)) \in E$  and
  - $(v, (s, \psi_2)) \in E$ .
- If  $\psi = \langle a \rangle \psi'$  then  $v \in V_0$  and for every  $s \xrightarrow{a} s'$  we have  $(v, (s', \psi')) \in E$ .
- If  $\psi = [a] \psi'$  then  $v \in V_1$  and for every  $s \xrightarrow{a} s'$  we have  $(v, (s', \psi')) \in E$ .
- If  $\psi = \mu X. \psi'$  then  $(v, (s, \psi'[X := \mu X. \psi'])) \in E$ .
- If  $\psi = \nu X. \psi'$  then  $(v, (s, \psi'[X := \nu X. \psi'])) \in E$ .

Since the Fischer-Ladner formula's are closed we never get the case  $\psi = X$ .

$$\text{Finally we have } \Omega(s, \psi) = \begin{cases} 2 \lfloor \text{adepth}(X)/2 \rfloor & \text{if } \psi = \nu X. \psi' \\ 2 \lfloor \text{adepth}(X)/2 \rfloor + 1 & \text{if } \psi = \mu X. \psi' \\ 0 & \text{otherwise} \end{cases}$$




Figure 6: LTS  $M$

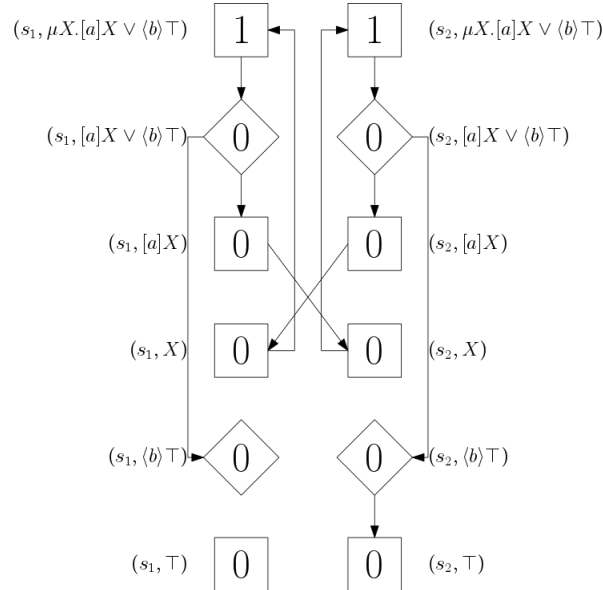


Figure 7: Parity game  $LTS2PG(M, \varphi)$

Consider LTS  $M$  in figure 6 and formula  $\varphi = \mu X. ([a]X \vee \langle b \rangle \top)$  expressing that on any path reached by  $a$ 's we can eventually do a  $b$  action. We will use this as a working example in the next few sections. The

resulting parity game is depicted in figure 7. Solving this parity game results in the following winning sets:

$$\begin{aligned}
W_0 = \{ & (s_1, \mu X.[a]X \vee \langle b \rangle \top), \\
& (s_1, [a]X \vee \langle b \rangle \top), \\
& (s_1, [a]X), \\
& (s_1, X), \\
& (s_1, \top), \\
& (s_2, \mu X.[a]X \vee \langle b \rangle \top), \\
& (s_2, [a]X \vee \langle b \rangle \top), \\
& (s_2, [a]X), \\
& (s_2, X), \\
& (s_2, \langle b \rangle \top), \\
& (s_2, \top) \} \\
W_1 = \{ & (s_1, \langle b \rangle \top) \}
\end{aligned}$$

With the strategies  $\sigma_0$  for player 0 and  $\sigma_1$  for player 1 being (vertices with one outgoing edge are omitted):

$$\begin{aligned}
\sigma_0 = \{ & (s_1, [a]X \vee \langle b \rangle \top) \mapsto (s_1, [a]X), \\
& (s_2, [a]X \vee \langle b \rangle \top) \mapsto (s_2, \langle b \rangle \top) \} \\
\sigma_1 = \{ & \}
\end{aligned}$$

State  $s$  in LTS  $M$  only satisfies  $\varphi$  iff player 0 has a winning strategy from vertex  $(s, \varphi)$ . This is formally stated in the following theorem which is proven in [4].

**Theorem 3.1.** *Given LTS  $M = (S, Act, trans, s_0)$ , modal  $\mu$ -calculus formula  $\varphi$  and state  $s \in S$  it holds that  $(M, s) \models \varphi$  iff  $s \in W_0$  for the game  $LTS2PG(M, \varphi)$ .*

### 3.3 FTSs and parity games

Using the theory we have seen thus far we can verify FTSs by verifying every projection of the FTS to a valid product. This relation is depicted in the following diagram where  $\Pi$  indicates a projection:

$$\begin{array}{ccc}
& \text{FTS} & \\
& \downarrow \Pi & \\
& \text{LTS} & \xrightarrow{\varphi} \text{PG}
\end{array}$$

As mentioned before verifying products dependently is potentially more efficient. In the next two sections we define an extension to parity games, namely *variability parity games* (VPGs) which can be used to verify an FTS. We will translate an FTS and a formula into a VPG which solution will provide the information needed to conclude for which products the FTS satisfies the formula.

## 4 Featured parity games

Before we can define variability parity games we first define *featured parity games* (FPG), featured parity games extend the definition of parity games to capture the variability represented in an FTS. It uses the same concepts as FTSs: features, products and a function that guards edges. In this section we will introduce the definition of FPGs and show that solving them answers the verification questions for FTS: For which products in the FTS does its projection satisfy  $\varphi$ ?

First we introduce the definition of an FPG:



**Definition 4.1.** A featured parity game (FPG) is a tuple  $(V, V_0, V_1, E, \Omega, N, P, \gamma)$ , where:

- $V = V_0 \cup V_1$  and  $V_0 \cap V_1 = \emptyset$ ,
- $V_0$  is the set of vertices owned by player 0,
- $V_1$  is the set of vertices owned by player 1,
- $E \subseteq V \times V$  is the edge relation,
- $\Omega : V \rightarrow \mathbb{N}$  is a priority assignment,
- $N$  is a non-empty set of features,
- $P \subseteq \mathcal{P}(N)$  is a non-empty set of products, ie. feature assignments, for which the game can be played,
- $\gamma : E \rightarrow \mathbb{B}(N)$  is a total function, labelling each edge with a Boolean expression over the features.

An FPG is played similarly to a PG, however the game is played for a specific product  $p \in P$ . Player  $\alpha$  can only move the token from  $v \in V_\alpha$  to  $w \in V$  if  $(v, w) \in E$  and  $p \models \gamma(v, w)$ .

A game played for product  $p \in P$  results in winnings sets  $W_0^p$  and  $W_1^p$ , which are defined similar to the  $W_0$  and  $W_1$  winning sets for parity games.

An FPG can simply be projected to a product  $p$  by removing the edges that are not satisfied by  $p$ .

**Definition 4.2.** The projection from FPG  $G = (V, V_0, V_1, E, \Omega, N, P, \gamma)$  to a product  $p \in P$ , noted  $G|_p$ , is the parity game  $(V, V_0, V_1, E', \Omega)$  where  $E' = \{e \in E \mid p \models \gamma(e)\}$ .

Playing FPG  $G$  for a specific product  $p \in P$  is the same as playing the PG  $G|_p$ . Any path that is valid in  $G$  for  $p$  is also valid in  $G|_p$  and vice versa. Therefore the strategies are also interchangeable, furthermore the winning sets  $W_\alpha$  for  $G|_p$  and  $W_\alpha^p$  for  $G$  are identical. Since parity games are positionally determined so are FPGs. Similarly, since finite parity games are decidable, so are finite FPGs.

We say that an FPG is solved when the winning sets for every valid product in the FPG are determined.

## 4.1 Creating featured parity games

An FPG can be created from an FTS in combination with a model  $\mu$ -calculus formula. We translate an FTS to an FPG by first creating a PG from the transition system as if there were no transition guards, next we apply the same guards to the FPG as are present in the FTS for edges that originate from transitions. The features and valid products in the FPG are identical to those in the FTS.

**Definition 4.3.**  $FTS2FPG(M, \varphi)$  converts FTS  $M = (S, Act, trans, s_0, N, P, \gamma)$  and closed formula  $\varphi$  to FPG  $(V, V_0, V_1, E, \Omega, N, P, \gamma')$ .

We have  $(V, V_0, V_1, E, \Omega) = LTS2PG((S, Act, trans, s_0), \varphi)$  and

$$\gamma'((s, \psi), (s', \psi')) = \begin{cases} \gamma(s, a, s') & \text{if } \psi = \langle a \rangle \psi' \text{ or } \psi = [a] \psi' \\ \top & \text{otherwise} \end{cases}$$

Consider our working example which we extend to an FTS depicted in figure 8, for this example we have features  $N = \{f, g\}$  and products  $P = \{\emptyset, \{f\}, \{f, g\}\}$ . We can translate this FTS with formula

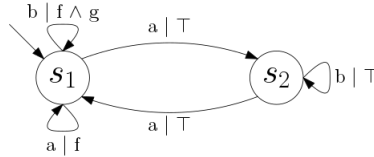


Figure 8: FTS  $M$

$\varphi = \mu X.([a]X \vee \langle b \rangle \top)$  to an FPG depicted in figure 9. As we can see from the FTS if feature  $f$  is enabled

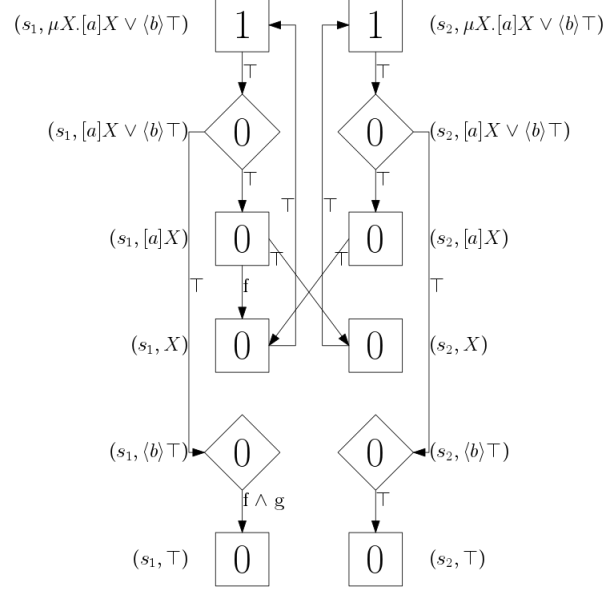


Figure 9: FPG for  $M$  and  $\varphi$

and  $g$  is disabled then we have an infinite path of  $a$ 's where  $b$  is never enabled, therefore  $\varphi$  doesn't hold for  $M_{\{f\}}$ . If  $g$  is enabled however we can always do a  $b$  so  $\varphi$  holds for  $M_{\{f,g\}}$ . As we have seen  $\varphi$  does hold for  $M_{\emptyset}$ . For the product  $\emptyset$  we have the same winning set as before:

$$\begin{aligned}
 W_0^\emptyset = \{ & (s_1, \mu X.[a]X \vee \langle b \rangle \top), \\
 & (s_1, [a]X \vee \langle b \rangle \top), \\
 & (s_1, [a]X), \\
 & (s_1, X), \\
 & (s_1, \top), \\
 & (s_2, \mu X.[a]X \vee \langle b \rangle \top), \\
 & (s_2, [a]X \vee \langle b \rangle \top), \\
 & (s_2, [a]X), \\
 & (s_2, X), \\
 & (s_2, \langle b \rangle \top), \\
 & (s_2, \top) \} \\
 W_1^\emptyset = \{ & (s_1, \langle b \rangle \top) \}
 \end{aligned}$$

In the FPG we can see that if  $f$  is enabled and  $g$  is disabled then player 1 can move the token from  $(s_1, [a]X)$  to  $(s_1, \langle b \rangle \top)$  and losing or an infinite path where

1 occurs infinitely often which is also player 1 wins. For product  $\{f\}$  we have winning sets:

$$\begin{aligned}
W_0^{\{f\}} &= \{(s_1, \top), \\
&\quad (s_2, \mu X.[a]X \vee \langle b \rangle \top), \\
&\quad (s_2, [a]X \vee \langle b \rangle \top), \\
&\quad (s_2, X), \\
&\quad (s_2, \langle b \rangle \top), \\
&\quad (s_2, \top)\} \\
W_1^{\{f\}} &= \{(s_1, \mu X.[a]X \vee \langle b \rangle \top), \\
&\quad (s_1, [a]X \vee \langle b \rangle \top), \\
&\quad (s_1, [a]X), \\
&\quad (s_1, X), \\
&\quad (s_1, \langle b \rangle \top), \\
&\quad (s_2, [a]X)\}
\end{aligned}$$

However if  $g$  is also enabled then player 0 wins in  $(s_1, \langle b \rangle \top)$ , thus giving the following winning sets:

$$\begin{aligned}
W_0^{\{f,g\}} &= \{(s_1, \mu X.[a]X \vee \langle b \rangle \top), \\
&\quad (s_1, [a]X \vee \langle b \rangle \top), \\
&\quad (s_1, [a]X), \\
&\quad (s_1, X), \\
&\quad (s_1, \langle b \rangle \top), \\
&\quad (s_1, \top), \\
&\quad (s_2, \mu X.[a]X \vee \langle b \rangle \top), \\
&\quad (s_2, [a]X \vee \langle b \rangle \top), \\
&\quad (s_2, [a]X), \\
&\quad (s_2, X), \\
&\quad (s_2, \langle b \rangle \top), \\
&\quad (s_2, \top)\} \\
W_1^{\{f,g\}} &= \{\}
\end{aligned}$$


In the next section we will show how the winning sets relate to the model verification question.

## 4.2 FTS verification using FPG

We can create an FPG from an FTS and project it to a product, resulting in a PG, this is shown in the following diagram:

$$\begin{array}{ccc}
\text{FTS} & \xrightarrow{\varphi} & \text{FPG} \\
& & \Downarrow \Pi \\
& & \text{PG}
\end{array}$$

Earlier we saw that we could also derive a PG by projecting the FTS to a product and then translation the resulting LTS to a PG, depicted by the following diagram:




We will now show that the resulting parity games are identical.

**Theorem 4.1.** *Given:*

- $\text{FTS } M = (S, \text{Act}, \text{trans}, s_0, N, P, \gamma)$ ,
- $a \text{ closed modal mu-calculus formula } \varphi$ ,
- $a \text{ product } p \in P$

*it holds that the parity games  $\text{LTS2PG}(M|_p, \varphi)$  and  $\text{FTS2FPG}(M, \varphi)|_p$  are identical.*

*Proof.* Let  $G^F = (V^F, V_0^F, V_1^F, E^F, \Omega^F, N, P, \gamma') = \text{FTS2FPG}(M, \varphi)$ , using definition 4.3, and  $G_{|p}^F = (V^F, V_0^F, V_1^F, E^{F'}, \Omega^F)$ , using definition 4.2. Furthermore we have  $M|_p = (S, \text{Act}, \text{trans}', s_0)$  and we let  $G = (V, V_0, V_1, E, \Omega) = \text{LTS2PG}(M|_p, \varphi)$ . We depict the different transition systems and games in the following diagram.

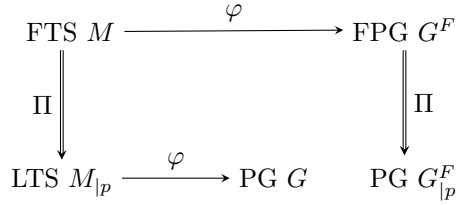

We will prove that  $G = G_{|p}^F$ . We first note that game  $G$  is created by

$$(V, V_0, V_1, E, \Omega) = \text{LTS2PG}((S, \text{Act}, \text{trans}', s_0), \varphi)$$

and the vertices, edges and priorities of game  $G^F$  are created by

$$(V^F, V_0^F, V_1^F, E^F, \Omega^F) = \text{LTS2PG}((S, \text{Act}, \text{trans}, s_0), \varphi)$$

Using the definition of  $\text{LTS2PG}$  (3.4) we find that the vertices and the priorities only depend on the states in  $S$  and the formula  $\varphi$ , since these are identical in the above two statements we immediately get  $V = V^F, V_0 = V_0^F, V_1 = V_1^F$  and  $\Omega = \Omega^F$ . The vertices and priorities don't change when an FTS is projected, therefore  $G_{|p}^F$  has the same vertices and priorities as  $G^F$ .

Now we are left with showing that  $E = E^{F'}$  in order to conclude that  $G = G_{|p}^F$ . We will do this by showing  $E \subseteq E^{F'}$  and  $E \supseteq E^{F'}$ .

First let  $e \in E$ . Note that a vertex in the parity game is represented by a pair of a state and a formula. So we can write  $e = ((s, \psi), (s', \psi'))$ . To show that  $e \in E^{F'}$  we distinguish two cases:

- If  $\psi = \langle a \rangle \psi'$  or  $\psi = [a] \psi'$  then there exists an  $a \in \text{Act}$  such that  $(s, a, s') \in \text{trans}'$ . Using the FTS projection definition (2.5) we get  $(s, a, s') \in \text{trans}$  and  $p \models \gamma(s, a, s')$ . Using the FTS2FPG definition (4.3) we find that  $\gamma'((s, \psi), (s', \psi')) = \gamma(s, a, s')$  and therefore  $p \models \gamma'((s, \psi), (s', \psi'))$ . Now using the FPG projection definition (4.2) we find  $((s, \psi), (s', \psi')) \in E^{F'}$ .
- Otherwise the existence of the edge does not depend on the  $\text{trans}$  parameter and therefore  $((s, \psi), (s', \psi')) \in E^{F'}$  if  $(s, \psi) \in V^F$ , since  $V^F = V$  we have  $(s, \psi) \in V^F$ .

We can conclude that  $E \subseteq E^{F'}$ , next we will show  $E \supseteq E^{F'}$ . Let  $e = ((s, \psi), (s', \psi')) \in E^{F'}$ . We distinguish two cases:

- If  $\psi = \langle a \rangle \psi'$  or  $\psi = [a] \psi'$  then there exists an  $a \in Act$  such that  $(s, a, s') \in trans$ . Using the FPG projection definition (4.2) we get  $p \models \gamma'(s, a, s')$ . Using the FTS2FPG definition (4.3) we get  $p \models \gamma(s, a, s')$ . Using the FTS projection definition (2.5) we get  $(s, a, s') \in trans'$  and therefore  $((s, \psi), (s', \psi')) \in E$ .
- Otherwise the existence of the edge does not depend on the  $trans$  parameter and therefore  $((s, \psi), (s', \psi')) \in E$  if  $(s, \psi) \in V$ , since  $V^F = V$  we have  $(s, \psi) \in V$ .

□

Having proven this we can visualize the relation between the different games and transition systems in the following diagram:

$$\begin{array}{ccc}
 \text{FTS} & \xrightarrow{\varphi} & \text{FPG} \\
 \Pi \downarrow & & \downarrow \Pi \\
 \text{LTS} & \xrightarrow{\varphi} & \text{PG}
 \end{array}$$

Finally we prove that solving an FTS, ie. finding winning sets for all products, answers the verification question.

**Theorem 4.2.** *Given:*

- $FTS M = (S, Act, trans, s_0, N, P, \gamma)$ ,
- *closed modal mu-calculus formula*  $\varphi$ ,
- *product*  $p \in P$  *and*
- *state*  $s \in S$

*it holds that*  $(M|_p, s) \models \varphi$  *if and only if*  $(s, \varphi) \in W_0^p$  *in*  $FTS2FPG(M, \varphi)$ .

*Proof.* The winning set  $W_\alpha^p$  is equal to winning set  $W_\alpha$  in  $FTS2FPG(M, \varphi)|_p$ , for any  $\alpha \in \{0, 1\}$ , using the FPG definition (4.1). Using theorem 4.1 we find that the game  $FTS2FPG(M, \varphi)|_p$  is equal to the game  $LTS2PG(M|_p, \varphi)$ , obviously their winning sets are also equal. Using the well studied relation between parity games and LTS verification, stated in theorem 3.1, we know that  $(M|_p, s) \models \varphi$  if and only if  $(s, \varphi) \in W_0$  in game  $LTS2PG(M|_p, \varphi)$ . Winning set  $W_\alpha^p$  is equal to  $W_\alpha$ , therefore the theorem holds. □

Revisiting our prior example we can see the theorem in action by noting that  $M|_\emptyset \models \varphi$ ,  $M|_{\{f\}} \not\models \varphi$  and  $M|_{\{f, g\}} \models \varphi$ . This is reflected by the vertex  $(s_1, \mu X. [a]X \vee \langle b \rangle \top)$  being present in  $W_0^\emptyset$  and  $W_0^{\{f, g\}}$  but not in  $W_0^{\{f\}}$ .

## 5 Variability parity games

Next we will introduce *variability parity games* (VPGs). VPGs are very similar to FPGs, however VPGs use configurations instead of features and products to express variability. This gives a syntactically more pleasant representation that is not solely tailored for FTSs. Furthermore in VPGs deadlocks are removed, by doing so VPG plays can only result in infinite paths and no longer in finite paths.

Later we will show the relation between VPGs and FTS verification, which is similar to the relation between FPGs and FTS verification. First we introduce VPGs.

**Definition 5.1.** *A variability parity game (VPG) is a tuple  $(V, V_0, V_1, E, \Omega, \mathfrak{C}, \theta)$ , where:*

- $V = V_0 \cup V_1$  *and*  $V_0 \cap V_1 = \emptyset$ ,
- $V_0$  *is the set of vertices owned by player* 0,

- $V_1$  is the set of vertices owned by player 1,
- $E \subseteq V \times V$  is the edge relation; we assume that  $E$  is total, i.e. for all  $v \in V$  there is some  $w \in V$  such that  $(v, w) \in E$ ,
- $\Omega : V \rightarrow \mathbb{N}$  is a priority assignment,
- $\mathfrak{C}$  is a non-empty finite set of configurations,
- $\theta : E \rightarrow \mathcal{P}(\mathfrak{C}) \setminus \{0\}$  is the configuration mapping, satisfying for all  $v \in V$ ,  $\bigcup \{\theta(v, w) \mid (v, w) \in E\} = \mathfrak{C}$ .

A VPG is played similarly to a PG, however the game is played for a specific configuration  $c \in \mathfrak{C}$ . Player  $\alpha$  can only move the token from  $v \in V_\alpha$  to  $w \in V$  if  $(v, w) \in E$  and  $c \in \theta(v, w)$ . Furthermore VPGs don't have deadlocks, therefore every play results in an infinite path.

A game played for configuration  $c \in \mathfrak{C}$  results in winning sets  $W_0^c$  and  $W_1^c$ , which are defined similar to the  $W_0$  and  $W_1$  winning sets for parity games.

Solving a VPG means determining winning sets for every configuration in the VPG.

**Definition 5.2.** The projection from VPG  $G = (V, V_0, V_1, E, \Omega, \mathfrak{C}, \theta)$  to a configuration  $c \in \mathfrak{C}$ , noted  $G|_c$ , is the parity game  $(V, V_0, V_1, E', \Omega)$  where  $E' = \{e \in E \mid c \in \theta(e)\}$ .

Playing VPG  $G$  for a specific configuration  $c \in \mathfrak{C}$  is the same as playing the PG  $G|_c$ . Any path that is valid in  $G$  for  $c$  is also valid in  $G|_c$  and vice versa. Therefore the strategies are also interchangeable, furthermore the winning sets  $W_\alpha$  for  $G|_c$  and  $W_\alpha^c$  for  $G$  are identical. Since parity games are positionally determined so are VPGs. Similarly, since finite parity games are decidable, so are finite VPGs.

## 5.1 Creating variability parity games

We will define a translation from an FPG to a VPG. To do so we use the set of valid products as the set of configurations. Furthermore we make the FPG deadlock free, this is done by creating two losing vertices  $l_0$  and  $l_1$  such that player  $\alpha$  loses when the token is in vertex  $l_\alpha$ . Any vertex that can't move for a configuration will get an edge that is admissible for that configuration towards one of the losing vertices.

**Definition 5.3.**  $FPG2VPG(G^F)$  converts  $FPG G^F = (V^F, V_0^F, V_1^F, E^F, \Omega^F, N, P, \gamma)$  to  $VPG G = (V, V_0, V_1, E, \Omega, \mathfrak{C}, \theta)$ .

We define  $\mathfrak{C} = P$ . We create vertices  $l_0$  and  $l_1$  and define  $V_0 = V_0^F \cup \{l_0\}$ ,  $V_1 = V_1^F \cup \{l_1\}$  and  $V = V_0 \cup V_1$ .

We construct  $E$  by first making  $E = E^F$  and adding edges  $(l_0, l_0)$  and  $(l_1, l_1)$  to  $E$ . Simultaneously we construct  $\theta$  by first making  $\theta(e) = \{p \in \mathfrak{C} \mid p \models \gamma(e)\}$  for every  $e \in E^F$ . Furthermore  $\theta(l_0, l_0) = \theta(l_1, l_1) = \mathfrak{C}$ .

Next, for every vertex  $v \in V_\alpha$  with  $\alpha = \{0, 1\}$ , we have  $C = \mathfrak{C} \setminus \bigcup \{\theta(v, w) \mid (v, w) \in E\}$ . If  $C \neq \emptyset$  then we add  $(v, l_\alpha)$  to  $E$  and make  $\theta(v, l_\alpha) = C$ . Finally we have

$$\Omega(v) = \begin{cases} 1 & \text{if } v = l_0 \\ 0 & \text{if } v = l_1 \\ \Omega^F(v) & \text{otherwise} \end{cases}$$

Again considering our previous working example we can translate the FPG shown in figure 9 to the VPG shown in figure 10. Where  $c_0$  is product  $\emptyset$ ,  $c_1$  is  $\{f\}$  and  $c_2$  is  $\{f, g\}$ .

## 5.2 FTS verification using VPG

We have shown in theorem 4.2 that we can use an FPG to verify an FTS. Next we will show that a winning set in the FPG  $M$  is the subset of the winning set in the VPG  $FPG2VPG(M)$ .

**Theorem 5.1.** Given:

- $FPG G^F = (V^F, V_0^F, V_1^F, E^F, \Omega^F, N, P, \gamma)$ ,
- product  $p \in P$

we have for winning sets  $Q_\alpha^p$  in  $G^F$  and  $W_\alpha^p$  in  $FPG2VPG(G^F)$  that  $Q_\alpha^p \subseteq W_\alpha^p$  for any  $\alpha \in \{0, 1\}$ .

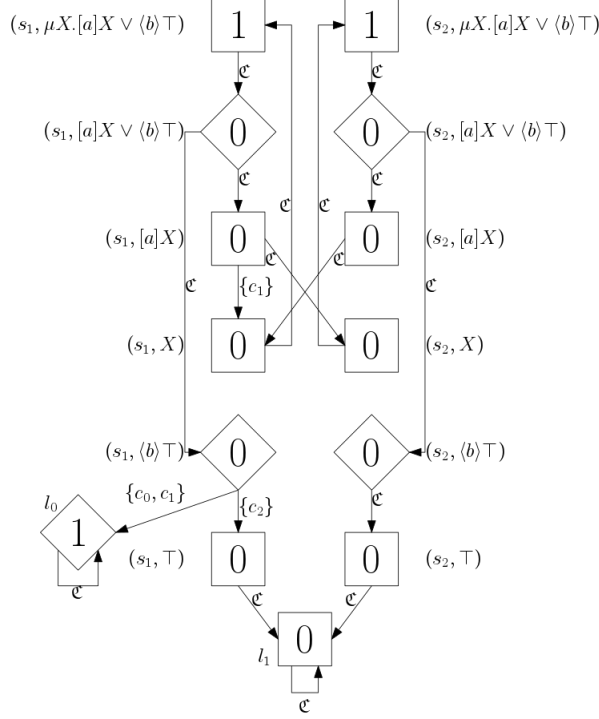


Figure 10: VPG

*Proof.* Let  $G = (V, V_0, V_1, E, \Omega, \mathfrak{C}, \theta) = FPG2VPG(G^F)$ . Consider finite play  $\pi$  that is valid in game  $G^F$  for product  $p$ . We have for every  $(\pi_i, \pi_{i+1})$  in  $\pi$  that  $(\pi_i, \pi_{i+1}) \in E^F$  and  $p \models \gamma(\pi_i, \pi_{i+1})$ . From the  $FPG2VPG$  definition (5.3) it follows that  $(\pi_i, \pi_{i+1}) \in E$  and  $p \in \theta(\pi_i, \pi_{i+1})$ . So we can conclude that path  $\pi$  is also valid in game  $G$  for configuration  $p$ . Since the play is finite the winner is determined by the last vertex  $v$  in  $\pi$ , player  $\alpha$  wins such that  $v \in V_{\bar{\alpha}}$ . Furthermore we know, because the play is finite, that there exists no  $(v, w) \in E^F$  with  $p \models \gamma(v, w)$ . From this we can conclude that  $(v, l_{\bar{\alpha}}) \in E$  and  $p \in \theta(v, l_{\bar{\alpha}})$ . Vertex  $l_{\bar{\alpha}}$  has one outgoing edge, namely to itself. So finite play  $\pi$  will in game  $G^F$  results in an infinite play  $\pi(l_{\bar{\alpha}})^\omega$ . Vertex  $l_{\bar{\alpha}}$  has a priority with the same parity as player  $\alpha$ , so player  $\alpha$  wins the infinite play in  $G$  for configuration  $p$ .


Consider infinite play  $\pi$  that is valid in game  $G^F$  for product  $p$ . As shown above this play is also valid in game  $G$  for configuration  $p$ . Since the win conditions of both games are the same the play will result in the same winner.

Consider infinite play  $\pi$  that is valid in game  $G$  for configuration  $p$ . We distinguish two cases:

- If  $l_\alpha$  doesn't occur in  $\pi$  then the path is also valid for game  $G^F$  with product  $p$  and has the same winner.
- If  $\pi = \pi'(l_\alpha)^\omega$  with no occurrence of  $l_\alpha$  in  $\pi'$  then the winner is player  $\bar{\alpha}$ . The path  $\pi'$  is valid for game  $G^F$  with product  $p$ . Let vertex  $v$  be the last vertex of  $\pi'$ . Since  $(v, l_\alpha) \in E$  and  $p \in \theta(v, l_\alpha)$  we know that there is no  $(v, w) \in E^F$  with  $p \models \gamma(v, w)$  and that vertex  $v$  is owned by player  $\alpha$ . So in game  $G^F$  player  $\alpha$  can't move at vertex  $v$  and therefore loses the game (in which case the winner is also  $\bar{\alpha}$ ).

We have shown that every path (finite or infinite) in game  $G^F$  with product  $p$  can be played in game  $G$  with configuration  $p$  and that they have the same winner. Furthermore every infinite path in game  $G$  with configuration  $p$  can be either played as an infinite path or the first part of the path can be played in  $G^F$  with product  $p$  and they have the same winner. From this we can conclude that the theorem holds.  $\square$

We can conclude the diagram depicting the relation between the different games and transition systems:

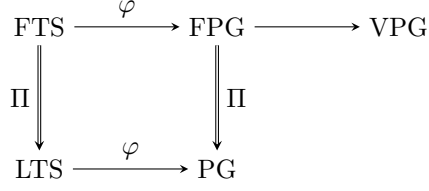

Finally we show that solving VPGs, ie. finding the winning sets for all configurations, can be used to verify FTSSs.

**Theorem 5.2.** *Given:*

- *FTS*  $M = (S, \text{Act}, \text{trans}, s_0, N, P, \gamma)$ ,
- *closed modal mu-calculus formula*  $\varphi$ ,
- *product*  $p \in P$  and
- *state*  $s \in S$

*it holds that*  $(M|_p, s) \models \varphi$  *if and only if*  $(s, \varphi) \in W_0^p$  *in*  $\text{FPG2VPG}(\text{FTS2FPG}(M, \varphi))$ .

*Proof.* Let  $W_0^p$  and  $W_1^p$  denote the winning sets for game  $\text{FPG2VPG}(\text{FTS2FPG}(M, \varphi))$ . And  $Q_0^p$  and  $Q_1^p$  denote the winning sets for game  $\text{FTS2FPG}(M, \varphi)$ .

Using theorem 4.2 we find that  $(M|_p, s) \models \varphi$  if and only if  $(s, \varphi) \in Q_0^p$ . If  $(s, \varphi) \in Q_0^p$  then we find by using theorem 5.1 that  $(s, \varphi) \in W_0^p$ . If  $(s, \varphi) \notin Q_0^p$  then  $(s, \varphi) \in Q_1^p$  and therefore  $(s, \varphi) \in W_1^p$  and  $(s, \varphi) \notin W_0^p$ .  $\square$

Using this theorem we can visualize verification of an FTS in figure 11.

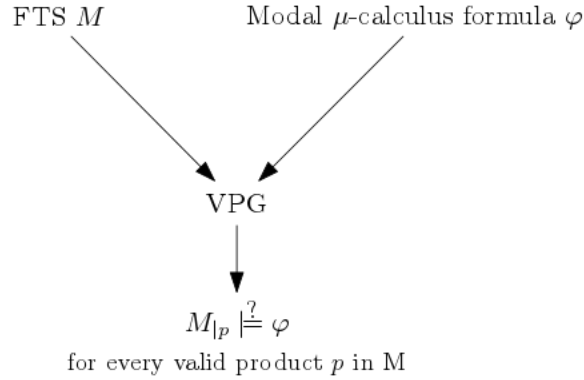


Figure 11: FTS verification using VPG



## 6 Solving variability parity games

### 6.1 Unified parity game

We can solve a VPG by solving a PG, we do this by creating a parity game that is the union of all the projections of the VPG to a configuration. We call the resulting PG the *unification* of the VPG.

**Definition 6.1.** Given VPG  $\hat{G} = (\hat{V}, \hat{V}_0, \hat{V}_1, \hat{E}, \hat{\Omega}, \mathfrak{C}, \theta)$  we define the unification of  $\hat{G}$ , denoted as  $\hat{G}_\downarrow$ , as

$$\hat{G}_\downarrow = \bigcup_{c \in \mathfrak{C}} \hat{G}_{|c}$$

where the union of two PGs is trivially defined as

$$(V, V_0, V_1, E, \Omega) \cup (V', V'_0, V'_1, E', \Omega') = (V \cup V', V_0 \cup V'_0, V_1 \cup V'_1, E \cup E', \Omega \cup \Omega')$$

We will use the hat decoration  $(\hat{G}, \hat{V}, \hat{E}, \hat{\Omega}, \hat{W})$  when referring to a VPG and use no hat decoration when referring to a PG.

Every vertex in game  $\hat{G}_\downarrow$  originates from a configuration and an original vertex. Therefore we can consider every vertex in an unification as a pair consisting of a vertex and a configuration, ie.  $V = \mathfrak{C} \times \hat{V}$ . We can consider edges in an unification similarly, ie.  $E \subseteq (\mathfrak{C} \times \hat{V}) \times (\mathfrak{C} \times \hat{V})$ . Note that for every  $((c, \hat{v}), (c', \hat{v}')) \in E$  we have  $c = c'$ .

**Theorem 6.1.** Given VPG  $\hat{G} = (\hat{V}, \hat{V}_0, \hat{V}_1, \hat{E}, \hat{\Omega}, \mathfrak{C}, \theta)$ . For winning sets  $W_0$  and  $W_1$  for game  $\hat{G}_\downarrow$  and winning sets  $\hat{W}_0^c$  and  $\hat{W}_1^c$  for some configuration  $c \in \mathfrak{C}$  it holds that

$$(c, \hat{v}) \in W_\alpha \iff \hat{v} \in \hat{W}_\alpha^c, \text{ for } \alpha \in \{0, 1\}$$

#### 6.1.1 Representing unified parity games

A set  $X \subseteq (\mathfrak{C} \times \hat{V})$  can be represented as a complete function  $f : \hat{V} \rightarrow 2^\mathfrak{C}$ . The following relation holds:

$$(c, \hat{v}) \in X \iff c \in f(\hat{v})$$

We can also represent edges as a complete function  $f : \hat{E} \rightarrow 2^\mathfrak{C}$ . The following relation holds:

$$((c, \hat{v}), (c', \hat{v}')) \in E \iff c \in f(\hat{v}, \hat{v}')$$

We write  $\lambda^\emptyset$  to denote the function that maps every element to  $\emptyset$ . We call using a set of pairs to represent vertices a *set-wise* representation and using functions to represent vertices a *function-wise* representation. We say that a function-wise representation is equivalent to a set-wise representation if the above two relations hold.

Finally we don't need a new priority assignment function, we can simply use the original priority assignment function because the following relation holds:

$$\hat{\Omega}(c, \hat{v}) = \Omega(\hat{v})$$

## 6.2 Recursive algorithm

### 6.2.1 Original Zielonka's recursive algorithm

The original Zielonka's recursive algorithm, created from the constructive proof given in [7], is defined for a total PG (ie. an infinite game). We have a few definitions that are relevant for the algorithm.

**Definition 6.2.** [7] Given parity game  $G = (V, V_0, V_1, E, \Omega)$  and a non-empty set  $U \subseteq V$  we define  $\alpha\text{-Attr}(G, U)$  such that

$$U_0 = U$$

---

**Algorithm 1** RECURSIVEPG( $PG\ G = (V, V_0, V_1, E, \Omega)$ )

---

```

1:  $m \leftarrow \min\{\Omega(v) \mid v \in V\}$ 
2:  $h \leftarrow \max\{\Omega(v) \mid v \in V\}$ 
3: if  $h = m$  or  $V = \emptyset$  then
4:   if  $h$  is even or  $V = \emptyset$  then
5:     return  $(V, \emptyset)$ 
6:   else
7:     return  $(\emptyset, V)$ 
8:   end if
9: end if
10:  $\alpha \leftarrow 0$  if  $h$  is even and 1 otherwise
11:  $U \leftarrow \{v \in V \mid \Omega(v) = h\}$ 
12:  $A \leftarrow \alpha\text{-Attr}(G, U)$ 
13:  $(W'_0, W'_1) \leftarrow \text{RECURSIVEPG}(G \setminus A)$ 
14: if  $W'_\alpha = \emptyset$  then
15:    $W_\alpha \leftarrow A \cup W'_\alpha$ 
16:    $W_{\bar{\alpha}} \leftarrow \emptyset$ 
17: else
18:    $B \leftarrow \bar{\alpha}\text{-Attr}(G, W'_{\bar{\alpha}})$ 
19:    $(W''_0, W''_1) \leftarrow \text{RECURSIVEPG}(G \setminus B)$ 
20:    $W_\alpha \leftarrow W''_\alpha$ 
21:    $W_{\bar{\alpha}} \leftarrow W''_{\bar{\alpha}} \cup B$ 
22: end if
23: return  $(W_0, W_1)$ 

```

---

For  $i \geq 0$ :

$$U_{i+1} = \{v \in V_\alpha \mid \exists v' \in V : v' \in U_i \wedge (v, v') \in E\} \\ \cup \{v \in V_{\bar{\alpha}} \mid \forall v' \in V : (v, v') \in E \implies v' \in U_i\}$$

$$\alpha\text{-Attr}(G, U) = U_k$$

such that for  $k$  we have

$$U_k = U_{k+1}$$

**Definition 6.3.** [7] Given a parity game  $G = (V, V_0, V_1, E, \Omega)$  and  $U \subseteq V$  we define the subgame  $G \setminus U$  to be the game  $(V', V'_0, V'_1, E', \Omega)$  with:

- $V' = V \setminus U$ ,
- $V'_0 = V_0 \cap V'$ ,
- $V'_1 = V_1 \cap V'$  and
- $E' = E \cap (V' \times V')$ .

We can relax the subgame definition, to a definition where we only remove vertices and not remove edges.

**Definition 6.4.** Given a parity game  $G = (V, V_0, V_1, E, \Omega)$  and  $U \subseteq V$  we define the relaxed subgame  $G \setminus U$  to be the game  $(V', V'_0, V'_1, E', \Omega)$  with:

- $V' = V \setminus U$ ,
- $V'_0 = V_0 \cap V'$  and
- $V'_1 = V_1 \cap V'$ .

We will show that using the relaxed subgame definition in the recursive algorithm gives the same result.

**Lemma 6.2.** *Using the relaxed subgame (6.4) definition in the recursive algorithm gives the same result as using the regular subgame definition (6.3).*

*Proof.* Let  $E$  be the edge relation resulting from a regular subgame operation and  $E'$  be the edge relation resulting from a relaxed subgame operation.

We first observe that the difference between the two definitions is that in  $E$  only edges exists that go from and go to vertices that are in  $V$ . In  $E'$  edges can exists that go from and/or go to vertices that are not in  $V$ . We also find  $E \subseteq E'$ .

Next we observe that the only place where edges are used in the algorithm is in the calculation of the attractor set. We will show that the attractor set calculated for  $E$  is equal to the attractor set calculated for  $E'$ .

Let  $v \in V$ , we distinguish two cases:

- Case:  $v \in V_\alpha$ .

Vertex  $v$  will only be attracted if there exists a  $v' \in V$  such that there is an edge from  $v$  to  $v'$ . Since  $v$  and  $v'$  are both in  $V$  an edge  $(v, v') \in E'$  will also exist in  $E$ , therefore the result is the same.

- Case:  $v \in V_{\bar{\alpha}}$ .

Vertex  $v$  will only be attracted if all the edges that go to  $v' \in V$  are in  $U_i$ . Since edges that go from  $v$  to  $v'' \notin V$  are not considered the result for both  $E$  and  $E'$  will be the same.

□

### 6.2.2 Recursive algorithm for unified VPGs

We can modify the recursive algorithm to work with the function representation of vertices and edges introduced in section 6.1. We have two modified operators.

**Definition 6.5.** *Given unified VPG  $G = (V, V_0, V_1, E, \Omega)$ , represented function-wise, and a non-empty set  $U \subseteq V$  we define  $\alpha$ -FAttr( $G, U$ ) such that*

$$U_0 = U$$

For  $i \geq 0$ :

$$U_{i+1}(\hat{v}) = \begin{cases} \bigcup_{\hat{v}'} (V(\hat{v}) \cap E(\hat{v}, \hat{v}') \cap U_i(\hat{v}')) & \text{if } V_\alpha(\hat{v}) \neq \emptyset \\ V(\hat{v}) \cap \bigcap_{\hat{v}'} ((\mathcal{C} \setminus E(\hat{v}, \hat{v}')) \cup U_i(\hat{v}') \cup (\mathcal{C} \setminus V(\hat{v}')) & \text{if } V_{\bar{\alpha}}(\hat{v}) \neq \emptyset \end{cases}$$

$$\alpha\text{-FAttr}(G, U) = U_k$$

such that for  $k$  we have

$$U_k = U_{k+1}$$

**Definition 6.6.** *For unified VPG  $G = (V, V_0, V_1, E, \Omega)$ , represented function-wise, and set  $X \subseteq V$  we define the subgame  $G \setminus X = (V', V'_0, V'_1, E, \Omega)$  such that:*

- $V'(\hat{v}) = V(\hat{v}) \setminus X(\hat{v})$ ,
- $V'_0(\hat{v}) = V'(\hat{v}) \cap V_0(\hat{v})$  and
- $V'_1(\hat{v}) = V'(\hat{v}) \cap V_1(\hat{v})$ .

**Lemma 6.3.** *Given unified VPG  $G = (\mathcal{V}, \mathcal{V}_0, \mathcal{V}_1, \mathcal{E}, \Omega)$  and set  $\mathcal{U} \subseteq \mathcal{V}$  the function-wise attractor  $\alpha\text{-FAttr}(G, \mathcal{U})$  is equivalent to the set-wise attractor  $\alpha\text{-Attr}(G, \mathcal{U})$  for any  $\alpha \in \{0, 1\}$ .*

*Proof.* Let  $V, V_0, V_1, E, U$  be the set-wise representation and  $V^\lambda, V_0^\lambda, V_1^\lambda, E^\lambda, U^\lambda$  be the function-wise representation of  $\mathcal{V}, \mathcal{V}_0, \mathcal{V}_1, \mathcal{E}, \mathcal{U}$  respectively.

The following properties hold by definition:

$$(c, \hat{v}) \in X \iff c \in X^\lambda(\hat{v}) \text{ for all } X \in \{V, V_0, V_1, U\}$$

---

**Algorithm 2** RECURSIVEUVPG( $PG\ G = ($

$V : \hat{V} \rightarrow 2^{\mathcal{C}},$   
 $V_0 : \hat{V} \rightarrow 2^{\mathcal{C}},$   
 $V_1 : \hat{V} \rightarrow 2^{\mathcal{C}},$   
 $E : \hat{E} \rightarrow 2^{\mathcal{C}},$   
 $\Omega : \hat{V} \rightarrow \mathbb{N}))$

---

```

1:  $m \leftarrow \min\{\Omega(\hat{v}) \mid V(\hat{v}) \neq \emptyset\}$ 
2:  $h \leftarrow \max\{\Omega(\hat{v}) \mid V(\hat{v}) \neq \emptyset\}$ 
3: if  $h = m$  or  $V(\hat{v}) = \lambda^\emptyset$  then
4:   if  $h$  is even or  $V = \lambda^\emptyset$  then
5:     return  $(V, \lambda^\emptyset)$ 
6:   else
7:     return  $(\lambda^\emptyset, V)$ 
8:   end if
9: end if
10:  $\alpha \leftarrow 0$  if  $h$  is even and 1 otherwise
11:  $U \leftarrow \{\hat{v} \mid V(\hat{v}) \neq \emptyset \wedge \Omega(\hat{v}) = h\}$ 
12:  $A \leftarrow \alpha\text{-FAttr}(G, U)$ 
13:  $(W'_0, W'_1) \leftarrow \text{RECURSIVEUVPG}(G \setminus A)$ 
14: if  $W'_\alpha = \lambda^\emptyset$  then
15:    $W_\alpha \leftarrow A \cup W'_\alpha$ 
16:    $W_{\bar{\alpha}} \leftarrow \lambda^\emptyset$ 
17: else
18:    $B \leftarrow \bar{\alpha}\text{-FAttr}(G, W'_{\bar{\alpha}})$ 
19:    $(W''_0, W''_1) \leftarrow \text{RECURSIVEUVPG}(G \setminus B)$ 
20:    $W_\alpha \leftarrow W''_\alpha$ 
21:    $W_{\bar{\alpha}} \leftarrow W''_{\bar{\alpha}} \cup B$ 
22: end if
23: return  $(W_0, W_1)$ 

```

---

$$((c, \hat{v}), (c, \hat{v}')) \in E \iff c \in E^\lambda(\hat{v}, \hat{v}')$$

Since the attractors are inductively defined and  $U_0$  and  $U_0^\lambda$  are equivalent (because  $U$  and  $U^\lambda$  are equivalent) we have to prove that for some  $i \geq 0$ , with  $U_i$  being equivalent to  $U_i^\lambda$ , the sets  $U_{i+1}$  and  $U_{i+1}^\lambda$  are equivalent. The sets  $U_{i+1}$  and  $U_{i+1}^\lambda$  are equivalent iff:

$$(c, \hat{v}) \in U_{i+1} \iff c \in U_{i+1}^\lambda(\hat{v})$$

Let  $(c, \hat{v}) \in V$ , we consider 4 cases.

- Case:  $(c, \hat{v}) \in V_\alpha$  and  $(c, \hat{v}) \in U_{i+1}$ :  
 To prove:  $c \in U_{i+1}^\lambda(\hat{v})$ .

It follows immediately that  $c \in V_\alpha^\lambda(\hat{v})$  therefore  $V_\alpha^\lambda(\hat{v}) \neq \emptyset$  so we get

$$U_{i+1}^\lambda = \bigcup_{\hat{v}'} (V^\lambda(\hat{v}) \cap E^\lambda(\hat{v}, \hat{v}') \cap U_i^\lambda(\hat{v}'))$$

There exists an  $(c', \hat{v}') \in V$  such that  $(c', \hat{v}') \in U_i$  and  $((c, \hat{v}), (c', \hat{v}')) \in E$ . Because edges don't cross configurations we can conclude that  $c' = c$ . Due to equivalence we have  $c \in V^\lambda(\hat{v})$ ,  $c \in U_i^\lambda(\hat{v}')$  and  $c \in E^\lambda(\hat{v}, \hat{v}')$ . If we fill this in in the above formula we can conclude that  $c \in U_{i+1}^\lambda(\hat{v})$ .

- Case:  $(c, \hat{v}) \in V_\alpha$  and  $(c, \hat{v}) \notin U_{i+1}$ :  
 To prove:  $c \notin U_{i+1}^\lambda(\hat{v})$ .

It follows immediately that  $c \in V_\alpha^\lambda(\hat{v})$  therefore  $V_\alpha^\lambda(\hat{v}) \neq \emptyset$  so we get

$$U_{i+1}^\lambda = \bigcup_{\hat{v}'} (V^\lambda(\hat{v}) \cap E^\lambda(\hat{v}, \hat{v}') \cap U_i^\lambda(\hat{v}'))$$

Assume  $c \in U_{i+1}^\lambda(\hat{v})$ . There must exist a  $\hat{v}'$  such that  $c \in V^\lambda(\hat{v})$ ,  $c \in E^\lambda(\hat{v}, \hat{v}')$  and  $c \in U_i^\lambda(\hat{v}')$ . Due to equivalence we have a vertex  $(c, \hat{v}) \in V$ ,  $((c, \hat{v}), (c, \hat{v}')) \in E$  and  $(c, \hat{v}') \in U_i$ . In which case  $(c, \hat{v})$  would be attracted and would be in  $U_{i+1}$  which is a contradiction.

- Case:  $(c, \hat{v}) \in V_{\bar{\alpha}}$  and  $(c, \hat{v}) \in U_{i+1}$ :  
To prove:  $c \in U_{i+1}^\lambda(\hat{v})$ .

It follows immediately that  $c \in V_\alpha^\lambda(\hat{v})$  therefore  $V_\alpha^\lambda(\hat{v}) \neq \emptyset$  so we get

$$U_{i+1}^\lambda = V^\lambda(\hat{v}) \cap \bigcap_{\hat{v}'} ((\mathfrak{C} \setminus E^\lambda(\hat{v}, \hat{v}')) \cup U_i^\lambda(\hat{v}') \cup (\mathfrak{C} \setminus V^\lambda(\hat{v}'))$$

Assume  $c \notin U_{i+1}^\lambda(\hat{v})$ . Because  $c \in V^\lambda(\hat{v})$  there must exist an  $\hat{v}$  such that

$$c \notin ((\mathfrak{C} \setminus E^\lambda(\hat{v}, \hat{v}')) \text{ and } c \notin U_i^\lambda(\hat{v}') \text{ and } c \notin (\mathfrak{C} \setminus V^\lambda(\hat{v}'))$$

which is equal to

$$c \in E^\lambda(\hat{v}, \hat{v}') \text{ and } c \notin U_i^\lambda(\hat{v}') \text{ and } c \in V^\lambda(\hat{v}')$$

By equivalence we have  $((c, \hat{v}), (c, \hat{v}')) \in E$ ,  $(c, \hat{v}') \notin U_i$  and  $(c, \hat{v}') \in V$ . Which means that  $(c, \hat{v})$  will not be attracted and  $(c, \hat{v}) \notin U_{i+1}$  which is a contradiction.

- Case:  $(c, \hat{v}) \in V_{\bar{\alpha}}$  and  $(c, \hat{v}) \notin U_{i+1}$ :  
To prove:  $c \notin U_{i+1}^\lambda(\hat{v})$ .

It follows immediately that  $c \in V_\alpha^\lambda(\hat{v})$  therefore  $V_\alpha^\lambda(\hat{v}) \neq \emptyset$  so we get

$$U_{i+1}^\lambda = V^\lambda(\hat{v}) \cap \bigcap_{\hat{v}'} ((\mathfrak{C} \setminus E^\lambda(\hat{v}, \hat{v}')) \cup U_i^\lambda(\hat{v}') \cup (\mathfrak{C} \setminus V^\lambda(\hat{v}'))$$

There must exist a  $(c, \hat{v}') \in V$  such that

$$((c, \hat{v}), (c, \hat{v}')) \in E \text{ and } (c, \hat{v}') \notin U_i$$

By equivalence we have

$$c \in V^\lambda(\hat{v}') \text{ and } c \in E^\lambda(\hat{v}, \hat{v}') \text{ and } c \notin U_i^\lambda(\hat{v}')$$

Which is equal to

$$c \notin (\mathfrak{C} \setminus V^\lambda(\hat{v}')) \text{ and } c \notin (\mathfrak{C} \setminus E^\lambda(\hat{v}, \hat{v}')) \text{ and } c \notin U_i^\lambda(\hat{v}')$$

From which we conclude

$$c \notin ((\mathfrak{C} \setminus V^\lambda(\hat{v}')) \cup c \notin (\mathfrak{C} \setminus E^\lambda(\hat{v}, \hat{v}')) \cup c \notin U_i^\lambda(\hat{v}'))$$

Therefore we have  $c \notin U_{i+1}^\lambda(\hat{v})$ .

□

**Lemma 6.4.** *Given unified VPG  $G = (\mathcal{V}, \mathcal{V}_0, \mathcal{V}_1, \mathcal{E}, \Omega)$  and set  $\mathcal{U} \subseteq \mathcal{V}$  the function-wise subgame  $G \setminus \mathcal{U}$  is equal to the relaxed set-wise subgame  $G \setminus \mathcal{U}$ .*

*Proof.* Follows immediately from the subgame definitions (6.4, 6.6) and the equivalence relation between function-wise and set-wise games. □

**Theorem 6.5.** *Given unified VPG  $\mathcal{G} = (\mathcal{V}, \mathcal{V}_0, \mathcal{V}_1, \mathcal{E}, \Omega)$  the winning sets resulting from  $\text{RECURSIVEUVPG}(\mathcal{G})$  ran over the function-wise representation of  $G$  is equal to the winning sets resulting from  $\text{RECURSIVEPG}(G)$  ran over the set-wise representation of  $G$ .*

*Proof.* Let  $G = (V, V_0, V_1, E, \Omega)$  be the set-wise representation of  $\mathcal{G}$  and  $G^\lambda = (V^\lambda, V_0^\lambda, V_1^\lambda, E^\lambda, \Omega)$  be the function-wise representation of  $\mathcal{G}$ .

Proof by induction on  $\mathcal{G}$ .

**Base**  $\mathcal{V} = \emptyset$ .

$\text{RECURSIVEUVPG}(G^\lambda)$  returns  $\lambda^\emptyset$  and  $\text{RECURSIVEPG}(G)$  returns  $\emptyset$ , these two results are equal therefore the theorem holds in this case.

**Base**  $\min\{\Omega(v) \mid v \in \mathcal{V}\} = \max\{\Omega(v) \mid v \in \mathcal{V}\}$ .

$\text{RECURSIVEUVPG}(G^\lambda)$  returns  $\lambda^\emptyset$  and  $\text{RECURSIVEPG}(G)$  returns  $\emptyset$ , these two results are equal therefore the theorem holds in this case.

**Step**

Player  $\alpha$  gets the same value in both algorithms since the highest priority is equal for both algorithms.

Set  $\{v \in V \mid \Omega(v) = h\}$  is equal to  $\{\hat{v} \mid V(\hat{v}) \neq \emptyset \wedge \Omega(\hat{v}) = h\}$  by equivalence definition. So the values for  $U$  are equal in both algorithms.

For the rest of the algorithm it is sufficient to see that attractor sets are equal if the game and input set are equal (as shown in lemma 6.3) and that the created subgames are equal (as shown in lemma 6.4). Since the subgames are equal we can apply the theorem on it by induction and conclude that the winning sets are also equal.  $\square$

We can now conclude that for VPG  $\hat{G}$  vertex  $\hat{v}$  is won by player  $\alpha$  for configuration  $c$  iff  $c \in W_\alpha(\hat{v})$  with  $(W_0, W_1) = \text{RECURSIVEUVPG}(G_\downarrow)$ .

## References

- [1] J. F. Groote and M. R. Mousavi, *Modeling and Analysis of Communicating Systems*. The MIT Press, 2014.
- [2] M. ter Beek, E. de Vink, and T. Willemse, “Family-based model checking with mcrl2,” in *Fundamental Approaches to Software Engineering* (M. Huisman and J. Rubin, eds.), Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics), (Germany), pp. 387–405, Springer, 2017.
- [3] A. Classen, M. Cordy, P.-Y. Schobbens, P. Heymans, A. Legay, and J.-F. Raskin, “Featured transition systems: Foundations for verifying variability-intensive systems and their application to ltl model checking,” *IEEE Transactions on Software Engineering*, vol. 39, pp. 1069–1089, 2013.
- [4] J. Bradfield and I. Walukiewicz, *The mu-calculus and Model Checking*, pp. 871–919. Cham: Springer International Publishing, 2018.
- [5] R. S. Streett and E. A. Emerson, “An automata theoretic decision procedure for the propositional mu-calculus,” *Information and Computation*, vol. 81, no. 3, pp. 249 – 264, 1989.
- [6] M. J. Fischer and R. E. Ladner, “Propositional dynamic logic of regular programs,” *Journal of Computer and System Sciences*, vol. 18, no. 2, pp. 194 – 211, 1979.
- [7] W. Zielonka, “Infinite games on finitely coloured graphs with applications to automata on infinite trees,” *Theoretical Computer Science*, vol. 200, no. 1, pp. 135 – 183, 1998.