

SKELETON ECOSYSTEM

SMART CONTRACT AUDIT



Wojak Fork \$WORK ERC20

0x5CaD41154aD9E0A45c3c75bD1853e7345242



Table of Contents

Table of Contents	1
Disclaimer	2
Overview	3
Creation/Audit Date	3
Verified Socials	3
Contract Functions Analysis	4
Contract Safety and Weakness	9
Detected Vulnerability Description	13
Contract Flow Graph	17
Contract Interaction Graph	18
Inheritance Graph	19
Contract Descriptions	20
Audit Scope	27

Global Disclaimer

This document serves as a disclaimer for the crypto smart contract audit conducted by Skeleton Ecosystem. The purpose of the audit was to review the codebase of the smart contracts for potential vulnerabilities and issues. It is important to note the following:

Limited Scope: The audit is based on the code and information available up to the audit completion date. It does not cover external factors, system interactions, or changes made after the audit. The audit itself can not guarantee 100% safety and can not detect common scam methods like farming and developer sell-out.

No Guarantee of Security: While we have taken reasonable steps to identify vulnerabilities, it is impossible to guarantee the complete absence of security risks or issues. The audit report provides an assessment of the contract's security as of the audit date.

Continued Development: Smart contracts and blockchain technology are evolving fields. Updates, forks, or changes to the contract post-audit may introduce new risks that were not present during the audit.

Third-party Code: If the smart contract relies on third-party libraries or code, those components were not thoroughly audited unless explicitly stated. Security of these dependencies is the responsibility of their respective developers.

Non-Exhaustive Testing: The audit involved automated analysis, manual review, and testing under controlled conditions. It is possible that certain vulnerabilities or issues may not have been identified.

Risk Evaluation: The audit report includes a risk assessment for identified vulnerabilities. It is recommended that the development team carefully reviews and addresses these risks to mitigate potential exploits.

Not Financial Advice: This audit report is not intended as financial or investment advice. Decisions regarding the use, deployment, or investment in the smart contract should be made based on a comprehensive assessment of the associated risks.

By accessing and using this audit report, you acknowledge and agree to the limitations outlined above. Skeleton Ecosystem and its auditors shall not be held liable for any direct or indirect damages resulting from the use of the audit report or the smart contract itself.

Please consult with legal, technical, and financial professionals before making any decisions related to the smart contract.

Overview

Contract Name	Work
Ticker/Symbol	Work
Blockchain	Ethereum ERC20
Contract Address	0x5CaD41154aD9E0A45c3c75bD1853e73452424fB2
Creator Address	0xc0Bf57Caf4d182c04FF89C1dc5c5bc978d792A82
Current Owner Address	0x00
Contract Explorer	https://etherscan.io/address/0x5cad41154ad9e0a45c3c75bd1853e73452424fb2#code
Compiler Version	v0.8.19+commit.7dd6d404
License	None
Optimisation	Yes with 200 Runs
Total Supply	1,000,000 WORK
Decimals	18

Creation/Audit

Contract Deployed	01.02.2024
Audit Created	20.02.2024
Audit Update	V 1.0


Verified Socials








Website	https://wojakfork.vip/
Telegram	https://t.me/wojakfork_community_portal
Twitter (X)	https://twitter.com/wojakfork


Contract Function Analysis

 Pass
  Attention Item
  Risky Item

■ Pass
 ■ Attention
 ■ Risk



Contract Verified		The contract source code is uploaded to blockchain explorer and is open source, so everybody can read it.
Contract Ownership		0x00 Sometimes referred to as the "zero address" or "dead address" and is not owned by anyone.
Buy Tax	0 %	Shows the taxes for purchase transactions. Above 10% may be considered a high tax rate. More than 50% tax rate means may not be tradable. Fee can be set!
Sell Tax	0 %	Shows the taxes for sell transactions. Above 10% may be considered a high tax rate. More than 50% tax rate means may not be tradable. Fee can be set!
Honeypot Analyse		Holder is able to buy and sell. If honeypot: The contract blocks sell transfer from holder wallet. Multiple events may cause honeypot. Trading disabled, extremely high tax
Liquidity Status		Liquidity status on 20.02.2024 100% Lp Tokens Burned
Trading Disable Functions		No Trading suspendable function found. If a suspendable code is included, the token maybe neither be bought or sold (honeypot risk). If contract is renounced this function can't be used
Set Fees function		Fee Setting function found. Contract renounced, function can not be triggered by owner. The contract owner may contain the authority to modify the transaction tax. If the transaction tax is increased to more than 49%, the tokens may not be able to be traded (honeypot risk).
Proxy Contract		Not a Proxy contract with authorisations.
Mint Function		No Mint Function detected Mint function is transparent or non-existent. Hidden mint functions may increase the amount of tokens in circulation and effect the price of the token. Owner can mint new tokens and sell.



Balance Modifier Function		<p>No Balance Modifier function found.</p> <p>If there is a function for this, the contract owner can have the authority to modify the balance of tokens at other addresses. For example revoke the bought tokens from the holders wallet. Common form of scam: You buy the token, but it's disappearing from your wallet.</p>
Blacklist Function		<p>Blacklist Setting function found. Contract renounced, function can not be triggered by owner.</p> <p>If there is a blacklist, some addresses may not be able to trade normally. Example: you buy the token and right after your Wallet getting blacklisted. Like so you will be unable to sell. Honeypot Risk.</p>
Whitelist Function		<p>Whitelist Setting function found. Contract renounced, function can not be triggered by owner.</p> <p>If there is a function for this Developer can set zero fee or no max wallet size for addresses (for example team wallets can trade without fee. Can cause farming)</p>
Hidden Owner Analysis		<p>No Hidden or multi owner with authorisation</p> <p>For contract with a hidden owner, developer can still manipulate the contract even if the ownership has been abandoned.</p>
Retrieve Ownership Function		<p>No Functions found which can retrieve ownership of the contract.</p> <p>If this function exists, it is possible for the project owner to regain ownership even after relinquishing it. Also known as fake renounce.</p>
Self Destruct Function		<p>No Self Destruct function found.</p> <p>If this function exists and is triggered, the contract will be destroyed, all functions will be unavailable, and all related assets will be erased.</p>
Specific Tax Changing Function		<p>No Specific Tax Changing Functions found.</p> <p>If it exists, the contract owner may set a very outrageous tax rate for assigned address to block it from trading. Can assign all wallets at once!</p>
Trading Cooldown Function		<p>No Trading Cooldown Function found</p> <p>If there is a trading cooldown function, the user will not be able to sell the token within a certain time or block after buying. Like a temporary honeypot.</p>
Max Transaction and Holding Modify Function		<p>Max Transaction and Holding Modify function found. Contract renounced, function can not be triggered by owner.</p> <p>If there is a function for this, the maximum trading amount or maximum position can be modified. Can cause honeypot</p>
Transaction Limiting Function		<p>No Transaction Limiter Function Found.</p> <p>The number of overall token transactions may be limited (honeypot risk)</p>

Details of Risk - Attention Items

Removing Risk of contract function based on renounced ownership

Transaction Receipt Event Logs

67

Address 0x5cad41154ad9e0a45c3c75bd1853e73452424fb2  

Name OwnershipTransferred (index_topic_1 address previousOwner, index_topic_2 address newOwner) [View Source](#)

Topics

0

0x8be0079c531659141344cd1fd0a4f28419497f9722a3daafe3b4186f6b6457e0

1: previousOwner

Dec ▾

→ 0xc08f57Caf4d182c04FF89C1dc5c5bc978d792A82

2: newOwner

Dec ▾

→ 0x00

Data 0x

Following detected contract functions serve as informational purposes about the contract. The owner has no more authorisation to trigger the following functions.

Set Fee

Contract renounced, function can not be triggered by owner.

The contract owner may contain the authority to modify the transaction tax. If the transaction tax is increased to more than 49%, the tokens may not be able to be traded (honeypot risk).

```

fttrace | funcSig
1062 function updateBuyFees(uint256 _marketingFee!, uint256 _liquidityFee!, uint256 _devFee!) external onlyOwner {
1063     buyMarketingFee = _marketingFee!;
1064     buyLiquidityFee = _liquidityFee!;
1065     buyDevFee = _devFee!;
1066     buyTotalFees = buyMarketingFee + buyLiquidityFee + buyDevFee;
1067     require(buyTotalFees <= 30, "Must keep fees at 30% or less");
1068 }
1069

fttrace | funcSig
1070 function updateSellFees(uint256 _marketingFee!, uint256 _liquidityFee!, uint256 _devFee!, uint256 _earlySellLiquidityFee!, uint256 _earlySellMarketingFee!) e
1071     sellMarketingFee = _marketingFee!;
1072     sellLiquidityFee = _liquidityFee!;
1073     sellDevFee = _devFee!;
1074     earlySellLiquidityFee = _earlySellLiquidityFee!;
1075     earlySellMarketingFee = _earlySellMarketingFee!;
1076     sellTotalFees = sellMarketingFee + sellLiquidityFee + sellDevFee;
1077     require(sellTotalFees <= 99, "Must keep fees at 99% or less");
1078 }
1079
  
```

⚠️ Max Transaction and Holding Modify Function

[Min. 1.5% Wallet Size and Min. 0,5% Transaction]

Contract renounced, function can not be triggered by owner.

If there is a function for this, the maximum trading amount or maximum position can be modified. Can cause honeypot

```

1043   ftrace | funcSig
1044   function updateMaxTxnAmount(uint256 newNum!) external onlyOwner {
1045       require(newNum! >= (totalSupply() * 5 / 1000)/1e18, "Cannot set maxTransactionAmount lower than 0.5%");
1046       maxTransactionAmount = newNum! * (10**18);
1047   }

1048   ftrace | funcSig
1049   function updateMaxWalletAmount(uint256 newNum!) external onlyOwner {
1050       require(newNum! >= (totalSupply() * 15 / 1000)/1e18, "Cannot set maxWallet lower than 1.5%");
1051       maxWallet = newNum! * (10**18);
1052   }
  
```

⚠️ Whitelist (Set Excluded Wallets)

Contract renounced, function can not be triggered by owner.

If there is a function for this Developer can set zero fee or no max wallet size for addresses (for example team wallets can trade without fee. Can cause farming)

```

1079   ftrace | funcSig
1080   function excludeFromFees(address account!, bool excluded!) public onlyOwner {
1081       _isExcludedFromFees[account!] = excluded!;
1082       emit ExcludeFromFees(account!, excluded!);
1083   }
1084
  
```

```

1053   ftrace | funcSig
1054   function excludeFromMaxTransaction(address updAdst, bool isEx!) public onlyOwner {
1055       _isExcludedMaxTransactionAmount[updAdst] = isEx!;
1056   }
  
```


⚠ Blacklist

Contract renounced, function can not be triggered by owner.

If there is a blacklist, some addresses may not be able to trade normally. Example: you buy the token and right after your Wallet getting blacklisted. Like so you will be unable to sell. Honeypot Risk.

```


1085 function blacklistAccount (address account!, bool isBlacklisted!) public onlyOwner {
1086     | blacklist[account!] = isBlacklisted!;
1087 }
1088

```

Contract Security

Total Findings: 7

- High 0
- Medium 1
- Low 5
- Info 1

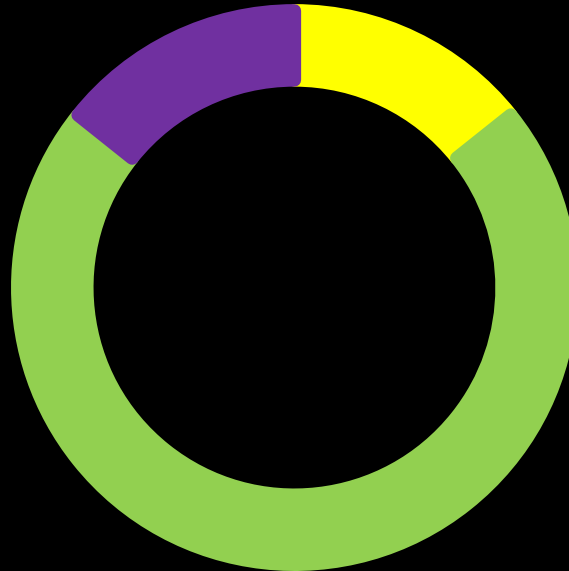

■ **High Severity Issues:** High possibility to cause problems, need to be resolved.

■ **Medium Severity Issue:** Will likely cause problems, recommended to resolve.

■ **Low Severity Issues:** Won't cause problems, but for improvement purposes could be adjusted.

■ **Informational Severity Issues:** Not harmful in any way, information for the developer team.

Contract Security

List of Found Issues

High severity Issues: (0)

Medium severity issues: (1)

- Use of Tx. Origin

Low severity issues: (5)

- Missing Events
- Long number literals
- Outdated Compiler Version
- Unchecked Array Length
- Approve of Front Running Attack

Informational severity issues: (1)

- Public Functions Should be Declared External

Contract Weakness Classification

THE SMART CONTRACT WEAKNESS CLASSIFICATION REGISTRY (SWC REGISTRY) IS AN IMPLEMENTATION OF THE WEAKNESS CLASSIFICATION SCHEME PROPOSED IN EIP-1470. IT IS LOOSELY ALIGNED TO THE TERMINOLOGIES AND STRUCTURE USED IN THE COMMON WEAKNESS ENUMERATION (CWE) WHILE OVERLAYING A WIDE RANGE OF WEAKNESS VARIANTS THAT ARE

ID	Description	AI	Manual	Result
SWC-100	Function Default Visibility	Passed	Passed	Passed
SWC-101	Integer Overflow and Underflow	Passed	Passed	Passed
SWC-102	Outdated Compiler Version	low	Passed	Passed
SWC-103	Floating Pragma	low	Passed	Passed
SWC-104	Unchecked Call Return Value	Passed	Passed	Passed
SWC-105	Unprotected Ether Withdrawal	Passed	Passed	Passed
SWC-106	Unprotected SELFDESTRUCT Instruction	Passed	Passed	Passed
SWC-107	Reentrancy	Passed	Passed	Passed
SWC-108	State Variable Default Visibility	Passed	Passed	Passed
SWC-109	Uninitialized Storage Pointer	Passed	Passed	Passed
SWC-110	Assert Violation	Passed	Passed	Passed
SWC-111	Use of Deprecated Solidity Functions	Passed	Passed	Passed
SWC-112	Delegatecall to Untrusted Callee	Passed	Passed	Passed
SWC-113	DoS with Failed Call	Passed	Passed	Passed
SWC-114	Transaction Order Dependence	Passed	Passed	Passed
SWC-115	Authorization through tx.origin	High	Medium	Medium
SWC-116	Block values as a proxy for time	Passed	Passed	Passed
SWC-117	Signature Malleability	Passed	Passed	Passed
SWC-118	Incorrect Constructor Name	Passed	Passed	Passed
SWC-119	Shadowing State Variables	Passed	Passed	Passed
SWC-120	Weak Sources of Randomness from Chain Attributes	Passed	Passed	Passed

SWC-121	Missing Protection against Signature Replay Attacks	Passed	Passed	Passed
SWC-122	Lack of Proper Signature Verification	Passed	Passed	Passed
SWC-123	Requirement Violation	Passed	Passed	Passed
SWC-124	Write to Arbitrary Storage Location	Passed	Passed	Passed
SWC-125	Incorrect Inheritance Order	Passed	Passed	Passed
SWC-126	Insufficient Gas Griefing	Passed	Passed	Passed
SWC-127	Arbitrary Jump with Function Type Variable	Passed	Passed	Passed
SWC-128	DoS With Block Gas Limit	Passed	Passed	Passed
SWC-129	Typographical Error	low	Passed	Passed
SWC-130	Right-To-Left-Override control character (U+202E)	Passed	Passed	Passed
SWC-131	Presence of unused variables	Passed	Passed	Passed
SWC-132	Unexpected Ether balance	Passed	Passed	Passed
SWC-133	Hash Collisions With Multiple Variable Length Arguments	Passed	Passed	Passed
SWC-134	Message call with hardcoded gas amount	Passed	Passed	Passed
SWC-135	Code With No Effects	Passed	Passed	Passed
SWC-136	Unencrypted Private Data On-Chain	Passed	Passed	Passed

Detected High and Medium Severity Vulnerability Description.

⚠ Use of tx. origin (2 Item)

Item: 1	Location:	Line 1146	Severity:	■ Medium
Item: 2	Location:	Line 1147	Severity:	■ Medium

Function	In Solidity, tx.origin is a global variable that returns the address of the account that sent the transaction. Using the variable for authorization could make a contract vulnerable. For example, if an authorized account calls a malicious contract which triggers it to call the vulnerable contract that passes an authorization check since tx.origin returns the original sender of the transaction which in this case is the authorized account.
Remediation	tx.origin should not be used for authorization in smart contracts. It does have some legitimate use cases, for example, To prevent external contracts from calling the current contract, you can implement a require of the form require(tx.origin == msg.sender). This prevents intermediate contracts from calling the current contract, thus limiting the contract to regular codeless addresses.

⚠️ Approve of Front Running Attack (Sandwich bots) (2 Item)

Item: 1	Location:	Line 278-281	Severity: ■ Low
---------	-----------	--------------	--

Function	<p>The approve() method overrides current allowance regardless of whether the spender already used it or not, so there is no way to increase or decrease allowance by a certain value atomically unless the token owner is a smart contract, not an account. This can be abused by a token receiver when they try to withdraw certain tokens from the sender's account.</p> <p>Meanwhile, if the sender decides to change the amount and sends another approve transaction, the receiver can notice this transaction before it's mined and can extract tokens from both the transactions, therefore, ending up with tokens from both the transactions. This is a front-running attack affecting the ERC20 Approve function.</p> <p>The function approve can be front-run by abusing the <code>_approve</code> function.</p>
Remediation	<ol style="list-style-type: none"> 1. Introduce mechanisms that limit the maximum acceptable gas price for transactions. This can help prevent front-runners from drastically increasing the gas fees to prioritize their transactions. 2. Use transaction taxes to prevent against front-run attack

```

277 | /*
    | itrace | funcSig
278 | function approve(address spender, uint256 amount) public virtual override returns (bool) {
279 |     _approve(_msgSender(), spender, amount);
280 |     return true;
281 | }
282 |
  
```


Item: 2	Location:	Line 296-304	Severity: ■ Low
---------	-----------	--------------	--

Function	<p>The transferFrom() method overrides current allowance regardless of whether the spender already used it or not, so there is no way to increase or decrease allowance by a certain value atomically unless the token owner is a smart contract, not an account.</p> <p>This can be abused by a token receiver when they try to withdraw certain tokens from the sender's account.</p> <p>Meanwhile, if the sender decides to change the amount and sends another approve transaction, the receiver can notice this transaction before it's mined and can extract tokens from both the transactions, therefore, ending up with tokens from both the transactions. This is a front-running attack affecting the ERC20 Approve function.</p> <p>The function approve can be front-run by abusing the _approve function.</p>
Remedation	<ol style="list-style-type: none"> 1. Introduce mechanisms that limit the maximum acceptable gas price for transactions. This can help prevent front-runners from drastically increasing the gas fees to prioritize their transactions. 2. Use transaction taxes to prevent against front-run attack

```

fttrace | funcSig
296 function transferFrom(
297     address sender!,
298     address recipient!,
299     uint256 amount!
300 ) public virtual override returns (bool) {
301     _transfer(sender!, recipient!, amount!);
302     _approve(sender!, _msgSender(), allowances[sender!][_msgSender()].sub(amount!, "ERC20: transfer amount exceeds allowance"));
303     return true;
304 }
305
  
```



Contract Flow Graph

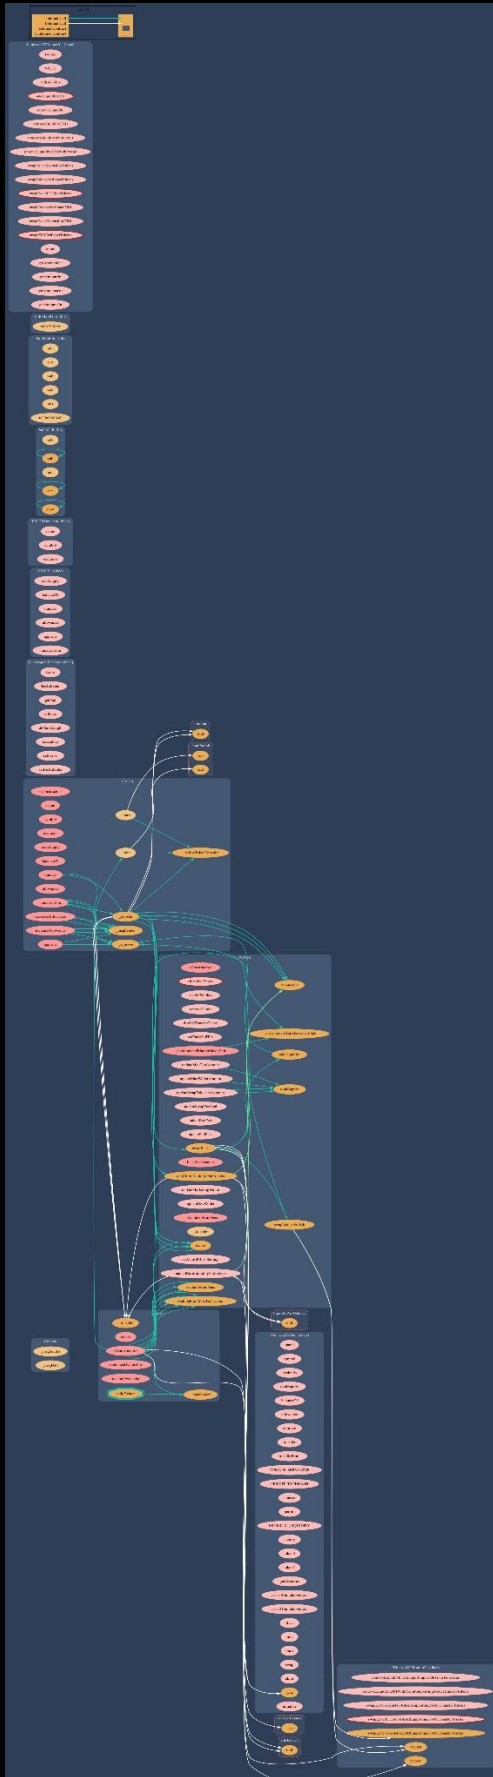









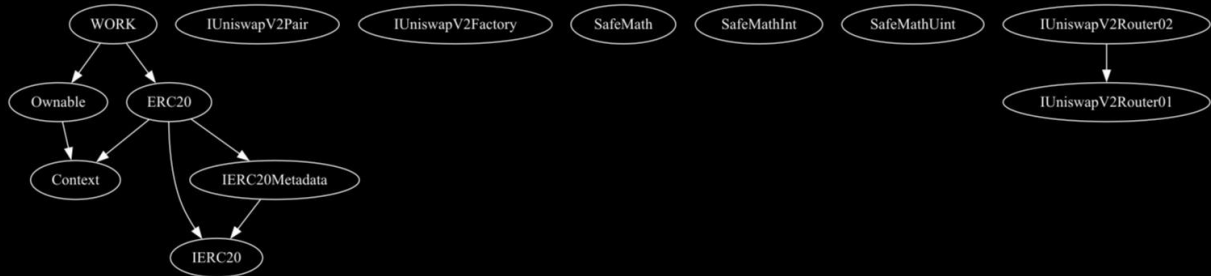



























Contract Interaction Graph








































Inheritance Graph







































































Contract Functions





































Contract	Type	Bases		
L	Function Name	Visibility	Mutability	Modifiers
Context	Implementation			
L	_msgSender	Internal 		
L	_msgData	Internal 		
IUniswapV2Pair	Interface			
L	name	External 		NO 
L	symbol	External 		NO 
L	decimals	External 		NO 
L	totalSupply	External 		NO 
L	balanceOf	External 		NO 
L	allowance	External 		NO 
L	approve	External 		NO 
L	transfer	External 		NO 
L	transferFrom	External 		NO 
L	DOMAIN_SEPARATOR	External 		NO 
L	PERMIT_TYPEHASH	External 		NO 
L	nonces	External 		NO 
L	permit	External 		NO 
L	MINIMUM_LIQUIDITY	External 		NO 
L	factory	External 		NO 





Contract	Type	Bases		
L	token0	External 		NO 
L	token1	External 		NO 
L	getReserves	External 		NO 
L	price0CumulativeLast	External 		NO 
L	price1CumulativeLast	External 		NO 
L	kLast	External 		NO 
L	mint	External 		NO 
L	burn	External 		NO 
L	swap	External 		NO 
L	skim	External 		NO 
L	sync	External 		NO 
L	initialize	External 		NO 
IUniswapV2Factory	Interface			
L	feeTo	External 		NO 
L	feeToSetter	External 		NO 
L	getPair	External 		NO 
L	allPairs	External 		NO 
L	allPairsLength	External 		NO 
L	createPair	External 		NO 
L	setFeeTo	External 		NO 
L	setFeeToSetter	External 		NO 
IERC20	Interface			



















Contract	Type	Bases		
L	totalSupply	External ¶		NO ¶
L	balanceOf	External ¶		NO ¶
L	transfer	External ¶	⦿	NO ¶
L	allowance	External ¶		NO ¶
L	approve	External ¶	⦿	NO ¶
L	transferFrom	External ¶	⦿	NO ¶
IERC20Metadata	Interface	IERC20		
L	name	External ¶		NO ¶
L	symbol	External ¶		NO ¶
L	decimals	External ¶		NO ¶
ERC20	Implementation	Context, IERC20, IERC20Metadata		
L		Public ¶	⦿	NO ¶
L	name	Public ¶		NO ¶
L	symbol	Public ¶		NO ¶
L	decimals	Public ¶		NO ¶
L	totalSupply	Public ¶		NO ¶
L	balanceOf	Public ¶		NO ¶
L	transfer	Public ¶	⦿	NO ¶
L	allowance	Public ¶		NO ¶
L	approve	Public ¶	⦿	NO ¶
L	transferFrom	Public ¶	⦿	NO ¶

Contract	Type	Bases		
L	increaseAllowance	Public 		NO 
L	decreaseAllowance	Public 		NO 
L	_transfer	Internal 		
L	_mint	Internal 		
L	_burn	Internal 		
L	_approve	Internal 		
L	_beforeTokenTransfer	Internal 		
SafeMath	Library			
L	add	Internal 		
L	sub	Internal 		
L	sub	Internal 		
L	mul	Internal 		
L	div	Internal 		
L	div	Internal 		
L	mod	Internal 		
L	mod	Internal 		
Ownable	Implementation	Context		
L		Public 		NO 
L	owner	Public 		NO 
L	renounceOwnership	Public 		onlyOwner
L	transferOwnership	Public 		onlyOwner

Contract	Type	Bases		
SafeMathInt	Library			
L	mul	Internal 		
L	div	Internal 		
L	sub	Internal 		
L	add	Internal 		
L	abs	Internal 		
L	toUint256Safe	Internal 		
SafeMathUint	Library			
L	toInt256Safe	Internal 		
IUniswapV2Router01	Interface			
L	factory	External 		NO 
L	WETH	External 		NO 
L	addLiquidity	External 		NO 
L	addLiquidityETH	External 		NO 
L	removeLiquidity	External 		NO 
L	removeLiquidityETH	External 		NO 
L	removeLiquidityWithPermit	External 		NO 
L	removeLiquidityETHWithPermit	External 		NO 
L	swapExactTokensForTokens	External 		NO 
L	swapTokensForExactTokens	External 		NO 

Contract	Type	Bases		
L	swapExactETHForTokens	External 		NO 
L	swapTokensForExactETH	External 		NO 
L	swapExactTokensForETH	External 		NO 
L	swapETHForExactTokens	External 		NO 
L	quote	External 		NO 
L	getAmountOut	External 		NO 
L	getAmountIn	External 		NO 
L	getAmountsOut	External 		NO 
L	getAmountsIn	External 		NO 
IUniswapV2Router02	Interface	IUniswapV2Router01		
L	removeLiquidityETHSupportingFeeOnTransferTokens	External 		NO 
L	removeLiquidityETHWithPermitSupportingFeeOnTransferTokens	External 		NO 
L	swapExactTokensForTokensSupportingFeeOnTransferTokens	External 		NO 
L	swapExactETHForTokensSupportingFeeOnTransferTokens	External 		NO 
L	swapExactTokensForETHSupportingFeeOnTransferTokens	External 		NO 

Contract	Type	Bases		
WORK	Implementation	ERC20, Ownable		
L		Public 		ERC20
L		External 		NO 
L	enableTrading	External 		onlyOwner
L	removeLimits	External 		onlyOwner
L	disableTransferDelay	External 		onlyOwner
L	setEarlySellTax	External 		onlyOwner
L	updateSwapTokensAtAmount	External 		onlyOwner
L	updateMaxTxnAmount	External 		onlyOwner
L	updateMaxWalletAmount	External 		onlyOwner
L	excludeFromMaxTransaction	Public 		onlyOwner
L	updateSwapEnabled	External 		onlyOwner
L	updateBuyFees	External 		onlyOwner
L	updateSellFees	External 		onlyOwner
L	excludeFromFees	Public 		onlyOwner
L	blacklistAccount	Public 		onlyOwner
L	setAutomatedMarketMakerPair	Public 		onlyOwner
L	_setAutomatedMarketMakerPair	Private 		
L	updateMarketingWallet	External 		onlyOwner

Contract	Type	Bases		
L	updateDevWallet	External 		onlyOwner
L	isExcludedFromFees	Public 		NO 
L	_transfer	Internal 		
L	swapTokensForEth	Private 		
L	addLiquidity	Private 		
L	swapBack	Private 		
L	setAutoLPBurnSettings	External 		onlyOwner
L	autoBurnLiquidityPairTokens	Internal 		
L	manualBurnLiquidityPairTokens	External 		onlyOwner



Function
can modify
state



Function
is payable

Audit Scope

Audit Method.

Our smart contract audit is an extensive methodical examination and analysis of the smart contract's code that is used to interact with the blockchain. Goal: discover errors, issues and security vulnerabilities in the code. Findings getting reported and improvements getting suggested.

Automatic and Manual Review

We are using automated tools to scan functions and weaknesses of the contract. Transfers, integer over-undeflow checks such as all CWE events.

Tools we use:

Visual Studio Code

CWE

SWC

Solidity Scan

SVD

In manual code review our auditor looking at source code and performing line by line examination. This method helps to clarify developer's coding decisions and business logic.

Skeleton Ecosystem

<https://skeletonecosystem.com>

<https://github.com/SkeletonEcosystem/Audits>

