


Vertex arrays

	vcur[u]	vfill[u]
0	0	(0 5)
1	1	(1 12)
2	<i>g</i>	(<i>g</i> 37)
3	0	(0 2)

Readers load vcur[u].
Writers do one fetch_add on vfill[u] per (warp, vertex): the high half names the generation, the low half the slot.

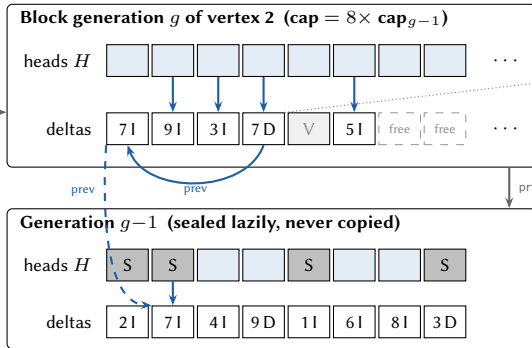

S = head sealed by the first writer of generation g that walked it (fetch_or SEAL). Cells show destination + op (I insert, D delete, V voided slot). Chain of destination 7: $H \rightarrow 7D \rightarrow 7I \rightarrow 7I$ in $g-1$.

Delta (32 B)

dst:30 op:2	prev	owner	cts	its
---------------	------	-------	-----	-----

owner: creating txid. cts: commit epoch (stamped lazily).
its: 0, TAG|txid, or invalidation epoch.

Transaction descriptors desc[owner]

ACTIVE	COMMIT(41)	ABORTED	COMMIT(42)
--------	------------	---------	------------

Visible to T iff T owns it, or COMMIT(e) with $e \leq rts$.

Group commit

