


Github repo url

[My Github repo](#)

w08-P1: navbar with card1 and card2

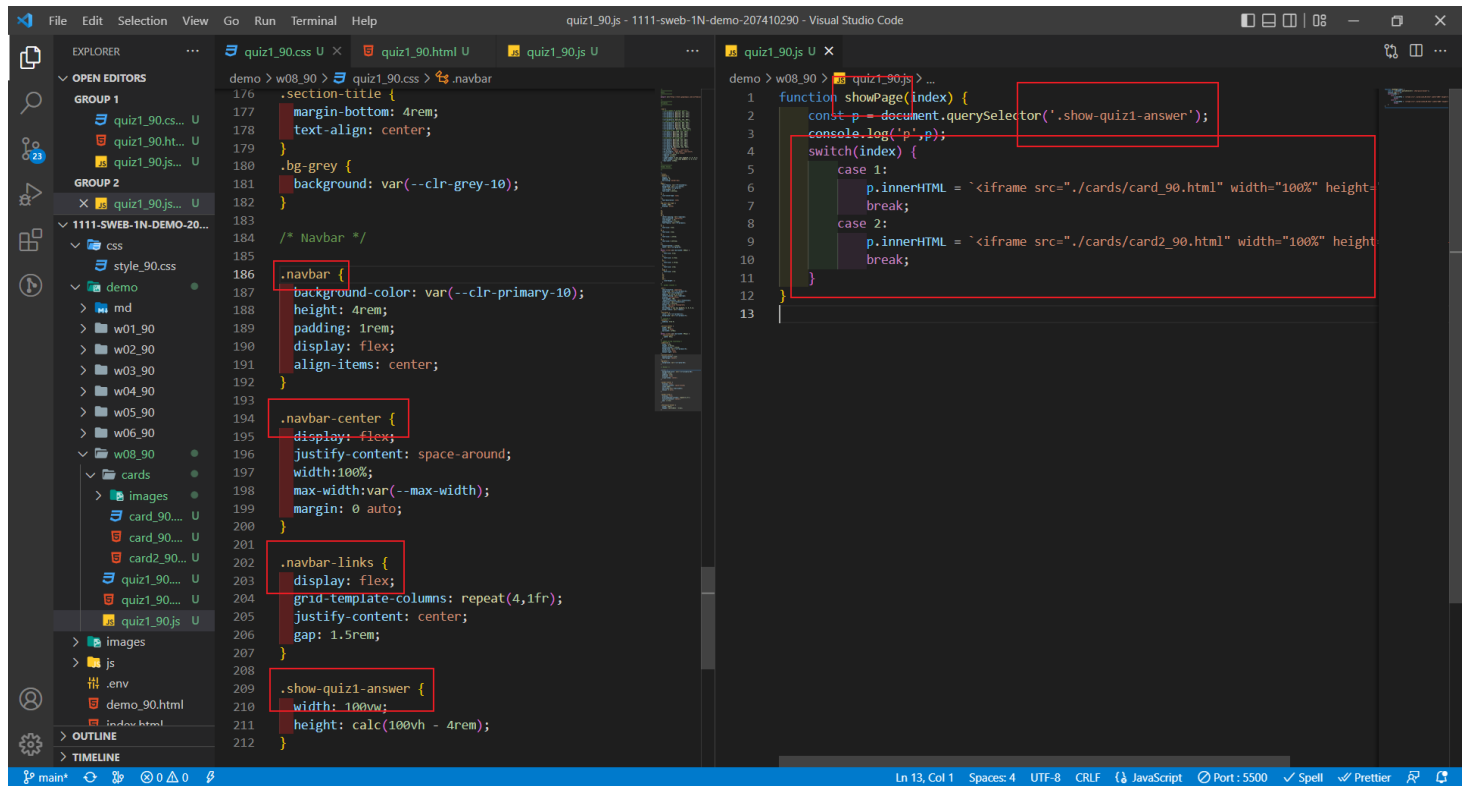

The screenshot shows the Visual Studio Code editor with two files open: `quiz1_90.css` and `quiz1_90.js`. The `quiz1_90.css` file contains CSS rules for a navbar and a show-quiz1-answer element. The `quiz1_90.js` file contains a `showPage` function that uses a switch statement to load different cards based on the index.

```
176 .section-title {
177   margin-bottom: 4rem;
178   text-align: center;
179 }
180 .bg-grey {
181   background: var(--clr-grey-10);
182 }
183
184 /* Navbar */
185
186 .navbar {
187   background-color: var(--clr-primary-10);
188   height: 4rem;
189   padding: 1rem;
190   display: flex;
191   align-items: center;
192 }
193
194 .navbar-center {
195   display: flex;
196   justify-content: space-around;
197   width: 100%;
198   max-width: var(--max-width);
199   margin: 0 auto;
200 }
201
202 .navbar-links {
203   display: flex;
204   grid-template-columns: repeat(4, 1fr);
205   justify-content: center;
206   gap: 1.5rem;
207 }
208
209 .show-quiz1-answer {
210   width: 100vw;
211   height: calc(100vh - 4rem);
212 }
```

```
1 function showPage(index) {
2   const p = document.querySelector('.show-quiz1-answer');
3   console.log('p', p);
4   switch(index) {
5     case 1:
6       p.innerHTML = `<iframe src="./cards/card_90.html" width="100%" height=
7       break;
8     case 2:
9       p.innerHTML = `<iframe src="./cards/card2_90.html" width="100%" height
10      break;
11   }
12 }
13
```

iClass x Sky00l/1111-sweb-1N-demo-2 x Quiz 1 Navbar and Answers x +

127.0.0.1:5500/demo/w08_90/quiz1_90.html#

Quiz1 -- 207410290 cards 1 cards 2

First Card 1

Lorem ipsum dolor sit amet, consectetur adipisicing elit. Minima, quae!

Sign In

div.card.card-1 366 x 268.23

Color #000000

Font 16px system-ui, -apple-system, BlinkMac...

Background #FFFFFF

Margin 48px

Padding 24px 32px

ACCESSIBILITY

Name generic

Role

Keyboard-focusable

DevTools is now available in Chinese!

Always match Chrome's language Switch DevTools to Chinese Don't show again

Elements Console Sources Network

```
<!DOCTYPE html>
<html lang="en">
<head>...</head>
<body>
  <!-- navbar -->
  <nav class="navbar" id="navbar">...</nav>
  <section class="show-quiz1-answer"> == $0
    <iframe src="./cards/card_90.html" width="100%" height="100%">
  </section>
  <!-- Code injected by live-server -->
  <!-- document -->
  <!DOCTYPE html>
  <html lang="en">
  <head>...</head>
  <body>
    <div class="card card-1">...</div>
    <div class="card card-2">...</div>
  </body>
</html>
```


html body section.show-quiz1-answer

Styles Computed Layout Event Listeners DOM Breakpoints Properties Accessibility

Filter :hov .cls +

```
element.style {
}
.show-quiz1-answer {
  width: 100vw;
  height: calc(100vh - 4rem);
}
*, ::after, ::before {
  margin: 0;
  padding: 0;
  box-sizing: border-box;
}
section {
  display: block;
}
Inherited from body
body {
  font-family: var(--ff-secondary);
```


Quiz1 -- 207410290 cards 1 cards 2



First Card 2

Lorem ipsum dolor sit amet, consectetur adipisicing elit. Minima, quae!

Sign In



Second Card

Lorem ipsum dolor sit amet, consectetur adipisicing elit. Minima, quae!

Sign In

DevTools is now available in Chinese!

Always match Chrome's language Switch DevTools to Chinese Don't show again

Elements Console Sources Network

```
</nav>
...
<section class="show-quiz1-answer"> == $0
  <iframe src="./cards/card2_90.html" width="100%" height="100%">
    #document
    <!DOCTYPE html>
    <html lang="en">
      <head>...</head>
      <body>...</body>
    </html>
  </iframe>
</section>
<script src="./quiz1_90.js"></script>
<!-- Code injected by live-server -->
<script>...</script>
</body>
</html>
```

html body section.show-quiz1-answer

Styles Computed Layout Event Listeners DOM Breakpoints Properties Accessibility

Filter :hov .cls +

```
element.style {
}

.show-quiz1-answer {
  width: 100vw;
  height: calc(100vh - 4rem);
}

*, ::after, ::before {
  margin: 0;
  padding: 0;
  box-sizing: border-box;
}

section {
  display: block;
}

Inherited from body
body {
  font-family: var(--ff-secondary);
```


w08-P2: fixed navbar setup and two sections with two links


```
File Edit Selection View Go Run Terminal Help landing_90.html - 1111-sweb-1N-demo-207410290 - Visual Studio Code

landing_90.html x script_90.js U style_90.css U blog_90.css
demo > w08_90 > cards > landing_90.html > html > body > section#section-blogs.blogs
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4 <meta charset="UTF-8" />
5 <meta http-equiv="X-UA-Compatible" content="IE=edge" />
6 <meta name="viewport" content="width=device-width, initial-scale=1.0" />
7 <title>Quiz 1 Navbar and Answers</title>
8 <link rel="stylesheet" href="./css/style_90.css" />
9 </head>
10 <body>
11 <!-- navbar -->
12 <nav class="navbar navbar-fixed" id="navbar">
13 <div class="navbar-center">
14 <!-- nav header -->
15 <div class="navbar-header">
16 <h3>Quiz1 -- 207410290</h3>
17 </div>
18 <!-- nav links -->
19 <ul class="navbar-links">
20 <li>
21 <a href="#section-blogs">blogs</a>
22 </li>
23 <li>
24 <a href="#section-cards">cards</a>
25 </li>
26 </ul>
27 </div>
28 </nav>
29
30 <section class="blogs" id="section-blogs">
31 <div class="blogs"> ...
32 </div>
33 </section>
34
35 <section class="cards" id="section-cards">
36 <div class="section-title"> ...
37 </div>
38 <div class="card-center"> ...
39 </div>
40 </section>
41 </body>
42 </html>


script_90.js x
1 const navbar = document.querySelector("#navbar");
2
3 // add fixed class to navbar
4
5 window.addEventListener('scroll', function () {
6   if (window.pageYOffset > 100) {
7     navbar.classList.add('navbar-fixed');
8   } else {
9     navbar.classList.remove('navbar-fixed');
10  }
11 });
12


style_90.css x
demo > w08_90 > cards > css > style_90.css > .blogs-center2
216 .navbar-links {
217   display: flex;
218   grid-template-columns: repeat(4,1fr);
219   justify-content: center;
220   gap: 1.5rem;
221 }
222
223 .navbar-fixed {
224   position: fixed;
225   top: 0;
226   left: 0;
227   width: 100%;
228   background: var(--clr-white);
229   z-index: 2;
230   box-shadow: var(--light-shadow);
231 }
232
233 .show-quiz1-answer {
234   width: 100vw;
235   height: calc(100vh - 4rem);
236 }
```

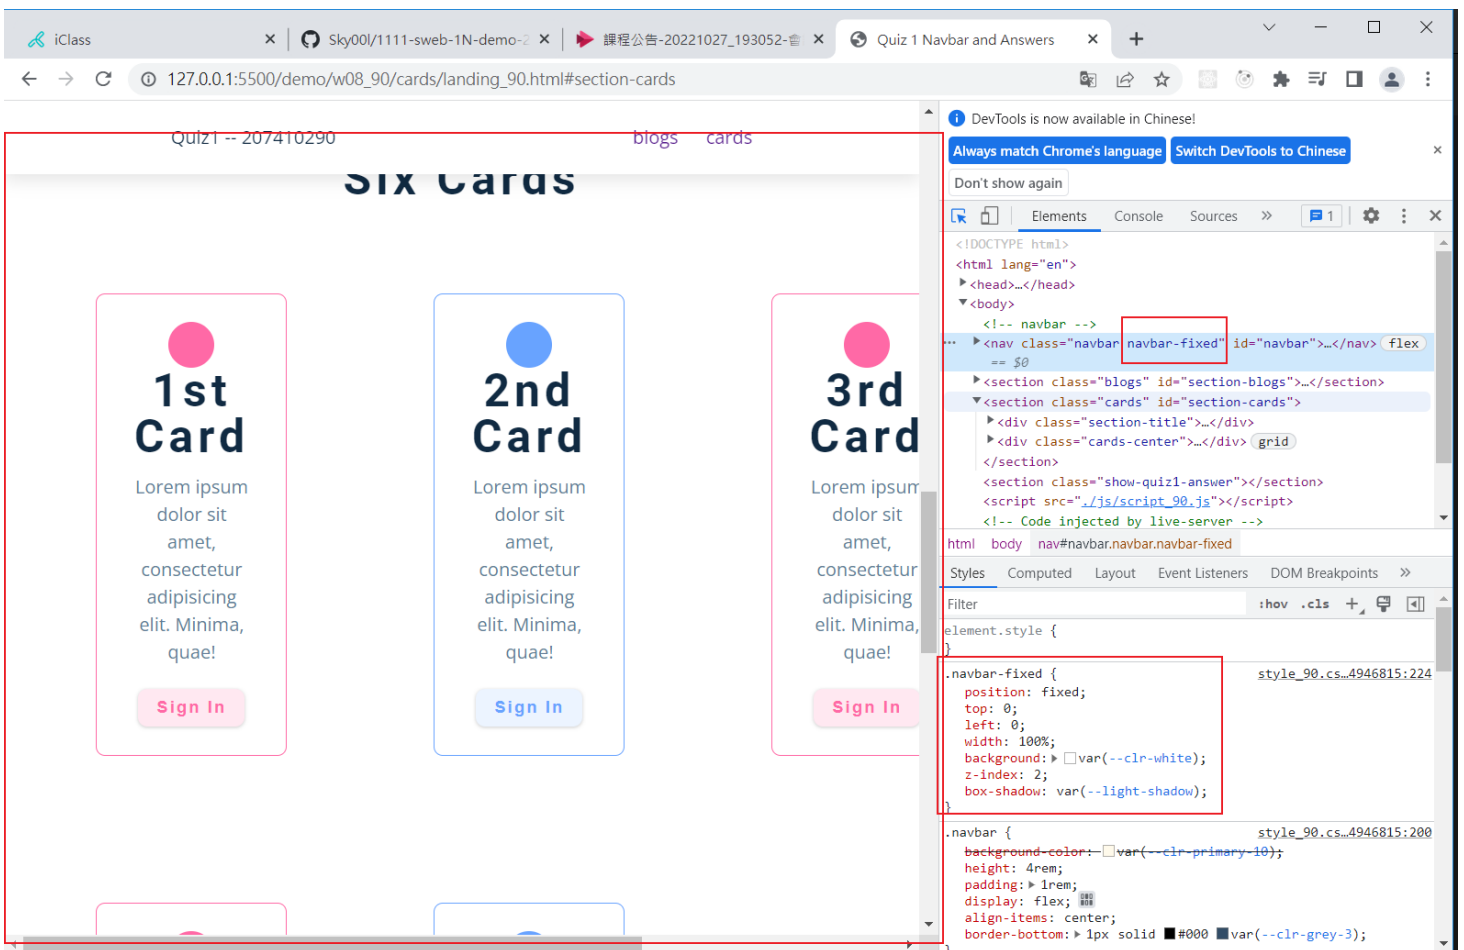

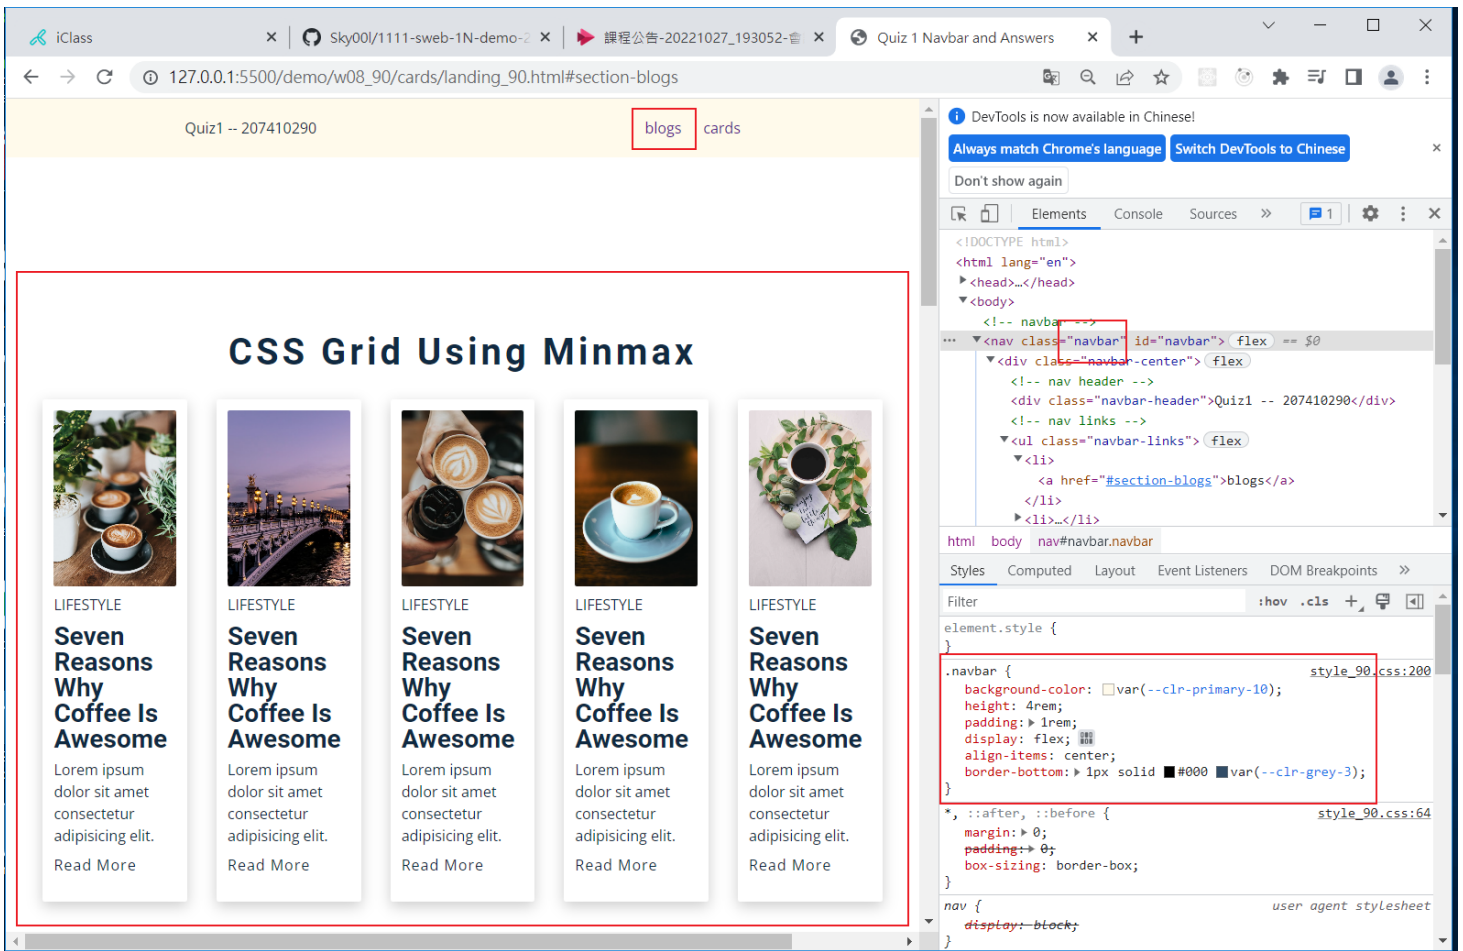

w08-P3: define css variables for .btn-1, .btn-2, .btn3

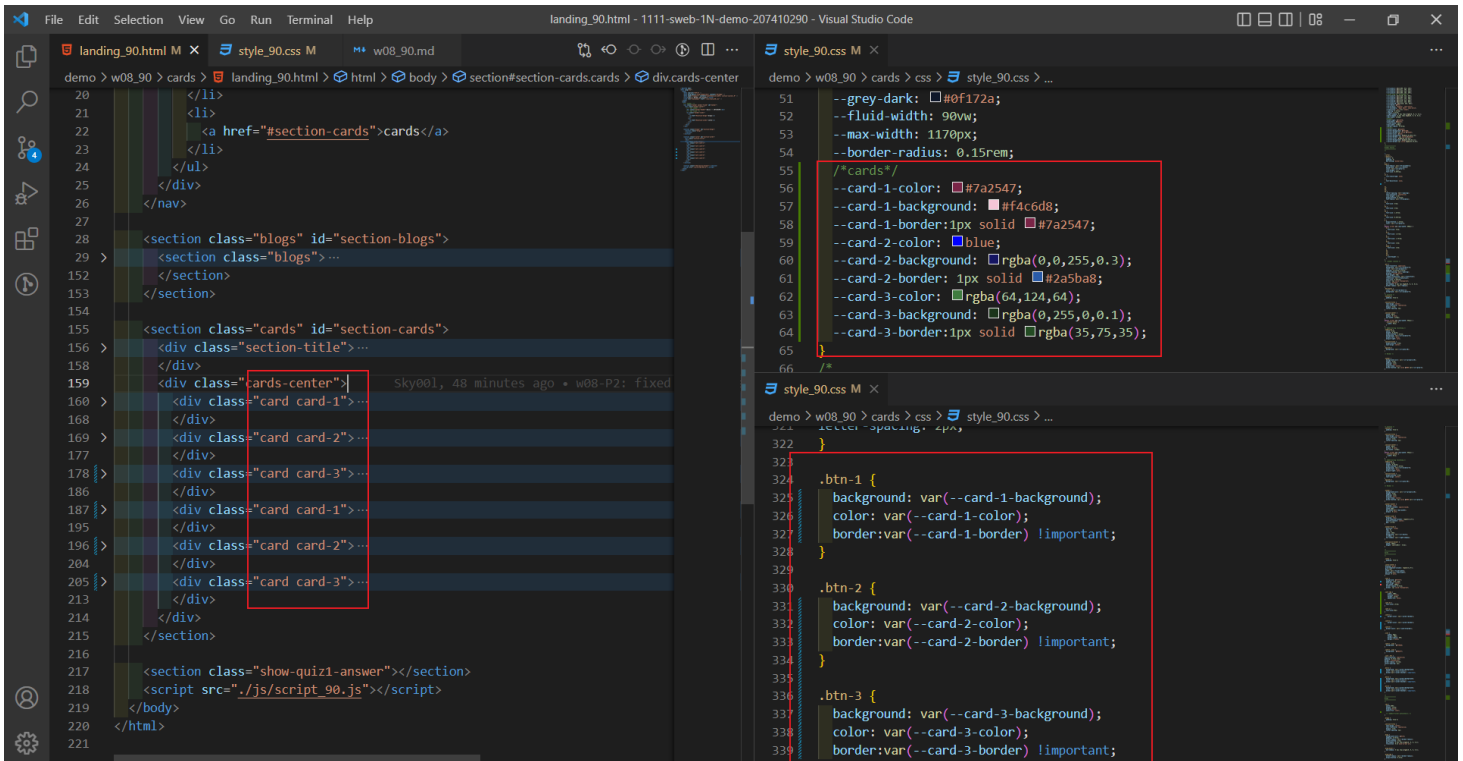

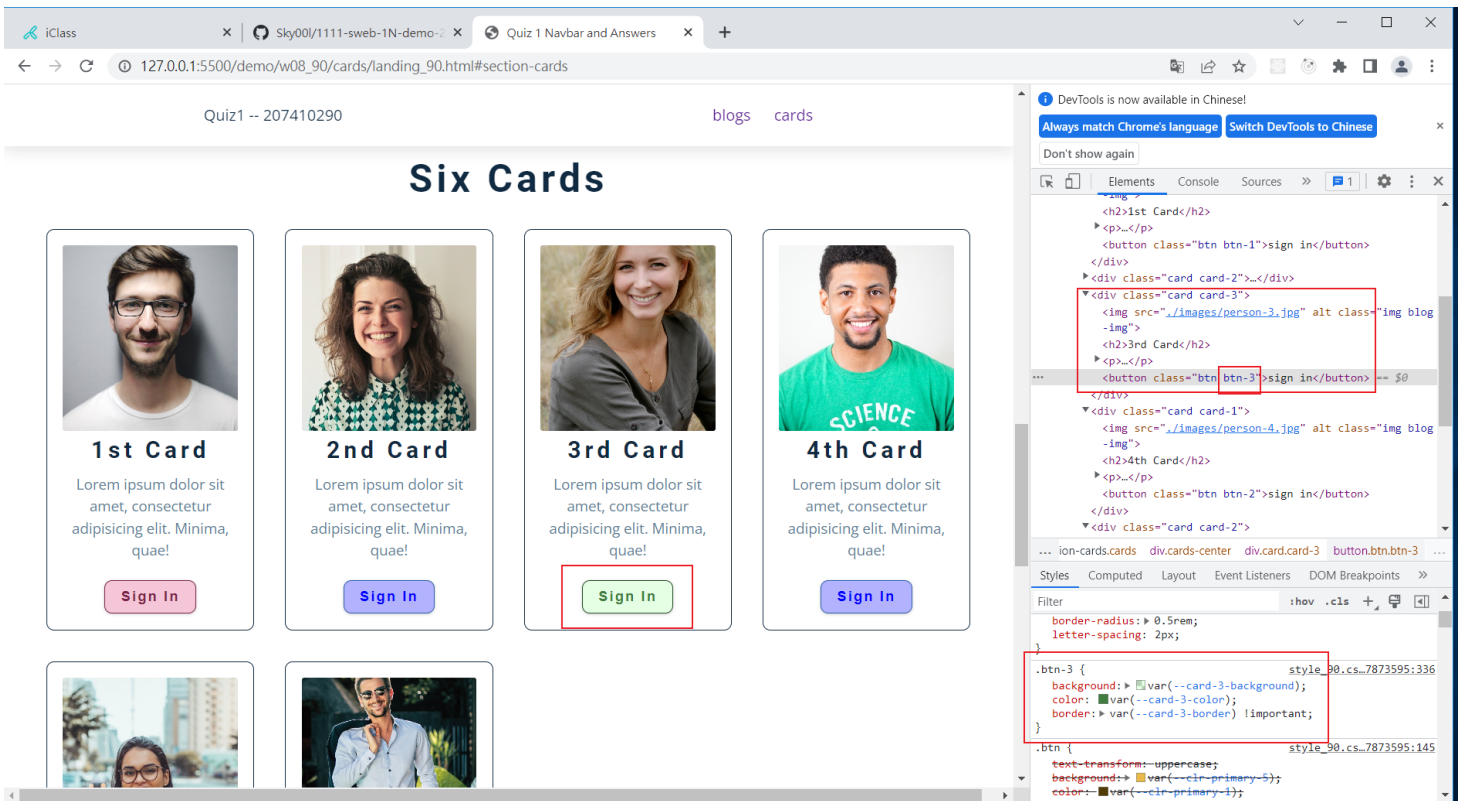

W08-logs: W8 all logs

```
User@E201-34 MINGW64 /d/1111-sweb-1N-demo-207410290 (main)
$ git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2022-10-26"
d8db435 Sky001 Thu Oct 27 21:44:33 2022 +0800 w08-P3: define css variables for .btn-1, .btn-2, .btn3
5e8da27 Sky001 Thu Oct 27 20:54:38 2022 +0800 w08-P2: fixed navbar setup and two sections with two links
7e67305 Sky001 Thu Oct 27 19:00:08 2022 +0800 w08-P1: navbar with card1 and card2
```

```
$ git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2022-10-26"
d8db435 Sky001 Thu Oct 27 21:44:33 2022 +0800 w08-P3: define css variables for .btn-1, .btn-2, .btn3
5e8da27 Sky001 Thu Oct 27 20:54:38 2022 +0800 w08-P2: fixed navbar setup and two sections with two links
7e67305 Sky001 Thu Oct 27 19:00:08 2022 +0800 w08-P1: navbar with card1 and card2
```