


Github repo url


My Github repo

W06-P1: add 3 breakpoints for different devices

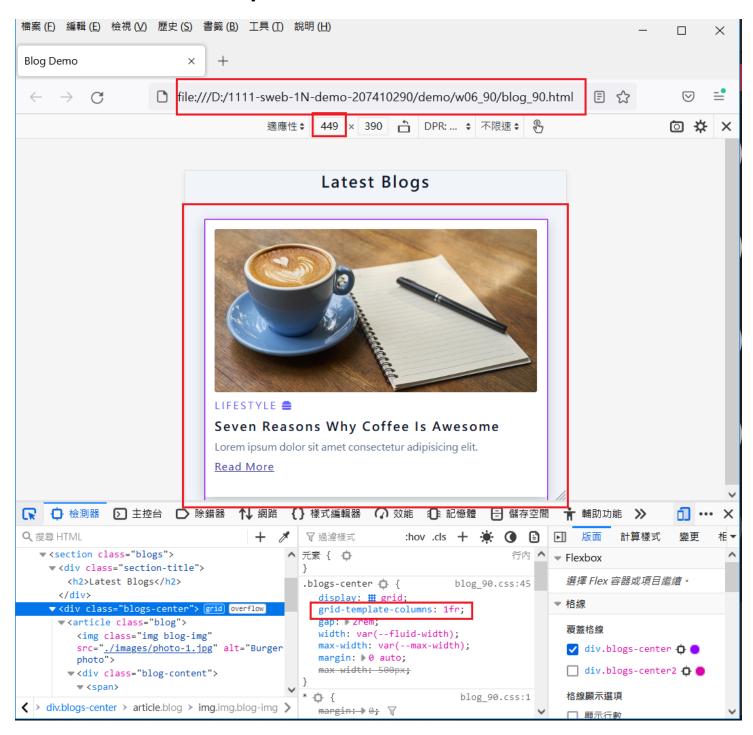


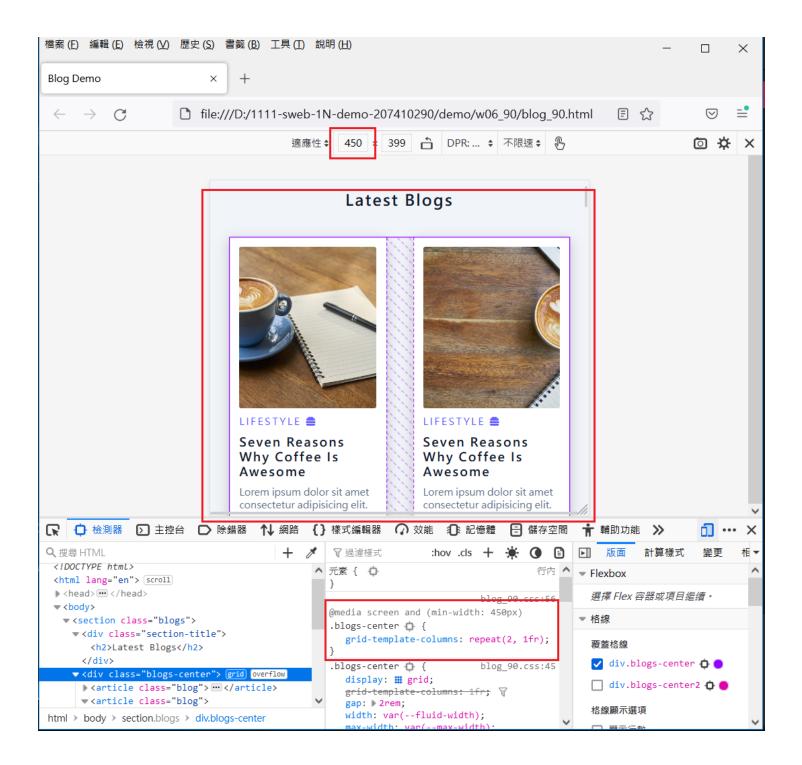

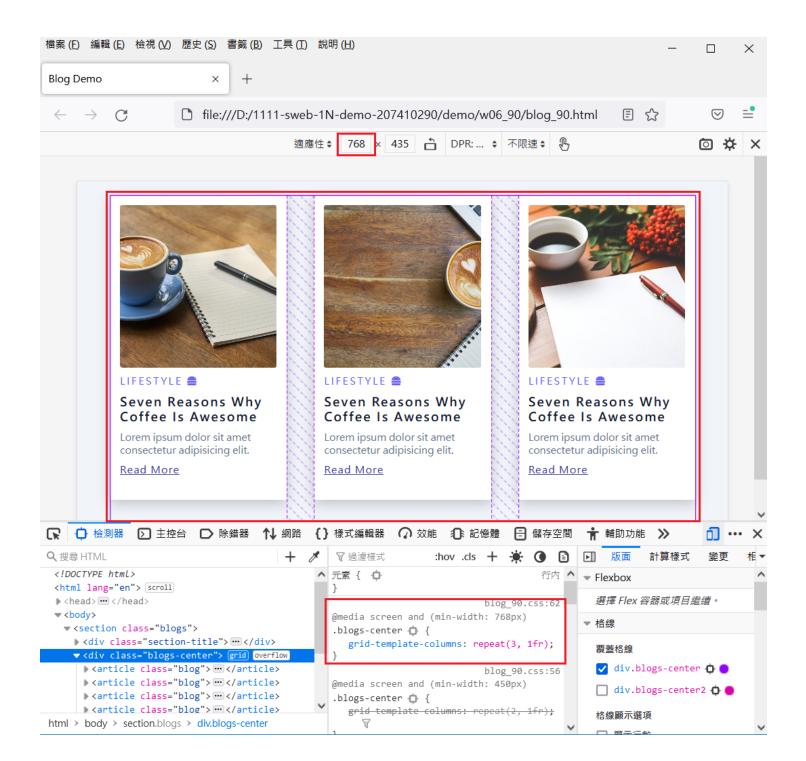


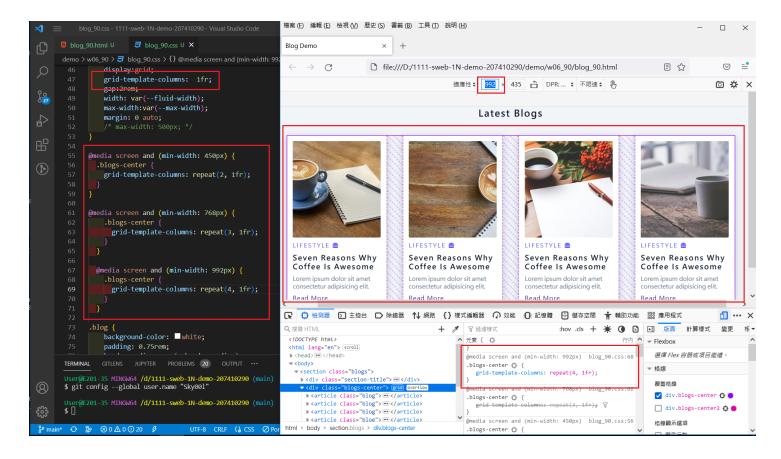


W06-P2: add navbar for demo links

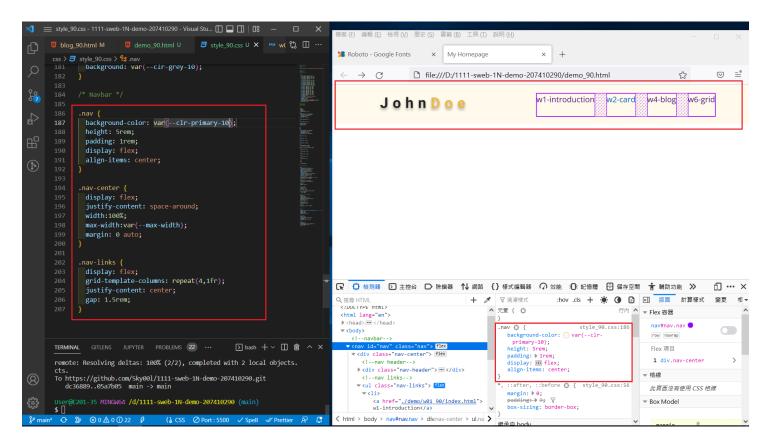

W06-P3: run 4 classdemo one by one

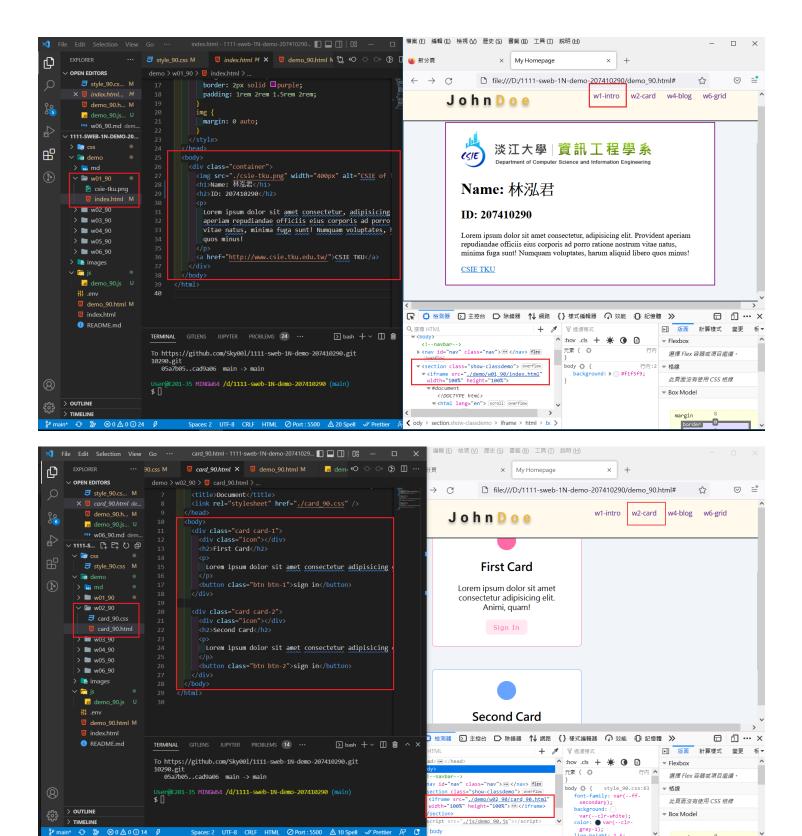

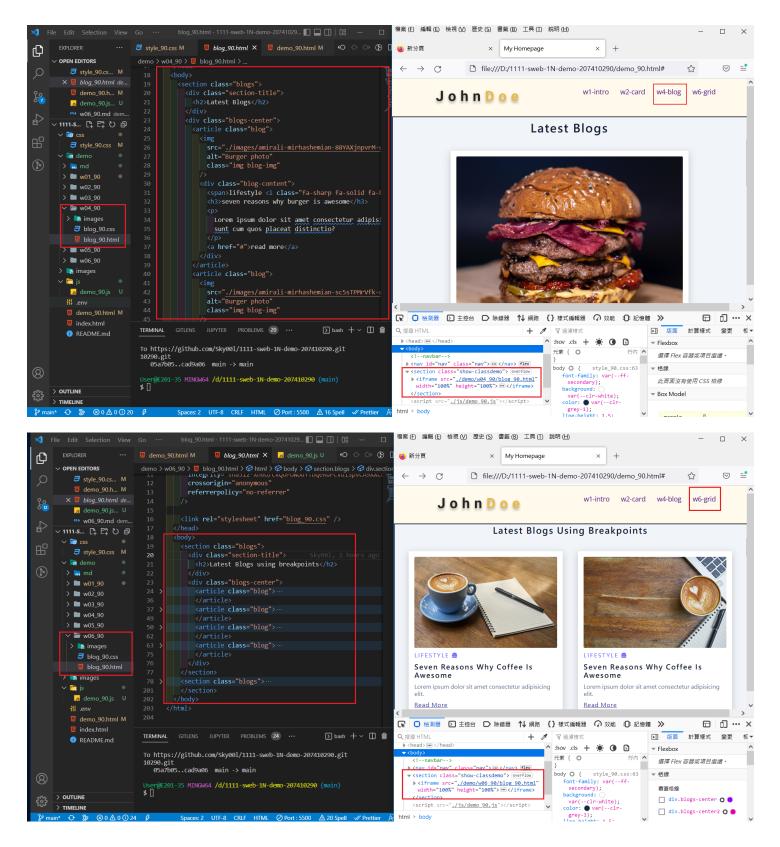

W06-logs: W6 all logs

```
User@E201-35 MINGW64 /d/1111-sweb-1N-demo-207410290 (main)
$ git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2022-10-12"
0beb9ec Sky00l Thu Oct 13 21:26:59 2022 +0800 W06-P3: run 4 classdemo one b
y one
cad9a06 Sky00l Thu Oct 13 20:29:55 2022 +0800 W06-P2: add navbar for demo links
05a7b05 Sky00l Thu Oct 13 19:09:45 2022 +0800 W06-P1: add 3 breakpoints for different
devices
```

```
$ git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2022-10-12"
0beb9ec Sky00l Thu Oct 13 21:26:59 2022 +0800 W06-P3: run 4 classdemo one by one
cad9a06 Sky00l Thu Oct 13 20:29:55 2022 +0800 W06-P2: add navbar for demo links
05a7b05 Sky00l Thu Oct 13 19:09:45 2022 +0800 W06-P1: add 3 breakpoints for different devices
```