

Корисничко сценарио 2:

Преглед на натпревари во дадена сезона за дадена лига

Актери:

1. Обичен корисник (кој што сака да направи преглед на некој натпревар во дадена сезона во некоја лига)


Предуслов: компјутер или мобилен телефон со интернет конекција

Сценарио:

1. Корисникот ја отвара почетната страна
2. Ја одбира опцијата “Натпревари”
3. Системот прикажува поглед со мени од сите лиги во сезони
4. Корисникот избира лига од некоја сезона од менито
5. Му се прикажува табела која што ги содржи сите информации за натпреварите во таа лига

Пост-услов: Корисникот има преглед за тимовите во селектираната лига и нивните одиграни натпревари.

ЕКРАНИ:

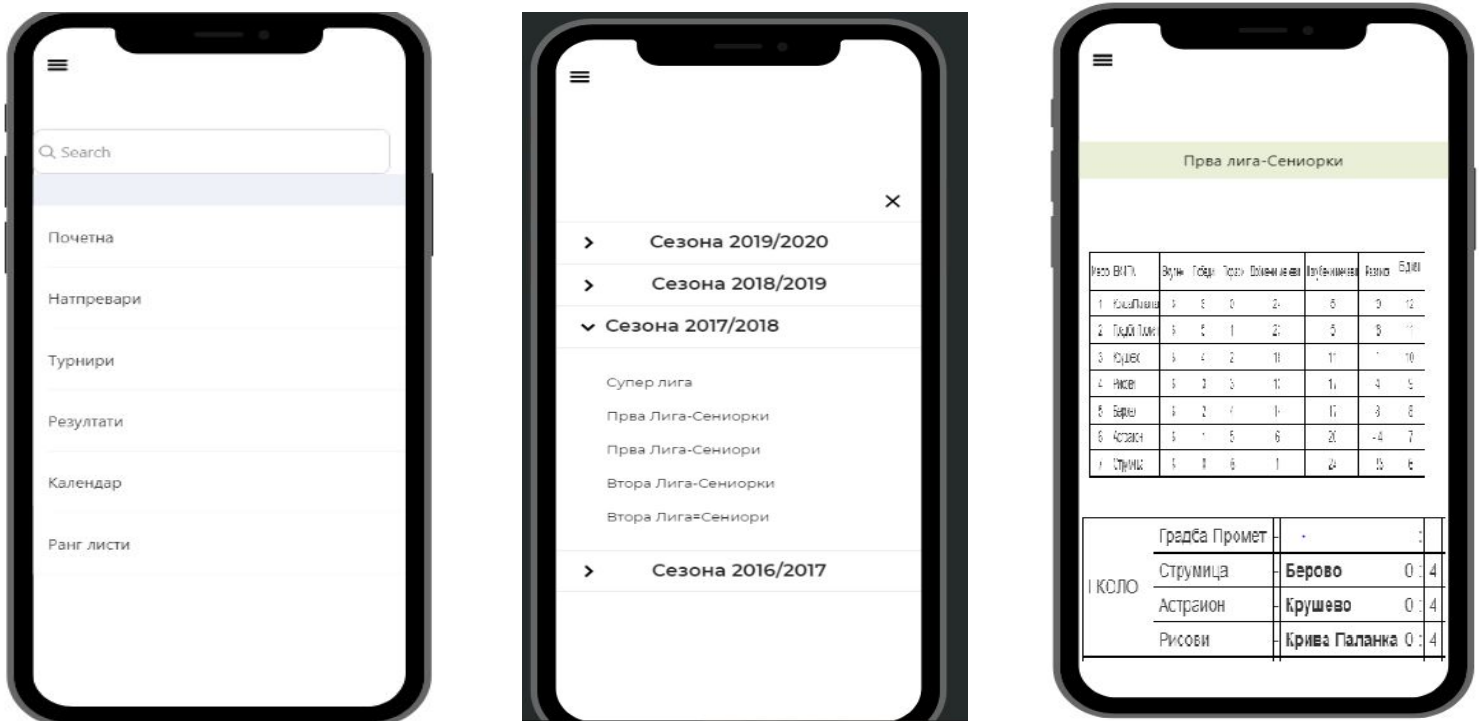

SQL прашалници:

```
-- povik za dobivanje na site sezoni
-- input: -
-- output: id_sezona, predsedatel, godina
select * from sezoni as s
```

```
-- povik za dobivanje na site ligi vo oredena sezona
-- input: sezona_id (3)
-- output: id_liga, ime_liga
select l.id_liga, ime_liga from ligi as l
where l.id_sezona=3
```

```
-- povik za dobivanje na informacii za natprevari vo odredena liga i sezona
-- input: sezona_id (3), liga_id(1)
-- output: id_natprevar, domakin, gostin, dobieni_mecchevi_domakjin, dobieni_mecchevi_gostin
select n.id_natprevar, (
    select ime_tim from timovi as t
    where n.id_tim_domakjin=t.id_tim
) as domakin, (
    select ime_tim from timovi as t
    where n.id_tim_gostin=t.id_tim
) as gostin, n.dobieni_mecchevi_domakjin, n.dobieni_mecchevi_gostin from natprevari as n
where n.id_sezona=3 and n.id_liga=1
```

```
-- povik za dobivanje na informacii na odigrani mechevi vo natprevar
-- input: natprevar_id(6)
-- output: id_mech, domakjin_ime, domakijn_prezime, gostin_ime, gostin_prezime,
dobieni_setovi_domakjin, dobieni_setovi_gostin
select m.id_mech, (
    select rl.ime_lice from mechevi as inm
    inner join registrirani_lica as rl on inm.id_lice_igrach_domakjin=rl.id_lice
```

```

        where inm.id_mech=m.id_mech
    ) as domakjin_ime, (
        select rl.prezime_lice from mechevi as inm
        inner join registrirani_lica as rl on inm.id_lice_igrach_domakjin=rl.id_lice
        where inm.id_mech=m.id_mech
    ) as domakjin_prezime, (
        select rl.ime_lice from mechevi as inm
        inner join registrirani_lica as rl on inm.id_lice_igrach_gostin=rl.id_lice
        where inm.id_mech=m.id_mech
    ) as gostin_ime, (
        select rl.prezime_lice from mechevi as inm
        inner join registrirani_lica as rl on inm.id_lice_igrach_gostin=rl.id_lice
        where inm.id_mech=m.id_mech
    ) as gostin_prezime, m.dobieni_setovi_domakjin, m.dobieni_setovi_gostin from mechevi as m
    where m.id_natprevar=6

```

```

-- povik za dobivanje na rezultati od set za daden mech
-- input: mech_id(15)
-- output: poeni_gostin, poeni_domakjin
select poeni_gostin, poeni_domakjin from setovi as s
where s.id_mech=15

```