

SPLUNK QUERY REPORT FOR THREAT INTELLIGENCE AND INCIDENT RESPONSE

PREPARED BY: HARSH

Failed Login Attempts

Monitors file change events in the system to detect potential tampering or unauthorized modifications. Essential for integrity monitoring.

The screenshot displays the Splunk Cloud 'Add Data' workflow. The top navigation bar includes 'splunk>cloud', 'Apps', 'Messages', 'Settings', 'Activity', 'Find', and a search icon. On the right, it shows 'Splunk Cloud Admin' and 'Support & Services'. The 'Add Data' section features a progress bar with five steps: 'Select Source' (active), 'Set Source Type', 'Input Settings', 'Review', and 'Done'. Navigation buttons '< Back' and 'Next >' are present. The 'Select Source' panel prompts the user to 'Choose a file to upload to the Splunk platform, either by browsing your computer or by dropping a file into the target box below.' It shows 'Selected File: failed_login.log' and a 'Select File' button. Below is a large dashed box for file drops, with the text 'Drop your data file here' and 'The maximum file upload size is 500 Mb'. An 'FAQ' section at the bottom lists three questions: 'What kinds of files can the Splunk platform index?', 'What is a source?', and 'How do I get remote data onto my Splunk platform instance?'.

splunk-cloudAppsMessagesSettingsActivityFind

Splunk Cloud AdminSupport & Services

Add Data

Select SourceSet Source TypeInput SettingsReviewDone

Input Settings

Optionally set additional input parameters for this data input as follows:

Host

When the Splunk platform indexes data, each event receives a "host" value. The host value should be the name of the machine from which the event originates. The type of input you choose determines the available configuration options. [Learn More](#)

Constant value

Regular expression on path

Segment in path

Host field value

si-I-0b61fc8397807e968.prd-p-dpm5e

Index

The Splunk platform stores incoming data as events in the selected index. Consider using a "sandbox" index as a destination if you have problems determining a source type for your data. A sandbox index lets you troubleshoot your configuration without impacting production indexes. You can always change this setting later. [Learn More](#)

Index

main

FAQ

> How do indexes work?

> How do I know when to create or use multiple indexes?

splunk-cloudAppsMessagesSettingsActivityFind

Splunk Cloud AdminSupport & Services

Add Data

Select SourceSet Source TypeInput SettingsReviewDone

Review

Input Type Uploaded File

File Name failed_login.log

Source Type failed_login.log

Host si-I-0b61fc8397807e968.prd-p-dpm5a.splunkcloud.com

Index main

> How do I know when to create or use multiple indexes?

splunk-cloud Apps Messages Settings Activity Find

Search Analytics Datasets Reports Alerts Dashboards

New Search

source="failed_login.log" host="si-1-0b611c8397807e968-prd-p-dpm5a.splunkcloud.com" index="main" sourcetype="failed_login_log" Time range: All time

2 events (before 6/12/25 11:32:17:000 AM) No Event Sampling

Events (2) Patterns Statistics Visualization

Timeline format Zoom Out Zoom to Selection Deselect 100 milliseconds per column

Format Show: 20 Per Page View: List

Hide Fields All Fields

SELECTED FIELDS

- host 1
- source 1
- sourcetype 1

INTERESTING FIELDS

- # date_hour 1
- # date_mday 1
- # date_minute 1
- # date_month 1
- # date_second 2
- # date_wday 1
- # date_year 1
- # date_zone 1

Time	Event
6/12/25 6:22:05.000 PM	Jun 12 18:22:85 server sshd[1324]: Failed password for root from 192.168.1.182 port 22 ssh2 host = si-1-0b611c8397807e968-prd-p-dpm5a.splunkcloud.com source = failed_login.log sourcetype = failed_login_log
6/12/25 6:22:01.000 PM	Jun 12 18:22:81 server sshd[1324]: Failed password for invalid user admin from 192.168.1.181 port 22 ssh2 host = si-1-0b611c8397807e968-prd-p-dpm5a.splunkcloud.com source = failed_login.log sourcetype = failed_login_log

splunk-cloud Apps Messages Settings Activity Find

Search Analytics Datasets Reports Alerts Dashboards

New Search

index=main sourcetype="failed_login_log" "Failed

2 events (before 6/12/25 11:35:23:000 AM) No Event Sampling

Events (2) Patterns Statistics Visualization

Timeline format Zoom Out Zoom to Selection Deselect 100 milliseconds per column

Format Show: 20 Per Page View: List

Hide Fields All Fields

SELECTED FIELDS

- host 1
- source 1
- sourcetype 1

INTERESTING FIELDS

- # date_hour 1
- # date_mday 1
- # date_minute 1
- # date_month 1
- # date_second 2
- # date_wday 1
- # date_year 1
- # date_zone 1

Save As Alert

Settings

Title Failed SSH Login Attempt

Description Optional

Permissions Private Shared In App

Alert type Scheduled

Run every hour

At 15 minutes past the hour



Expires 24 hour(s)

Trigger Conditions

Trigger alert when Number of Results



is greater than 0

Cancel Save

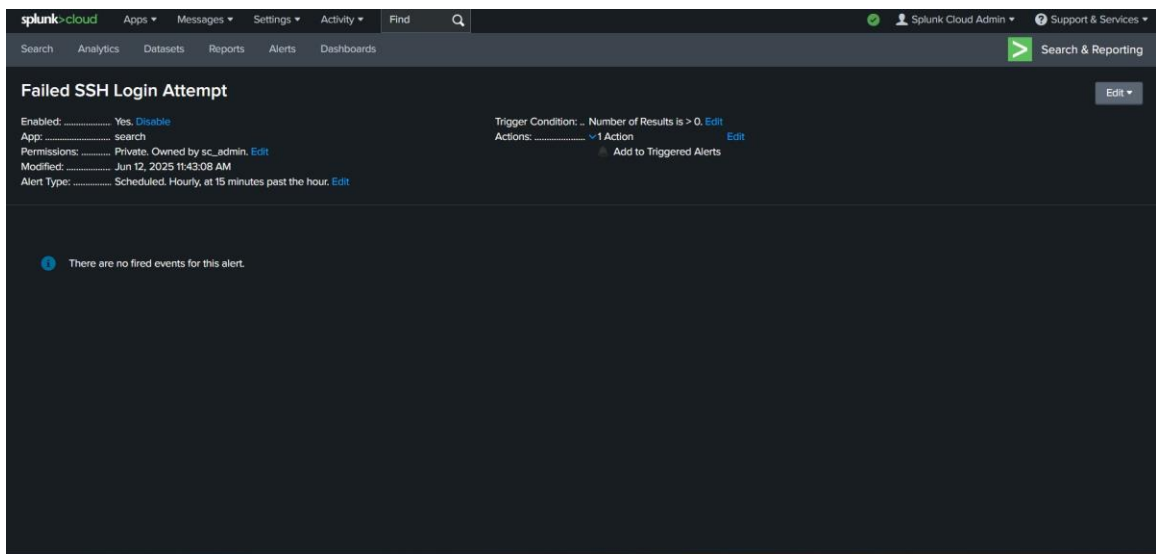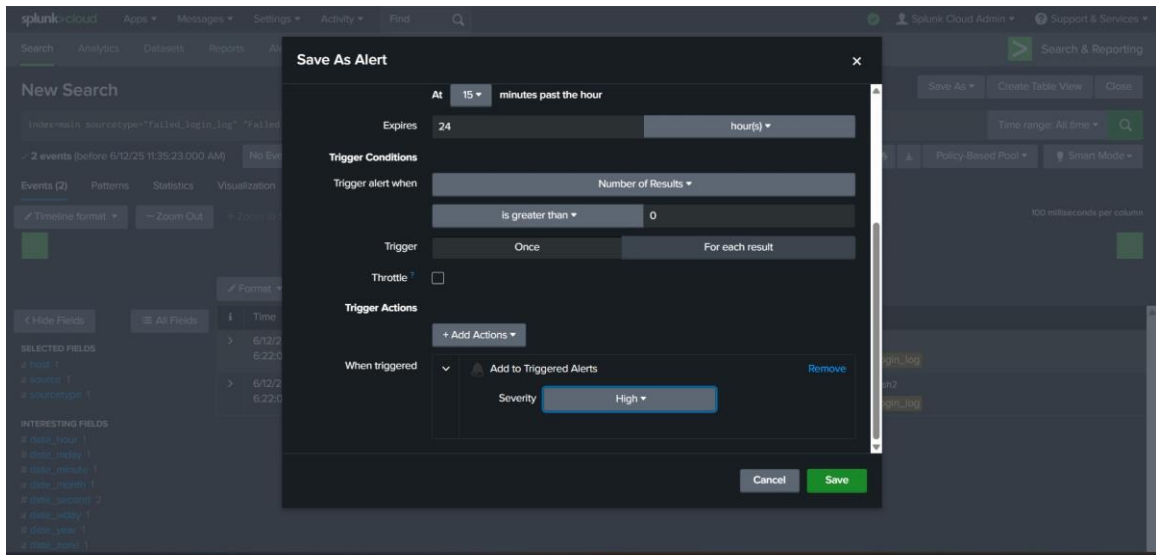

File Change Monitoring

Monitors file change events in the system to detect potential tampering or unauthorized modifications. Essential for integrity monitoring.

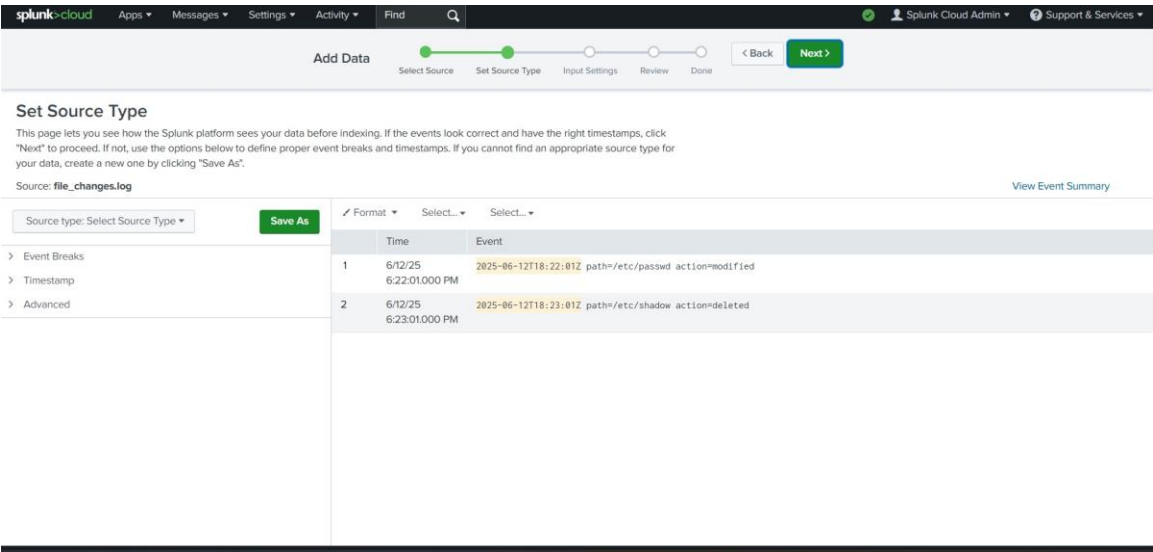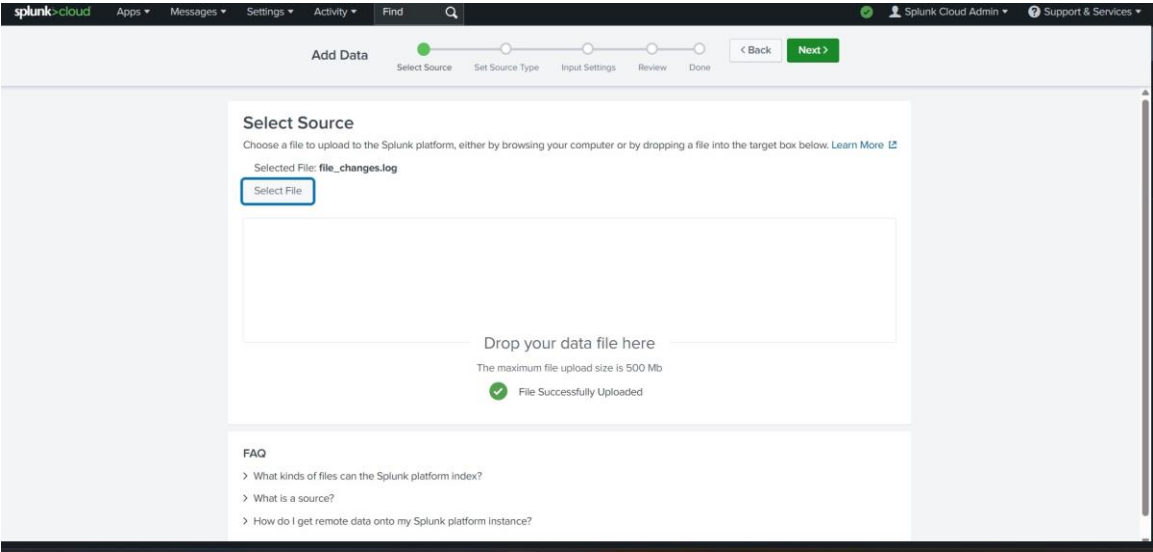

splunk-cloudAppsMessagesSettingsActivityFind

Input Settings

BackReview

Select SourceSet Source TypeInput SettingsReviewDone

Input Settings

Optionally set additional input parameters for this data input as follows:

Host

When the Splunk platform indexes data, each event receives a "host" value. The host value should be the name of the machine from which the event originates. The type of input you choose determines the available configuration options. [Learn More](#)

Constant valueRegular expression on pathSegment in path

Host field value: si-I-0b61fc8397807e968.prd-p-dpm5e

Index

The Splunk platform stores incoming data as events in the selected index. Consider using a "sandbox" index as a destination if you have problems determining a source type for your data. A sandbox index lets you troubleshoot your configuration without impacting production indexes. You can always change this setting later. [Learn More](#)

Index: main

FAQ

> How do indexes work?

> How do I know when to create or use multiple indexes?

splunk-cloudAppsMessagesSettingsActivityFind

Review

BackSubmit

Select SourceSet Source TypeInput SettingsReviewDone

Review

Input Type Uploaded File
File Name file_changes.log
Source Type file_change_log
Host si-I-0b61fc8397807e968.prd-p-dpm5a.splunkcloud.com
Index main

splunk-cloud Apps Messages Settings Activity Find

Search Analytics Datasets Reports Alerts Dashboards Search & Reporting

New Search

Save As Create Table View Close

index=main sourcetype="file_change_log" (action="modified" OR action="deleted") Time range: All time

2 events (before 6/12/25 11:53:35.000 AM) No Event Sampling Job

Events (2) Patterns Statistics Visualization

Timeline format Zoom Out Zoom to Selection Deselect 1 second per column

Format Show: 20 Per Page View: List

Hide Fields All Fields

SELECTED FIELDS

- host 1
- source 1
- sourcetype 1

INTERESTING FIELDS

- action 2
- date_hour 1
- date_mday 1
- date_minute 2
- date_month 1
- date_second 1
- date_wday 1
- date_year 1

Time	Event
6/12/25 6:23:01.000 PM	2025-06-12T18:23:01Z path=/etc/shadow action=deleted host = si-0b61fc8397807e968.prd-p-dpm5a.splunkcloud.com source = file_changes.log sourcetype = file_change_log
6/12/25 6:22:01.000 PM	2025-06-12T18:22:01Z path=/etc/passwd action=modified host = si-0b61fc8397807e968.prd-p-dpm5a.splunkcloud.com source = file_changes.log sourcetype = file_change_log

splunk-cloud Apps Messages Settings Activity Find

Search Analytics Datasets Reports Alerts Dashboards Search & Reporting

New Search

Save As Create Table View Close

index=main sourcetype="file_change_log" (action="modified" OR action="deleted") Time range: All time

2 events (before 6/12/25 11:53:35.000 AM) No Event Sampling Job

Events (2) Patterns Statistics Visualization

Timeline format Zoom Out Zoom to Selection Deselect 1 second per column

Format Show: 20 Per Page View: List

Hide Fields All Fields

SELECTED FIELDS

- host 1
- source 1
- sourcetype 1

INTERESTING FIELDS

- action 2
- date_hour 1
- date_mday 1
- date_minute 2
- date_month 1
- date_second 1
- date_wday 1
- date_year 1

Time	Event
6/12/25 6:23:01.000 PM	2025-06-12T18:23:01Z path=/etc/shadow action=deleted host = si-0b61fc8397807e968.prd-p-dpm5a.splunkcloud.com source = file_changes.log sourcetype = file_change_log
6/12/25 6:22:01.000 PM	2025-06-12T18:22:01Z path=/etc/passwd action=modified host = si-0b61fc8397807e968.prd-p-dpm5a.splunkcloud.com source = file_changes.log sourcetype = file_change_log

Save As Alert

Settings

Title Critical File Change Detected

Description Alerts when files in /etc are modified or deleted

Permissions Private Shared In App

Alert type Scheduled

Run every hour

At 15 minutes past the hour



Expires 24 hour(s)

Trigger Conditions

Trigger alert when Number of Results

is greater than 0

Cancel Save

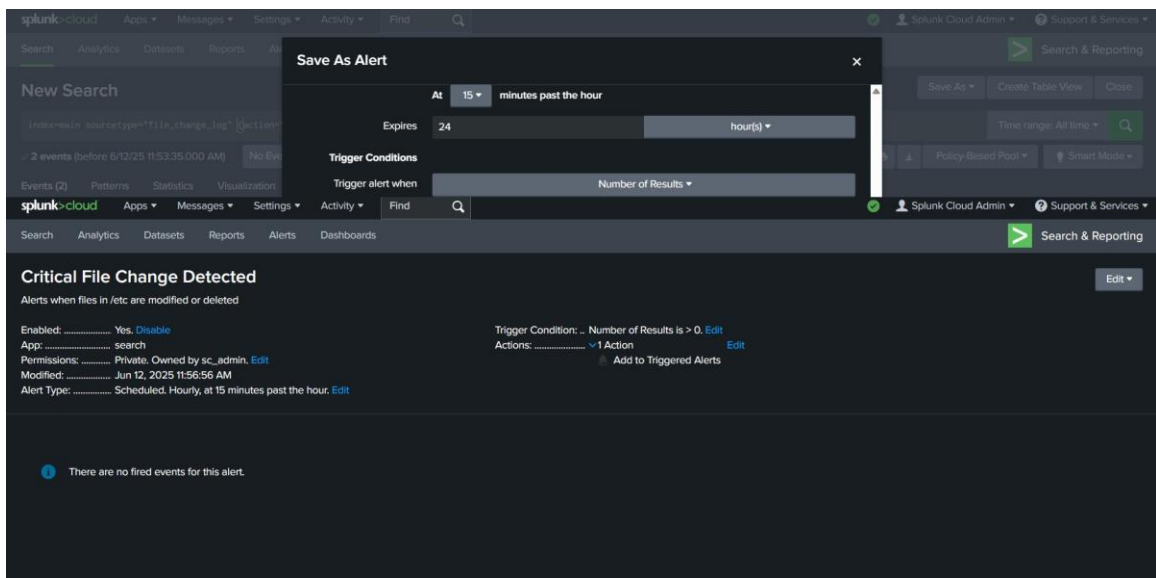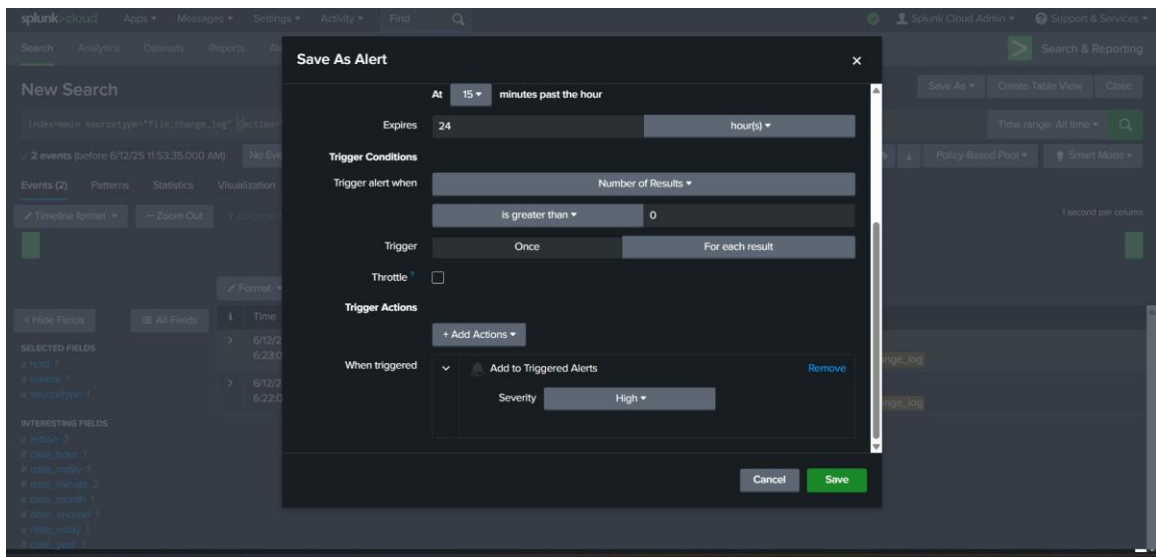

High CPU Usage

Triggers when system CPU usage exceeds 80%. Helps identify performance bottlenecks or overloaded processes.

The screenshot shows the 'Add Data' wizard in Splunk Cloud. The 'Select Source' step is active, showing a progress bar with five steps: Select Source, Set Source Type, Input Settings, Review, and Done. The 'Selected File' is 'high_cpu.log'. A 'Select File' button is visible. Below the file selection area, there is a large empty box with the text 'Drop your data file here' and 'The maximum file upload size is 500 Mb'. A green checkmark and the text 'File Successfully Uploaded' are displayed. At the bottom, there is an 'FAQ' section with three questions: 'What kinds of files can the Splunk platform index?', 'What is a source?', and 'How do I get remote data onto my Splunk platform instance?'.

Select Source

Choose a file to upload to the Splunk platform, either by browsing your computer or by dropping a file into the target box below. [Learn More](#)

Selected File: **high_cpu.log**

Select File

Drop your data file here

The maximum file upload size is 500 Mb

File Successfully Uploaded

FAQ

- > What kinds of files can the Splunk platform index?
- > What is a source?
- > How do I get remote data onto my Splunk platform instance?

The screenshot shows the 'Set Source Type' step of the 'Add Data' wizard. The progress bar shows 'Set Source Type' as the current step. The source is 'high_cpu.log'. Below the source name, there is a 'Source type: Select Source Type' dropdown and a 'Save As' button. To the right, there is a 'View Event Summary' link. The main area displays a table with two columns: 'Time' and 'Event'. The table contains two rows of data, each with a timestamp and a usage value.

Set Source Type

This page lets you see how the Splunk platform sees your data before indexing. If the events look correct and have the right timestamps, click "Next" to proceed. If not, use the options below to define proper event breaks and timestamps. If you cannot find an appropriate source type for your data, create a new one by clicking "Save As".

Source: **high_cpu.log**

Source type: Select Source Type **Save As**

View Event Summary

	Time	Event
1	6/12/25 6:20:00.000 PM	timestamp=2025-06-12T18:20:00Z usage=85
2	6/12/25 6:25:00.000 PM	timestamp=2025-06-12T18:25:00Z usage=92

splunk-cloudAppsMessagesSettingsActivityFind

Splunk Cloud AdminSupport & Services

Add Data

Select SourceSet Source TypeInput SettingsReviewDone

Input Settings

Optionally set additional input parameters for this data input as follows:

Host

When the Splunk platform indexes data, each event receives a "host" value. The host value should be the name of the machine from which the event originates. The type of input you choose determines the available configuration options. [Learn More](#)

Constant value

Regular expression on path

Segment in path

Host field value

si-0b61fc8397807e968.prd-p-dpm5e

Index

The Splunk platform stores incoming data as events in the selected index. Consider using a "sandbox" index as a destination if you have problems determining a source type for your data. A sandbox index lets you troubleshoot your configuration without impacting production indexes. You can always change this setting later. [Learn More](#)

main

FAQ

> How do indexes work?

> How do I know when to create or use multiple indexes?

splunk-cloudAppsMessagesSettingsActivityFind

Splunk Cloud AdminSupport & Services

Add Data

Select SourceSet Source TypeInput SettingsReviewDone

Review

Input Type Uploaded File
File Name high_cpu.log
Source Type cpu_log
Host si-0b61fc8397807e968.prd-p-dpm5a.splunkcloud.com
Index main

> How do I know when to create or use multiple indexes?

splunk-cloud Apps Messages Settings Activity Find

Search Analytics Datasets Reports Alerts Dashboards

Search & Reporting

New Search

Index=main sourcetype="cpu_log" usage>80 Time range: All time

2 events (before 6/12/25 12:04:57:000 PM) No Event Sampling

Events (2) Patterns Statistics Visualization

Timeline format Zoom Out Zoom to Selection Deselect

Format Show: 20 Per Page View: List

Hide Fields All Fields

SELECTED FIELDS

- host 1
- source 1
- sourcetype 1

INTERESTING FIELDS

- # date_hour 1
- # date_mday 1
- # date_minute 2
- # date_month 1
- # date_second 1
- # date_wday 1
- # date_year 1
- # date_zone 1

Time	Event
6/12/25 6:25:00.000 PM	timestamp=2025-06-12T18:25:00Z usage=92 host = si-0b611c8397807e968-prd-p-dpm5a.splunkcloud.com source = high_cpu_log sourcetype = cpu_log
6/12/25 6:20:00.000 PM	timestamp=2025-06-12T18:20:00Z usage=85 host = si-0b611c8397807e968-prd-p-dpm5a.splunkcloud.com source = high_cpu_log sourcetype = cpu_log

splunk-cloud Apps Messages Settings Activity Find

Search Analytics Datasets Reports Alerts Dashboards

Search & Reporting

New Search

Index=main sourcetype="cpu_log" usage>80 Time range: All time

2 events (before 6/12/25 12:04:57:000 PM) No Event Sampling

Events (2) Patterns Statistics Visualization

Timeline format Zoom Out Zoom to Selection Deselect

Format Show: 20 Per Page View: List

Hide Fields All Fields

SELECTED FIELDS

- host 1
- source 1
- sourcetype 1

INTERESTING FIELDS

- # date_hour 1
- # date_mday 1
- # date_minute 2
- # date_month 1
- # date_second 1
- # date_wday 1
- # date_year 1
- # date_zone 1

Save As Alert

Settings

Title: High CPU Usage Alert

Description: Alerts when CPU usage exceeds 80%

Permissions: Private Shared In App

Alert type: Scheduled

Run every hour

At: 15 minutes past the hour



Expires: 24 hour(s)

Trigger Conditions

Trigger alert when: Number of Results



is greater than 0

Cancel Save

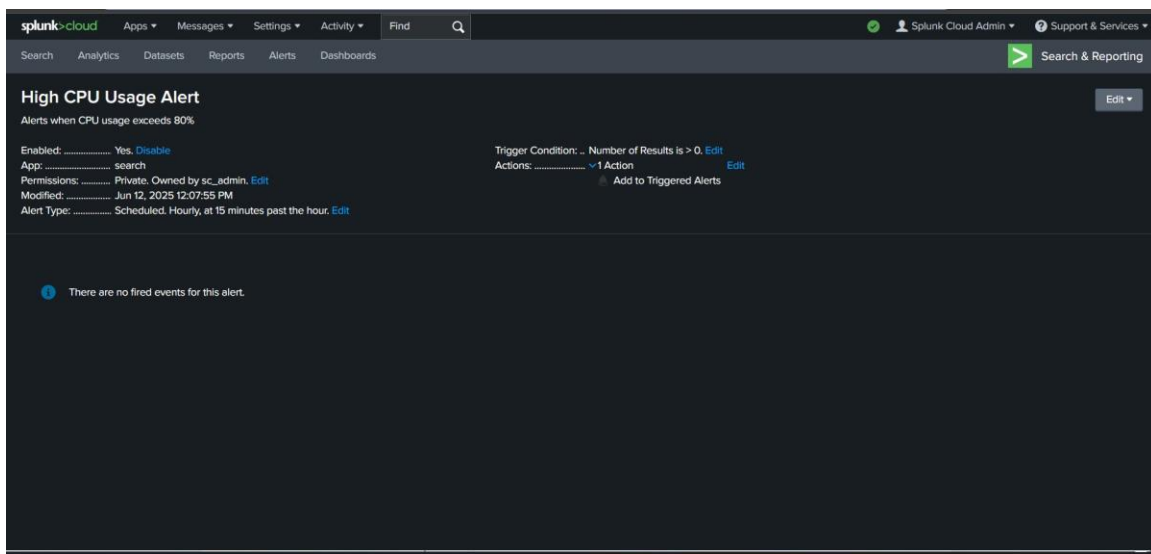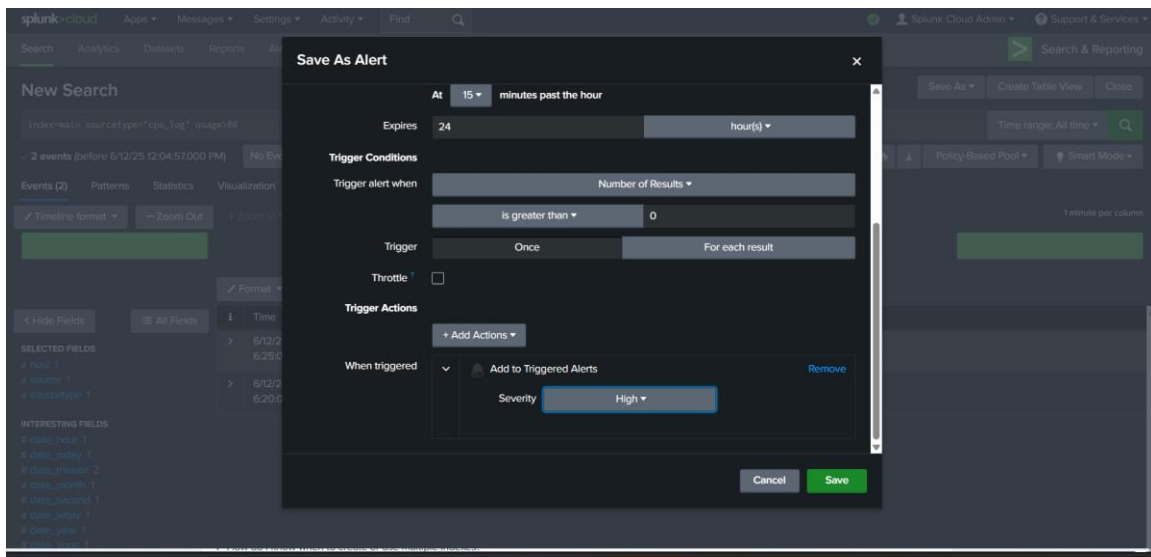

Suspicious Network Activity

Flags network logs for signs of port scans, blacklisted IPs, or failed connections. Helps detect malicious network behavior.

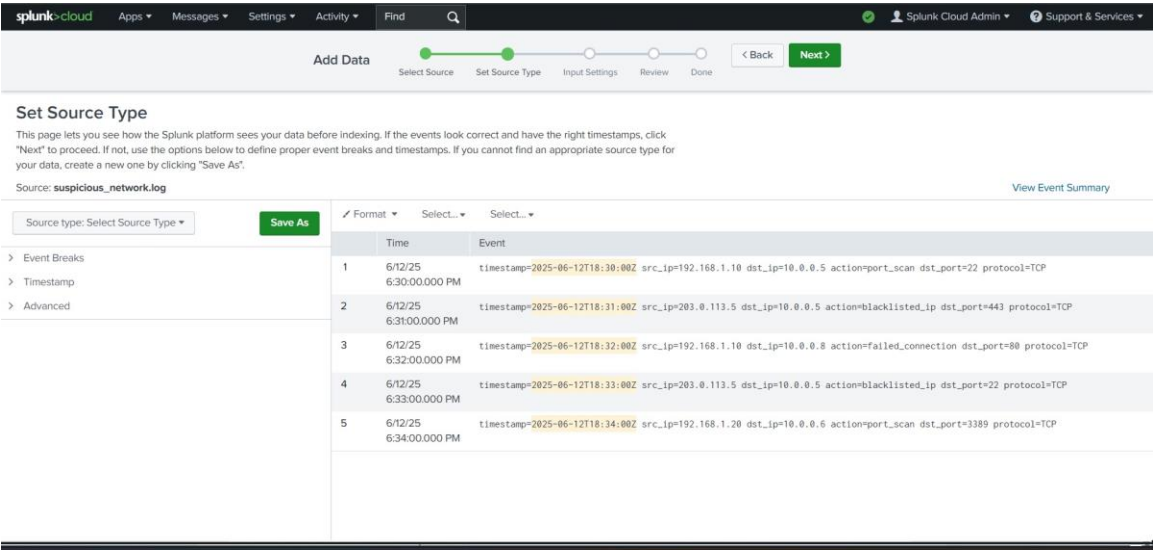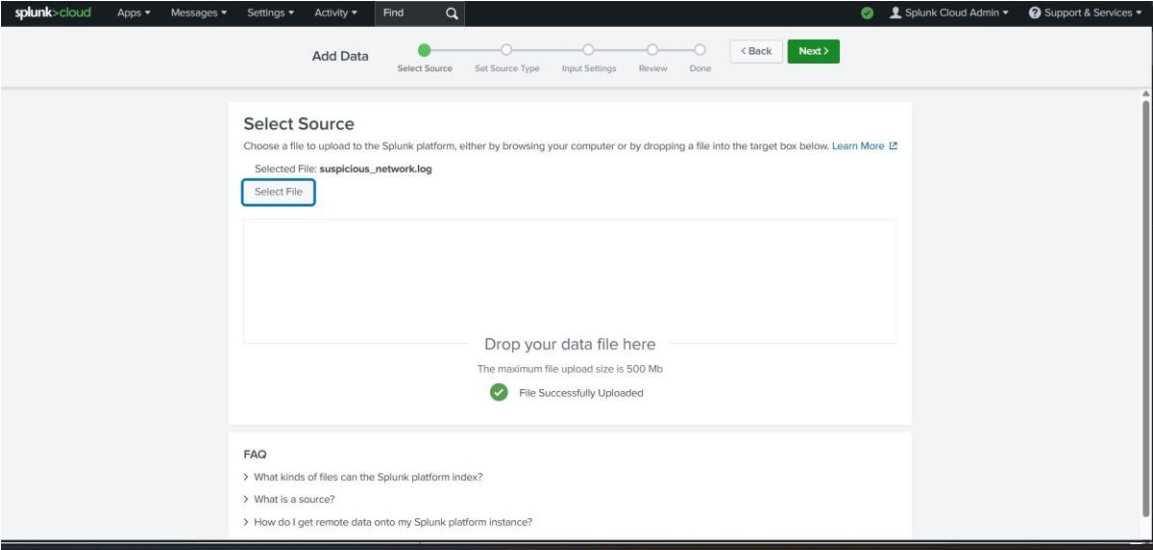

splunk-cloud

Apps

Messages

Settings

Activity

Find

Splunk Cloud Admin

Support & Services

Add Data

Select Source

Set Source Type

Input Settings

Review

Done

< Back

Review >

Input Settings

Optionally set additional input parameters for this data input as follows:

Host

When the Splunk platform indexes data, each event receives a "host" value. The host value should be the name of the machine from which the event originates. The type of input you choose determines the available configuration options. [Learn More](#)

Constant value

Regular expression on path

Segment in path

Host field value

si-0b611c8397807e968.prd-p-dpm5e

Index

The Splunk platform stores incoming data as events in the selected index. Consider using a "sandbox" index as a destination if you have problems determining a source type for your data. A sandbox index lets you troubleshoot your configuration without impacting production indexes. You can always change this setting later. [Learn More](#)

main

FAQ

> How do indexes work?

> How do I know when to create or use multiple indexes?

splunk-cloud

Apps

Messages

Settings

Activity

Find

Splunk Cloud Admin

Support & Services

Search

Analytics

Datasets

Reports

Alerts

Dashboards

Search & Reporting

New Search

Save As

Create Table View

Close

Index=main sourcetype=network_log (action="port_scan" OR action="blacklisted_ip" OR action="failed_connection")

Time range: All time

5 events (before 6/12/25 12:20:01.000 PM)

No Event Sampling

Job

Policy-Based Pool

Smart Mode

Events (5)

Patterns

Statistics

Visualization

Timeline format

Zoom Out

Zoom to Selection

Deselect

1 minute per column

Format

Show: 20 Per Page

View: List

Hide Fields

All Fields

SELECTED FIELDS

host 1

source 1

sourcetype 1

INTERESTING FIELDS

action 3

date_hour 1

date_mday 1

date_minute 5



date_month 1


date_second 1

date_wday 1

date_year 1


#	Time	Event
>	6/12/25 6:34:00.000 PM	timestamp=2025-06-12T18:34:00Z src_ip=192.168.1.20 dst_ip=10.0.0.6 action=port_scan dst_port=3389 protocol=TCP host = si-0b611c8397807e968.prd-p-dpm5a.splunkcloud.com source = suspicious_network.log sourcetype = network_log
>	6/12/25 6:33:00.000 PM	timestamp=2025-06-12T18:33:00Z src_ip=203.0.113.5 dst_ip=10.0.0.5 action=blacklisted_ip dst_port=22 protocol=TCP host = si-0b611c8397807e968.prd-p-dpm5a.splunkcloud.com source = suspicious_network.log sourcetype = network_log
>	6/12/25 6:32:00.000 PM	timestamp=2025-06-12T18:32:00Z src_ip=192.168.1.10 dst_ip=10.0.0.8 action=failed_connection dst_port=88 protocol=TCP host = si-0b611c8397807e968.prd-p-dpm5a.splunkcloud.com source = suspicious_network.log sourcetype = network_log
>	6/12/25 6:31:00.000 PM	timestamp=2025-06-12T18:31:00Z src_ip=203.0.113.5 dst_ip=10.0.0.5 action=blacklisted_ip dst_port=443 protocol=TCP host = si-0b611c8397807e968.prd-p-dpm5a.splunkcloud.com source = suspicious_network.log sourcetype = network_log
>	6/12/25 6:30:00.000 PM	timestamp=2025-06-12T18:30:00Z src_ip=192.168.1.10 dst_ip=10.0.0.5 action=port_scan dst_port=22 protocol=TCP host = si-0b611c8397807e968.prd-p-dpm5a.splunkcloud.com source = suspicious_network.log sourcetype = network_log

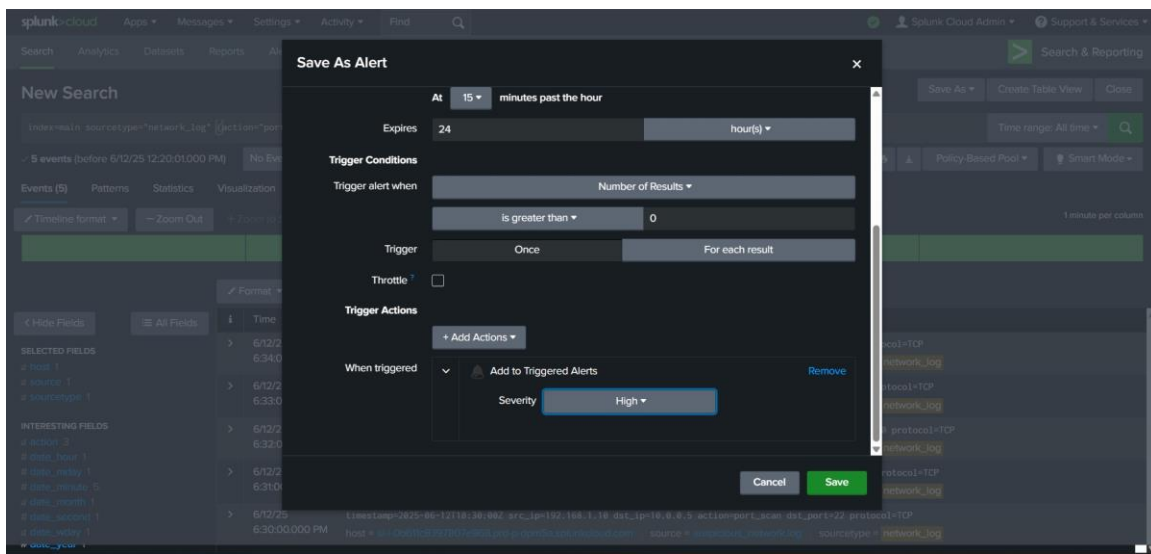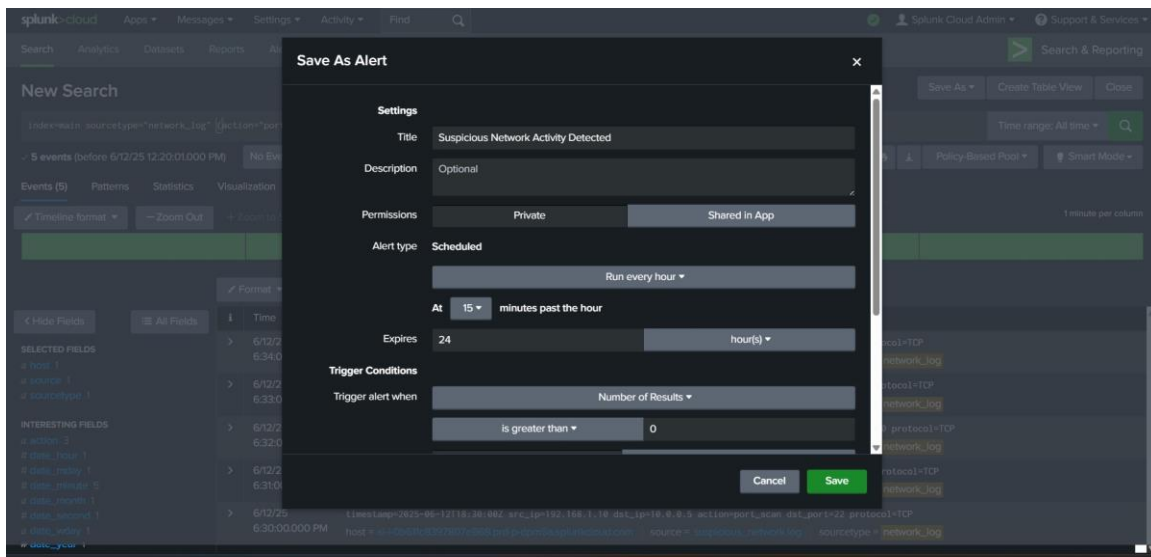

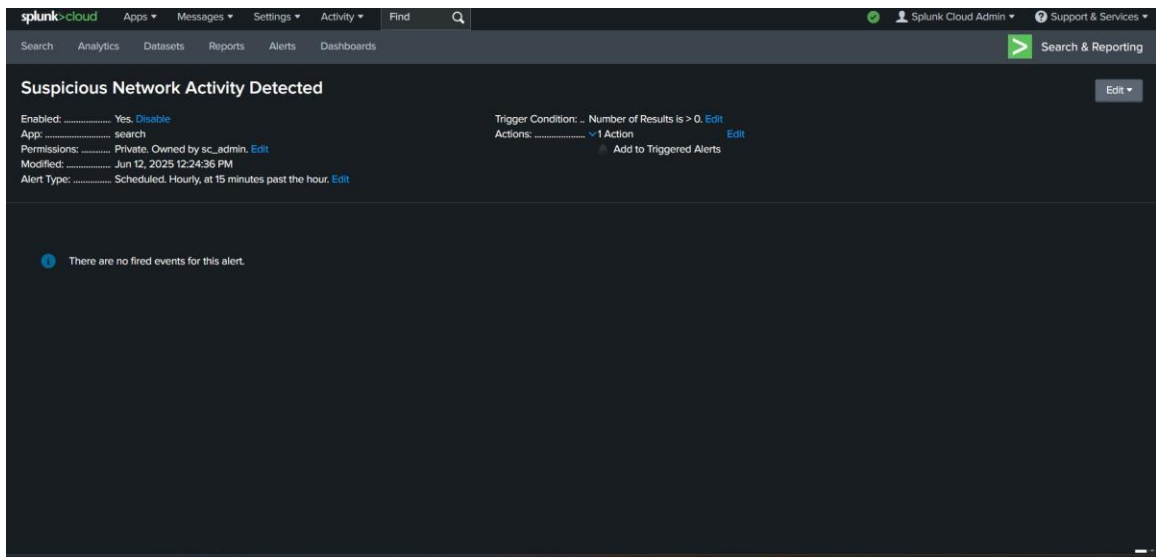

Application Errors

This alert identifies application error events in the logs to detect potential bugs or system issues. Useful for application monitoring and early fault detection.

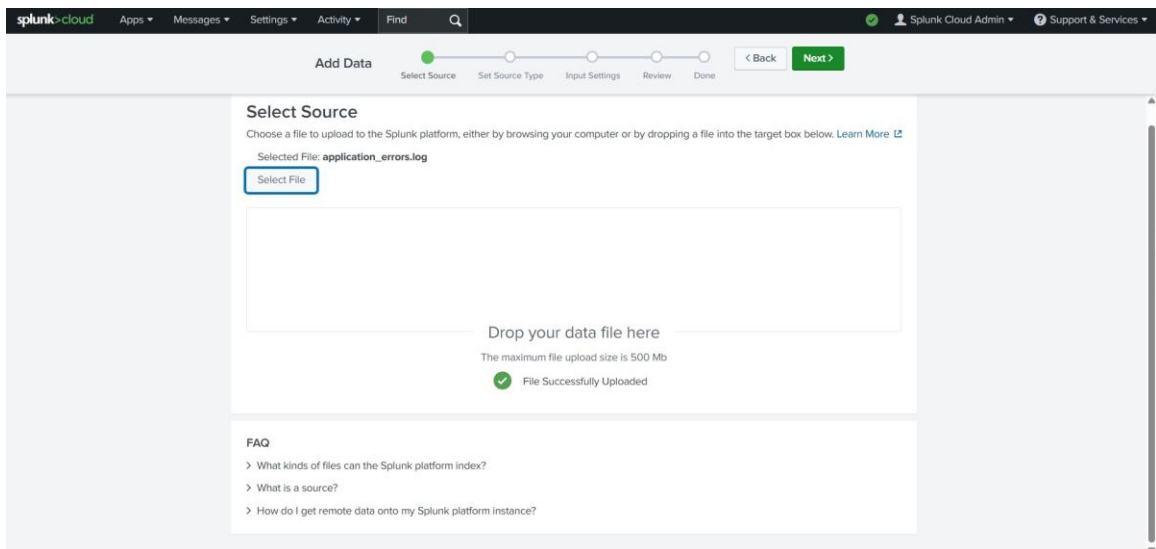

splunk-cloudAppsMessagesSettingsActivityFind

Review

Input Type Uploaded File

File Name application_errors.log

Source Type apps log

Host si-i-0b61fc8397807e968.prd-p-dpm5a.splunkcloud.com

Index main

splunk-cloudAppsMessagesSettingsActivityFind

Search & Reporting

New Search

Index=main sourcetype=apps log ERROR

Time range: All time

2 events (before 6/12/25 10:53:50.000 AM)

Job

Timeline format

Zoom Out

Format

Show: 20 Per Page

View: List

	Time	Event
>	6/12/25 6:25:00.000 PM	2025-06-12T18:25:00Z ERROR: Database connection failed host = si-i-0b61fc8397807e968.prd-p-dpm5a.splunkcloud.com source = application_errors.log sourcetype = apps log
>	6/12/25 6:24:00.000 PM	2025-06-12T18:24:00Z ERROR: NullPointerException at line 32 host = si-i-0b61fc8397807e968.prd-p-dpm5a.splunkcloud.com source = application_errors.log sourcetype = apps log

< Hide Fields

All Fields

SELECTED FIELDS

host 1

source 1

sourcetype 1

INTERESTING FIELDS

date_hour 1

date_mday 1

date_minute 2



date_month 1

date_second 1

date_wday 1

date_year 1

date_zone 1

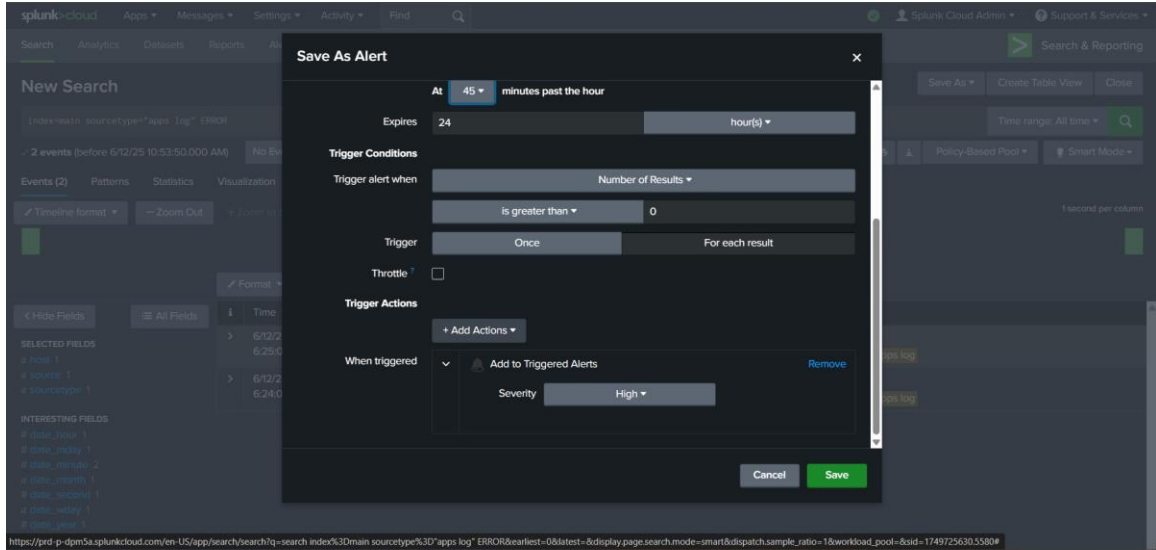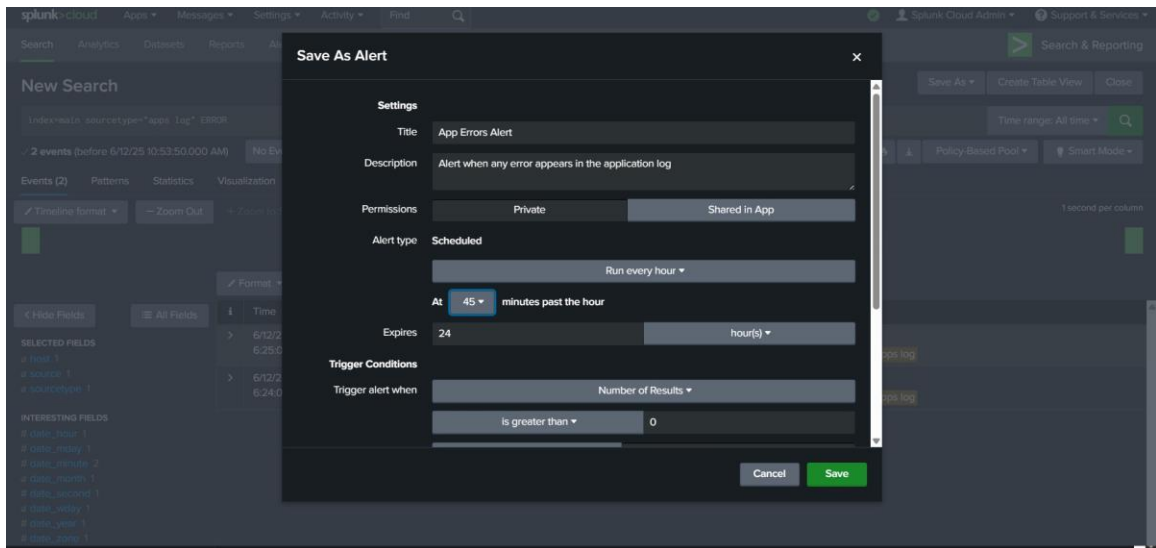

https://prod-p-dm5a.splunkcloud.com/en-US/app/search/search?q=search%3Dmain+sourceType%3D%27apps+log%27+ERROR&earliest=-0&latest=-&display.page.search.mode=smart&dispatch.sample_ratio=1&workload_pool=&sid=1749725630.55804

splunkcloud

AppsMessagesSettingsActivityFind

Splunk Cloud AdminSupport & Services

SearchAnalyticsDatasetsReportsAlertsDashboards

Search & Reporting

App Errors Alert

Edit

Alert when any error appears in the application log

Enabled: Yes [Disable](#)

App: search

Permissions: Private, Owned by sc_admin [Edit](#)

Modified: Jun 12, 2025 11:06:50 AM

Alert Type: Scheduled: Hourly, at 45 minutes past the hour [Edit](#)

Trigger Condition: Number of Results is > 0 [Edit](#)

Actions: 1 Action [Edit](#)

Add to Triggered Alerts

There are no fired events for this alert.