

PROGRESSION · TIMELINE · STRUCTURE


# journey

Native user-journey chart — sections of tasks, each tagged with actor(s) and a 1-5 mood. Renders as section bars, task chips, plumb lines, and mood faces.


# Customer onboarding · trial to activation.

**P** prospect   **S** sales   **U** user   **O** onboarding


**PAIN** 1 2 3 4 5 **DELIGHT**

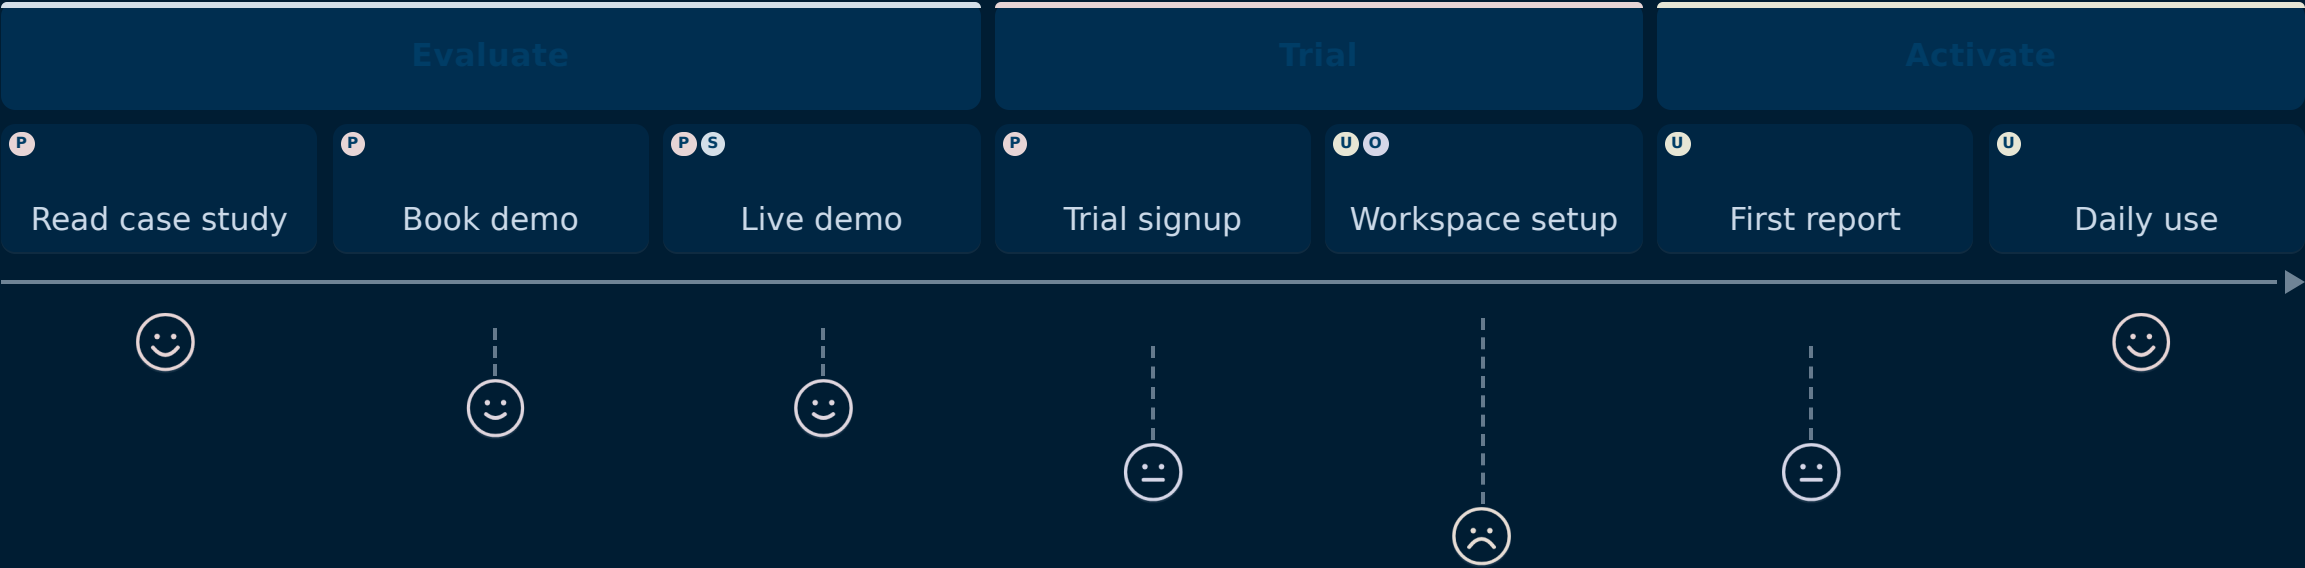

# Heatmap · where the trial drops off.

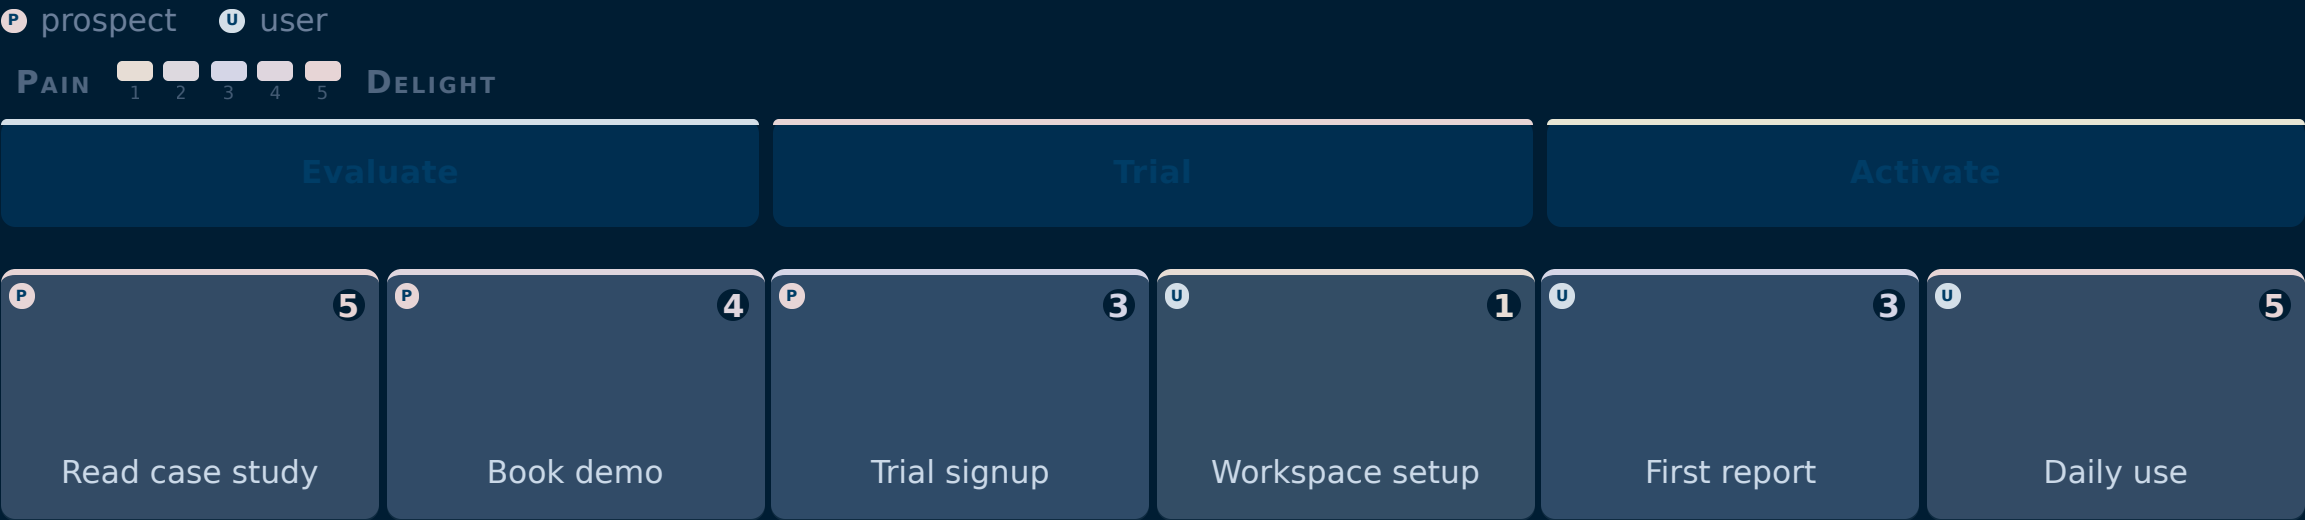


# Curve · the affect contour.

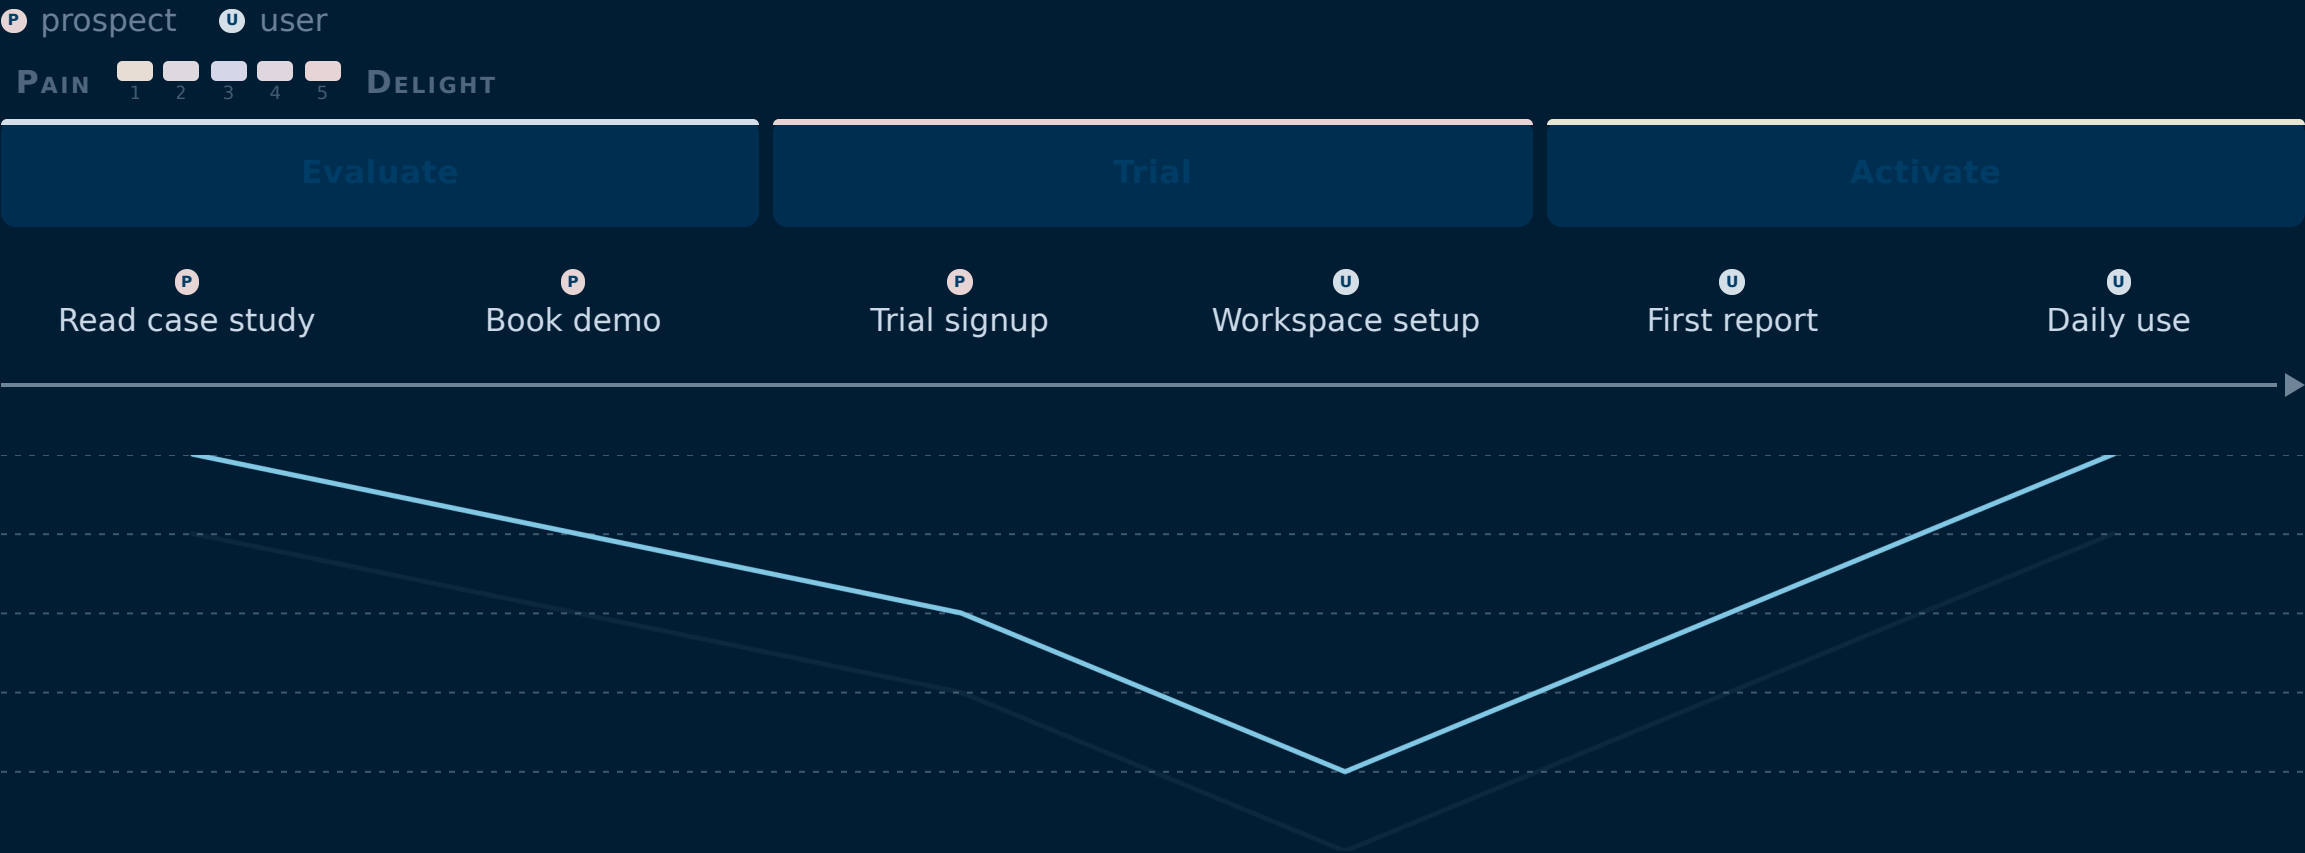

# Swimlane · who owns each moment.




# Weighted · where the traffic actually lands.

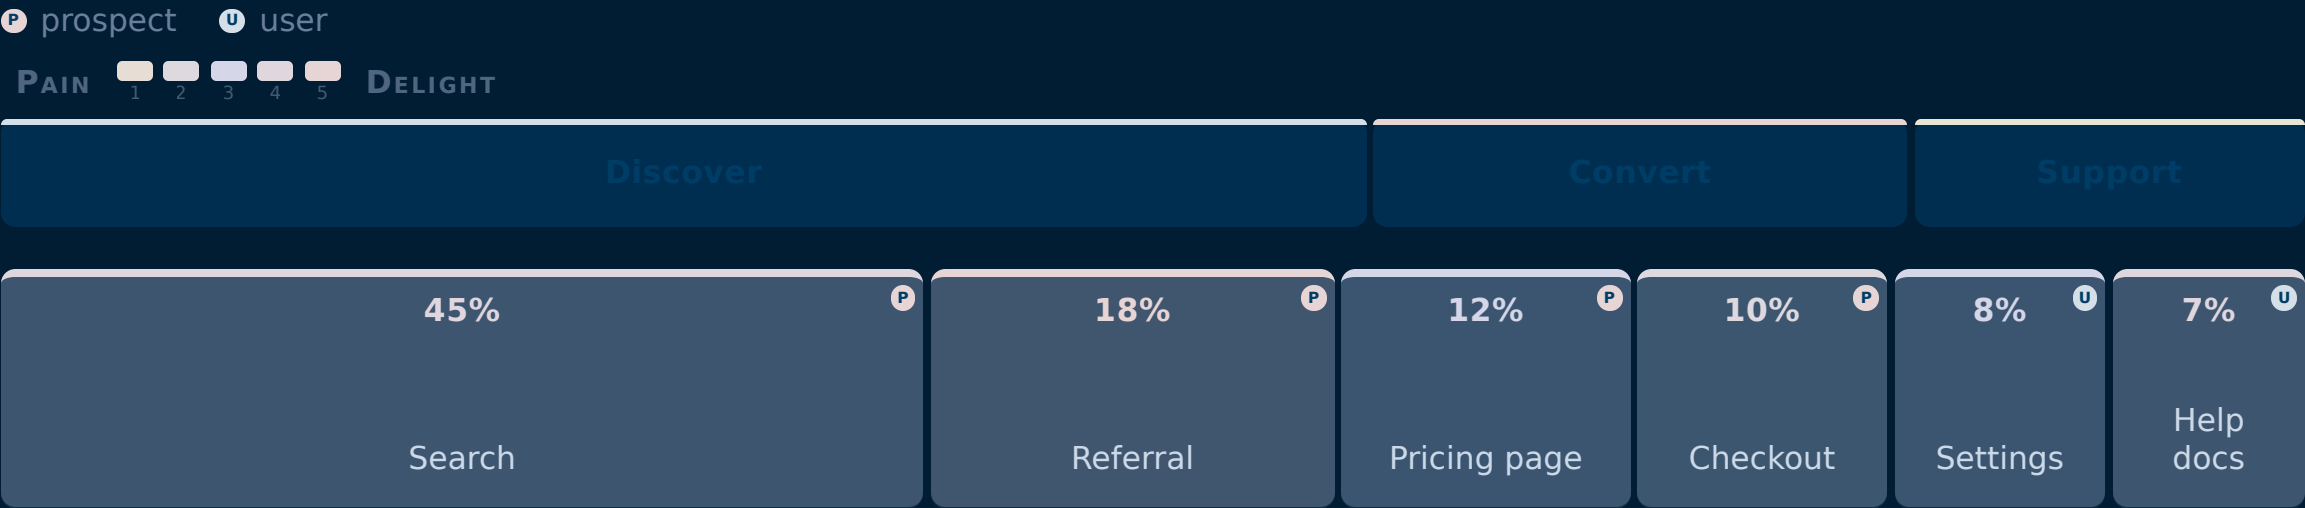


# Customer onboarding · trial to activation.

**P** prospect    **S** sales    **U** user    **O** onboarding

**PAIN** 1 2 3 4 5 **DELIGHT**

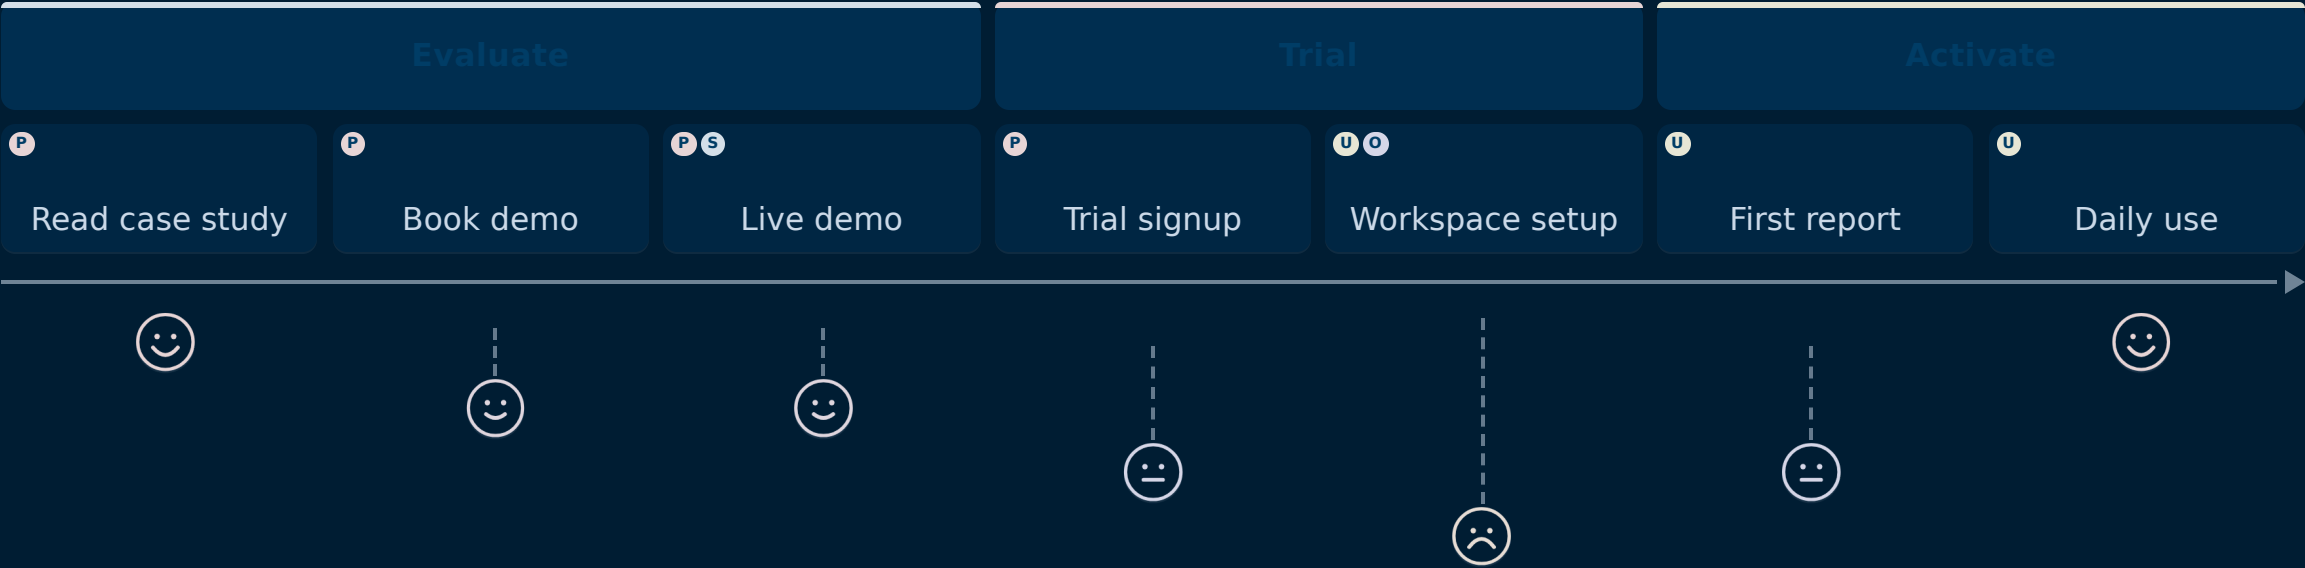

# Customer onboarding · trial to activation.

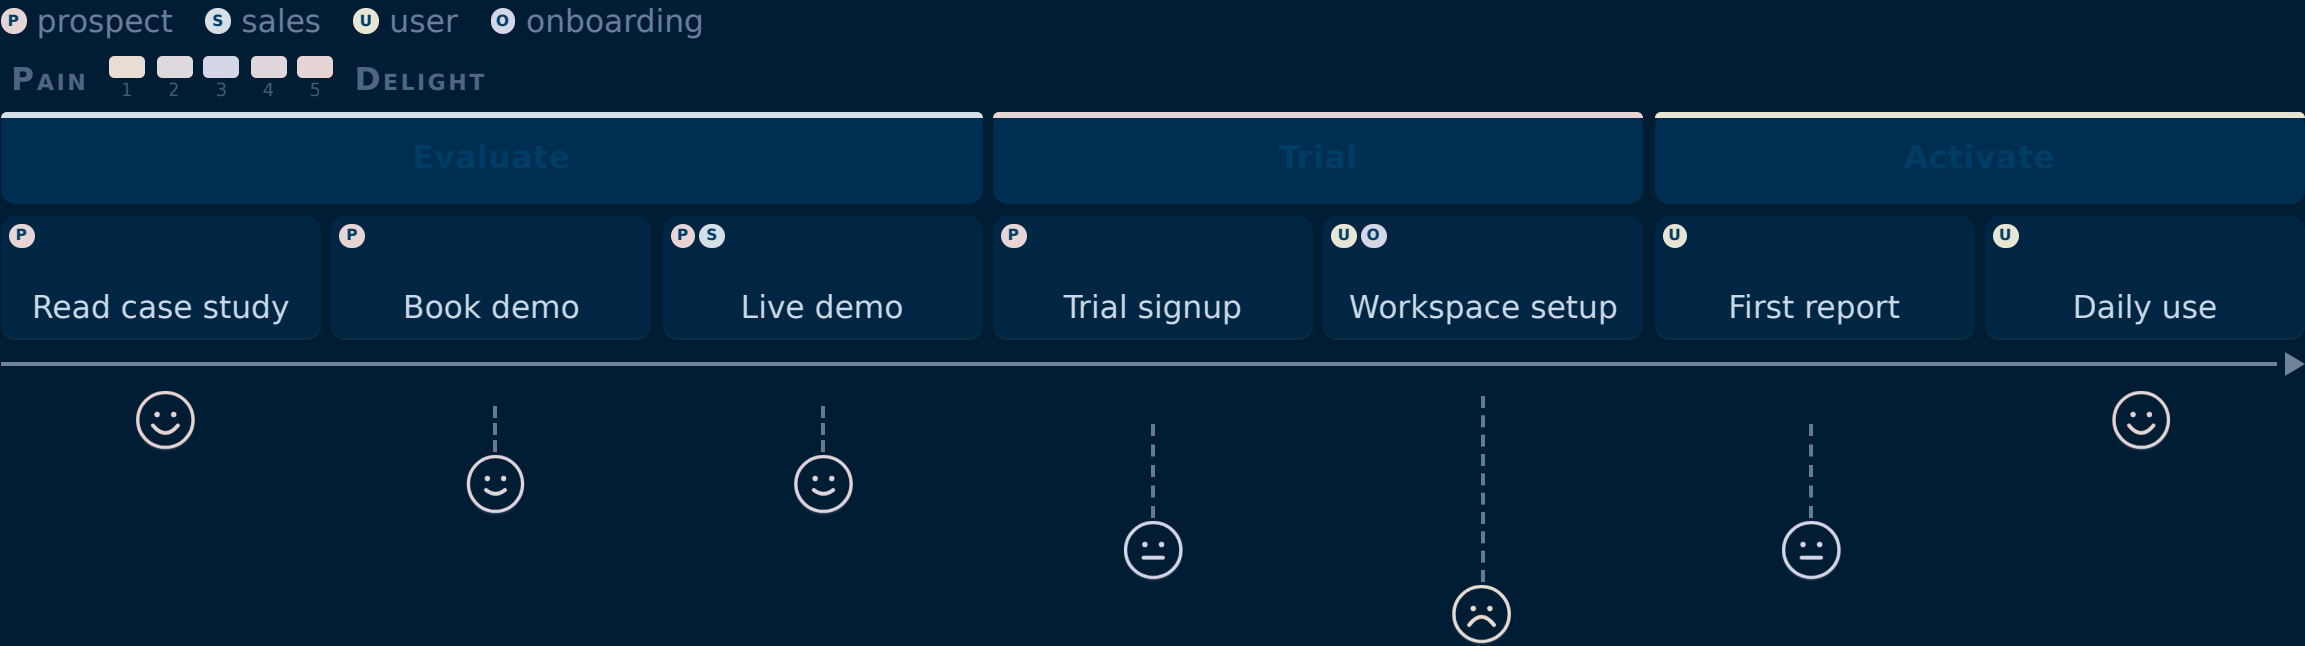




# Customer onboarding · trial to activation.

**P** prospect   **S** sales   **U** user   **O** onboarding

**PAIN** 1 2 3 4 5 **DELIGHT**

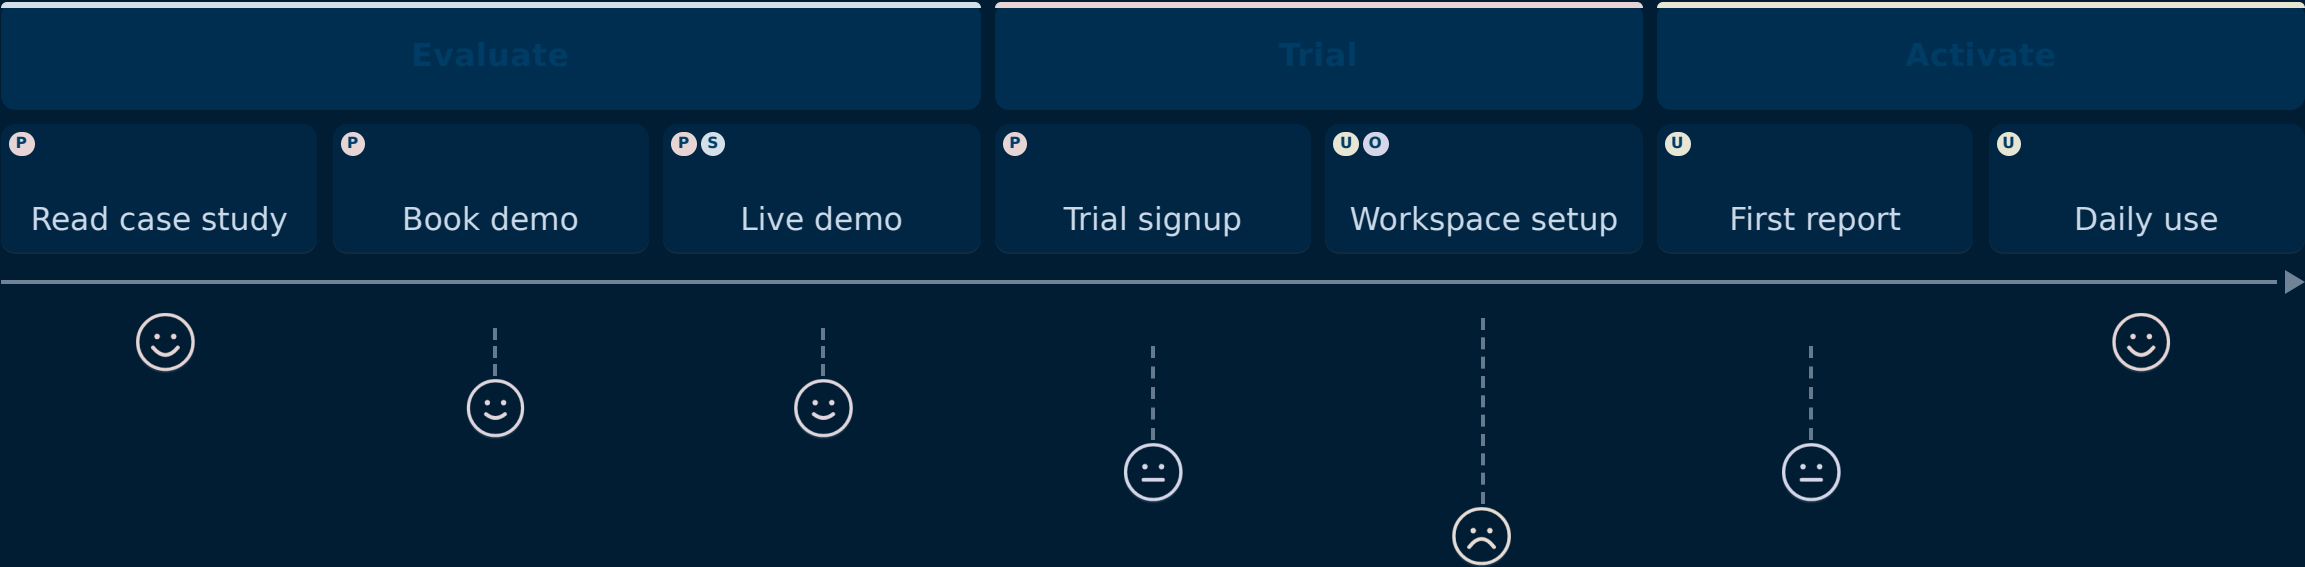

# When NOT to reach for journey.

**Process without affect.** If the mood scores are all the same or arbitrary, the chart is doing less work than `timeline` or `list-steps`. Reserve journey for sequences where the affect changes meaningfully.

**More than ten tasks.** Past ten tasks the chips compress and the labels become unreadable. Group into fewer sections, or split the journey at a natural break.

**Volume tokens without weighted.** The `+N` volume token is meaningful only under the `weighted` variant. On the other four it is parsed but invisible — strip it from the markdown or commit to weighted.

# See also.

## *RELATED COMPONENTS*

- `timeline` — linear sequence without per-step mood or actors
- `list-steps` — process needs descriptive body per step, no chart
- `gantt` — schedule of overlapping tasks across lanes
- `kanban` — current status by stage rather than sequence over time