

UNIVERSAL TOKEN SYSTEM · PHASE 7

# The universal token system, whole.

*Seven phases, one coherent vocabulary — what it means, how it is used, and a CI gate that keeps it that way.*

# Organized on two axes.

## Abstraction

Primitive → Semantic → Component. What it means flows into how it is used.

## Render shape

css-rich (live cascade) vs bridge-flat (the offline Mermaid resolver) — now both evaluate the same expressions.

## Foreground

Ink, stroke, mark — painted on something. Named for its background with `on-`.

## Background

Surface, fill — things sit on it. Takes the bare role name.

# Seven phases, each byte-identical.

## Categorical • structural

`--cat-N-fill/mark/on-fill/on-mark` and `--diagram-stroke/line`.

## Status • lifecycle

`--status-*` for the engine + charts; `--diagram-active/done/critical` for gantt.

## Surfaces • sequential


`--surface-inverse` + `--scheme-dark-*`; `--seq-*` frees "scale".

## Chart • self-policing

`--chart-cat-*` ends the bare-cat collision; a CI gate guards the vocabulary.

PROOF

And it all still renders.

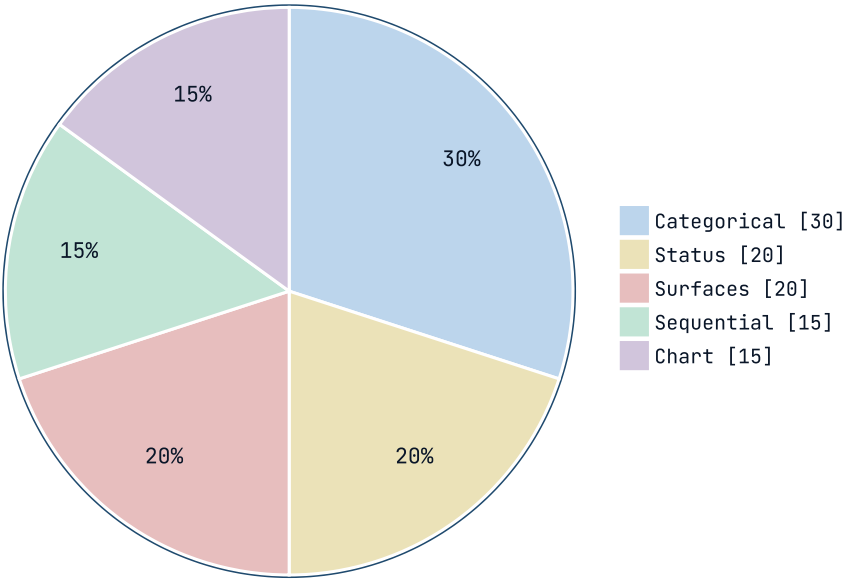

KEY INSIGHT

Every colour above resolves through the new names across all three render paths — light and dark, fourteen palettes, zero visual change.

PHASE 7 OF 7 · ENGINEERING/DECISIONS/2026-06-

11-UNIVERSAL-TOKEN-SYSTEM.MD

A boardroom-ready  
token system, built to  
scale.