

PROGRESSION · TIMELINE · STRUCTURE


journey

Native user-journey chart — sections of tasks, each tagged with actor(s) and a 1-5 mood. Renders as section bars, task chips, plumb lines, and mood faces.


Customer onboarding · trial to activation.

P prospect **S** sales **U** user **O** onboarding


PAIN 1 2 3 4 5 **DELIGHT**

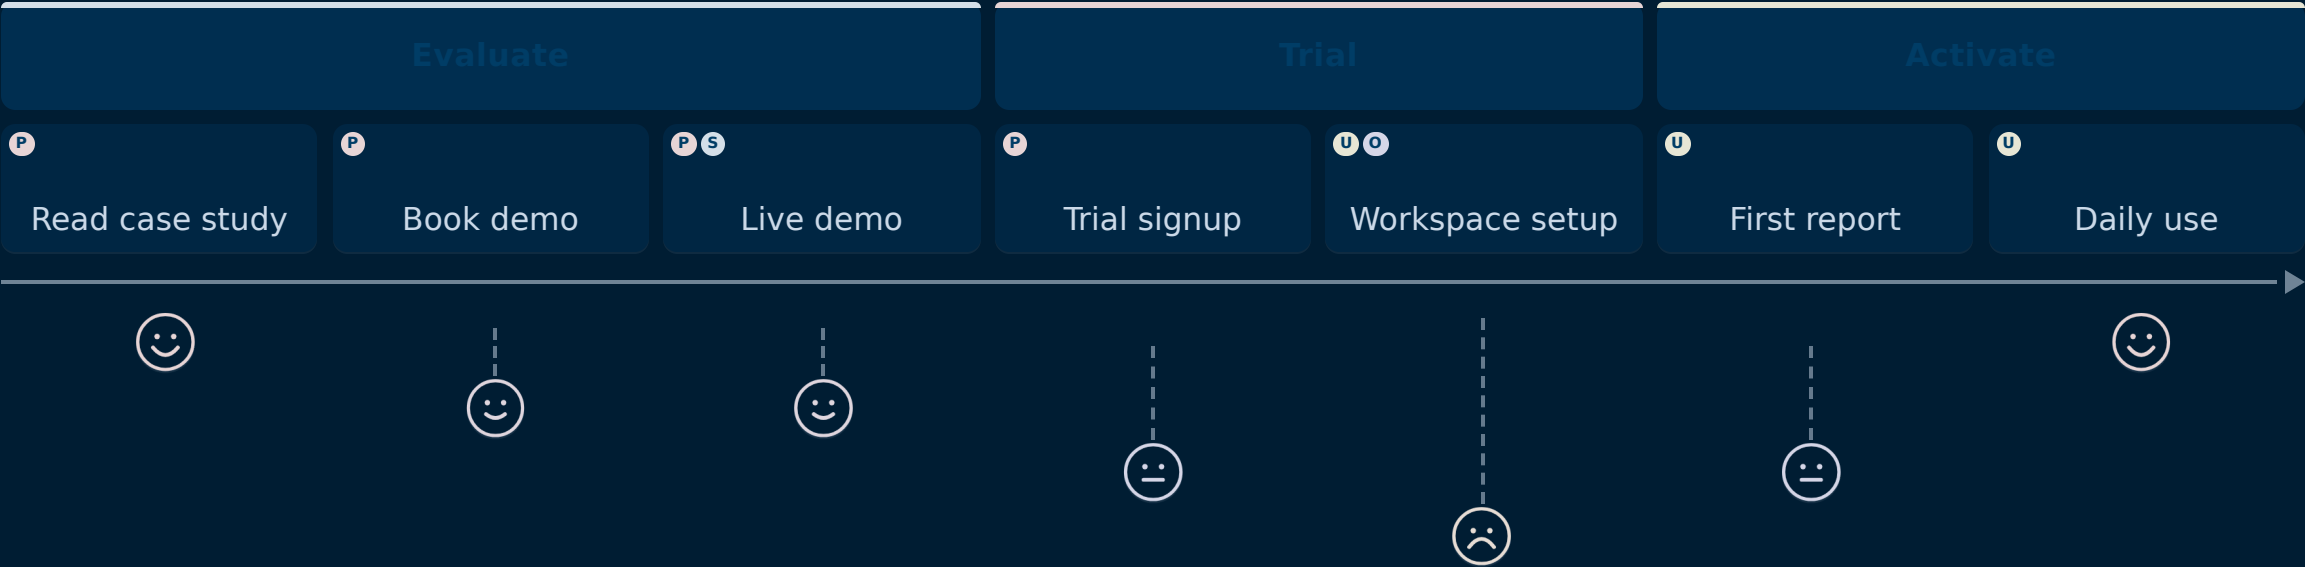

Heatmap · where the trial drops off.

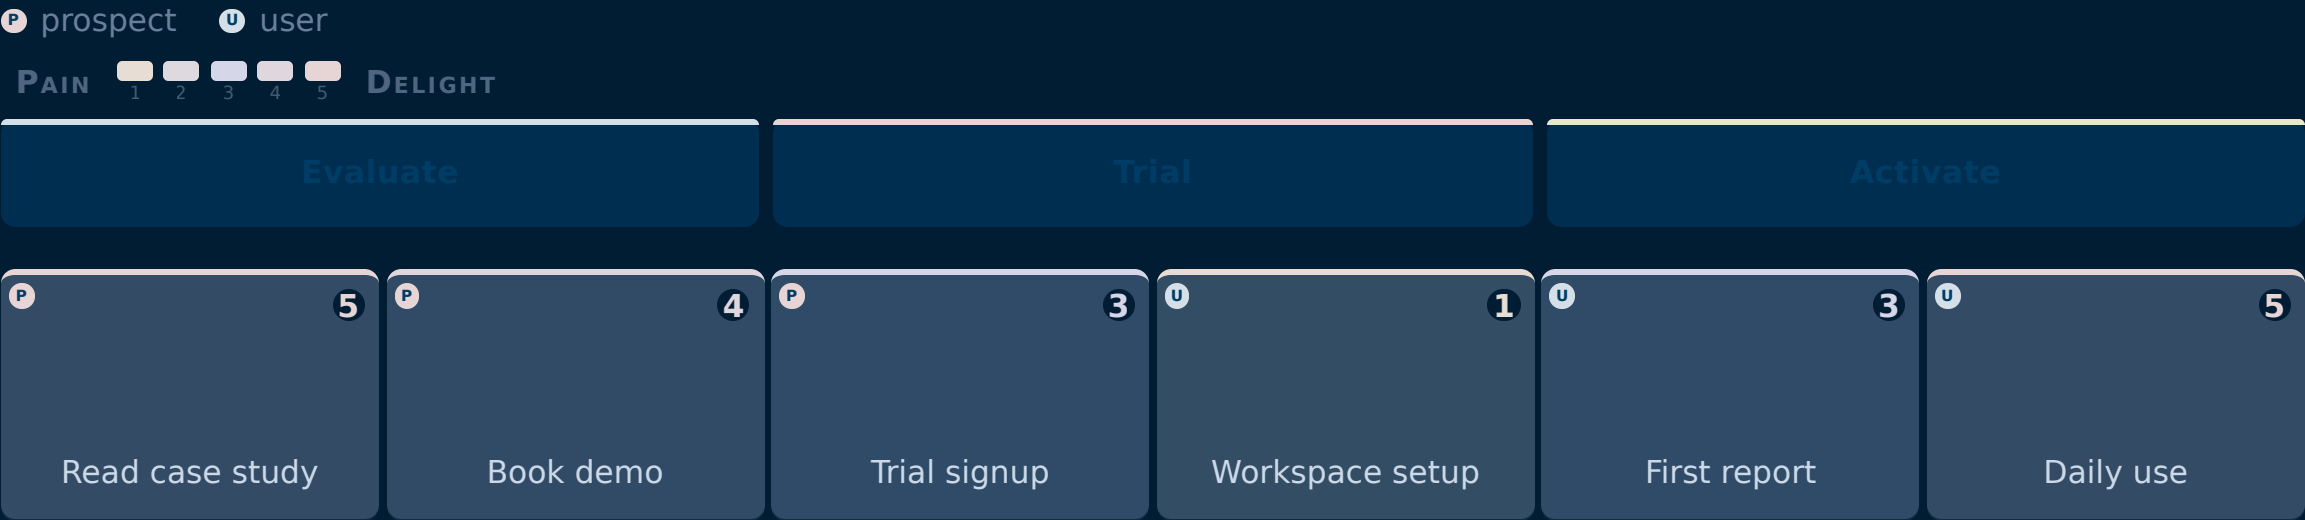


Curve · the affect contour.

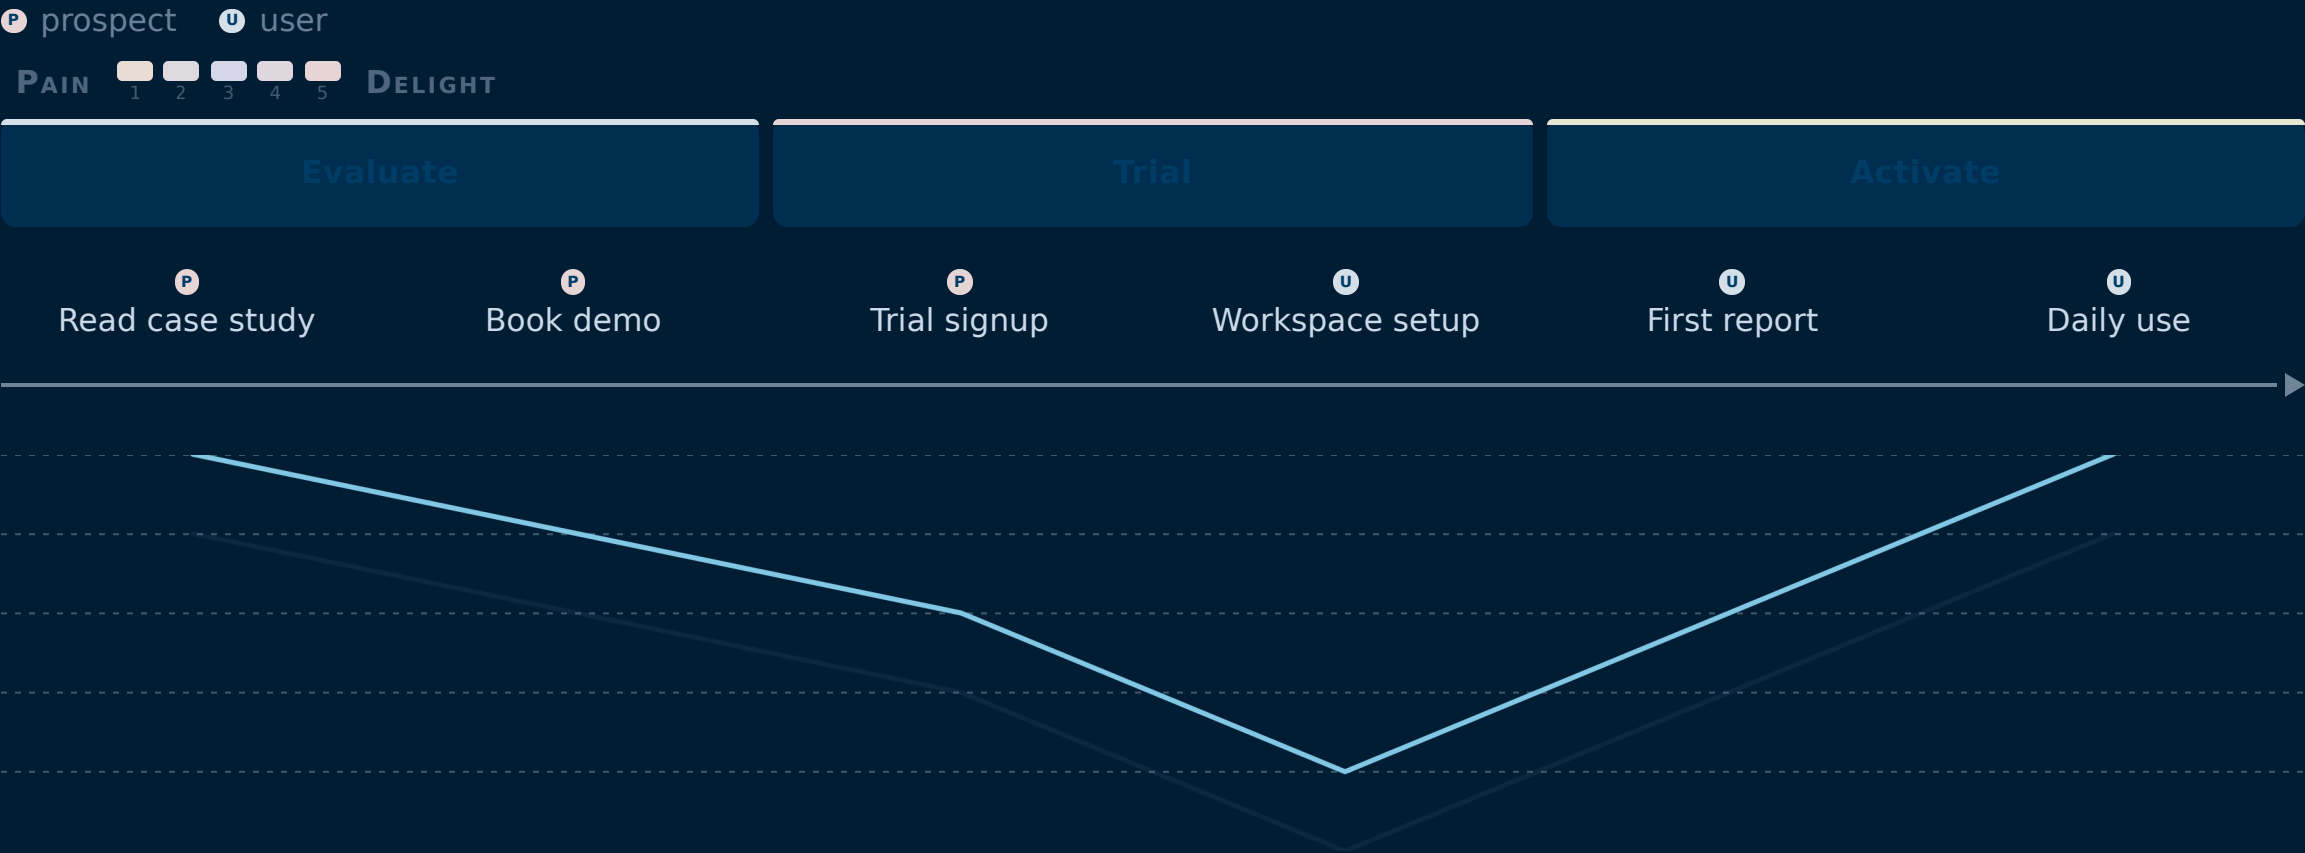

Swimlane · who owns each moment.




Weighted · where the traffic actually lands.

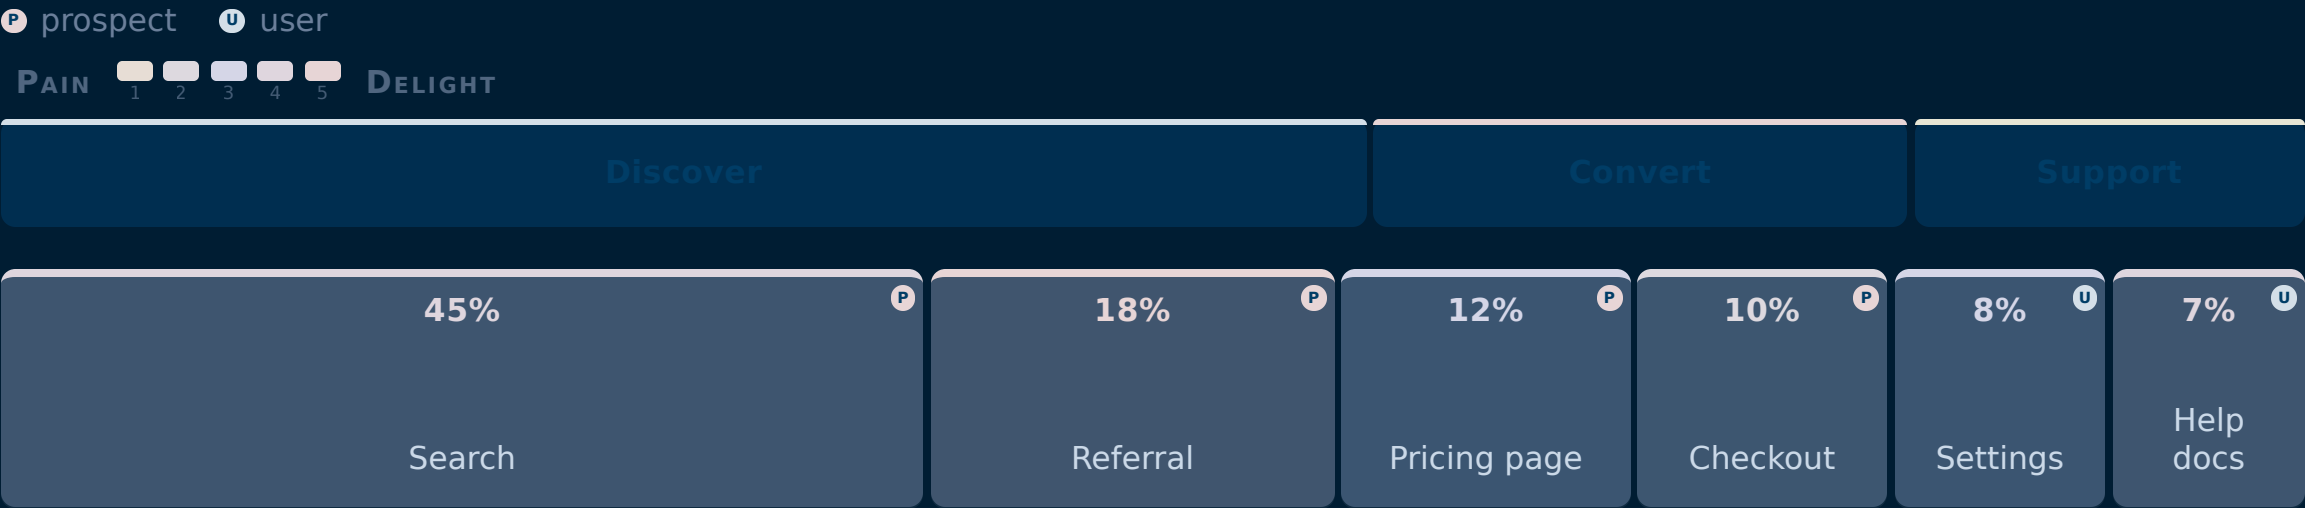


Customer onboarding · trial to activation.

P prospect **S** sales **U** user **O** onboarding

PAIN 1 2 3 4 5 **DELIGHT**

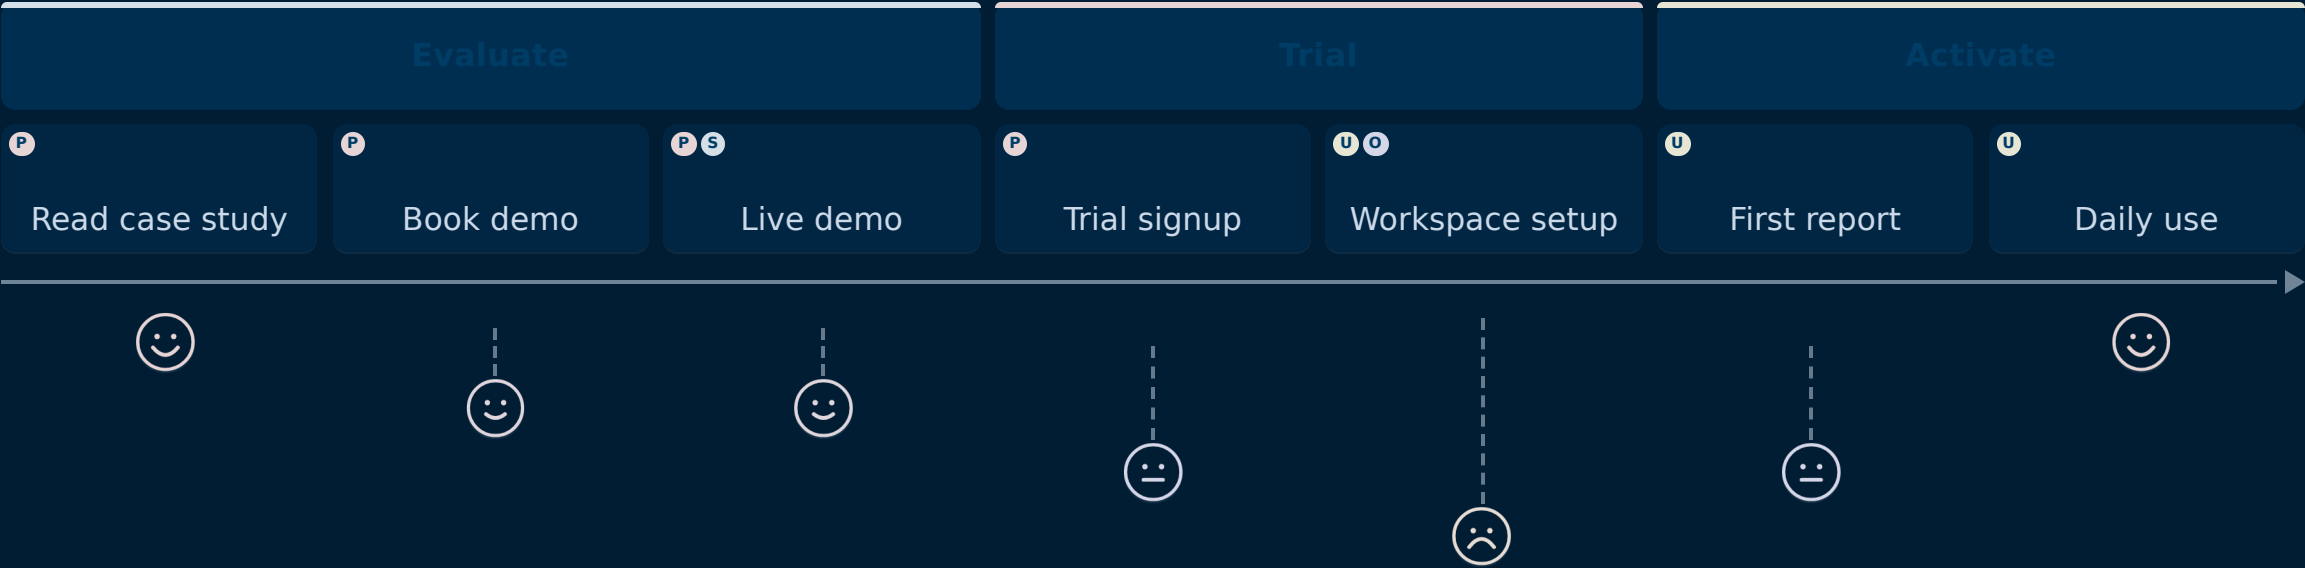


Customer onboarding · trial to activation.

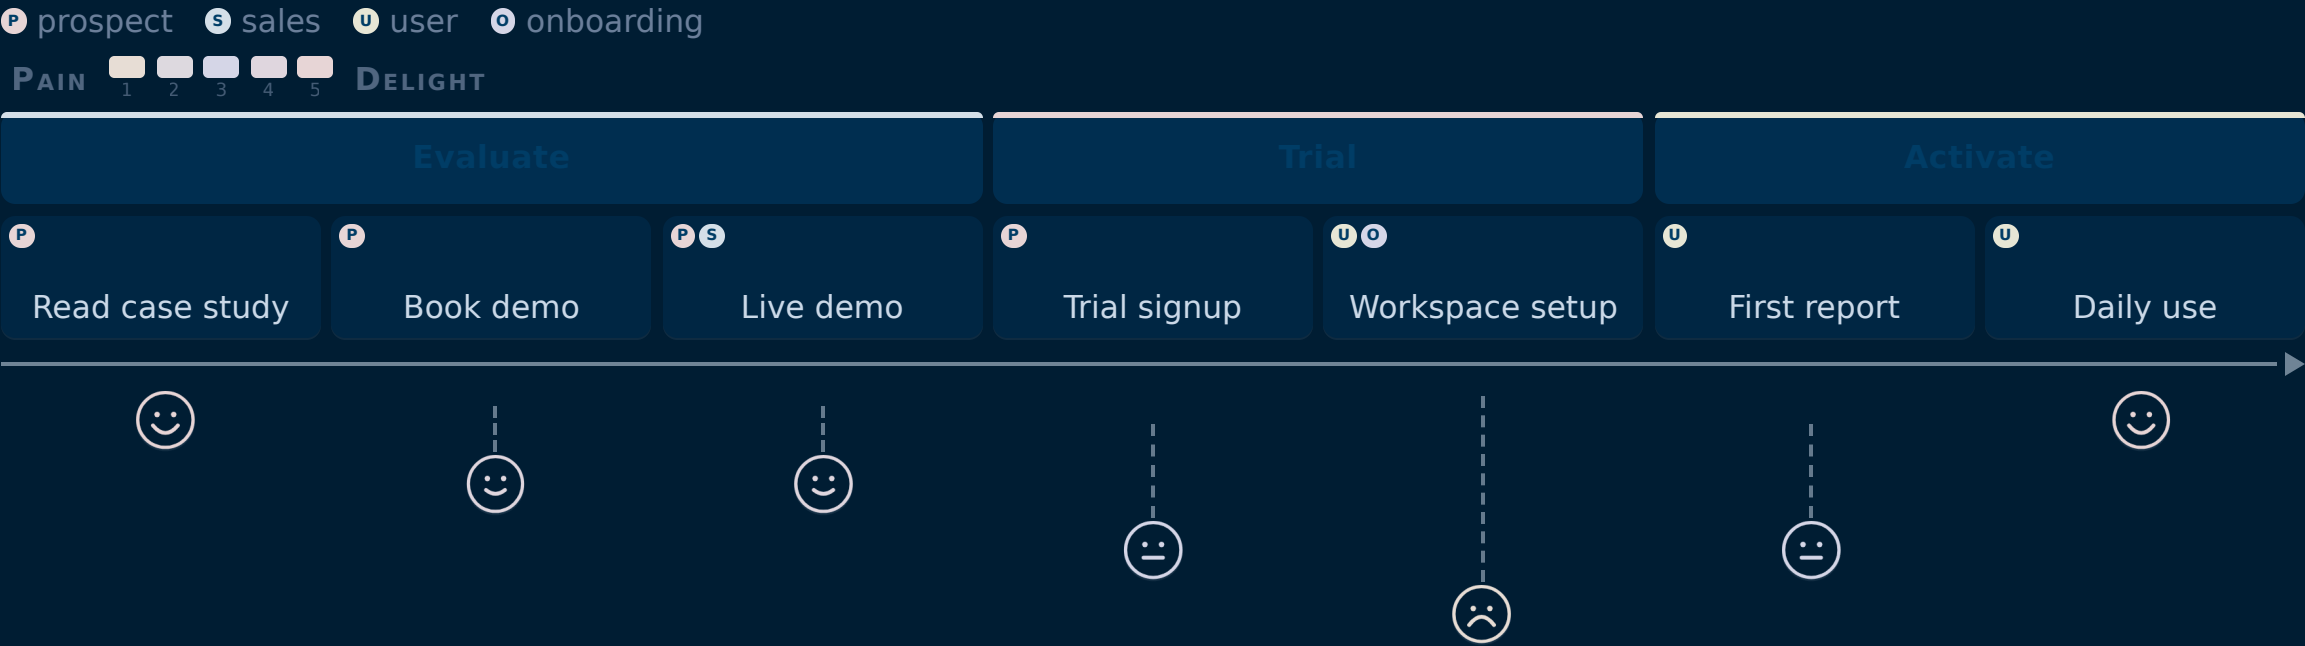

Customer onboarding · trial to activation.

P prospect **S** sales **U** user **O** onboarding

PAIN 1 2 3 4 5 **DELIGHT**

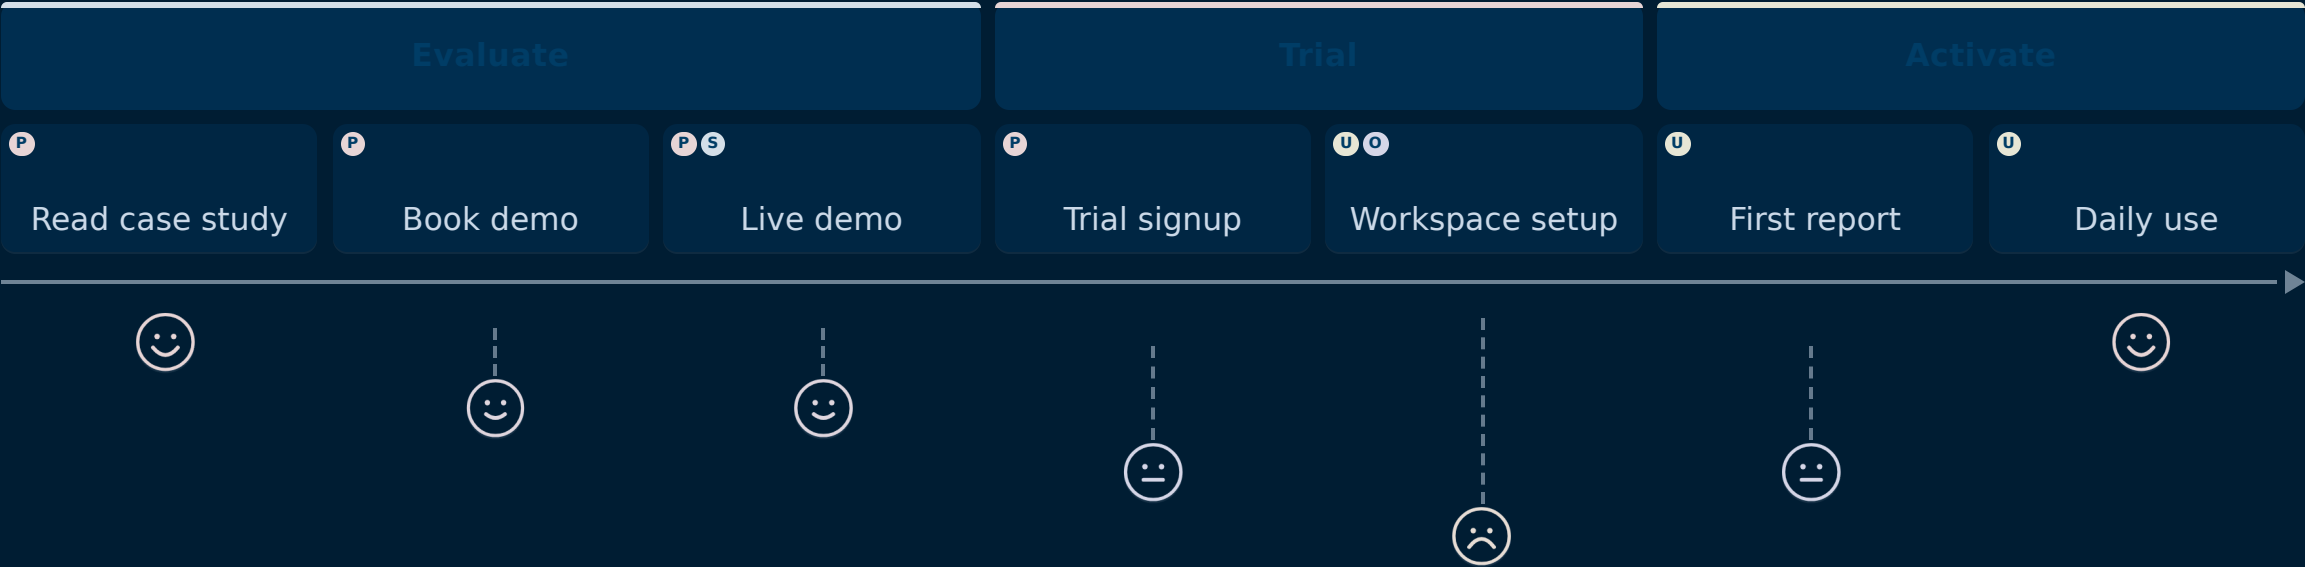

When NOT to reach for journey.

Process without affect. If the mood scores are all the same or arbitrary, the chart is doing less work than `timeline` or `list-steps`. Reserve journey for sequences where the affect changes meaningfully.

More than ten tasks. Past ten tasks the chips compress and the labels become unreadable. Group into fewer sections, or split the journey at a natural break.

Volume tokens without weighted. The `+N` volume token is meaningful only under the `weighted` variant. On the other four it is parsed but invisible — strip it from the markdown or commit to weighted.

See also.

RELATED COMPONENTS

- `timeline` — linear sequence without per-step mood or actors
- `list-steps` — process needs descriptive body per step, no chart
- `gantt` — schedule of overlapping tasks across lanes
- `kanban` — current status by stage rather than sequence over time