

MERMAID 11.14 · LATTICE THEME

Every Mermaid diagram, one slide each.

A reference gallery of the 26 diagram types Mermaid supports, rendered with the Lattice palette so you can see what each one looks like in production.



ORIENTATION · HOW TO USE THIS DECK

How this gallery is organised.

Mermaid 11.14 · rendered through the diagram component

Three groups, twenty-six diagrams

Stable diagrams render with full theme control. Experimental ones marked 🔥 may evolve in syntax and have limited theming surfaces.

15

Stable

Flowchart, sequence, class, state, ER, journey, gantt, pie, quadrant, requirement, gitgraph, c4, mindmap, timeline, zenuml.

11

Experimental 🔥

Sankey, xy chart, block, packet, kanban, architecture, radar, treemap, venn, ishikawa, treeView.

6


Themeable

Flowchart, sequence, pie, state, class, journey have named

GROUP 01 · STABLE DIAGRAMS

The fifteen well-supported types.

Boxes and arrows. The most-used diagram type.

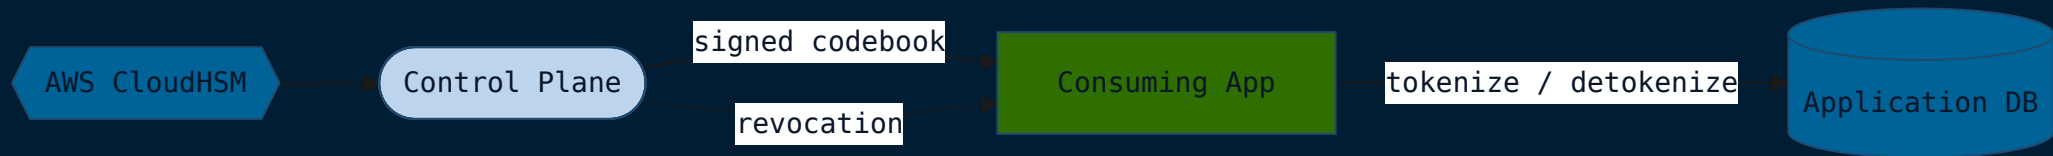


KEY INSIGHT

Full theme support — node fills, borders, edge colors, cluster fills, edge labels all controllable via themeVariables.

02 · SEQUENCE DIAGRAM


Actors and signals over time.

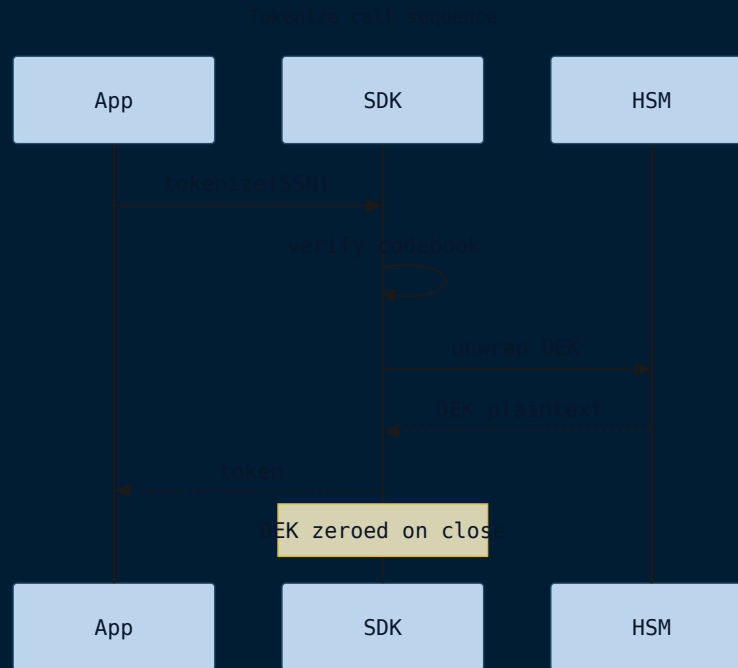**KEY INSIGHT**

Full theme support — actor backgrounds, signal colors, activation bars, note styling all themeable.

03 · CLASS DIAGRAM


UML classes with attributes, methods, and inheritance.

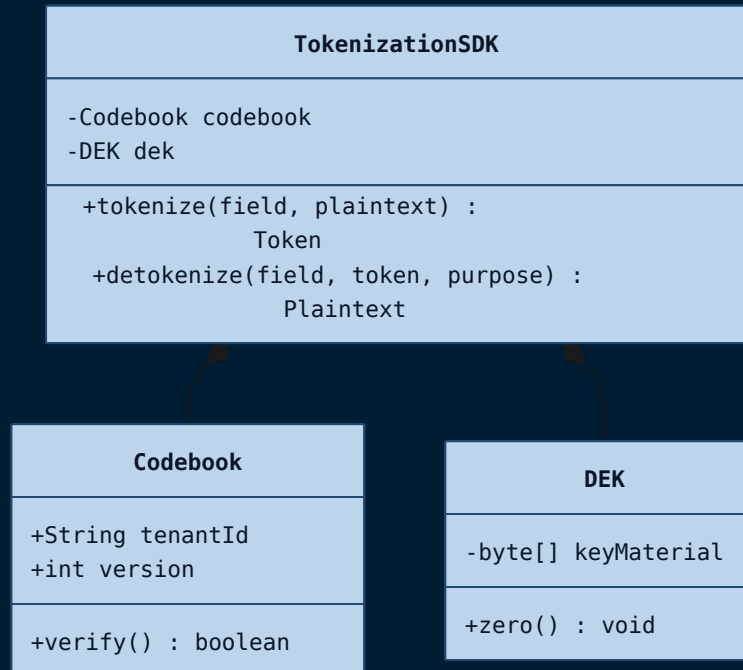**KEY INSIGHT**

Themeable — `classText` controls label color; node fills inherit from `primaryColor`.

04 · STATE DIAGRAM


A finite state machine.

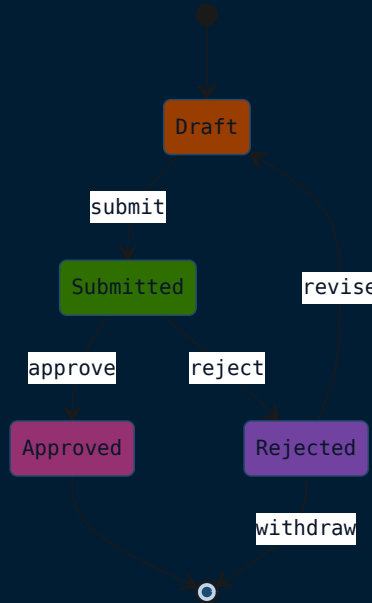**KEY INSIGHT**

Themeable — `labelColor` and `altBackground` for composite states. State fills inherit from primary.

05 · ENTITY RELATIONSHIP DIAGRAM

Database tables and their relationships.

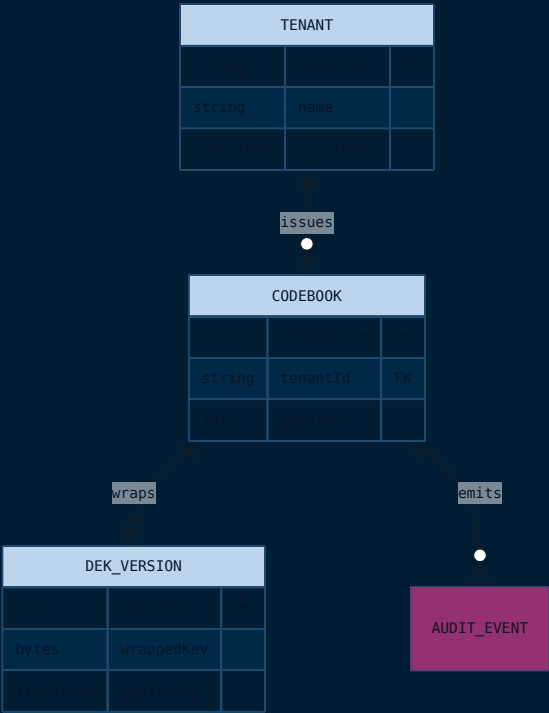


KEY INSIGHT

No named themeVariables — inherits border / text / fill from core variables.

06 · USER JOURNEY


Steps and the emotional state at each one.

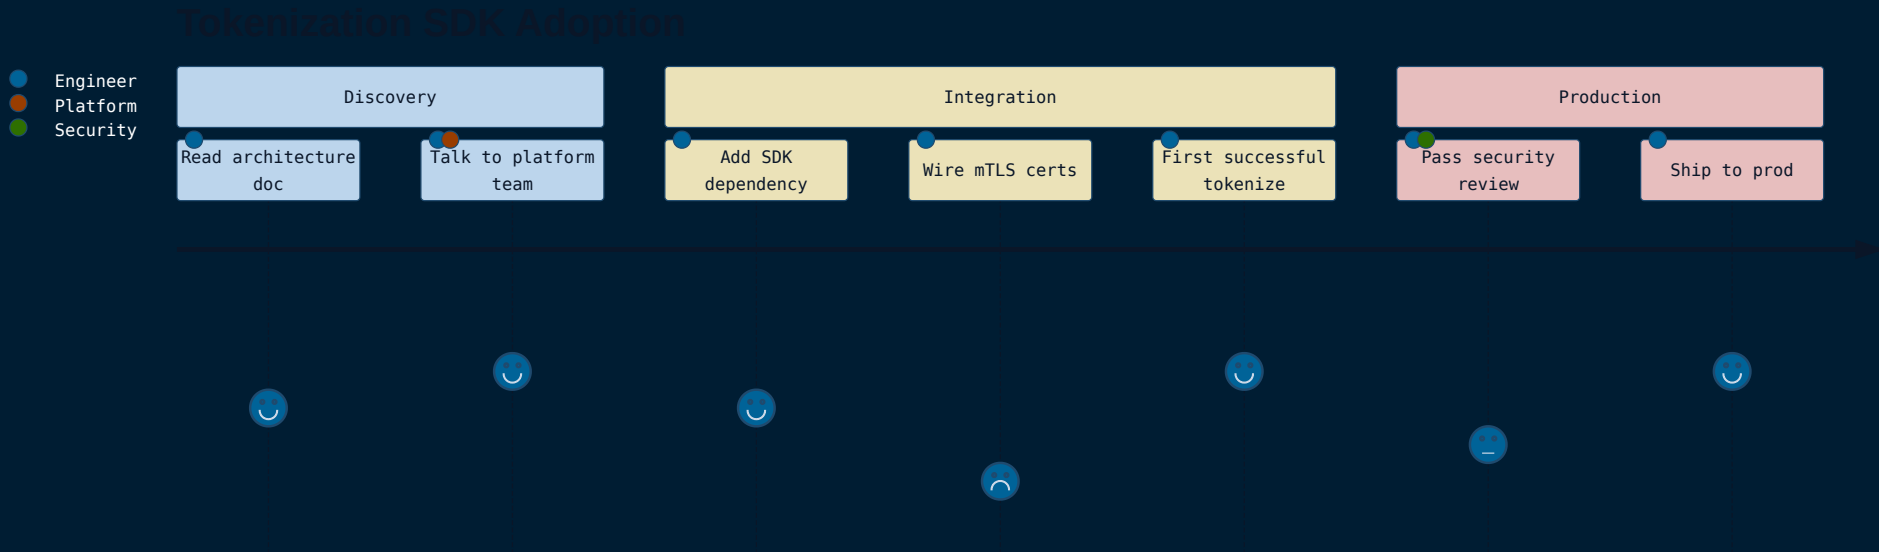

KEY INSIGHT

Themeable — eight `fillType0..7` variables for the section coloring.

Tasks across a timeline, with dependencies.

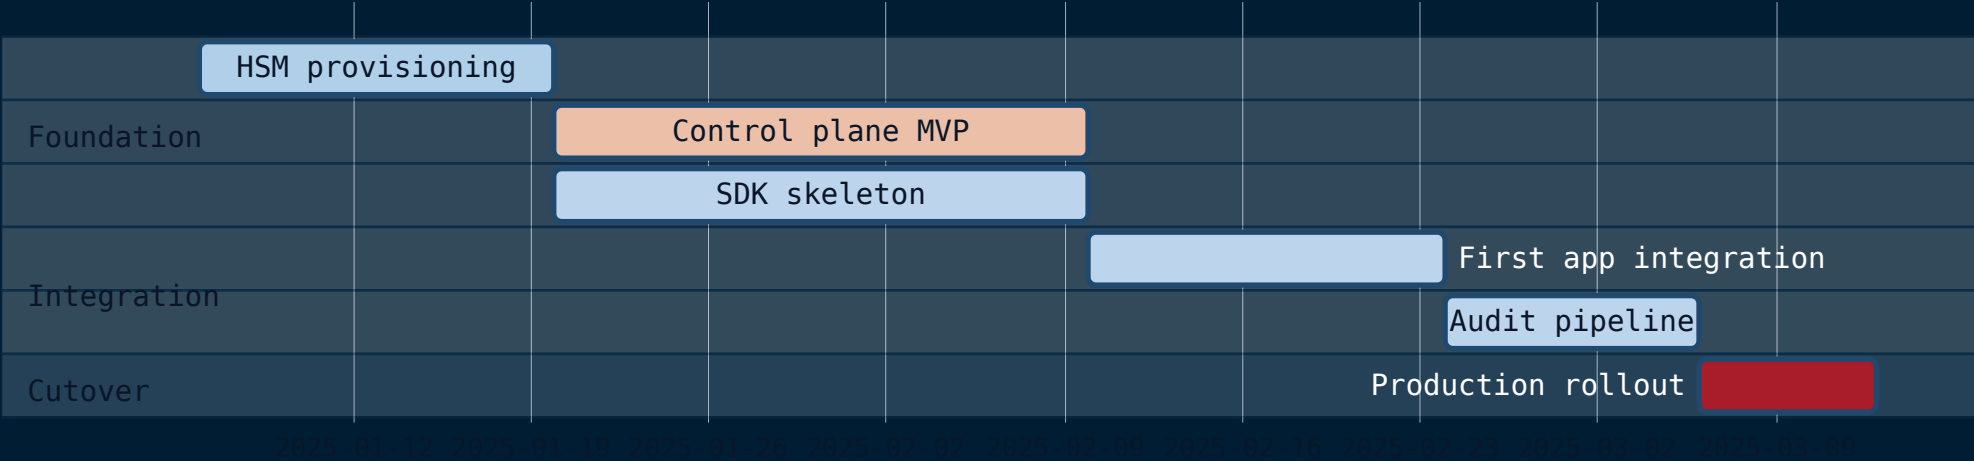


KEY INSIGHT

Lots of dedicated themeVariables — task bar, active task, done task, critical, today line all separately controllable.

08 · PIE CHART


Proportions of a whole.

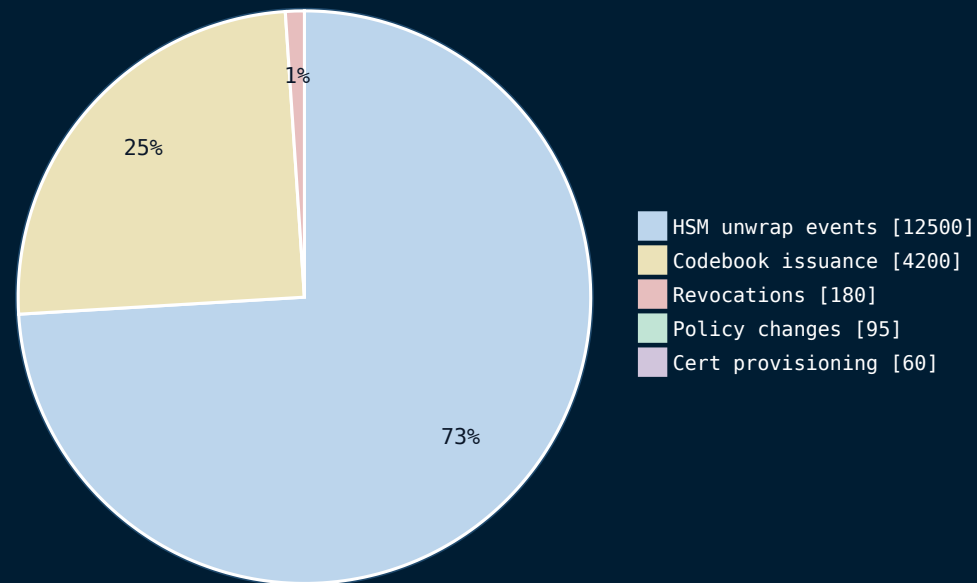**KEY INSIGHT**

Most theme-rich diagram — twelve `pie1..12` slot colors plus title, section, legend, stroke variables.

09 · QUADRANT CHART

Two-axis priority scatter.

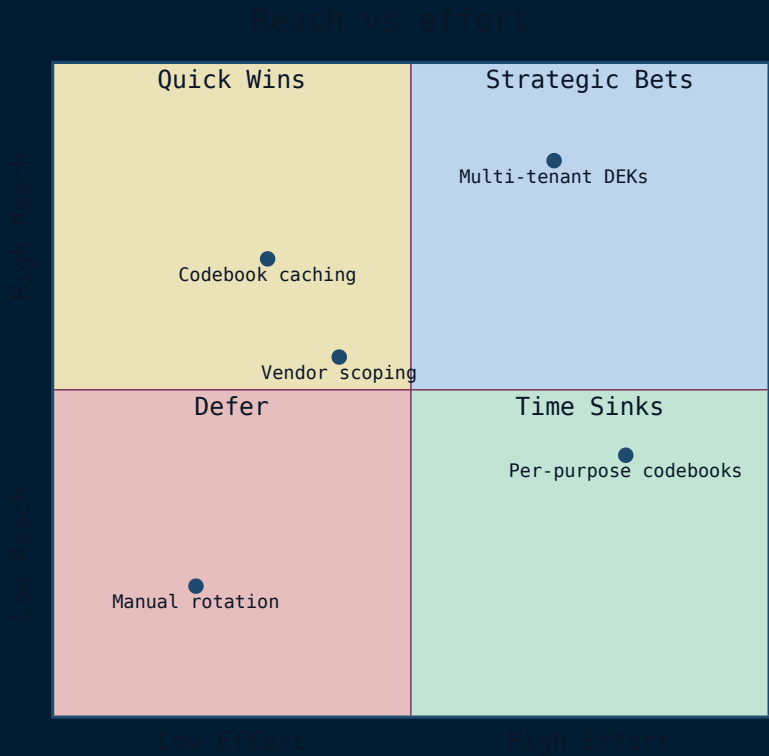

KEY INSIGHT

Themeable — four quadrant fills and text colors, axis labels, point fill all controllable.


SysML-style requirements with traceability.



KEY INSIGHT


Inherits from core variables. No diagram-specific theme keys.

Branching, merging, tags.

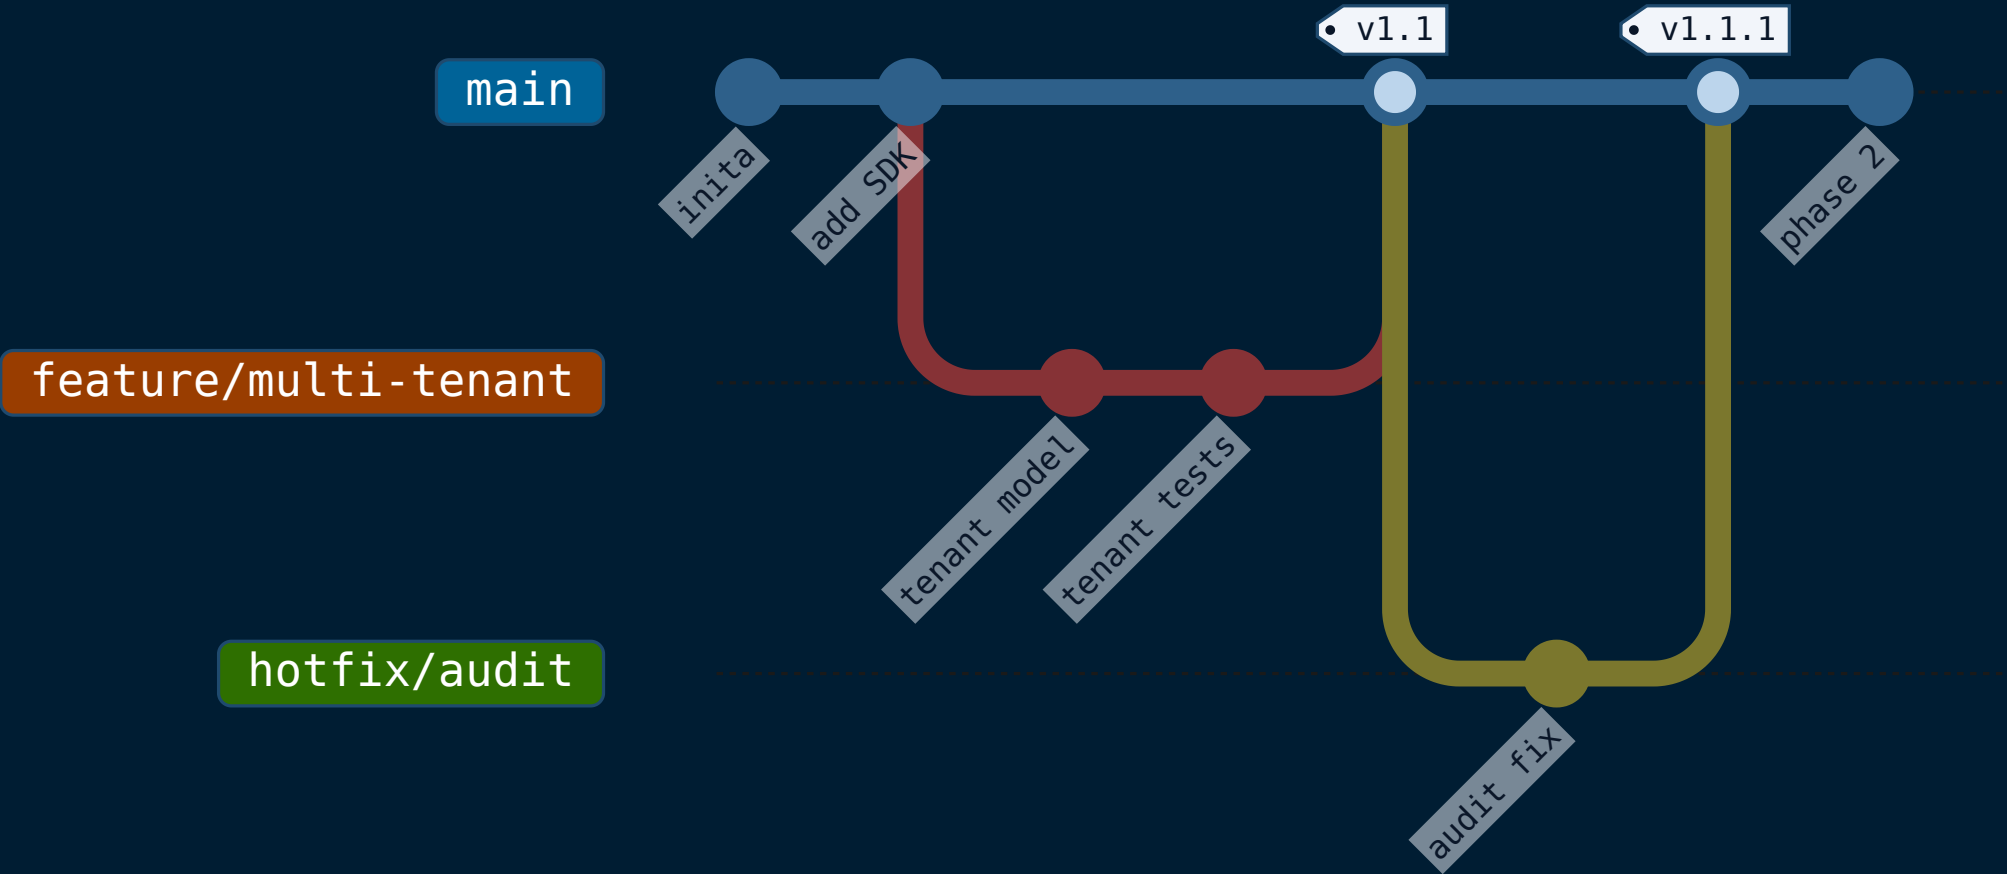

12 · C4 DIAGRAM


Software architecture at four zoom levels.

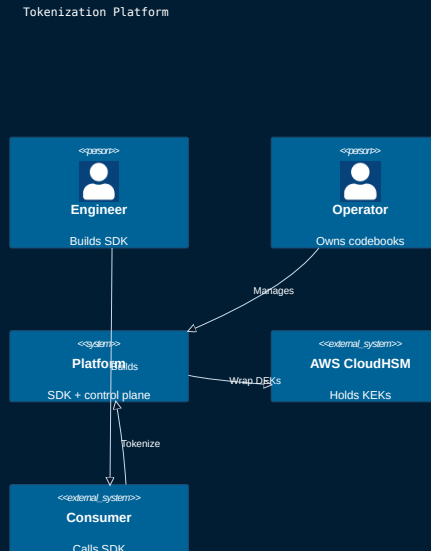

KEY INSIGHT

Marked 🚧⚠️ in the docs — supported but the team flags it as work-in-progress. Theme support partial.


Hierarchical brainstorm.

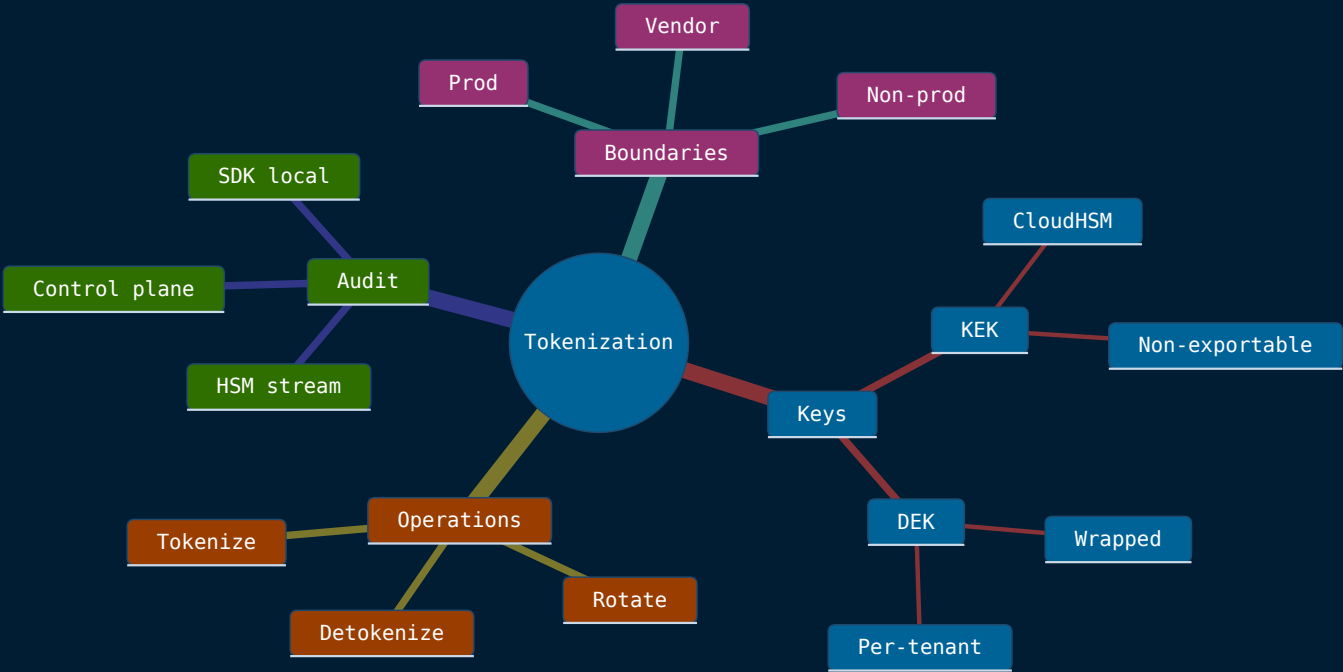

KEY INSIGHT

Inherits from core. Multiple shape syntaxes: `((round))`, `[square]`, `(rounded)`, `))cloud((`, `)hex(`.

Events on a horizontal axis.

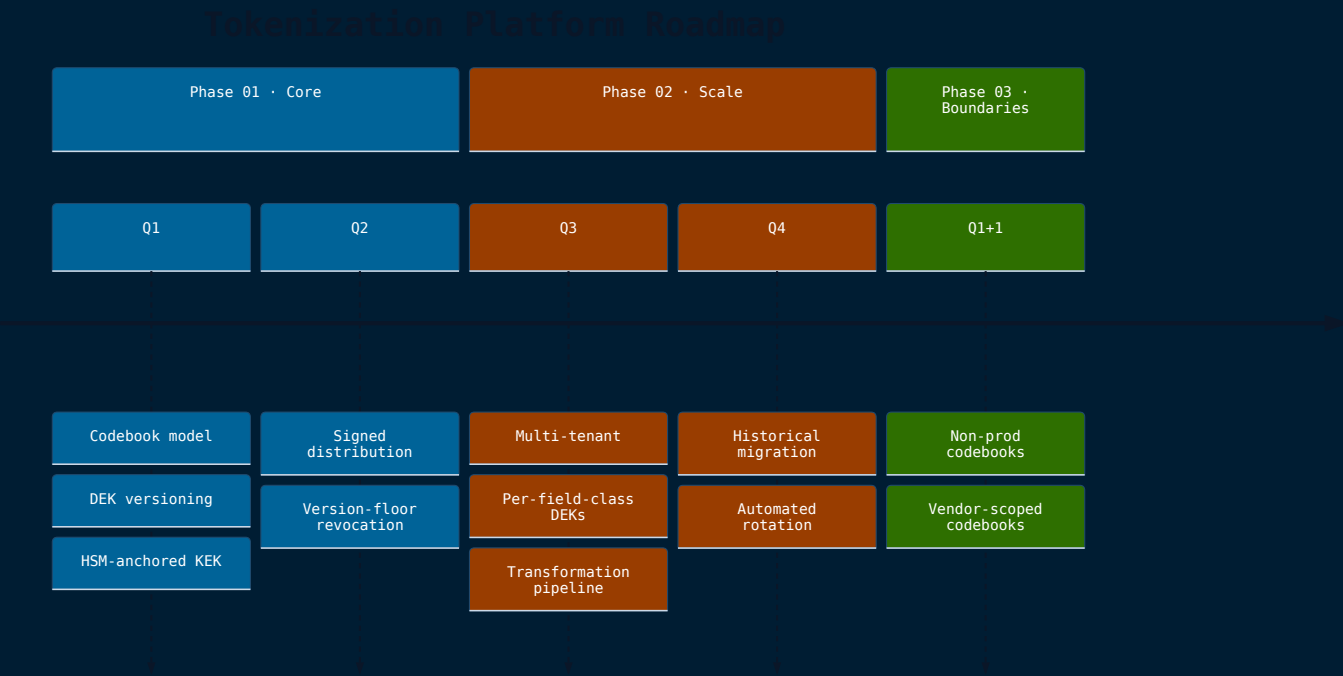

KEY INSIGHT

Inherits from core. The section coloring uses the `cScale` palette.

A simpler sequence-diagram dialect.

ZenUML is a Mermaid diagram type that emits HTML+SVG with Tailwind CSS classes for styling. The Mermaid CLI can produce the markup, but it does not bundle the @zenuml/core stylesheet — so static SVG export renders the structure without the visual styling. ZenUML works in browser contexts where the Tailwind utilities resolve.

For static-PDF pipelines like this one, prefer the standard `sequenceDiagram` (slide 5) — same conceptual model, fully supported by the Mermaid CLI, themable through `themeVariables`.

```
zenuml
title Order
Customer->>Order.create() {
  Order->>Inventory.check() {
    return available
  }
  return confirmed
}
```

KEY INSIGHT

ZenUML uses HTML/Tailwind rendering rather than pure SVG. Use `sequenceDiagram` for static export contexts.

GROUP 02 · EXPERIMENTAL DIAGRAMS

The eleven new types
marked 🔥.

16 · SANKEY 🔥


Flow volumes between nodes.



KEY INSIGHT


CSV-style input. Theme inheritance only — link colors are computed from node colors via the `linkColor` config.

17 · XY CHART 🔥

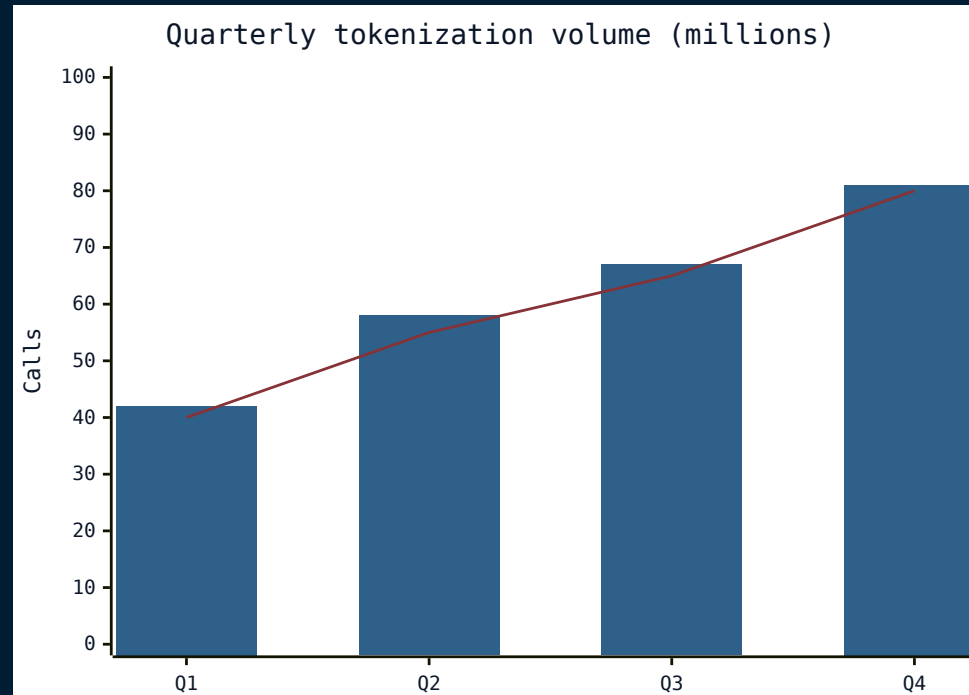Bar and line chart on a numeric axis.**KEY INSIGHT**

Inherits from core. The plot color palette can be overridden but per-series control is limited.


Tile layout for system blocks.

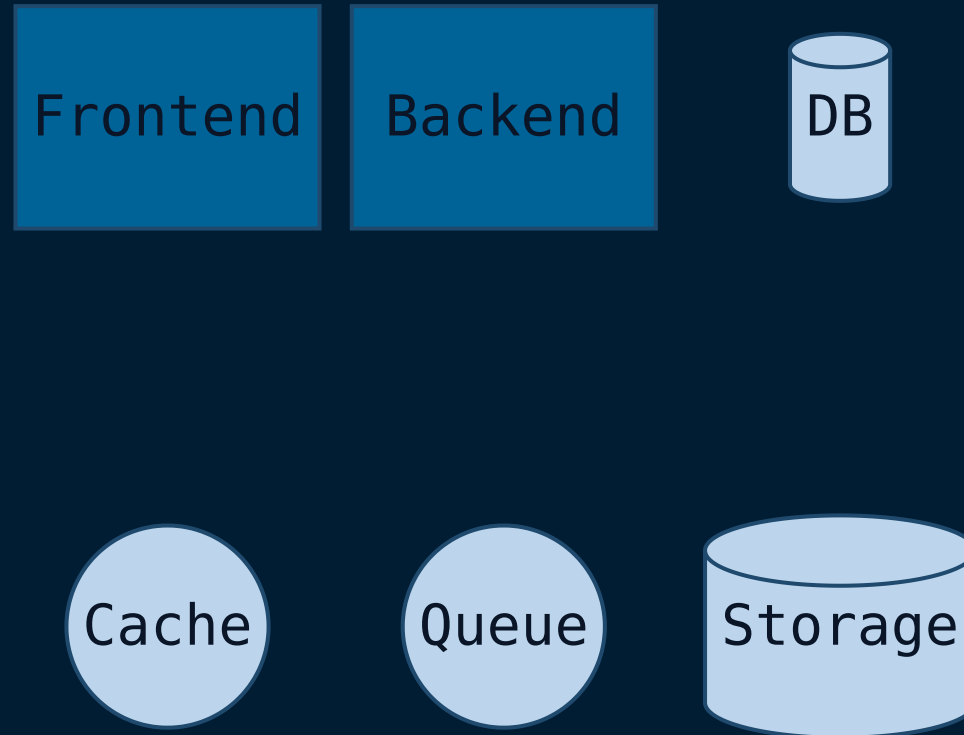

KEY INSIGHT

Inherits from core. Spacing controlled by the `space:N` directive.


Bit-level packet layout.

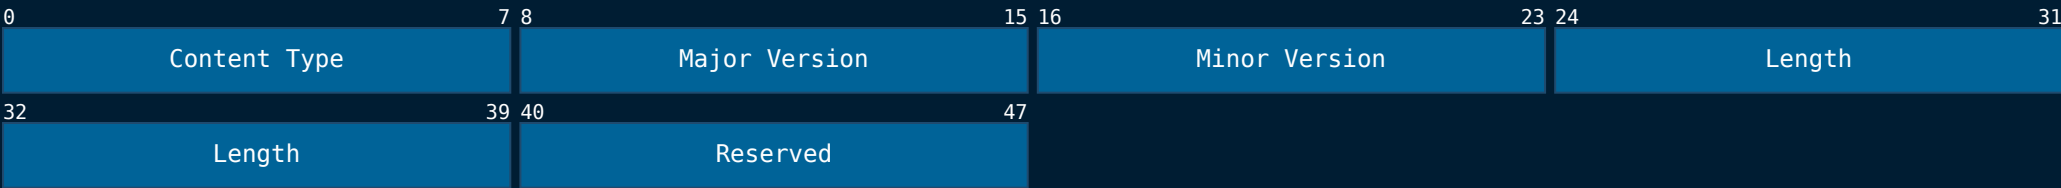

KEY INSIGHT

Inherits from core. Width-fixed at 32 bits per row by default; 0-N ranges define each field.


A board with swim-lane columns.

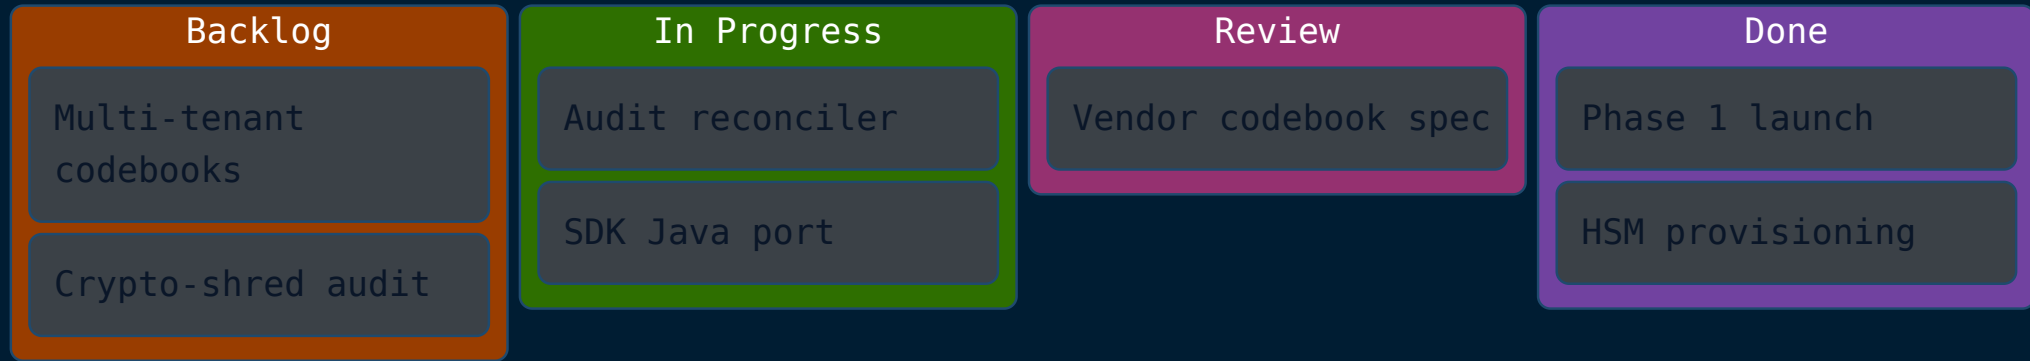

KEY INSIGHT

Inherits from core. Per-card `[Title]@{ assigned: ..., priority: ... }` metadata supported but optional.

Cloud-architecture style with services and groups.

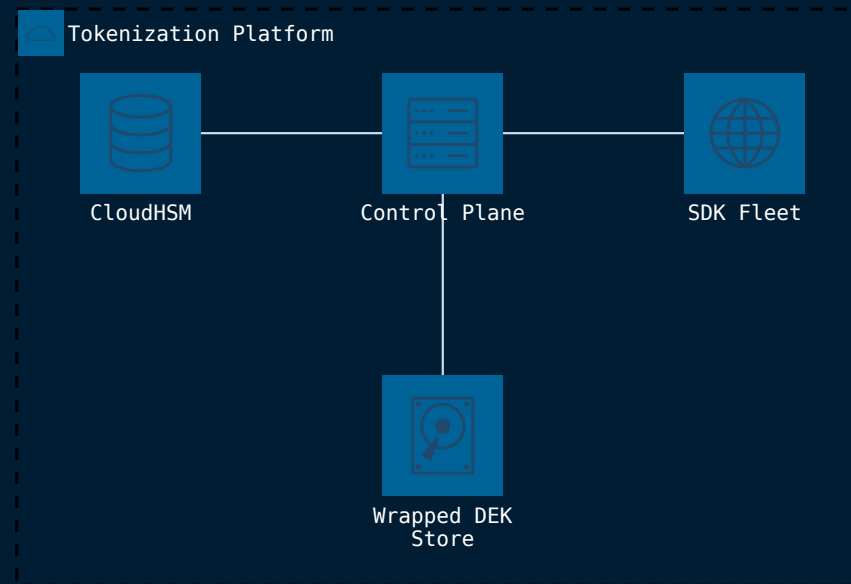


KEY INSIGHT

Inherits from core. Icons drawn from a registered set; default set is limited — register more via `mermaid.registerIconPacks`.

22 · RADAR 🔥


Multi-axis polar chart.

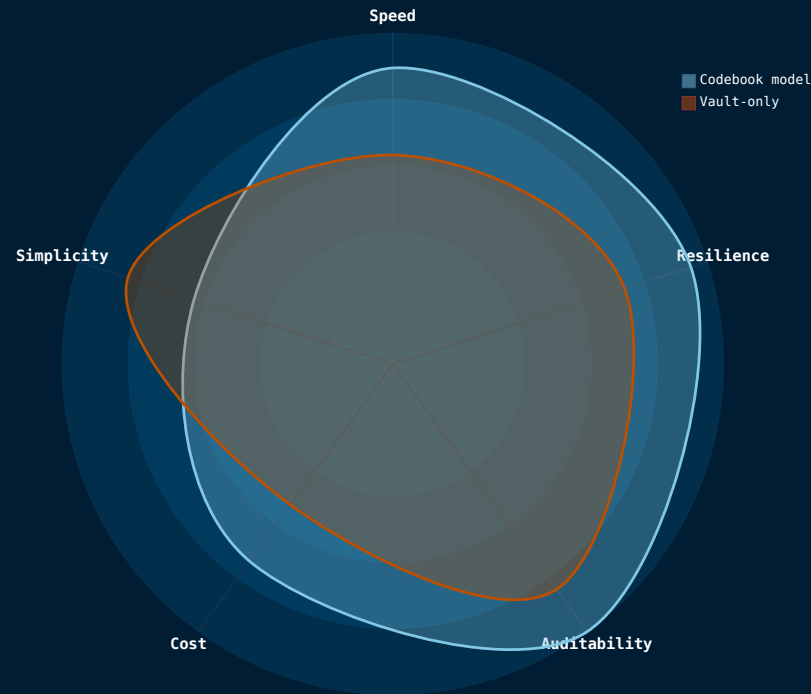

KEY INSIGHT

Inherits from core. Multiple `curve` lines plot on the same axes.

Nested rectangles sized by value.

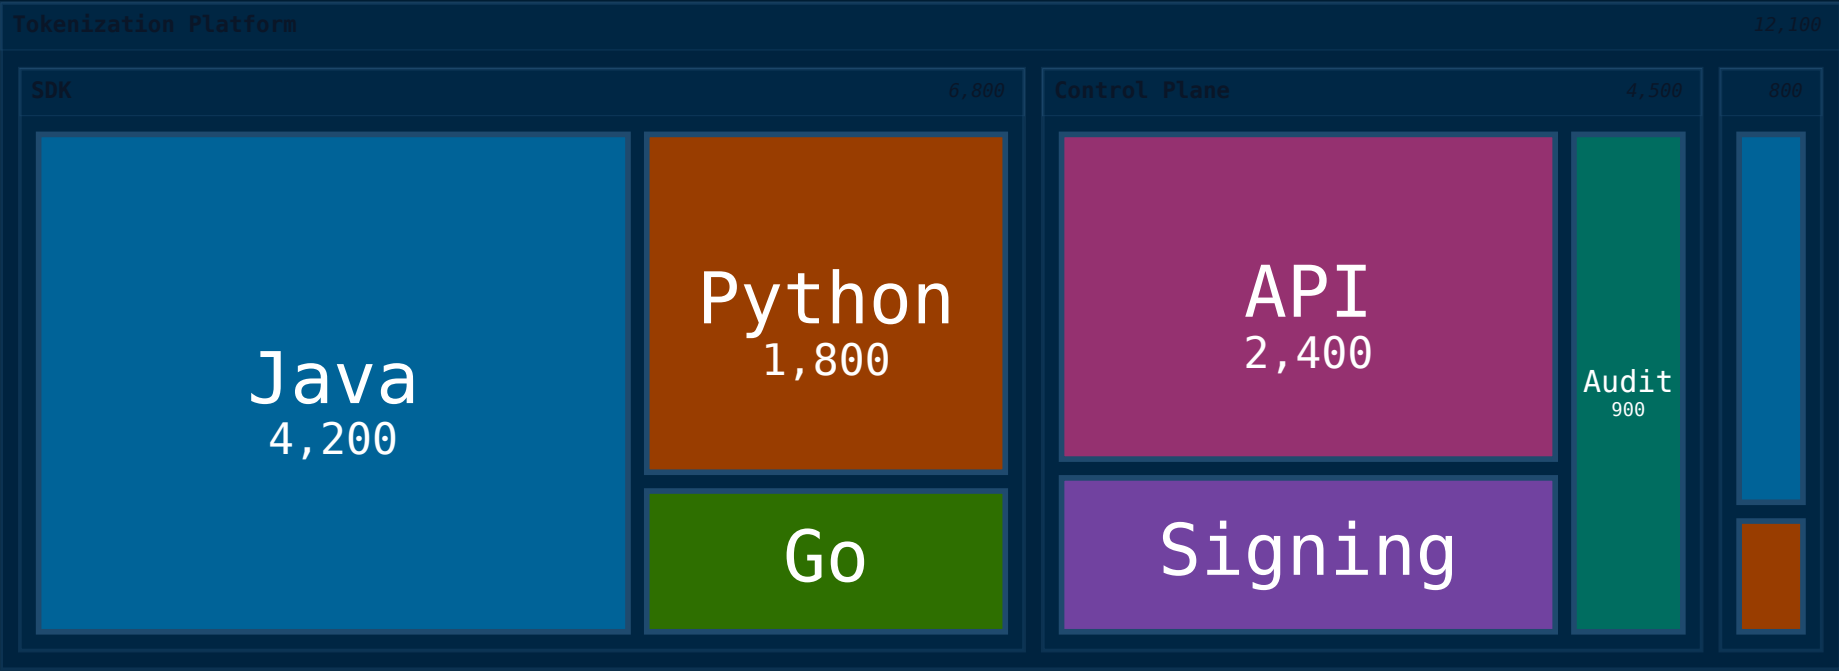


KEY INSIGHT

Inherits from core. Sized values cascade from leaves up; intermediate nodes don't take a value.

24 · VENN 🔥

Set overlap.

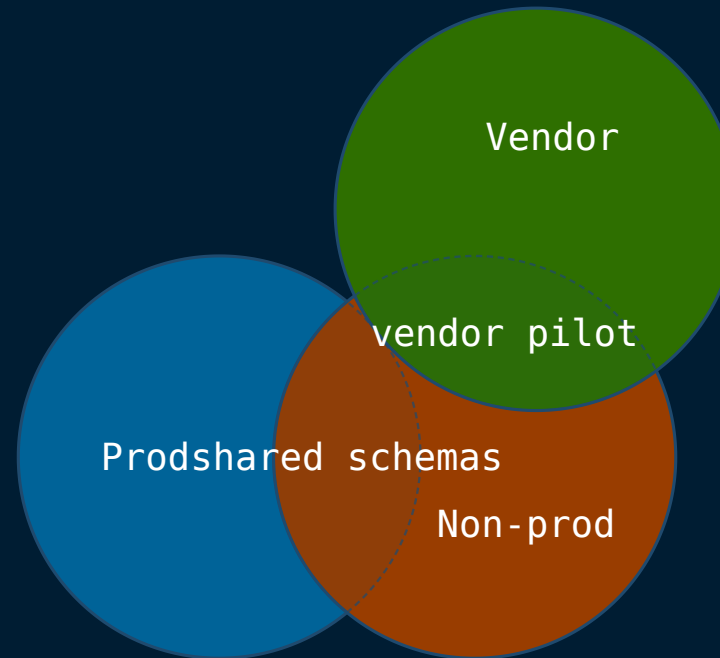


KEY INSIGHT

Inherits from core. `union A, B` for two-set overlap; `set X["Label"]` to give a display name distinct from the identifier; `union A, B["..."]` to label an intersection region.

25 · ISHIKAWA 🔥

Fishbone cause-and-effect.

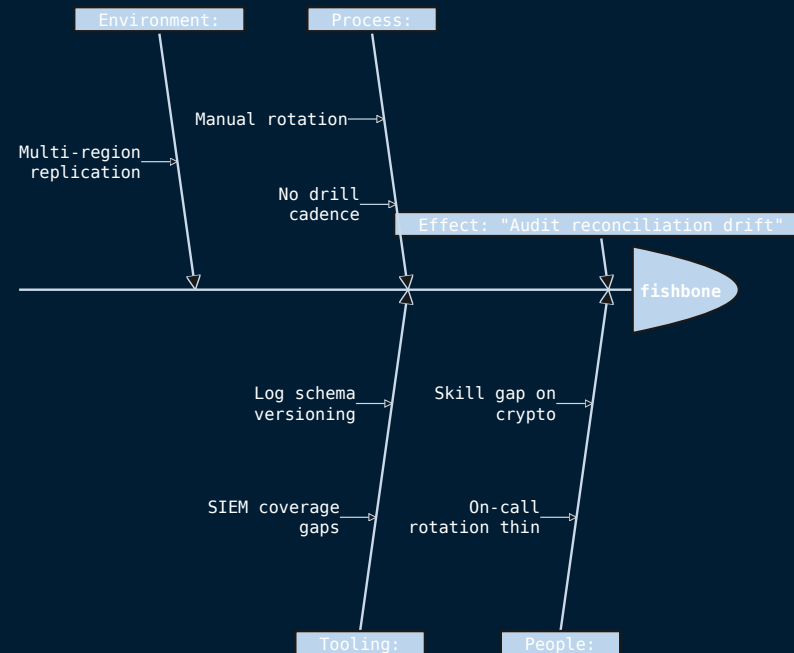

KEY INSIGHT

Inherits from core. Branches default to four (people, process, tooling, environment) but any heading is allowed.

Indented file-tree style hierarchy.



KEY INSIGHT

Three named theme variables: `labelFontSize`, `labelColor`, `lineColor`. Indentation alone determines the tree.

MERMAID 11.14 · LATTICE THEME

Twenty-six diagrams, one theme.

Stable diagrams have rich theme control. Experimental diagrams marked 🔥 inherit from the core six variables and may evolve in syntax. Use this gallery as a reference for which diagram fits a given problem.