

EVIDENCE · TIMELINE · SERIES


timeline-list

Date-stamped event list — spine with date pills, status pills, and body.

CODEBOOK ARCHITECTURE


How the codebook architecture arrived in production.

Four stages over eighteen months, from the first vault round-trip to sub-5 ms codebook caching.

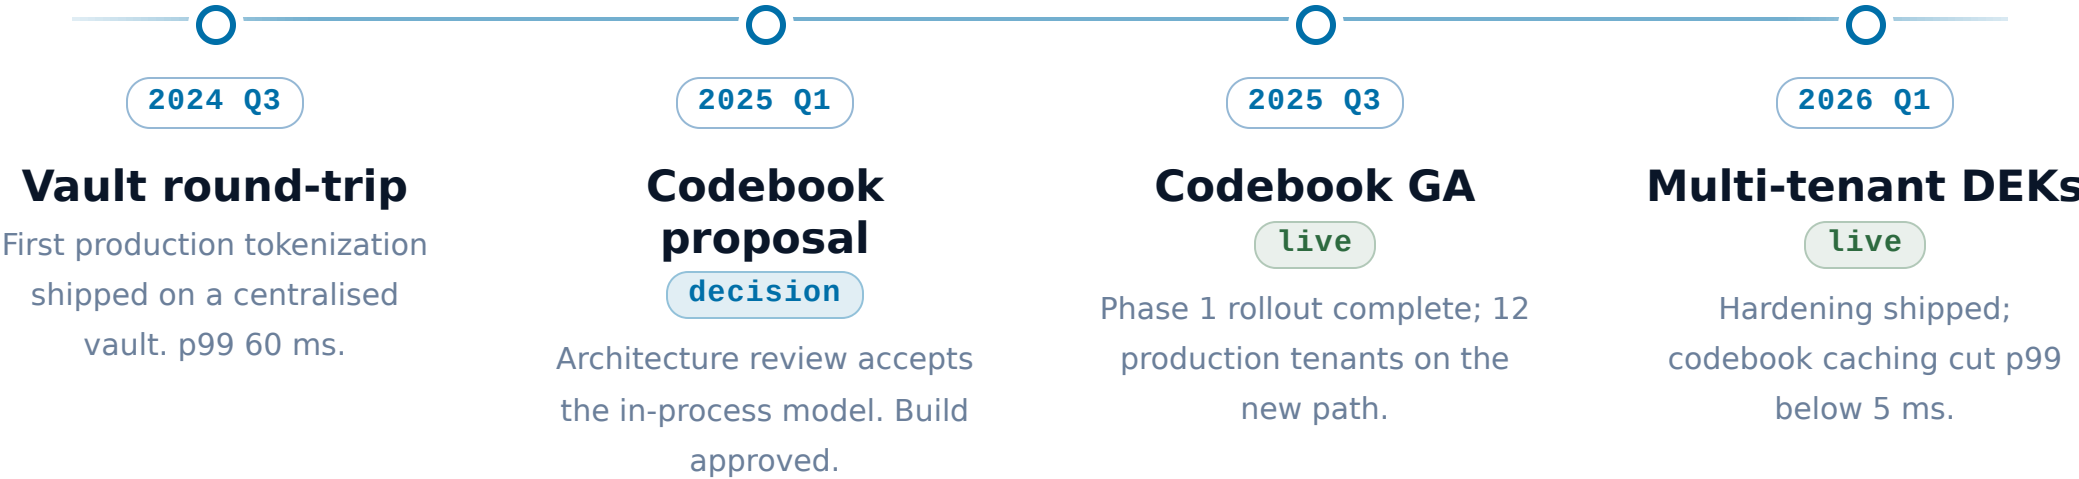

CODEBOOK ARCHITECTURE


Stress test — six milestones over three years.

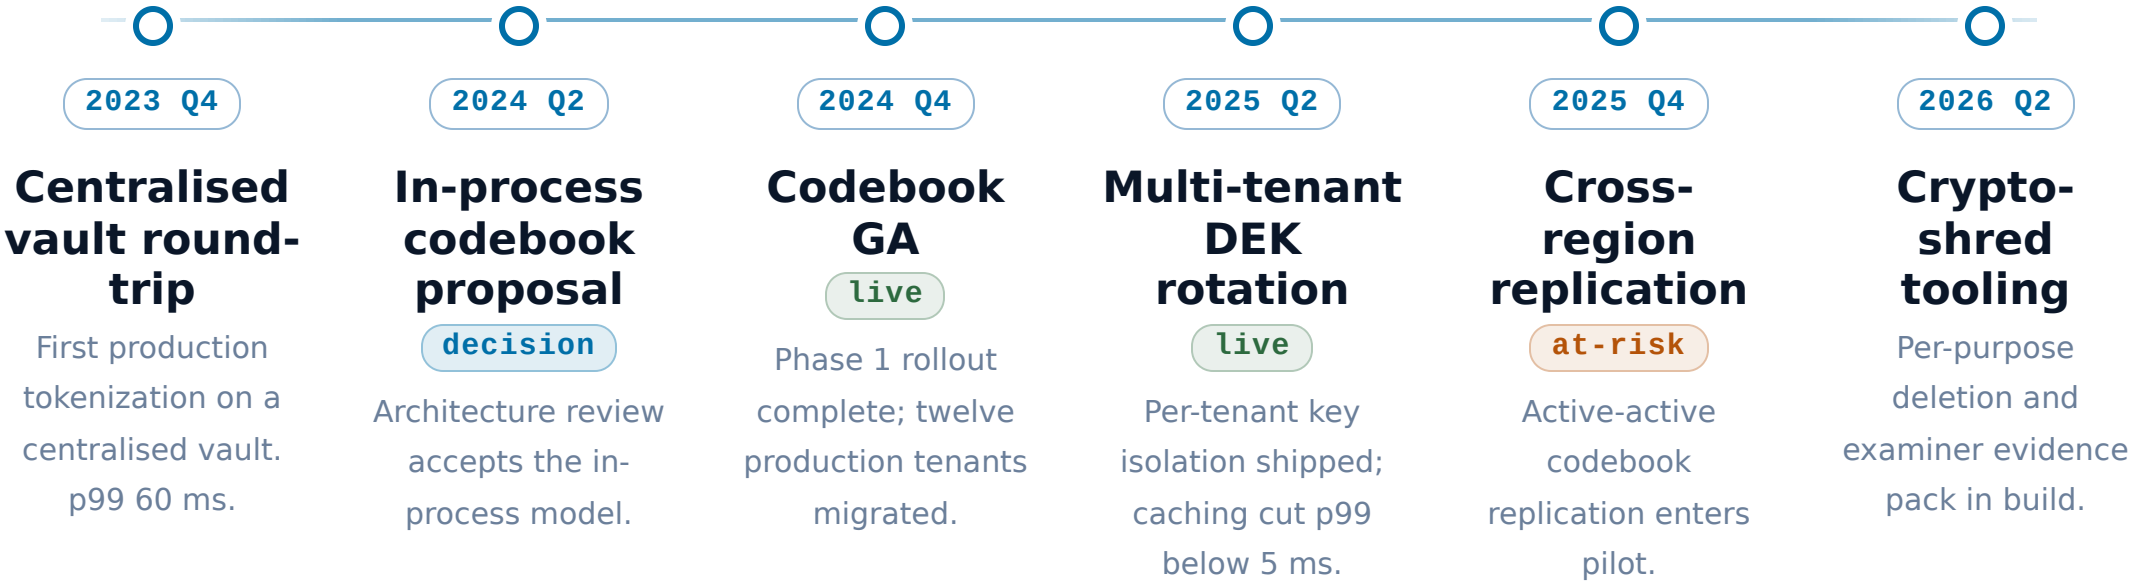

CODEBOOK ARCHITECTURE

How the codebook architecture arrived in production.

Four stages over eighteen months, from the first vault round-trip to sub-5 ms codebook caching.

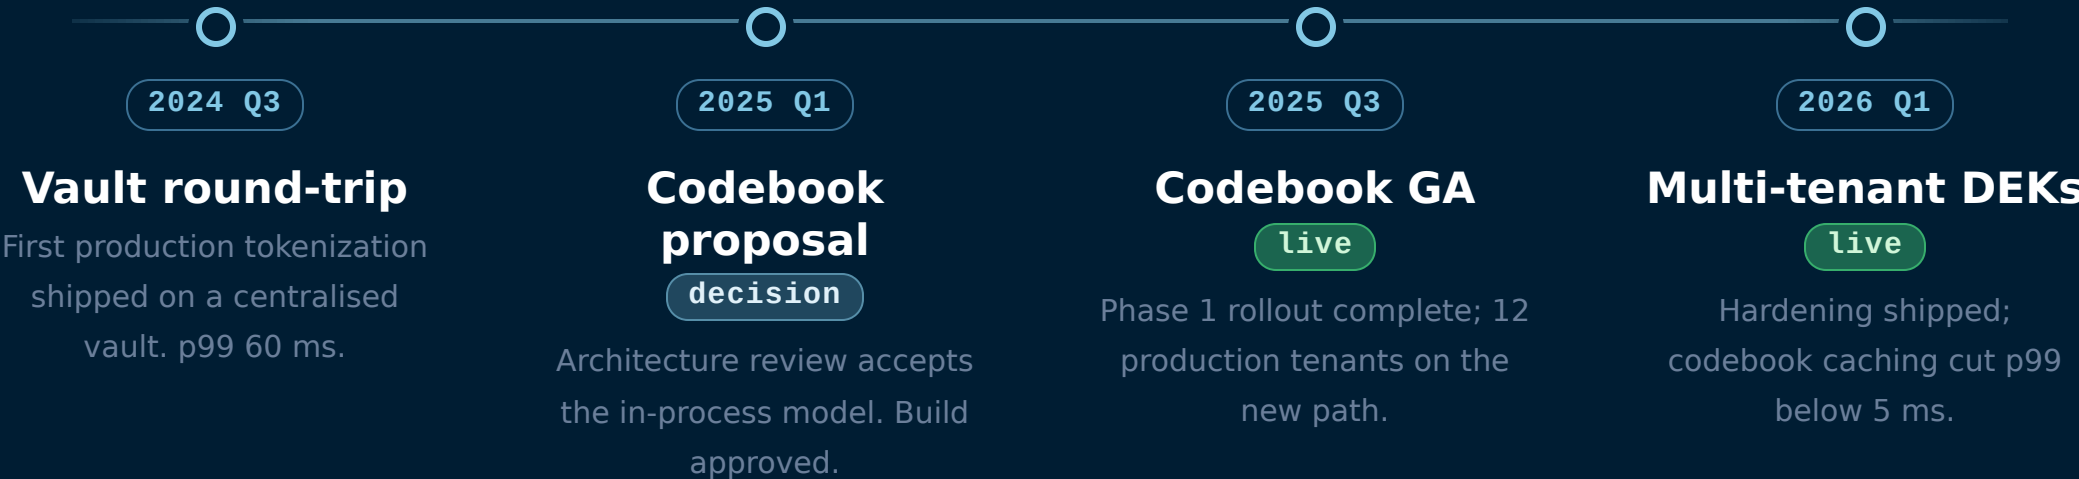

CODEBOOK ARCHITECTURE

How the codebook architecture arrived in production.


Four stages over eighteen months, from the first vault round-trip to sub-5 ms codebook caching.



CODEBOOK ARCHITECTURE

How the codebook architecture arrived in production.

Four stages over eighteen months, from the first vault round-trip to sub-5 ms codebook caching.

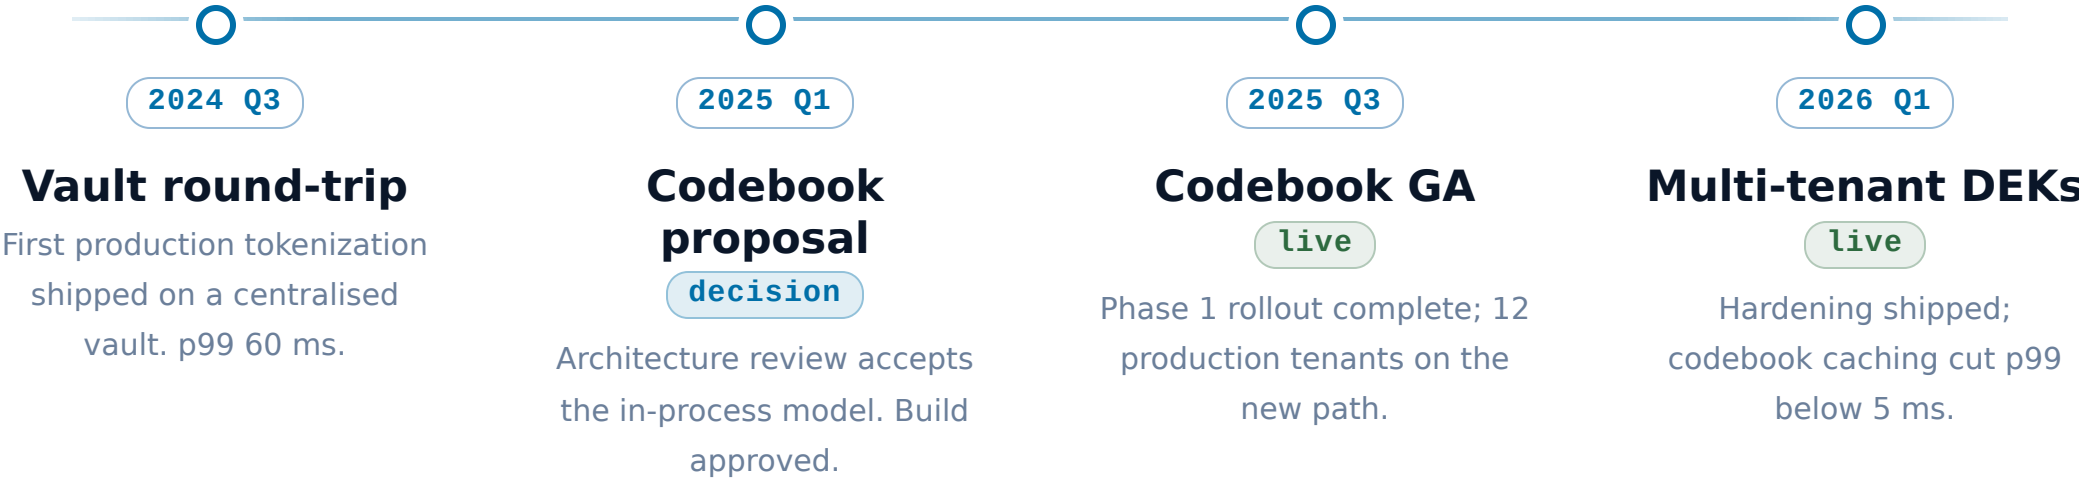

When NOT to reach for timeline-list.

Date-less steps. If the items don't carry calendar dates, you have a sequence, not a timeline. Use `list-steps` for an ordered list or `journey` for stage-by-stage progress without a date axis.

Date-range bars. If each milestone needs a start and an end on a shared time axis, the slide is a Gantt chart. Use `gantt` — the bar geometry will convey the durations the pill cannot.

Status pills as decoration. The status pill is a verdict — `decision`, `live`, `at-risk`, `blocked`, `done`. Don't invent freeform tags; the engine only tints the recognised vocabulary, and decorative pills break the at-a-glance read.

See also.

RELATED COMPONENTS

- `gantt` — milestones occupy date ranges, not single moments
- `list-steps` — the sequence has no dates, just an order
- `journey` — stage-by-stage progress without calendar dates
- `roadmap` — the timeline is forward-looking and bucketed by horizon
- `progress` — the events are parallel workstreams with completion percentages