

PROGRESSION · TIMELINE · STRUCTURE


# journey

Native user-journey chart — sections of tasks, each tagged with actor(s) and a 1-5 mood.  
Renders as section bars, task chips, plumb lines, and mood faces.

# Customer onboarding · trial to activation.

**P** prospect   **S** sales   **U** user   **O** onboarding

**PAIN** 1 2 3 4 5 **DELIGHT**

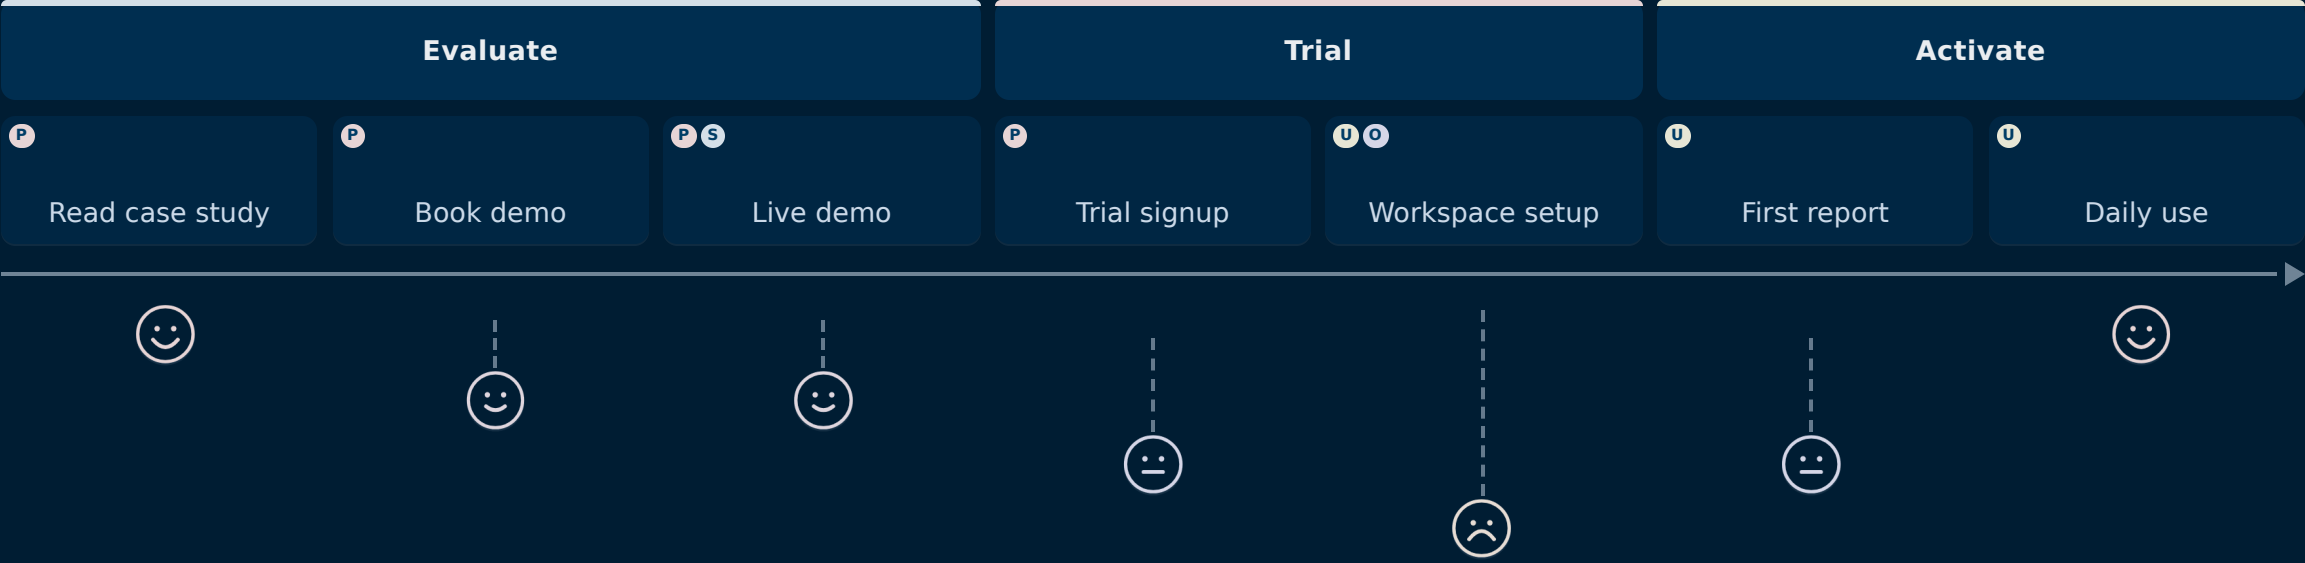

# Heatmap · where the trial drops off.




# Curve · the affect contour.




# Swimlane · who owns each moment.



# Weighted · where the traffic actually lands.

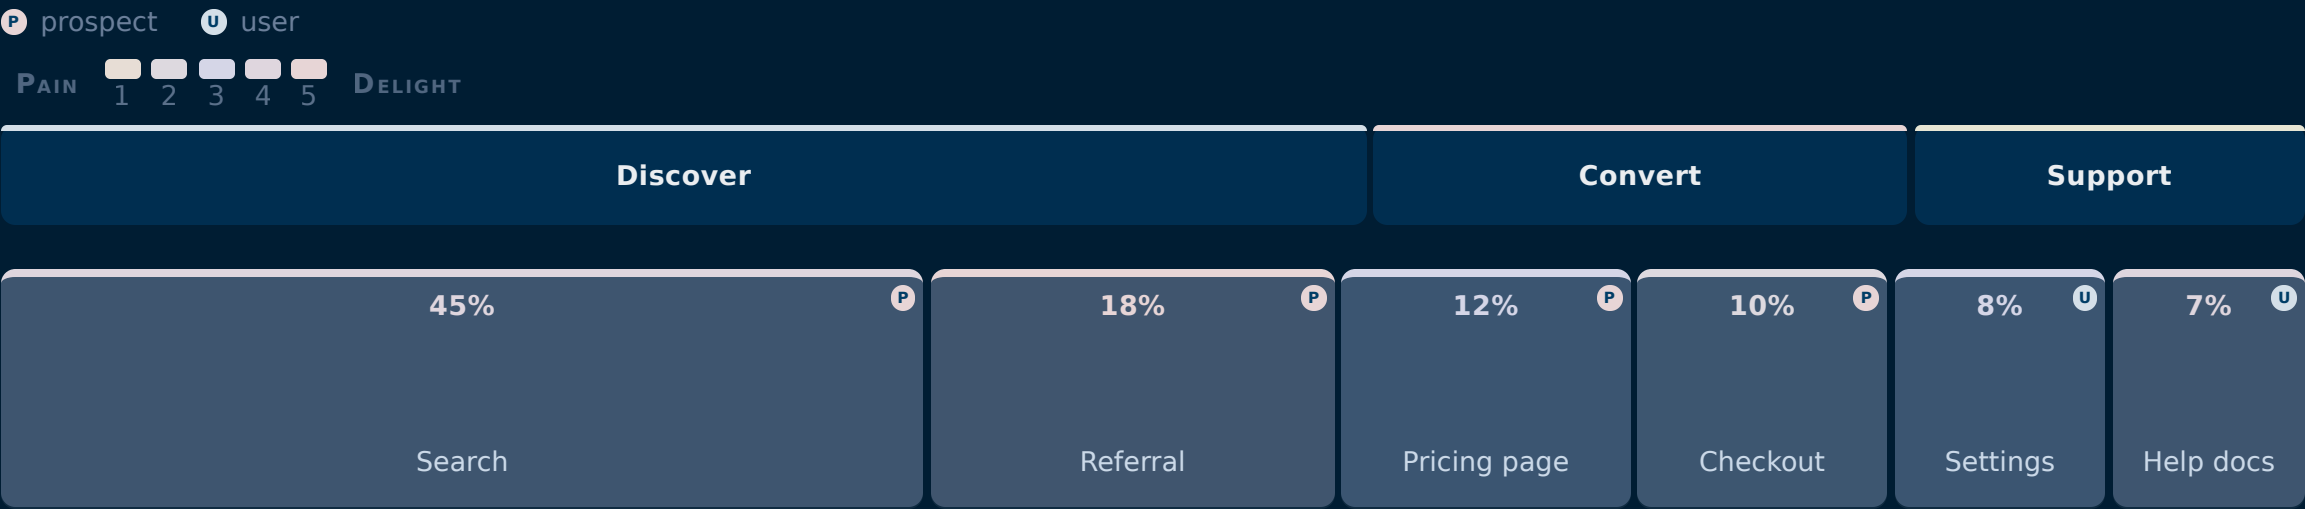


# Customer onboarding · trial to activation.

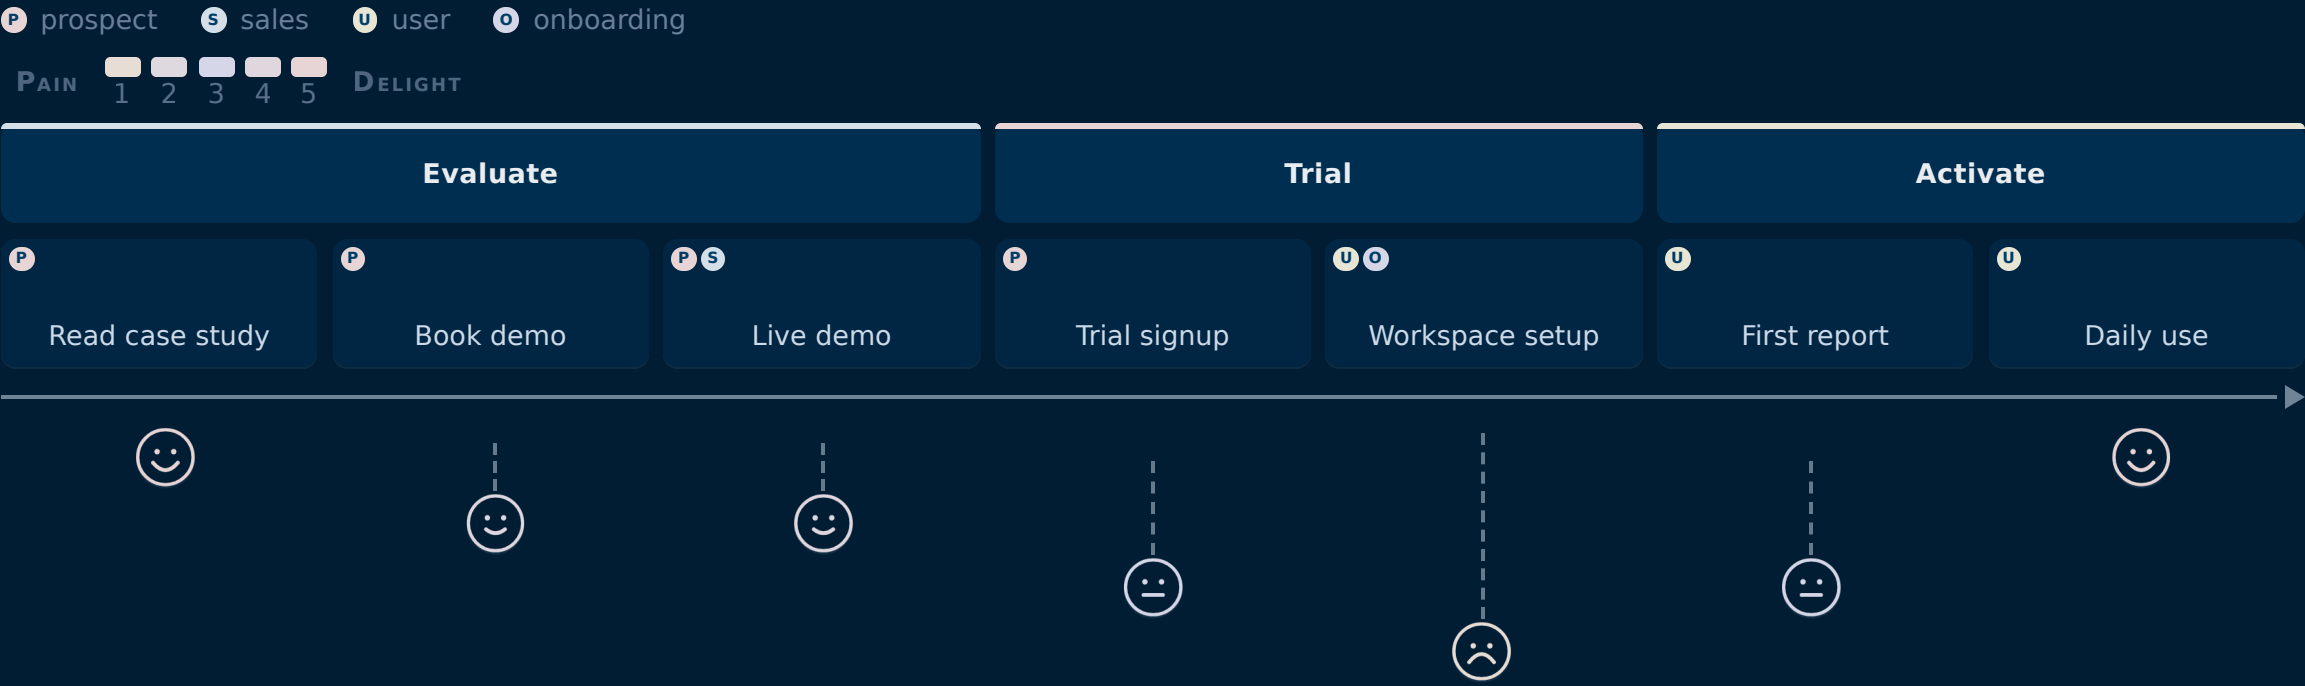

# Customer onboarding · trial to activation.


**P** prospect   **S** sales   **U** user   **O** onboarding

**PAIN** 1 2 3 4 5 **DELIGHT**

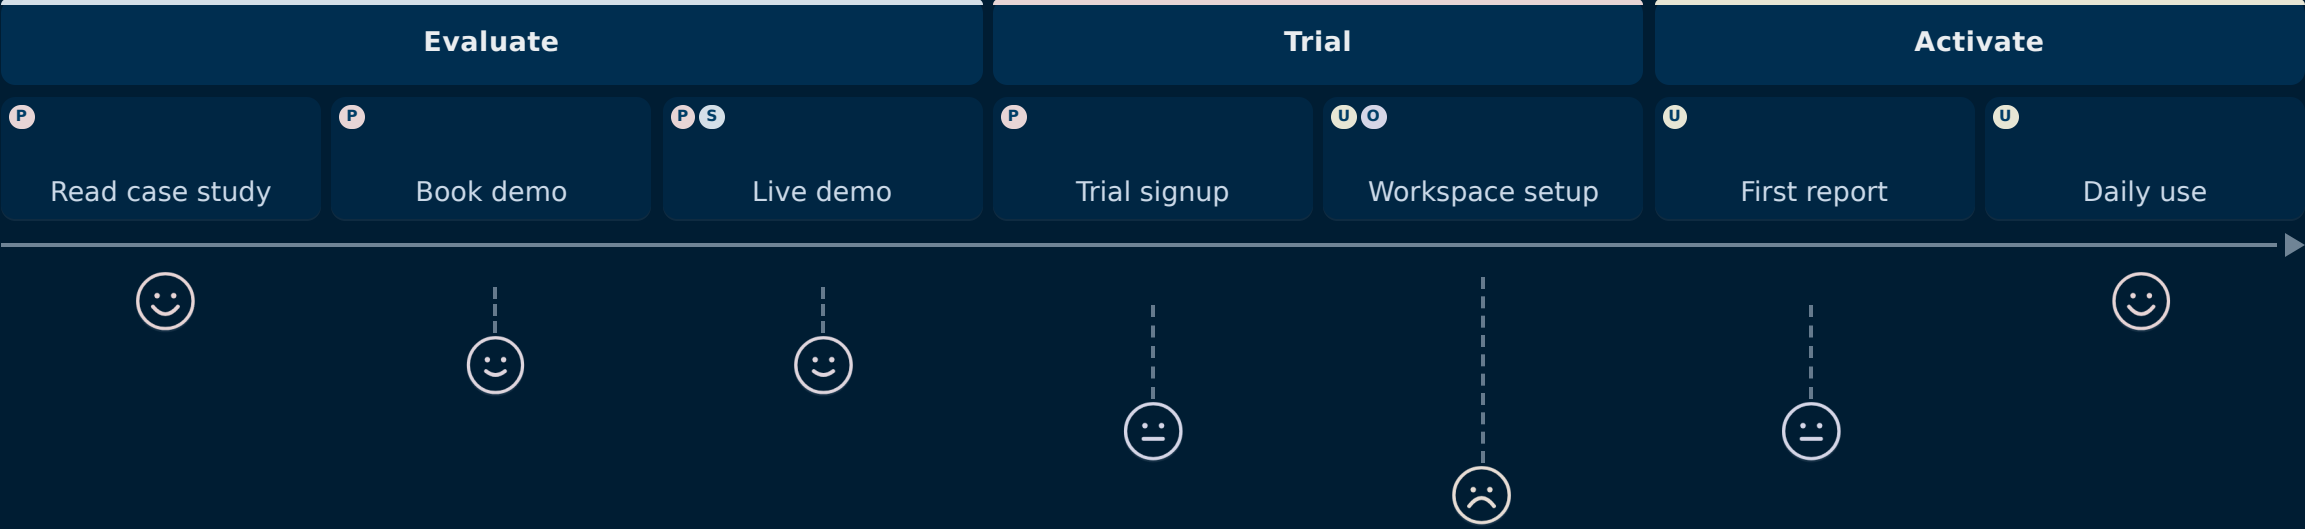



# Customer onboarding · trial to activation.

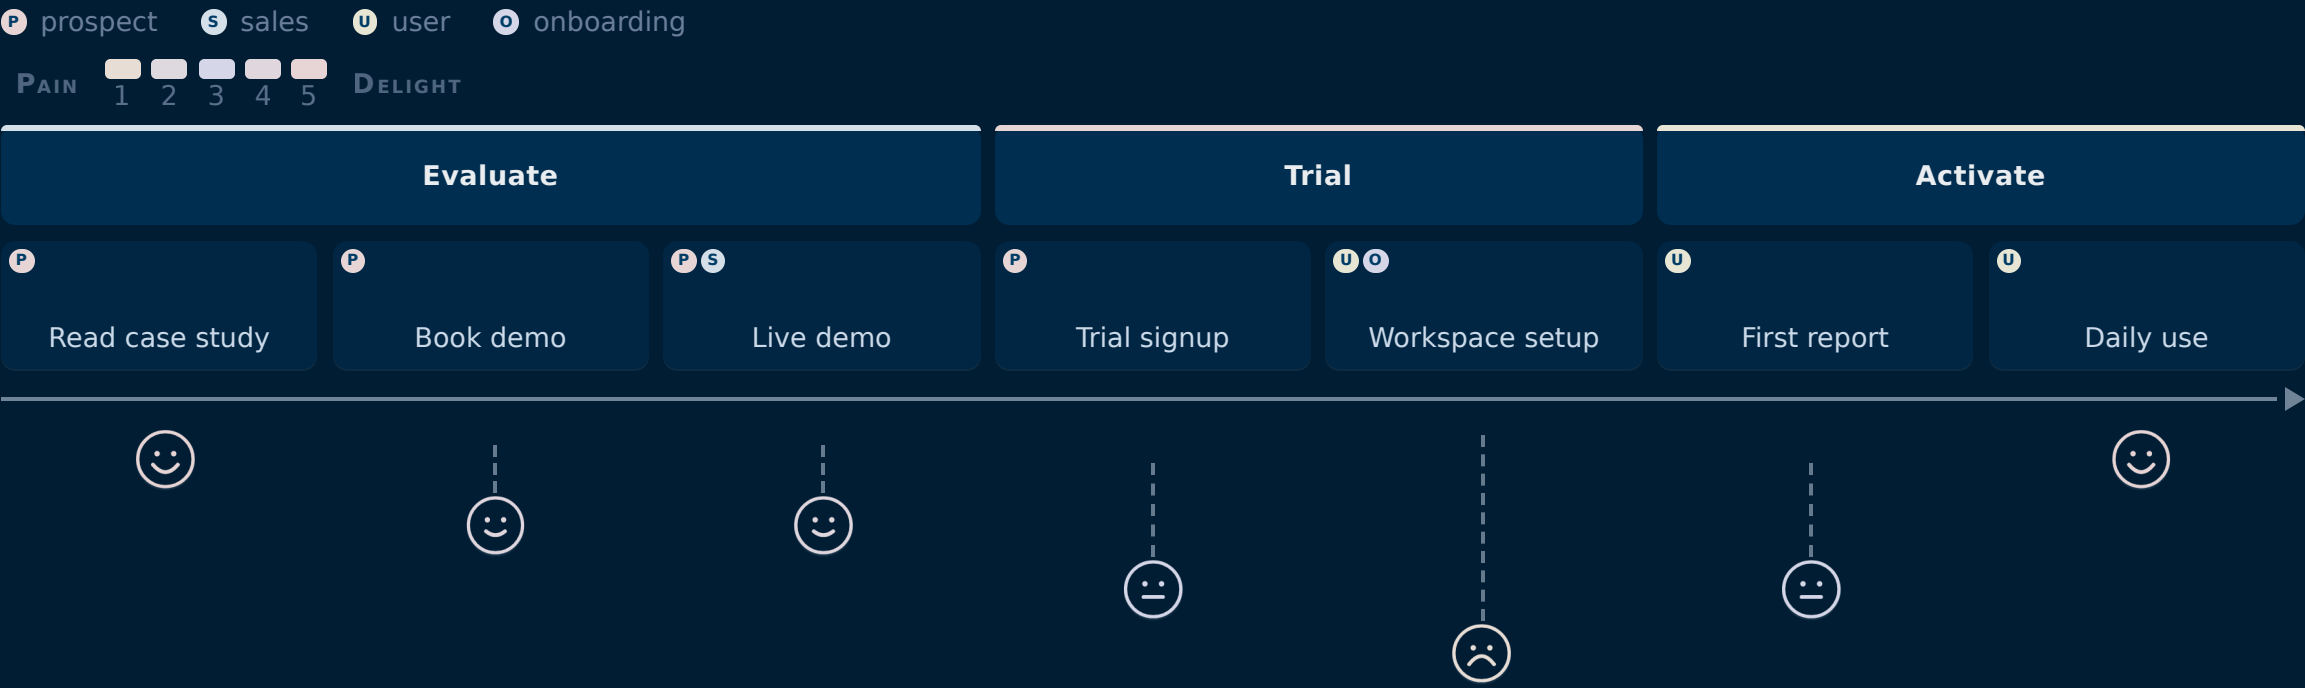

## When NOT to reach for journey.

**Process without affect.** If the mood scores are all the same or arbitrary, the chart is `timeline` or `list-steps`. Reserve journey for sequences where the affect changes meaningfully.

**More than ten tasks.** Past ten tasks the chips compress and the labels become unreadable. Group into fewer sections, or split the journey at a natural break.

**Volume tokens without weighted.** The volume token is `+N` meaningful only `weighted` variant. On the other four it is parsed but invisible — strip it from the markdown or commit to weighted.

#### RELATED COMPONENTS

## See also.

`list-steps` — process needs descriptive body per step, no chart

`gantt` — schedule of overlapping tasks across lanes

`kanban` — current status by stage rather than sequence over time