

EVIDENCE · TIMELINE · SERIES


# timeline-list

Date-stamped event list — spine with date pills, status pills, and body.

DECISION FRAMEWORK


# How the framework arrived in production.

*Four stages over eighteen months, from the first workshop to the operating rhythm.*

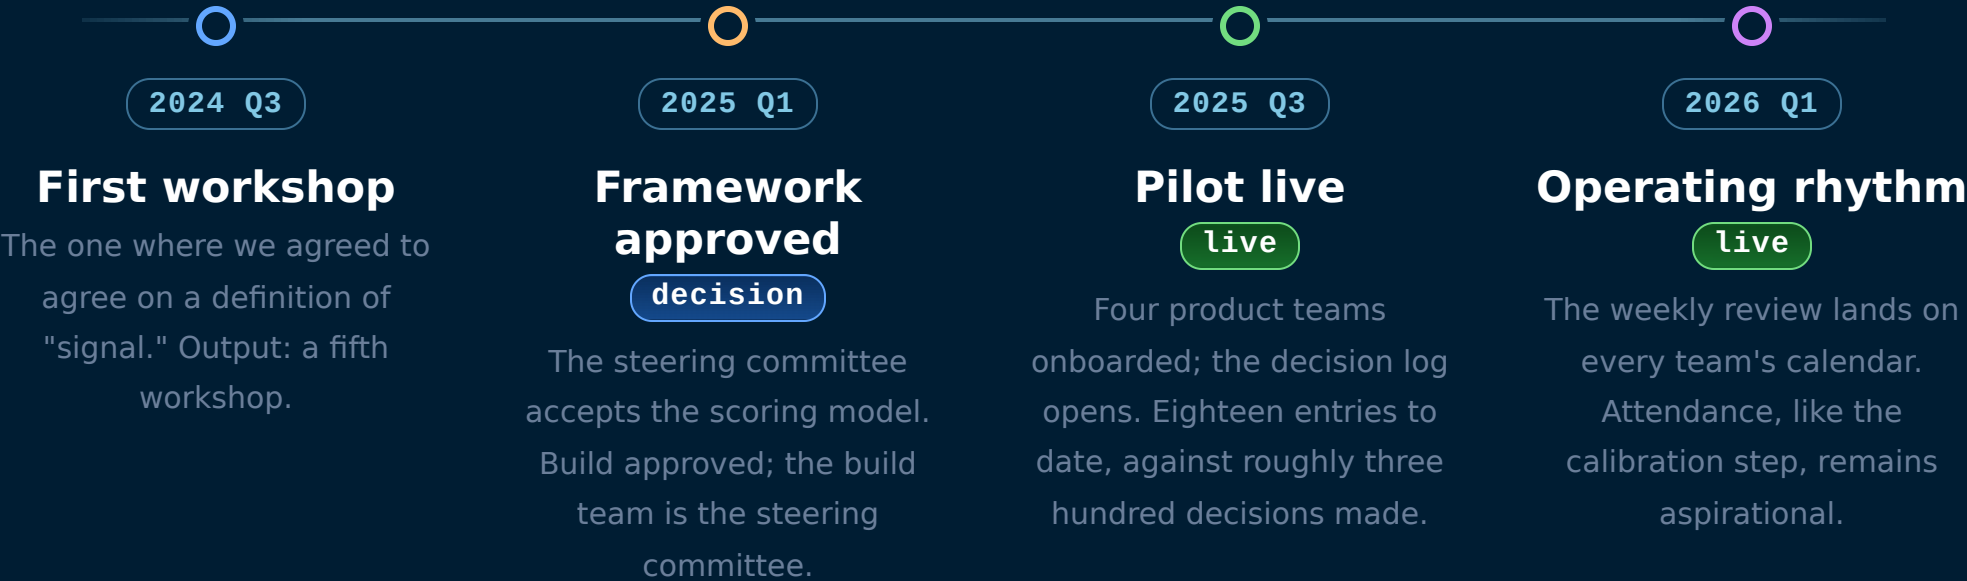

DECISION FRAMEWORK


Stress test — six milestones over three years, each described as inevitable in hindsight.

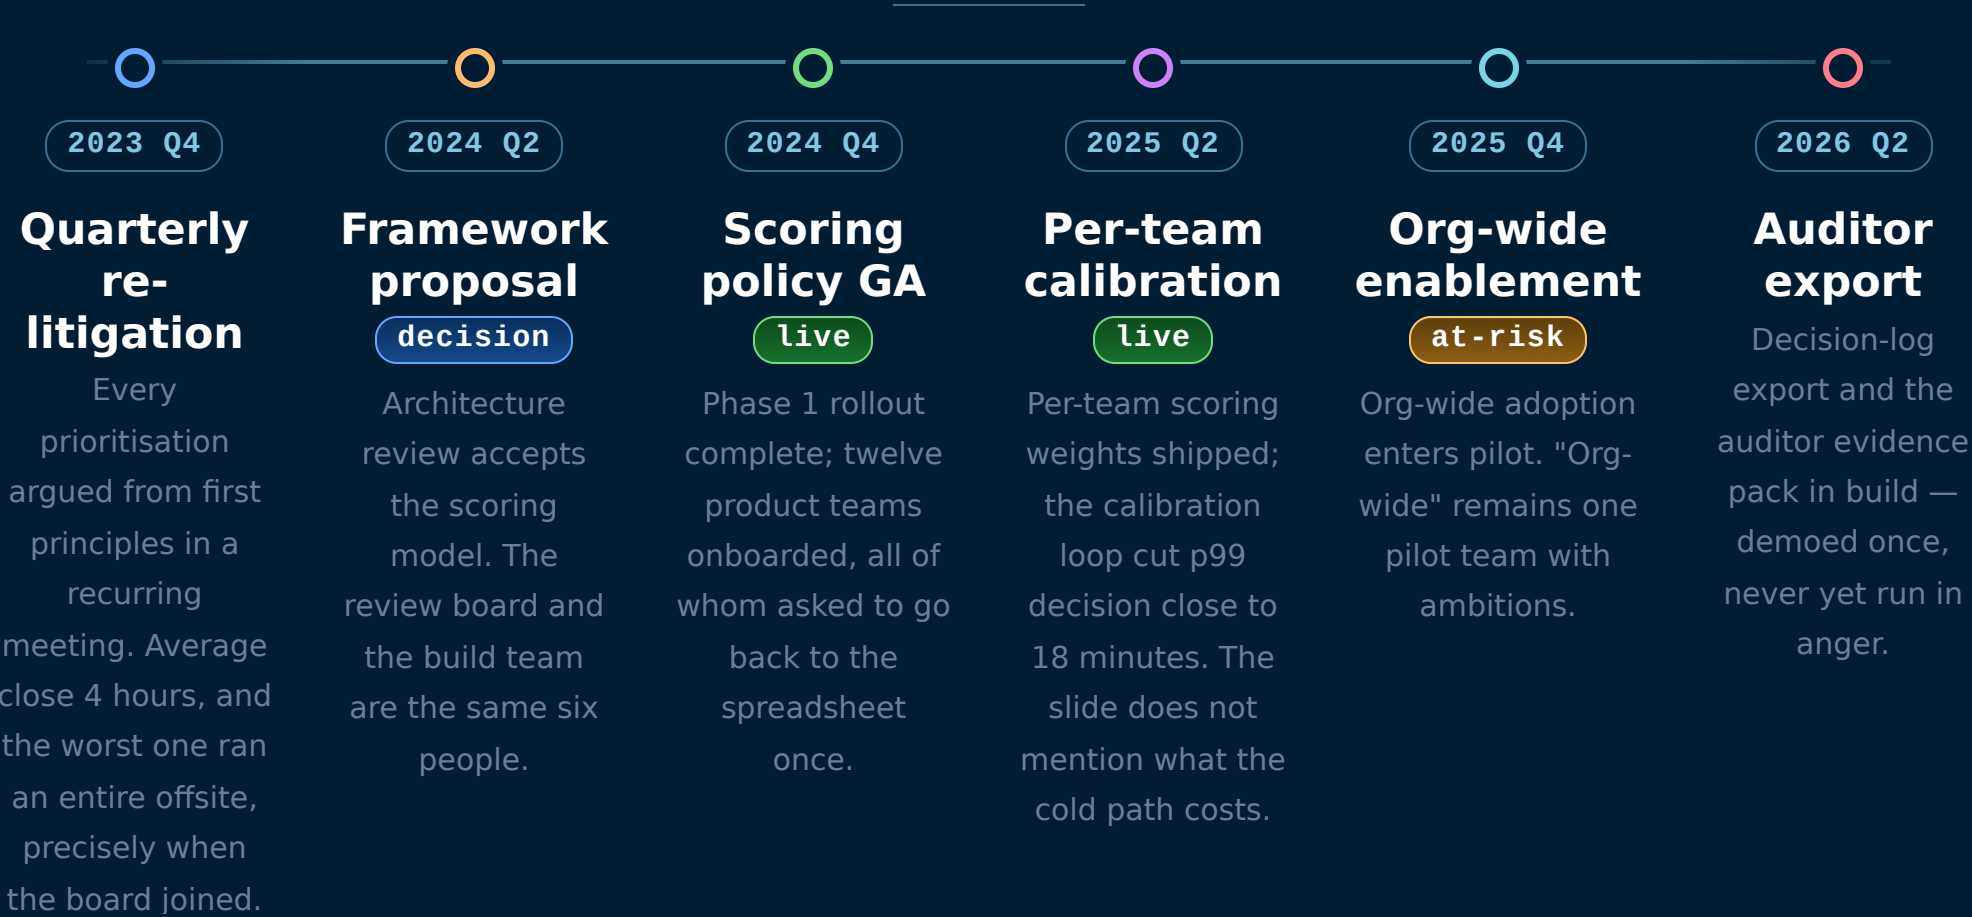

DECISION FRAMEWORK


# How the framework arrived in production.

*Four stages over eighteen months, from the first workshop to the operating rhythm.*

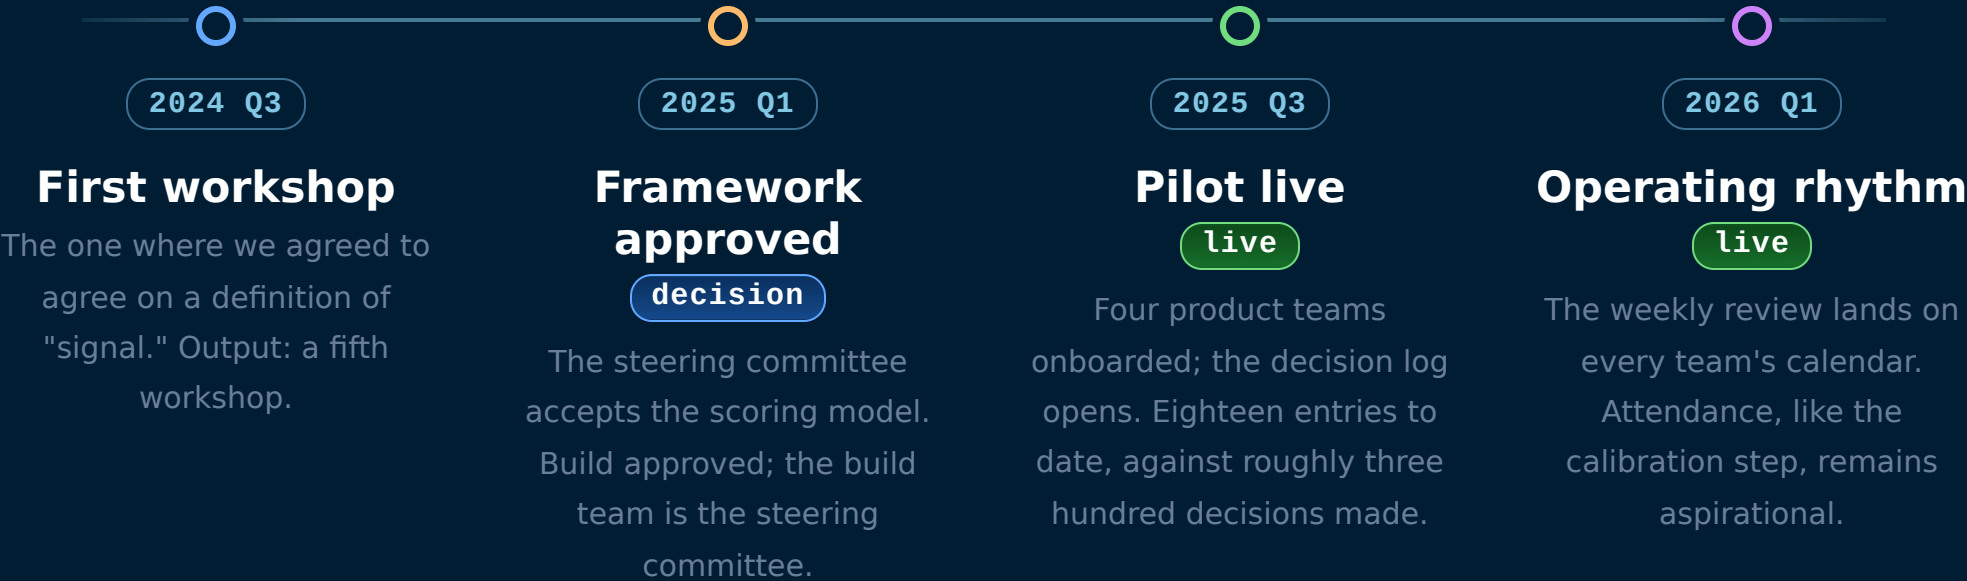

# How the framework arrived in production.


*Four stages over eighteen months, from the first workshop to the operating rhythm.*

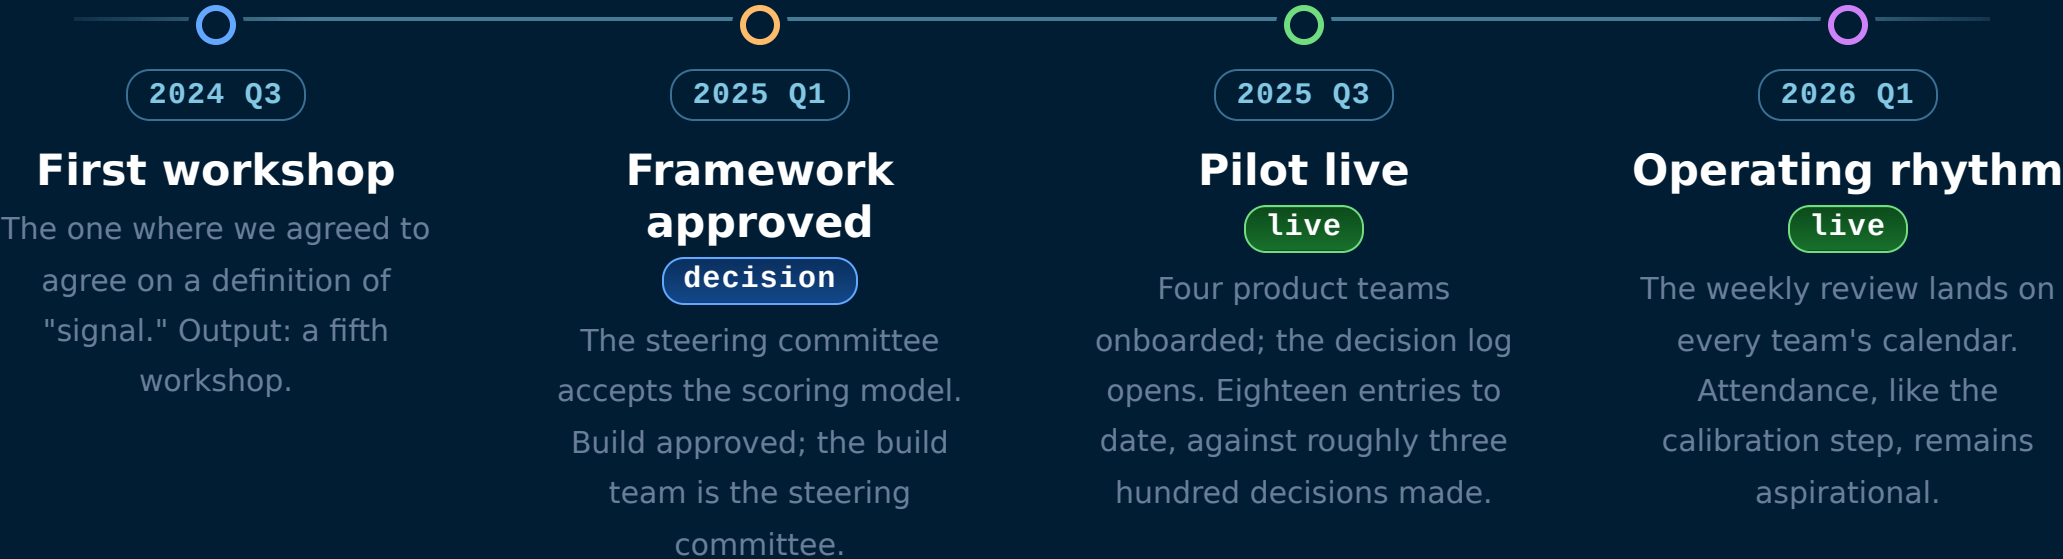

DECISION FRAMEWORK

# How the framework arrived in production.

*Four stages over eighteen months, from the first workshop to the operating rhythm.*

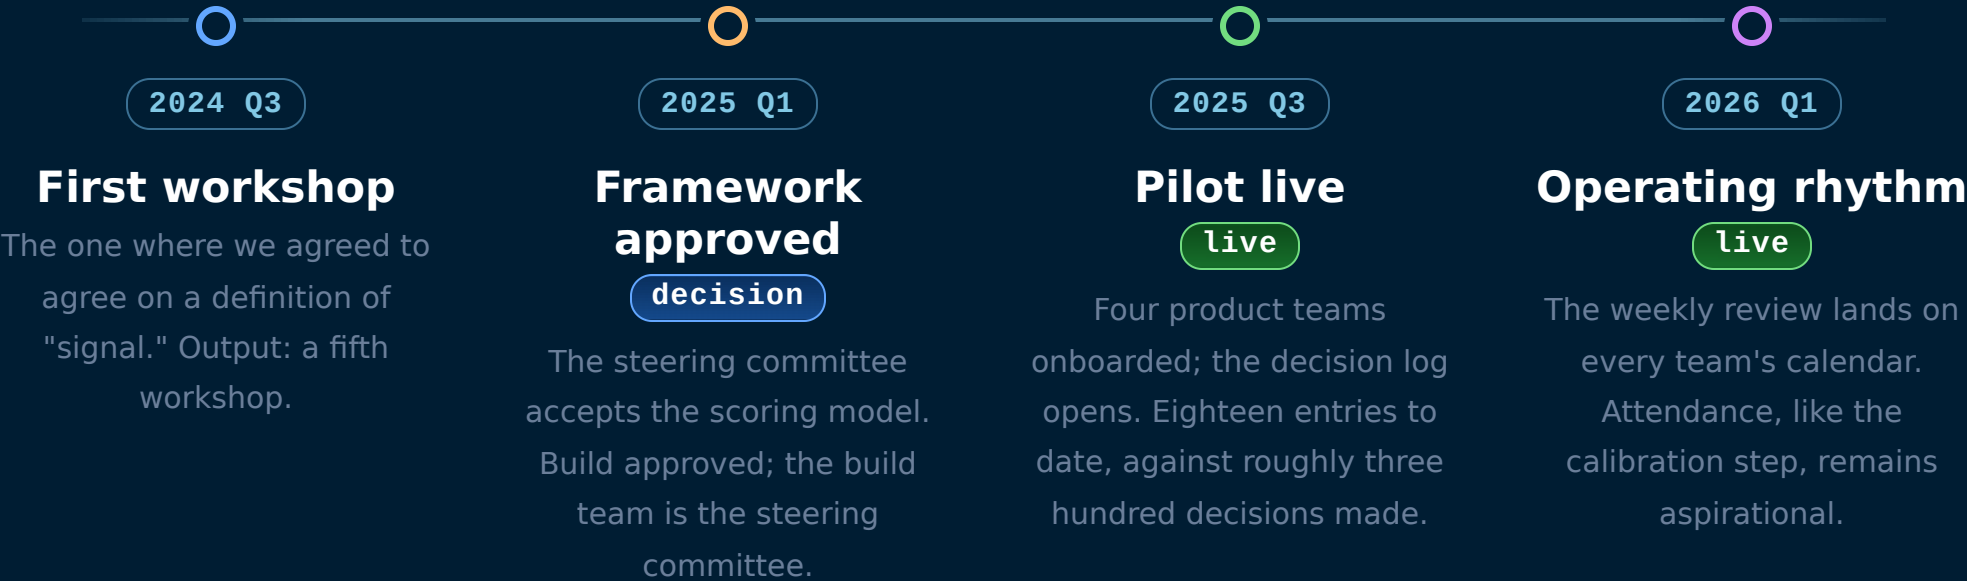

## When NOT to reach for timeline-list.

**Date-less steps.** If the items don't carry calendar dates, you have a sequence, not a timeline. Use `list-steps` for an ordered list or `journey` for stage-by-stage progress without a date axis.

**Date-range bars.** If each milestone needs a start and an end on a shared time axis, the slide is a Gantt chart. Use `gantt` — the bar geometry will convey the durations the pill cannot.

**Status pills as decoration.** The status pill is a verdict — `decision`, `live`, `at-risk`, `blocked`, `done`. Don't invent freeform tags; the engine only tints the recognised vocabulary, and decorative pills break the at-a-glance read.

# See also.

## *RELATED COMPONENTS*

`gantt` — milestones occupy date ranges, not single moments

`list-steps` — the sequence has no dates, just an order

`journey` — stage-by-stage progress without calendar dates

`roadmap` — the timeline is forward-looking and bucketed by horizon

`progress` — the events are parallel workstreams with completion percentages