

EVIDENCE · TIMELINE · SERIES


timeline-list

Date-stamped event list rendered as a horizontal spine — a dot per event with its date pill above and title, status pill, and body stacked below.

DECISION FRAMEWORK

How the framework arrived in production.

Four stages over eighteen months, from the first workshop to the operating rhythm.

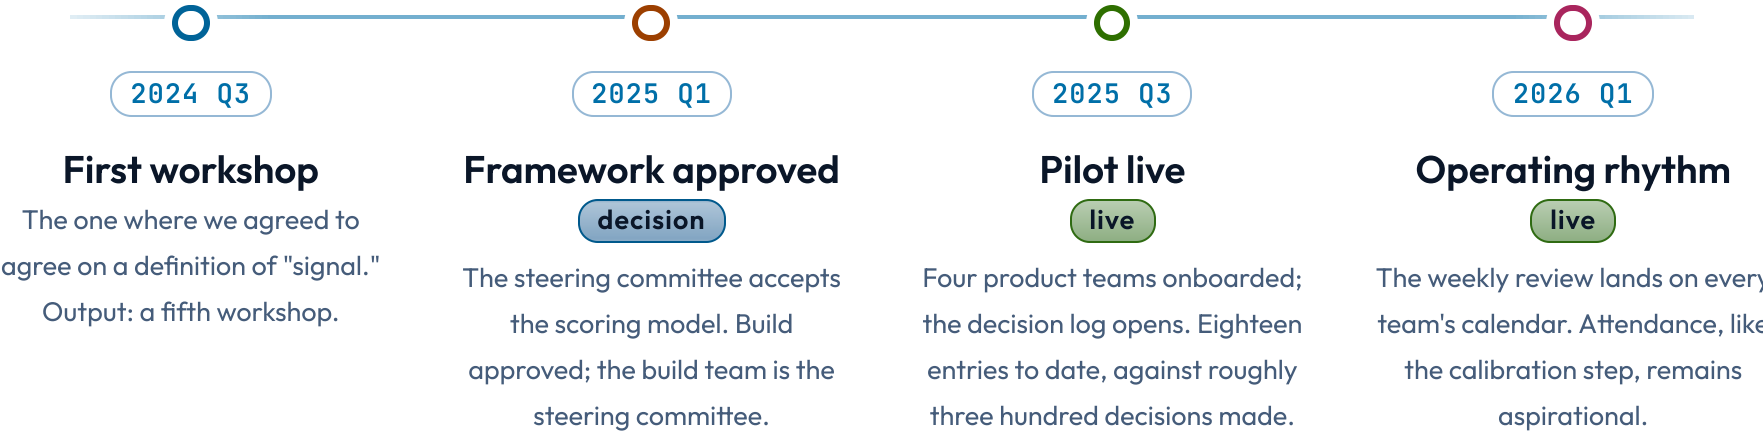

DECISION FRAMEWORK


Stress test — six milestones over three years, each described as inevitable in hindsight.



DECISION FRAMEWORK

How the framework arrived in production.


Four stages over eighteen months, from the first workshop to the operating rhythm.

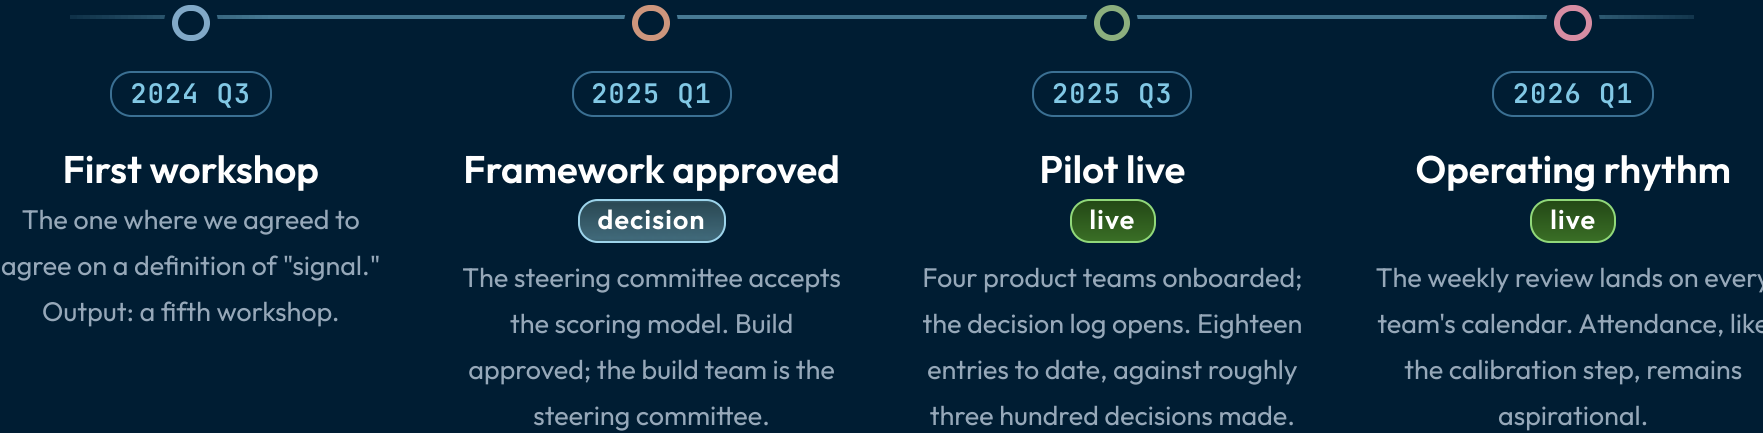

DECISION FRAMEWORK

How the framework arrived in production.


Four stages over eighteen months, from the first workshop to the operating rhythm.

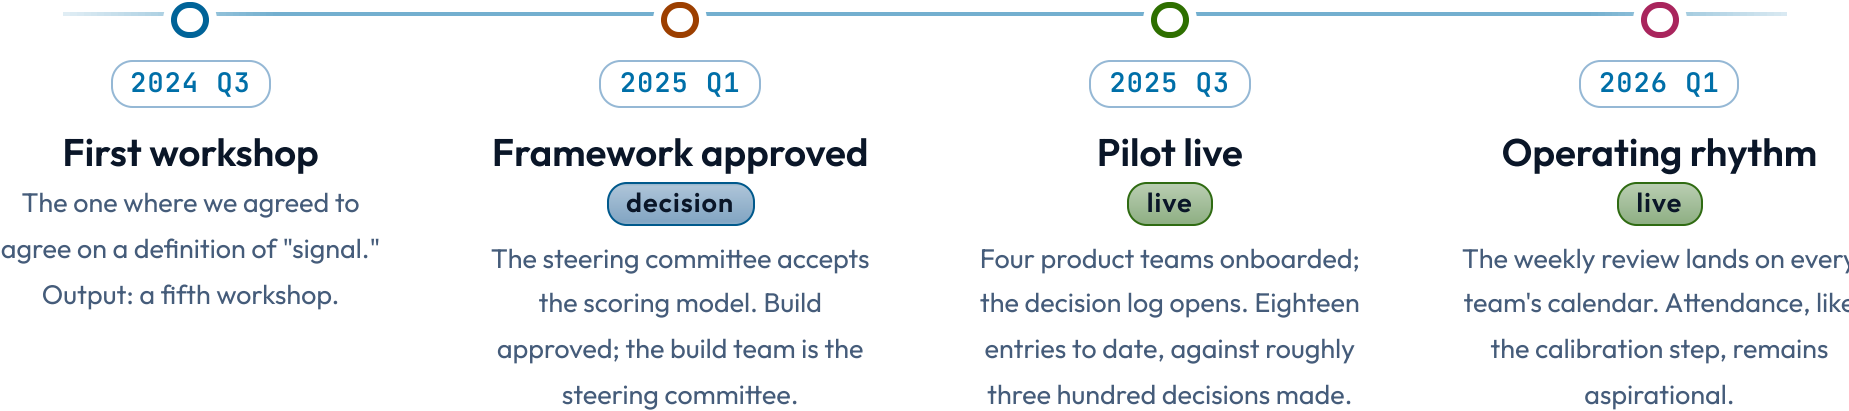

DECISION FRAMEWORK

How the framework arrived in production.

Four stages over eighteen months, from the first workshop to the operating rhythm.

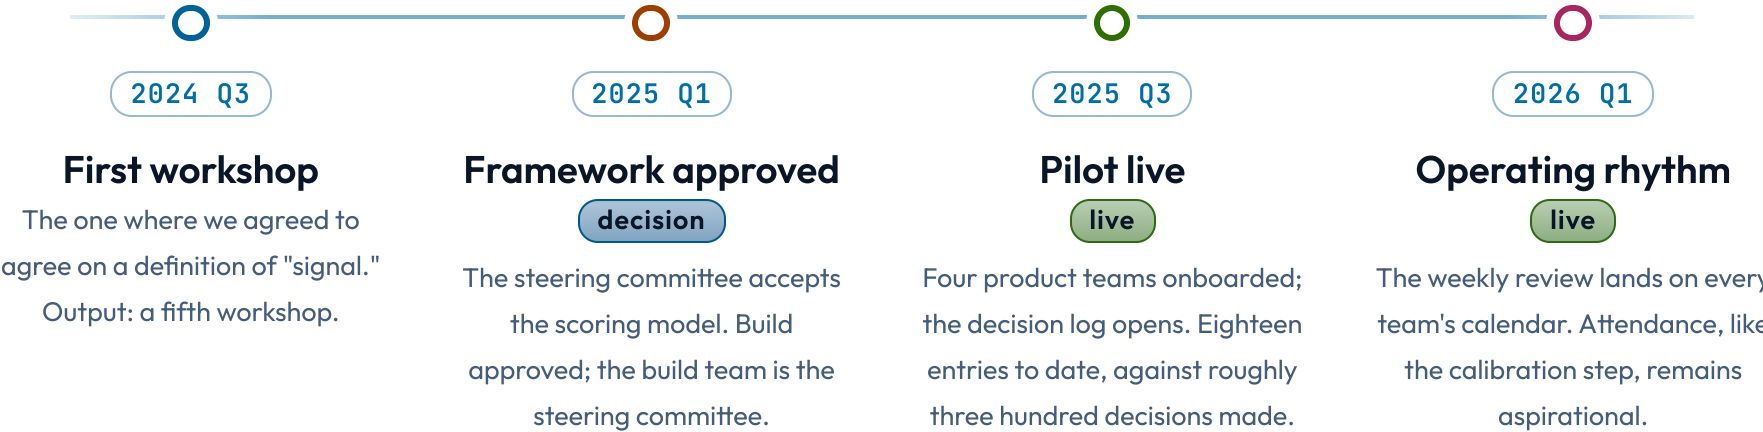

When NOT to reach for timeline-list.

Date-less steps. If the items don't carry calendar dates, you have a sequence, not a timeline. Use `list-steps` for an ordered list or `journey` for stage-by-stage progress without a date axis.

Date-range bars. If each milestone needs a start and an end on a shared time axis, the slide is a Gantt chart. Use `gantt` — the bar geometry will convey the durations the pill cannot.

The **Status pills as decoration.** status pill is a `decision`, `live`, `at-risk`, `blocked`, `done`. Don't invent freeform tags; the engine only tints the recognised vocabulary, and decorative pills break the at-a-glance read.

RELATED COMPONENTS

See also.

`gantt` — milestones occupy date ranges, not single moments

`list-steps` — the sequence has no dates, just an order

`journey` — stage-by-stage progress without calendar dates

`roadmap` — the timeline is forward-looking and bucketed by horizon

`progress` — the events are parallel workstreams with completion percentages