Mirakl Sellers API

Table of contents

Table of contents 1
Create a Seller API Key 2
Call Mirakl Sellers APIs 3
Authentication 3
Offers management APIs 4
Recommended API call order 4
Import a file to add or update offers (OF01) 4
Mandatory fields in Offer CSV file 6
All offer fields list 6
Examples of CSV input files
Update offers 11
cURL example 12
Response 12
Get information and statistics about an offer import (OF02) 12
cURL example 12
Response 13
Get the error report file for an offer import (OF03) 13
cURL example 13
Response 14
Get offers CSV file (OF51) 14
cURL example 16
Response 16
List offers of a shop (OF21) 17
cURL example 18
Get information about an offer (OF22) 18
cURL example 18
Create, update, or delete offers (OF24) 18
cURL example 19
Response 19
List offer conditions (OF61) 19
cURL example 19
Appendix 20
Channel Code list 20

Create a Seller API Key

Objective : The APi key is unique for each seller. It gives you access to all the Mirakl APIs. Do not communicate it to anyone.

Note :

- Every operator has **2 environments** : **1 test environment** and **1 production environment**. As a seller, you will first integrate your APIs on the test environment, then, once your integration is validated by the operator, you will repeat the integration on the prod environment.
- An **API Key** is specific to an environment. You will have to generate an API key for the test environment and then, one for the production environment.

Connect to your Mirakl portal:
TEST (PRE-PRODUCTION) : https://airbus-train.mirakl.net
PRODUCTION : https://airbus-prod.mirakl.net

Go to the “User Settings” configuration page by clicking the user icon visible on the top-right of your screen.



On the “User Settings” page, go to the “API Key” tab

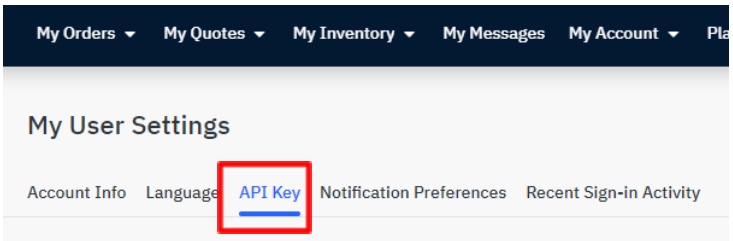

Click on the “Generate a new key” 

button to generate your API Key

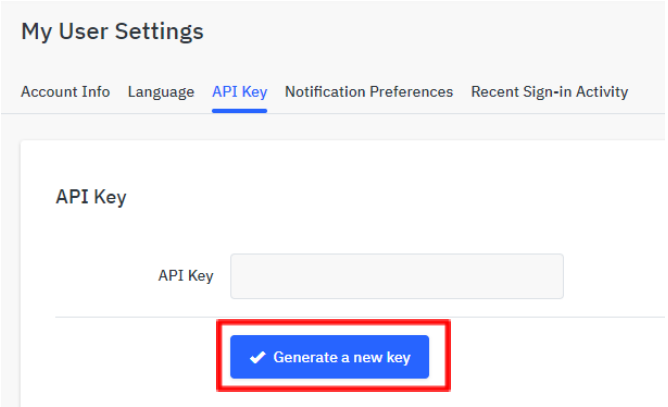

Copy your API Key (XXX-XXX-XXX-XXX-XXX)

Call Mirakl Sellers APIs

Mirakl offers APIs for sellers:

- Marketplace for Products Seller API
- Mirakl Catalog Manager Seller API

Authentication

First, Mirakl Sellers APIs accept only authenticated calls. In order to be authenticated, you have to pass your Mirakl Generated API Key on the HTTP “**Authorization**” header.

Example of cURL request:

```
curl --location --request GET 'https://airbus-train.mirakl.net/api/account \
--header 'Authorization: {YOUR_MIRAKL_API_KEY}'
```

Offers management APIs

In order to manage offers, Mirakl recommends to use OF01 API. This API gives you a way to update all or part of your offer data using a CSV file.

Nevertheless, you will see later that there exists another API (OF24) that also lets you update your offer following a different format but with less flexibility.

Recommended API call order

Step 1 : Import a file to add or update offers (OF01)

Step 2 : Get information and statistics about an offer import (OF02)

Step 3 : Get the error report file for an offer import (OF03)

Step 4 : Get offers CSV file (OF51)

Step 5 : List offers of a shop (OF21)

Step 6 : Get information about an offer (OF22)

Step 7 : Create, update or delete offers (OF24)

Step 8 : List offer conditions (OF61)

Import a file to add or update offers (OF01)

https://help.mirakl.net/help/api-doc/seller/mmp.html#OF01

URL	/api/offers/imports	
Method	POST	
Description	Import a file to add or update offers Returns the import identifier to track the status of the import. Please refer to OF02 API to see status details of your import.	
Query parameters	**shop_id** optional integer - int64	Use this parameter when your user has access to several shops. If not specified, the shop_id from your default shop will be used.
Input (Body)	**file** required string - binary	Import file (CSV or XML or XLSX) to upload. Use multipart/form-data with name file. Csv format: "sku";"product-id";"product-id-type";"description";"internal-description";"price";"price-additional-info";"quantity";"min-quantity-alert";"state";"available-

		start-date";"available-end-date";"discount-price";"discount-start-date";"discount-end-date";"discount-ranges";"allow-quote-requests";"leadtime-to-ship";"min-order-quantity";"max-order-quantity";"package-quantity";"update-delete";"price-ranges";"ecotax";"gift-wrap";"min-quantity-ordered" If you use specific sales channels, use: "price[channel=channel code]";"discount-price[channel=channel code]";"discount-start-date[channel=channel code]";"discount-end-date[channel=channel code]";"discount-ranges[channel=channel code]";"price-ranges[channel=channel code]" If you use the price per measurement unit feature, use pricing-unit to specify the unit corresponding to the submitted price. If you use U.S. tax manager, use: product-tax-code If Data collection related to circular economy regulations is enabled, use: "producer-id[EPR category code]"; "eco-contribution-amount[EPR category code]" EPR category code must be one of: FR-AGROPACK, FR-ASL, FR-DASRIPAT, FR-DBPS, FR-DDS, FR-DEA, FR-DEEE, FR-DISPMED, FR-DIY, FR-EMBM, FR-GF, FR-JOUETS, FR-LUB, FR-MH, FR-MNU, FR-PA, FR-PAP, FR-PCHIM, FR-PMCB, FR-PNEU, FR-TABAC, FR-TLC, FR-VEHICULE, FR-VHU, DE-BATTG, DE-PACK, DE-WEEE

		Note: field "eco-contributions" will be deprecated in the Spring 2023
	import_mode required string - One of: NORMAL, REPLACE	-
	operator_format optional boolean	Force the use of the operator product format Default to:false
	with_products optional boolean	This file also contains product information Default to:false

Mandatory fields in Offer CSV file

"sku" is the only field required when updating offers.

Field	creation	update
sku	Required	Required
product-id	Required	Optional
product-id-type	Required	Optional
price	Required	Optional
state	Required	Optional
quantity	Required	Optional
commercial-on-collection	Required	Optional

Note : If at least one mandatory field is not filled in, an error will be reported by the Get the error report file for an offer import (OF03) API's response.

All offer fields list

Field	Description	Status	Accepted Value	Example
sku	The offer's unique identifier in the store	Required	Character string limited to 255 characters. The character '/' is forbidden	OFFER_SKU_1
product-id	Unique product identifier for a given product-id-type	Required when creating an offer	Character string limited to 255 characters	98987DC
product-id-type	Type of product-id identifier	Required when creating an offer	Value in uppercase: SKU (product SKU) ISBN UPC EAN SHOP_SKU	SKU

description	Offer description	Recommended	The offer description is limited to 2000 characters	New product, original packaging
internal-description	The offer's description as shown in the back office	Optional	The offer's internal description is limited to 2000 characters	-
price	The selling price in the currency It is up to the operator to define with the seller whether the selling price includes or excludes taxes.	Required when creating an offer	Decimal number; a period is used to separate cents	45.50
price-additional-info	Information regarding the price of the offer Check with your operator if this information appears on the front.	Optional	Character string limited to 100 characters	"Environmental contribution (recycling fee) of 10 cents"
quantity	The quantity available in stock (maximum: one billion)	Optional	Integer greater than or equal to 0	100
min-quantity-alert	The minimum stock level that triggers an email alert No alerts are sent if this field is not specified.	Optional	Integer greater than or equal to 0	10
state	The state code of the offer	Required when creating an offer	1 for NEW	1
available-start-date	The first day the offer becomes available The offer has no start date if blank.	Optional	yyyy-MM-dd or yyyy-MM-ddThh:mm:ss+00	2017-11-27 or 2012-11-27T10:45:53+02 If no hours range specified, it is set to 00:00:00
available-end-date	The last day the offer is available The offer has no end date if blank.	Optional	yyyy-MM-dd or yyyy-MM-ddThh:mm:ss+00	2017-03-16 or 2013-03-16T30:45:12-07 If no hours range specified, it is set to 00:00:00
logistic-class	The code for the logistics class This logistic class overwrites the default logistic class defined for	Optional	Character string limited to 255 characters.	SP

	the product or Marketplace categor y assigned to the offer.			
favorite-rank	Define the offer as a favorite and set its rank value. This affects its positioning on the seller page of the website. The offer is not a favorite if blank.	Optional	Integer other than 0	1
discount-pri ce	Discount price in the currency	Optional	Decimal number*; a period is used to separate cents	30.15
discount-sta rt-date	The first day the offer becomes available The discount starts immediately if blank.	Optional	yyyy-MM-dd or yyyy-MM-ddThh:mm:ss+ 00	2017-11-27 or 2012-11-27T1 0:45:53+02 If no hours range specified, it is set to 00:00:00
discount-end -date	The last day the offer is available The discount has no end date if blank.	Optional	yyyy-MM-dd or yyyy-MM-ddThh:mm:ss+ 00	2017-12-27 or 2013-03-16T1 0:45:12-07 If no hours range specified, it is set to 23:59:59
discount-ran ges	The discount quantity thresholds and prices to define discounts with ranges	Optional	quantityThreshold1|price 1, quantityThreshold2|price 2	CSV format: 2|9.00,10|8.50 View XML format
update-delet e	Used only in "Normal" import mode Update mode is used if blank.	Optional	"", "update", "delete"	update
product-tax- code	Product tax code used for U.S. tax management	Optional	Character string limited to 255 characters	AB012345
allow-quote-r equest	Allow customers to request quotes on the offer	Optional	true or false	true
leadtime-to-s hip	The lead time to ship corresponding to the offer The unit is day.	Optional	Integer greater than or equal to 0 Integer smaller than max leadtime-to-ship	8
min-order-qu antity	The minimum quantity customers must put in their basket for one order	Optional	Integer between 1 and 1 000 000 000 or between 1 and max-order-quantity (i f activated)	3

max-order-quantity	The maximum quantity customers must put in their basket for one order	Optional	Integer between 1 and 1 000 000 000	20
package-quantity	The increment number of product items for one order	Optional	Integer between 1 and 1 000 000 000 or between 1 and max-order-quantity (if activated)	5
price-ranges	The ranges of the prices when the "Volume Pricing" feature is activated	Optional	quantityThreshold1|price1, quantityThreshold2|price2	CSV format: 1|12, 5|10
price-ranges[channel=<channelCode>]	The ranges of the prices for the indicated channel when the "Channel Pricing" and the "Volume Pricing" features are activated. *See Appendix "Channel Code list".*	Optional	quantityThreshold1|price1, quantityThreshold2|price2	CSV format: 1|12, 5|10
price[channel=<channelCode>]	The unit price of an offer for the indicated channel, when the "Channel Pricing" feature is activated. *See Appendix "Channel Code list".*	Optional	Decimal number*; a period is used to separate cents	12.50
discount-price[channel=<channelCode>]	The discount price of an offer for the indicated channel, when the "Channel Pricing" feature is activated. *See Appendix "Channel Code list".*	Optional	Decimal number*; a period is used to separate cents	9.50
discount-start-date[channel=<channelCode>]	The start date of the discount period for the indicated channel, when the "Channel Pricing" feature is activated. *See Appendix "Channel Code list".*	Optional	yyyy-MM-dd or yyyy-MM-ddThh:mm:ss+00	2017-11-27 or 2012-11-27T10:45:53+02 (N.B. +02 corresponds to the timezone)
discount-end-date[channel=<channelCode>]	The end date of the discount period for the indicated channel, when the "Channel Pricing" feature is	Optional	yyyy-MM-dd or yyyy-MM-ddThh:mm:ss+00	2017-11-27 or 2012-11-27T10:45:53+02 (N.B. +02

	activated. *See Appendix "Channel Code list".*			corresponds to the timezone)
discount-ranges[channel=<channelCode>]	The ranges of the discount prices for the indicated channel, when the "Channel Pricing" and "Volume Discount" feature are activated The format of the discount-ranges[channel=<channelCode>] is the same as the one of the discount-ranges field. *See Appendix "Channel Code list".*	Optional	quantityThreshold1|discountPrice1, quantityThreshold2|discountPrice2	CSV format: 1|9.50,5|8.20,10|7.80
pricing-unit	The unit used to set the price of the offer This option is only available if the operator creates a product with a measurement unit. The unit specified in this column must be the unit defined by the operator on the product.	Optional	One of the units accepted by Mirakl.	cm2
fulfillment-center-code	Code of the fulfilment centre	Optional	Character string	Fulfill
commercial-on-collection	On collection when stock is usually maintained or On demand if need to be supplied in case of new order.	Required when creating an offer. *(custom field)*	Value in uppercase: ON_COLLECTION ON_DEMAND	ON_DEMAND
plt	Use only dot character as separator	Optional. *(custom field)*	Numeric	2
plt-unit	DAY / WEEK / MONTH / YEAR	Optional. *(custom field)*	Value in uppercase: DAY WEEK MONTH YEAR	DAY
shelflife	Use only dot character as separator	Optional. *(custom field)*	Numeric	2

shelflife-unit	DAY / WEEK / MONTH / YEAR	Optional. *(custom field)*	Value in uppercase: DAY WEEK MONTH YEAR	DAY
warranty	Use only dot character as separator	Optional. *(custom field)*	Numeric	1
warranty-unit	DAY / WEEK / MONTH / YEAR	Optional. *(custom field)*	Value in uppercase: DAY WEEK MONTH YEAR	DAY
up-sell	Up Selling Part References list	Optional. *(custom field)*	Character string limited to 2000 characters	-
cross-sell	This column concerns the NATO references and their equivalences in the French, US, German Specifications. Values have to be at least in the Manufacturer Part Number and separated by the pipe character |.	Optional. *(custom field)*	Character string limited to 2000 characters	HENKEL-LOCTITE242-BLUE-10ML|HENKEL-LOCTITE243-BLUE-10ML
standards	standards	Optional. *(custom field)*	Character string limited to 2000 characters	-
vendor-reference	Vendor Reference	Optional. *(custom field)*	Character string limited to 2000 characters	-

Examples of CSV input files

Update offers

```
"sku";"quantity"
PM0001;24
PM0002;56
PM0003;12
```

Create an offer

```
"sku";"product-id";"product-id-type";"price";"state";"quantity";"commercial-on-collection"
PM0004; mkp-000000000001450871;SKU;666;1;800;"ON_DEMAND"
```

cURL example

```
curl --location --request POST 'https://airbus-train.mirakl.net/api/offers/imports' \
--header 'Authorization: {YOUR_MIRAKL_API_KEY}' \
--form 'file=@"/C:/offers_file.csv"' \
--form 'import_mode="NORMAL"'
```

Response

This API responds with an “Import ID”. This ID permits you to get information about the Mirakl offer import status. Please refer to the “Get information and statistics about an offer import (OF02)” API detail.

```
{
   "import_id": 2150
}
```

Get information and statistics about an offer import (OF02)

https://help.mirakl.net/help/api-doc/seller/mmp.html#OF02

URL	/api/offers/imports/{import}	
Method	GET	
Description	Get information and statistics about an offer import. This API gives you information and statistics about your offers import. In case of import error, the field “**has_error_report**” will be “**true**”. In such a case, you can retrieve the error report using the OF03 API. Please refer to the “Get the error report file for an offer import” API.	
Path parameters	**import_id** required integer - int64	Import identifier
Query parameters	**shop_id** optional integer - int64	Use this parameter when your user has access to several shops. If not specified, the shop_id from your default shop will be used.

cURL example

```
curl --location --request GET 'https://airbus-train.mirakl.net/api/offers/imports/{import_id}' \
--header 'Authorization: {YOUR_MIRAKL_API_KEY}'
```

Response

Example with response type.

```
{
  "date_created": "string",
  "has_error_report": "boolean",
  "import_id": "integer",
  "lines_in_error": "integer",
  "lines_in_pending": "integer",
  "lines_in_success": "integer",
  "lines_read": "integer",
  "mode": "string",
  "offer_deleted": "integer",
  "offer_inserted": "integer",
  "offer_updated": "integer",
  "reason_status": "string",
  "status": "string",
  "type": "string"
}
```

Get the error report file for an offer import (OF03)

https://help.mirakl.net/help/api-doc/seller/mmp.html#OF03

URL	/api/offers/imports/{import}/error_report	
Method	GET	
Description	Get the error report file for an offer import This API returns a CSV, XLSX or XML file, depending on the file format provided by the seller. This API will give you the reasons why your import failed.	
Path parameters	**import_id** required integer - int64	Import identifier
Query parameters	**shop_id** optional integer - int64	Use this parameter when your user has access to several shops. If not specified, the shop_id from your default shop will be used.

Note : if several .xlsx sheets have been imported in one file, the request will return a .zip folder. You can use the --output "*filename*.zip" in order to save the folder locally.

cURL example

```
curl --location --request GET 'https://airbus-train.mirakl.net/api/offers/imports/{import_id}/error_report' \
--header 'Authorization: {YOUR_MIRAKL_API_KEY}'
```

Response

Error report when using OF01 API (Manage offers using CSV file).

"sku";"product-id";"product-id-type";"description";"internal-description";"price-additional-info";"quantity";"min-quantity-alert";"state";"available-start-date";"available-end-date";"logistic-class";"update-delete";"discount-start-date";"discount-end-date";"price";"discount-price";"discount-ranges";"price-ranges";"discount-start-date[channel=FR]";"discount-end-date[channel=FR]";"price[channel=FR]";"discount-price[channel=FR]";"discount-ranges[channel=FR]";"prices-ranges[channel=FR]";"discount-start-date[channel=CA]";"discount-end-date[channel=CA]";"price[channel=CA]";"discount-price[channel=CA]";"discount-ranges[channel=CA]";"prices-ranges[channel=CA]";"leadtime-to-ship";"error-line";"error-message"
"OFFER_SKU_004";"MKP100000000195360";"SKU";"My Offer Description n°1";"My Internal description 1";"My price Additional innformations";"1000000";"20";"11";"2017-02-20T10:45:53+01";"2017-04-30T10:45:53+01";"S";"update";"2017-02-22T10:45:53+01";"2017-04-30T10:45:53+01";"110.52";"108,56";"";"5|109.20,10|108.736";"2017-02-22T10:45:53+01";"2017-03-31T10:45:53+01";"105.56";"102,36";"";"5|104.56,10|103.27";"2017-02-22T10:45:53+01";"2017-03-31T10:45:53+01";"190.23";"175,36";"";"5|182.58,10|181.27";"15";"2";**"The product does not exist"**

Get offers CSV file (OF51)

https://help.mirakl.net/help/api-doc/seller/mmp.html#OF51

URL	/api/offers/export
Method	GET
Description	Get offers CSV file Get a CSV file that includes the offers updated and deleted since the last request date For deleted offers, only offer-id, product-sku, shop-id, shop-sku, active and deleted columns are returned. If the last_request_date param is not set the api returns all the active offers (inactive offers can be included with include_inactive_offers parameter). If offers have custom fields, a column is added for each existing custom field with as header the code of the custom field. This API returns a CSV diff file: offer-id;product-sku;min-shipping-price;min-shipping-price-additional;min-shipping-zone;min-shipping-type;price;total-price;price-additional-info;quantity;description;state-code;shop-id;shop-name;professional;premium;logistic-class;active;favorite-rank;channels;deleted;origin-price;discount-start-date;discount-end-date;available-start-date;available-end-date;discount-price;currency-iso-code;discount-ranges;leadtime-to-ship;allow-quote-requests;price-ranges;fulfillment-center-code;shop-sku;measurement-units;min-order-quantity;max-order-quantity;package-quantity;product-tax-code If a seller uses a specific sales channel, the following fields are returned:

	price[channel=channel code];origin-price[channel=channel code];discount-price[channel=channel code];discount-start-date[channel=channel code];discount-end-date[channel=channel code];discount-ranges[channel=channel code];price-ranges[channel=channel code] If the supervisor toggle Export shipping charges and delivery times in OF51 has been enabled, the following fields are returned: shipping-price[zone=code,method=code];delivery-time-earliest-days[zone=code,method=code];delivery-time-latest-days[zone=code,method=code] If Data collection related to circular economy regulations is enabled, the following fields are returned: "producer-id[EPR category code]"; "eco-contribution-amount[EPR category code]" Note: field eco-contributions will be deprecated in the Spring 2023. Results are sorted by offer identifier.	
Query parameters	**last_request_date** optional string - date-time	Last request date
	channel_codes optional string	List of the channel codes to filter with, using a comma (,) as a separator. If specified, only offers linked to the given channels will be returned. Otherwise, offers will be returned regardless of their channels.
	shipping_zones optional string	List of the shipping zones codes to filter with, URL-encoded and using a comma (,) as a separator. If specified, only shipping information linked to the given zones will be returned. Otherwise, all shipping information for all zones will be returned.
	include_inactive_offers optional boolean	Can be used only if last_request_date is not specified. If 'true', active offers as well as inactive offers are returned. If 'false' or not specified, only active offers are returned. This does not return the deleted offers. Specify last_request_date to retrieve deleted offers. Default to false.

	include_fields optional string	List of the fields to include, URL-encoded and using a comma (,) as a separator. If specified, only listed fields will be returned.
	shop_id optional integer - int64	Use this parameter when your user has access to several shops. If not specified, the shop_id from your default shop will be used.

cURL example

```
curl --location --request GET 'https://airbus-train.mirakl.net/api/offers/export' \
--header  'Authorization: {YOUR_MIRAKL_API_KEY}'
```

Response

The response returns a CSV file with all offer fields.

```
offer-id;product-sku;min-shipping-price;min-shipping-price-additional;min-shipping-zone;min-shippin
g-type;price;total-price;price-additional-info;quantity;description;state-code;shop-id;shop-name;prof
essional;premium;logistic-class;active;favorite-rank;channels;deleted;origin-price;discount-start-dat
e;discount-end-date;available-start-date;available-end-date;discount-price;currency-iso-code;discou
nt-ranges;leadtime-to-ship;allow-quote-requests;price-ranges;fulfillment-center-code;shop-sku;mod
el;min-order-quantity;max-order-quantity;package-quantity;price[channel=CA];origin-price[channel=
CA];discount-start-date[channel=CA];discount-end-date[channel=CA];discount-price[channel=CA];d
iscount-ranges[channel=CA];price-ranges[channel=CA];price[channel=FR];origin-price[channel=FR
];discount-start-date[channel=FR];discount-end-date[channel=FR];discount-price[channel=FR];disc
ount-ranges[channel=FR];price-ranges[channel=FR];price[channel=BFR];origin-price[channel=BFR
];discount-start-date[channel=BFR];discount-end-date[channel=BFR];discount-price[channel=BFR];
discount-ranges[channel=BFR];price-ranges[channel=BFR];price[channel=CHR];origin-price[chann
el=CHR];discount-start-date[channel=CHR];discount-end-date[channel=CHR];discount-price[chann
el=CHR];discount-ranges[channel=CHR];price-ranges[channel=CHR];price[channel=US];origin-pric
e[channel=US];discount-start-date[channel=US];discount-end-date[channel=US];discount-price[cha
nnel=US];discount-ranges[channel=US];price-ranges[channel=US];ecotax;gift-wrap;min-quantity-or
dered;measurement-units;producer-id[FR-DEA];eco-contribution-amount[FR-DEA];producer-id[DE-
WEEE];eco-contribution-amount[DE-WEEE]
2130;MKP100000000037254;0.00;0.00;DOM1;CLC;50.00;50.00;;40;;11;2000;ACME
SHOP;true;true;M;true;;FR|US;false;50.00;;;;;;USD;;;false;1|50.00;DEFAULT;sku-2130;MARKETPL
ACE;;;;;;
```

List offers of a shop (OF21)

https://help.mirakl.net/help/api-doc/seller/mmp.html#OF21

URL	/api/offers	
Method	GET	
Description	List offers of a shop.	
Query parameters	**offer_state_codes** optional string	List of all offer state codes
	sku optional string	Offer's sku
	product_id optional string	Product's sku
	favorite optional boolean	Filter only favorite offers Default to false
	pricing_channel_code optional string	Filter only favorite offers. Filter used to pick prices on a specific channel.
	pricing_customer_organization_id optional string	For Customer Pricing users only. Customer identifier code the API will use to return the applicable price. Ignored if value does not exist.
	shop_id optional integer - int64	Use this parameter when your user has access to several shops. If not specified, the shop_id from your default shop will be used.
Pagination	This resource supports offset pagination	https://help.mirakl.net/help/api-doc/seller/mmp.html#offset-pagination
Sort fields	**totalPrice** (Default)	Sort by total price (asc by default)
	price	Sort by price, total price (asc by default)
	productTitle	Sort by product title, total price (asc by default)

cURL example

```
curl --location --request GET 'https://airbus-train.mirakl.net/api/offers \
--header 'Authorization: {YOUR_MIRAKL_API_KEY}'
```

Get information about an offer (OF22)

https://help.mirakl.net/help/api-doc/seller/mmp.html#OF22

URL	/api/offers/{offer}	
Method	GET	
Description	Get information about an offer. This information will be useful if you plan to update the offer later.	
Path parameters	**offer** required integer - int64	Offer identifier
Query parameters	**pricing_channel_code** optional string	Filter used to pick prices on a specific channel
	pricing_customer_organization_id optional string	For Customer Pricing users only. Customer identifier code the API will use to return the applicable price. Ignored if value does not exist.
	shop_id optional integer - int64	Use this parameter when your user has access to several shops. If not specified, the shop_id from your default shop will be used.

cURL example

```
curl --location --request GET 'https://airbus-train.mirakl.net/api/offers/{offer}' \
--header 'Authorization: {YOUR_MIRAKL_API_KEY}'
```

Create, update, or delete offers (OF24)

https://help.mirakl.net/help/api-doc/seller/mmp.html#OF24

URL	/api/offers	
Method	POST	
Description	Create, update, or delete offers Returns the import identifier to track the status of the update. **You must send all offer fields. Offer fields that are not sent are reset to their default value.**	
Query parameters	**shop_id** optional integer - int64	Use this parameter when your user has access to several shops. If not specified, the shop_id from your default shop will be used.

Input (Body):

Please refer to the API documentation.

cURL example

```
curl --location --request POST 'https://airbus-train.mirakl.net/api/offers' \
--header 'Authorization: {YOUR_MIRAKL_API_KEY}' \
--header 'Content-Type: application/json' \
--data-raw '{INPUT_JSON}'
```

Response

This API responds with an “Import ID”. This ID permits you to get information about the Mirakl offer import status. Please refer to the “Get information and statistics about an offer import (OF02)” API detail.

```
{
   "import_id": 2150
}
```

List offer conditions (OF61)

https://help.mirakl.net/help/api-doc/seller/mmp.html#OF61

URL	/api/offers/states	
Method	GET	
Description	List offer conditions Sorted by sort index, set in the back-office	
Query parameters	**active** optional boolean	Filter offer condition on their active status. If true, only active offer conditions are returned. If false, only inactive offer conditions are returned.
	shop_id optional integer - int64	Use this parameter when your user has access to several shops. If not specified, the shop_id from your default shop will be used.

cURL example

```
curl --location --request GET 'https://airbus-train.mirakl.net/api/offers/states' \
--header 'Authorization: {YOUR_MIRAKL_API_KEY}'
```

Appendix

Channel Code list

channelCode	Description
0100	Airbus Helicopters Spain
1000	Airbus Helicopters Germany
2000	Airbus Helicopters France
5000	Airbus Helicopters Inc (USA)