
Swagger 2

https://swagger.io/

http://petstore.swagger.io

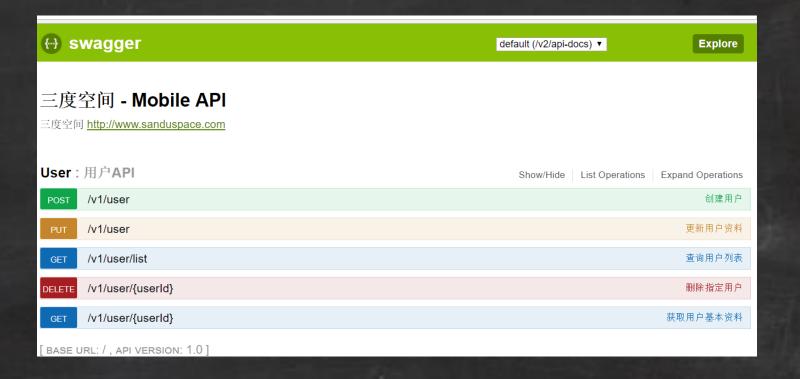

http://petstore.swagger.io

http://springfox.github.io/springfox/docs/current/

常用注释介绍

@EnableSwagger2 开启Swagger2

- 类
 - @Api(tags = "User", value = "用户")
- 方法
 - @ApiOperation(value="获取用户信息", response= UserVO.class)
- 成员属性/字段
 - @ApiModelProperty(value="用户ID", required= true)

参数

```
— @ApilmplicitParam(
    name="page",
    value = "页码",
    paramType="query",
    datatype="Integer",
    required= false)
```

参数组

```
— @ApilmplicitParams({
@ApilmplcitParam(name="", value="", ...),
@ApilmplicitParam(name="", value="", ...)
})
```

RestFul API & HTTP

- 获取 GET
 - @RequestMapping(value="/{userId}", method= RequestMethod.GET)
 - @GetMapping(value="/{userId}")
- 创建 POST
 - @PostMapping(consumes = MediaType.APPLICATION_JSON_UTF8_VALUE)
- 更新 PUT
 - @PutMapping()
- 删除 DELETE
 - @DeleteMapping(value="/{userId}")

Thanks, Bye!

@Author: DengDaYong

@Date: 2017-11-19