

# **TOURSIM MANAGEMENT SYSTEM**

## **A PROJECT REPORT**

*Submitted By*

<b>GAJENDREN. R</b>	<b>(Reg. No. 20203071401115)</b>
<b>MUKESH. S</b>	<b>(Reg. No. 20203071401120)</b>
<b>PRATHESH KUMAR. A</b>	<b>(Reg. No. 20203071401126)</b>
<b>SUBASH. K</b>	<b>(Reg. No. 20203071401136)</b>

*in partial fulfillment for the award of the degree of*

**BACHELOR OF COMPUTER APPLICATIONS**



**DEPARTMENT OF COMPUTER APPLICATIONS**

**GOVERNMENT ARTS AND SCIENCE COLLEGE**

**PALKULAM, KANYAKUMARI – 629401**

**APRIL 2023**

**GOVERNMENT ARTS AND SCIENCE COLLEGE**  
**PALKULAM, KANYAKUMARI – 629401**

**BONAFIDE CERTIFICATE**

Certified that this Project Report entitled “TOURSIM MANAGEMENT SYSTEM” is the bonafide work of **GAJENDREN. R (Reg. No. 20203071401115)**, **MUKESH. S (Reg. No. 20203071401120)**, **PRATHESH KUMAR. A (Reg. No. 20203071401126)**, and **SUBASH. K (Reg. No. 20203071401136)** who carried out the work under my supervision. Certified further that to the best of my knowledge the work reported herein does not form part of any other thesis or dissertation on the basis of which a degree or award was conferred on an earlier occasion on this or any other candidate.

Mrs. P. VASANTHI  
Assistant Professor & Head  
Department of Computer Applications  
Government Arts and Science College  
Palkulam, Kanyakumari – 629401

Dr. T. J. BENEDICT JOSE  
Assistant Professor & Supervisor  
Department of Computer Applications  
Government Arts and Science College  
Palkulam, Kanyakumari – 629401

Submitted for the viva –voce held on \_\_\_\_\_

1. \_\_\_\_\_

2. \_\_\_\_\_

External Examiners

## **ABSTRACT**

As the name specifies “TOURISM MANAGEMENT SYSTEM” is a software developed for managing tour booking. Identification of the drawbacks of the existing system leads to the designing of computerized system that will be compatible to the existing system with the system which is more user friendly and more GUI oriented. We can improve the efficiency of the system, thus overcome the drawbacks of the existing system.

- Less human error ·Strength and strain of manual labor can be reduced.
- High security.
- Data redundancy can be avoided to some extent.
- Data consistency.
- Easy to handle.
- Easy data updating.
- Easy record keeping.
- Backup data can be easily generated.

## **ACKNOWLEDGEMENT**

An endeavor carried about for a long period is complete only with the help and support of many well wishers. First and foremost I would like to thank God Almighty for helping us to successfully complete this project.

We thank Dr. G. SAROJA , the Principal of Government Arts and Science College, Palkulam, Kanyakumari, for allowing us to proceed with our project.

We specially acknowledge our thanks to Mrs. P. Vasanthi, Assistant Professor and Head, Department of Computer Applications, for providing timely advice and all facilities in making our venture a complete success.

We express our gratitude to our Supervisor Dr. T. J. Benedict Jose, Assistant Professor & Organizing Secretary of ASCA, Department of Computer Applications, for being a wonderful guidance to us in our efforts and whole heartedly helping us to do this project in a wonderful manner.

We express our thanks to all the staff members of the Department of Computer Applications. Last but not the least we extend our heartfelt thanks to our family and friends for their constant support.

<b>GAJENDREN. R</b>	<b>(Reg. No. 20203071401115)</b>
<b>MUKESH. S</b>	<b>(Reg. No. 20203071401120)</b>
<b>PRATHESH KUMAR. A</b>	<b>(Reg. No. 20203071401126)</b>
<b>SUBASH. K</b>	<b>(Reg. No. 20203071401136)</b>

## **TABLE OF CONTENTS**

<b>CHAPTER</b>	<b>TITLE</b>	<b>PAGE NO</b>
	<b>ABSTRACT</b>	III
	<b>LIST OF TABLES</b>	VII
1.	<b>INTRODUCTION</b>	1
	1.1. GENERAL	1
	1.2. NEED FOR THE STUDY	1
	1.3. OBJECTIVE OF THE STUDY	2
2.	<b>SYSTEM ANALYSIS</b>	3
	2.1. FEASIBILITY STUDY	3
	2.1.1. OPERATIONAL	3
	2.1.2. TECHNICAL	4
	2.1.3. ECONOMICAL	4
3.	<b>REQUIREMENT ANALYSIS</b>	5
	3.1. HARDWARE REQUIREMENT	5
	3.2. SOFTWARE REQUIREMENT	5
	3.3. EXSISTING SYSTEM	5
	3.4. PROPOSED SYSTEM	5
4.	<b>DESIGN AND PLANNING</b>	6
	4.1. DEVELOPMENT LIFE CYCLE MODEL	6
	4.1.1. WATERFALLS MODEL	6
	4.2. GENERAL OVERVIEW	7
	4.3. USE CASE DIAGRAM	8
	4.4. ER DIAGRAM	10
	4.5. DFD DIAGRAM	14
5.	<b>IMPLEMENTATION</b>	17
	5.1. FRONT END	17
	5.2. BACK END	20

<b>6.</b>	<b>TESTING</b>	22
6.1.	UNIT TESTING	22
6.2.	INTEGRATION TESTING	23
6.3.	VERIFICATION AND VALIDATION	25
6.4.	BLACK – BOX TESTING	26
6.5.	WHITE – BOX TESTING	26
6.6.	SYSTEM TESTING	28
<b>7.</b>	<b>FUTURE ENHANCEMENT</b>	29
<b>8.</b>	<b>CONCLUSION</b>	30
<b>9.</b>	<b>REFERENCES</b>	31
<b>10.</b>	<b>APPENDIXES</b>	32
<b>11.</b>	<b>SCREENSHOTS</b>	177

## LIST OF TABLES

### Table Name: admin

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	<b>id</b> 📄	int		No	None		AUTO_INCREMENT	📝 Change 🗑 Drop 🔍 More	
2	<b>UserName</b>	text	latin1_swedish_ci	Yes	NULL			📝 Change 🗑 Drop 🔍 More	
3	<b>Password</b>	varchar(10)	latin1_swedish_ci	Yes	NULL			📝 Change 🗑 Drop 🔍 More	
4	<b>updationDate</b>	timestamp		Yes	NULL			📝 Change 🗑 Drop 🔍 More	

Table: 5.1 Admin Table

### Table Name: tblusers

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	<b>id</b> 📄	int		No	None		AUTO_INCREMENT		📝 Change 🗑 Delete 🔍 More
2	<b>FullName</b>	text	latin1_swedish_ci	Yes	NULL				📝 Change 🗑 Delete 🔍 More
3	<b>Nationality</b>	text	latin1_swedish_ci	No	None				📝 Change 🗑 Delete 🔍 More
4	<b>MobileNumber</b>	char(10)	latin1_swedish_ci	Yes	NULL				📝 Change 🗑 Delete 🔍 More
5	<b>EmailId</b> 📩	varchar(70)	latin1_swedish_ci	Yes	NULL				📝 Change 🗑 Delete 🔍 More
6	<b>Password</b>	varchar(10)	latin1_swedish_ci	Yes	NULL				📝 Change 🗑 Delete 🔍 More
7	<b>RegDate</b>	timestamp		Yes	CURRENT_TIMESTAMP		DEFAULT_GENERATED		📝 Change 🗑 Delete 🔍 More
8	<b>UpdationDate</b>	timestamp	on update CURRENT_TIMESTAMP	Yes	NULL		ON UPDATE CURRENT_TIMESTAMP		📝 Change 🗑 Delete 🔍 More

Table: 5.2 User Table

### Table Name: tblbooking

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	<b>BookingId</b> 📄	int		No	None		AUTO_INCREMENT		📝 Change 🗑 Delete 🔍 More
2	<b>PackagedId</b>	int		Yes	NULL				📝 Change 🗑 Delete 🔍 More
3	<b>UserEmail</b>	varchar(100)	latin1_swedish_ci	Yes	NULL				📝 Change 🗑 Delete 🔍 More
4	<b>FromDate</b>	varchar(100)	latin1_swedish_ci	Yes	NULL				📝 Change 🗑 Delete 🔍 More
5	<b>ToDate</b>	varchar(100)	latin1_swedish_ci	Yes	NULL				📝 Change 🗑 Delete 🔍 More
6	<b>Comment</b>	mediumtext	latin1_swedish_ci	Yes	NULL				📝 Change 🗑 Delete 🔍 More
7	<b>RegDate</b>	timestamp		Yes	CURRENT_TIMESTAMP		DEFAULT_GENERATED		📝 Change 🗑 Delete 🔍 More
8	<b>status</b>	int		Yes	NULL				📝 Change 🗑 Delete 🔍 More
9	<b>CancelledBy</b>	varchar(5)	latin1_swedish_ci	Yes	NULL				📝 Change 🗑 Delete 🔍 More
10	<b>UpdationDate</b>	timestamp	on update CURRENT_TIMESTAMP	Yes	NULL		ON UPDATE CURRENT_TIMESTAMP		📝 Change 🗑 Delete 🔍 More

Table: 5.3 Booking Table

## Table Name: tblpackages

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	Packageld	int			No	None		AUTO_INCREMENT	Change
2	PackageName	varchar(200)	latin1_swedish_ci		Yes	NULL			Change
3	PackageType	varchar(150)	latin1_swedish_ci		Yes	NULL			Change
4	PackageLocation	varchar(100)	latin1_swedish_ci		Yes	NULL			Change
5	PackagePrice	int			Yes	NULL			Change
6	PackageFeatures	varchar(255)	latin1_swedish_ci		Yes	NULL			Change
7	PackageDetails	mediumtext	latin1_swedish_ci		Yes	NULL			Change
8	PackageImage	varchar(100)	latin1_swedish_ci		Yes	NULL			Change
9	Creationdate	timestamp			Yes	CURRENT_TIMESTAMP		DEFAULT_GENERATED	Change
10	UpdationDate	timestamp		on update CURRENT_TIMESTAMP	Yes	NULL		ON UPDATE CURRENT_TIMESTAMP	Change

Table: 5.4 Packages Table

## Table Name: tblenquiry

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	id	int			No	None		AUTO_INCREMENT	Change  Drop
2	FullName	varchar(100)	latin1_swedish_ci		Yes	NULL			Change  Drop
3	EmailId	varchar(100)	latin1_swedish_ci		Yes	NULL			Change  Drop
4	MobileNumber	char(10)	latin1_swedish_ci		Yes	NULL			Change  Drop
5	Subject	varchar(100)	latin1_swedish_ci		Yes	NULL			Change  Drop
6	Description	mediumtext	latin1_swedish_ci		Yes	NULL			Change  Drop
7	PostingDate	timestamp			Yes	CURRENT_TIMESTAMP		DEFAULT_GENERATED	Change  Drop
8	Status	int			Yes	NULL			Change  Drop

Table: 5.5 Enquiry Table

## Table Name: tblliesses

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	id	int			No	None		AUTO_INCREMENT	Change
2	UserEmail	varchar(100)	latin1_swedish_ci		Yes	NULL			Change
3	Issue	varchar(100)	latin1_swedish_ci		Yes	NULL			Change
4	Description	mediumtext	latin1_swedish_ci		Yes	NULL			Change
5	PostingDate	timestamp			Yes	CURRENT_TIMESTAMP		DEFAULT_GENERATED	Change
6	AdminRemark	mediumtext	latin1_swedish_ci		Yes	NULL			Change
7	AdminremarkDate	timestamp		on update CURRENT_TIMESTAMP	Yes	NULL		ON UPDATE CURRENT_TIMESTAMP	Change

Table: 5.6 Issues Table

## Table Name: tblpages

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	<a href="#">id</a>	int			No	None		AUTO_INCREMENT	<a href="#">Change</a> <a href="#">Drop</a> ▾ More
2	<a href="#">type</a>	varchar(255)	latin1_swedish_ci		Yes				<a href="#">Change</a> <a href="#">Drop</a> ▾ More
3	<a href="#">detail</a>	longtext	latin1_swedish_ci		Yes	NULL			<a href="#">Change</a> <a href="#">Drop</a> ▾ More

Table: 5.7 Pages Table

# **INTRODUCTION**

## **1.1. GENERAL**

Tourism Management system has turned out to be an economic booster contributing to the economic development of many countries over the last few decades. People see holidays as a necessity, and not as luxury in the present scenario. Tourism calls for coordination and cooperation between travel agents, tour operators, and tourists. Tourism has a few major elements – destinations, attractions, sites, accommodation, and all ancillary services. The need for a robust and dynamic tour management application has been around since the advent of the tourism concept. Thus we have developed an application to provide the best travelling services to the customers and travel agents. The Tourism Management System provides a search platform where a tourist can find their tour places according to their choices. This system also helps to promote responsible and interesting tourism so that people can enjoy their holidays at their favorable places and develop tourism with different cultures so that they enrich the tourism experience and build pride. The Tourism Management System is a web based application. The objective of this project is to develop a system that automates the processes and activities of a travel agency. It is tedious for a customer to plan a particular journey and have it executed properly. This project is developed to replace the currently existing system, which helps in keeping records of the customer details of destination as well as payment received. The proposed system is highly automated and makes the travelling activities much easier and flexible. The users can get the very right information at the very right time. This will increase the trust of the customer into the tourism company as well. This project is designed with SQL Server as back end. All the data will be stored in the server and in case of any data losing situation, a backup will be available by this server. The details related to every aspect of the tourist will be available separately. The admins just have to click once and all the details will be available to them.

## **1.2. NEED FOR THE STUDY**

To provide flexibility to the users, the interfaces have been developed that are accessible through a browser. The GUI'S at the top level have been categorized as

1. Administrative user interface
2. The operational or generic user interface

The ‘administrative user interface’ concentrates on the consistent information that is practically, part of the organizational activities and which needs proper authentication for the data collection. These interfaces help the administrators with all the transactional states like Data insertion, Data deletion and Date updating along with the extensive data search capabilities. The ‘operational or generic user interface’ helps the end users of the system in transactions through the existing data and required services. The operational user interface also helps the ordinary users in managing their own information in a customized manner as per the included flexibilities.

### **1.3. OBJECTIVE OF THE STUDY**

The Tourism Management System is web based application and maintain a centralized repository of all related information. The Objective of this project is to develop a system that automates the process and activities of a travel agency and customer details. The purpose is to design a system using which one can perform all operations related to traveling and sight-seeing.

## **SYSTEM ANALYSIS**

In tourism management, system analysis refers to the process of analyzing an existing or proposed system used for managing tourism activities. The goal of system analysis is to identify the components, functions, and interactions of the system in order to enhance its effectiveness, efficiency, and usability.

### **2.1. FEASIBILITY STUDY**

Preliminary investigation examines project feasibility, the likelihood the system will be useful to organization. The main objective of the feasibility study is to test the Technical, Operational and Economical feasibility for adding new modules and debugging old running system. All systems are feasible if they are given unlimited resources and infinite time. There are aspects in the feasibility study portion of the preliminary investigation:

- Technical Feasibility
- Operation Feasibility
- Economical Feasibility

#### **2.1.1. OPERATIONAL**

Proposed projects are beneficial only if they can be turned out into information systems, which will meet the organization's operating requirements. Operational feasibility aspects of the project are to be taken as an important part of the project implementation. Some of the important issues raised are to test the operational feasibility of a project includes the following: -

- Is there sufficient support for the management from the users?
- Will the system be used and work properly if it is being developed and implemented?
- Will there be any resistance from the user that will undermine the possible application benefits?

This system is targeted to be in accordance with the above-mentioned issues. Beforehand, the management issues and user requirements have been taken into consideration. So there is no question of resistance from the users that can undermine the possible application benefits. The well-planned design would ensure the optimal utilization of the computer resources and would help in the improvement of performance status.

## **2.1.2. TECHNICAL**

The technical issue usually raised during the feasibility stage of the investigation includes the following:

- Does the necessary technology exist to do what is suggested?
- Do the proposed equipments have the technical capacity to hold the data required to use the new system?
- Will the proposed system provide adequate response to inquiries, regardless of the number or location of users?
- Can the system be upgraded if developed?
- Are there technical guarantees of accuracy, reliability, ease of access and data security?

## **2.1.3. ECONOMICAL**

A system can be developed technically and that will be used if installed must still be a good investment for the organization. In the economical feasibility, the development cost in creating the system is evaluated against the ultimate benefit derived from the new systems. Financial benefits must equal or exceed the costs. The system is economically feasible. It does not require any additional hardware or software.

## **REQUIREMENT ANALYSIS**

Requirement analysis in tourism management system refers to the process of identifying, documenting, and prioritizing the needs and expectations of stakeholders involved in the tourism industry. The goal of requirement analysis is to define the functional and non-functional requirements of the system to meet the needs of the stakeholders.

### **3.1 HARDWARE REQUIREMENTS**

- Processor : Pentium 1 and above processors
- Memory : 2 GB RAM
- Hard Disk Space : 250 GB or more

### **3.2. SOFTWARE REQUIREMENTS**

- Operating system : Windows XP / Windows 7 / 8.1 / 10 / 11
- Front End : HTML, CSS, JavaScript, jQuery, Bootstrap
- Back End : PHP
- Database : MySQL
- IDE : Microsoft Visual Studio Code Editor
- Browser : Google Chrome, IE, Opera, Mozilla Firefox

### **3.3. EXSISTING SYSTEM**

- In the present system a customer has to approach various agencies to find details of places and to book tickets.
- This often requires a lot of time and effort.
- It is tedious for a customer to plan a particular journey and have it executed properly.

### **3.4. PROPOSED SYSTEM**

- The proposed system is a web based application and maintains a centralized repository of all related information.
- The system allows one to easily access the relevant information and make necessary travel arrangements.
- Users can decide about places they want to visit and make bookings online for travel and accommodation.

## **DESIGN AND PLANNING**

### **4.1. DEVELOPMENT LIFE CYCLE MODEL**

#### **4.1.1. WATERFALLS MODEL**

The waterfall model was selected as the SDLC model due to the following reasons:

- Requirements were very well documented, clear and fixed.
- Technology was adequately understood.
- Simple and easy to understand and use.
- There were no ambiguous requirements.
- Easy to manage due to the rigidity of the model. Each phase has specific deliverables and a review process.
- Clearly defined stages.
- Well understood milestones. Easy to arrange tasks.

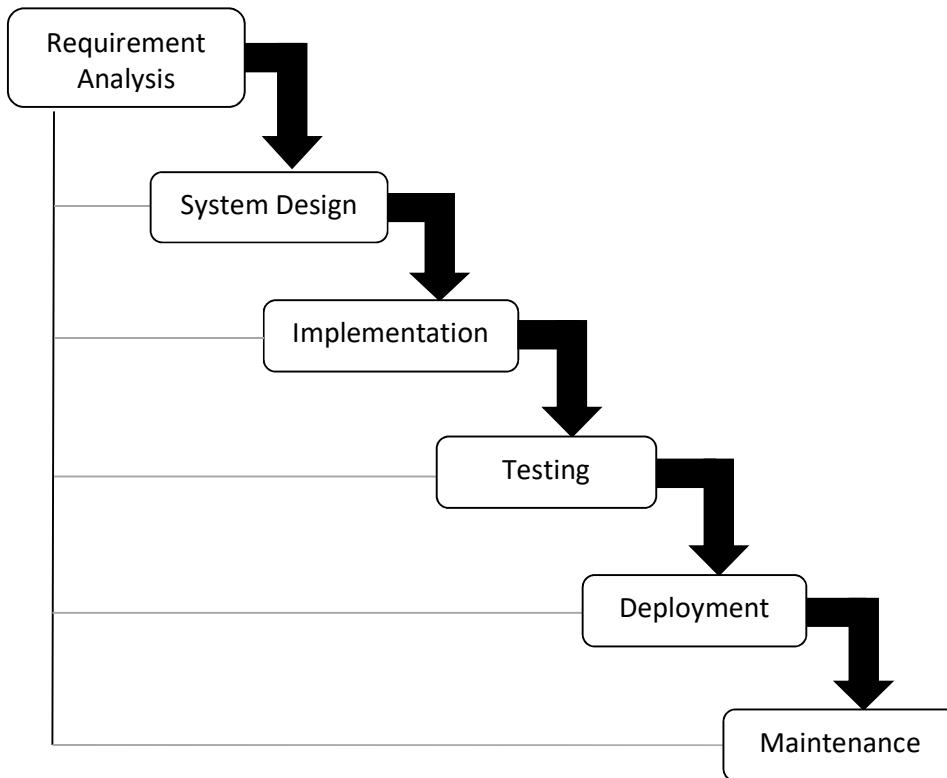


Figure: 4.1 Waterfalls Model

## 4.2. GENERAL OVERVIEW

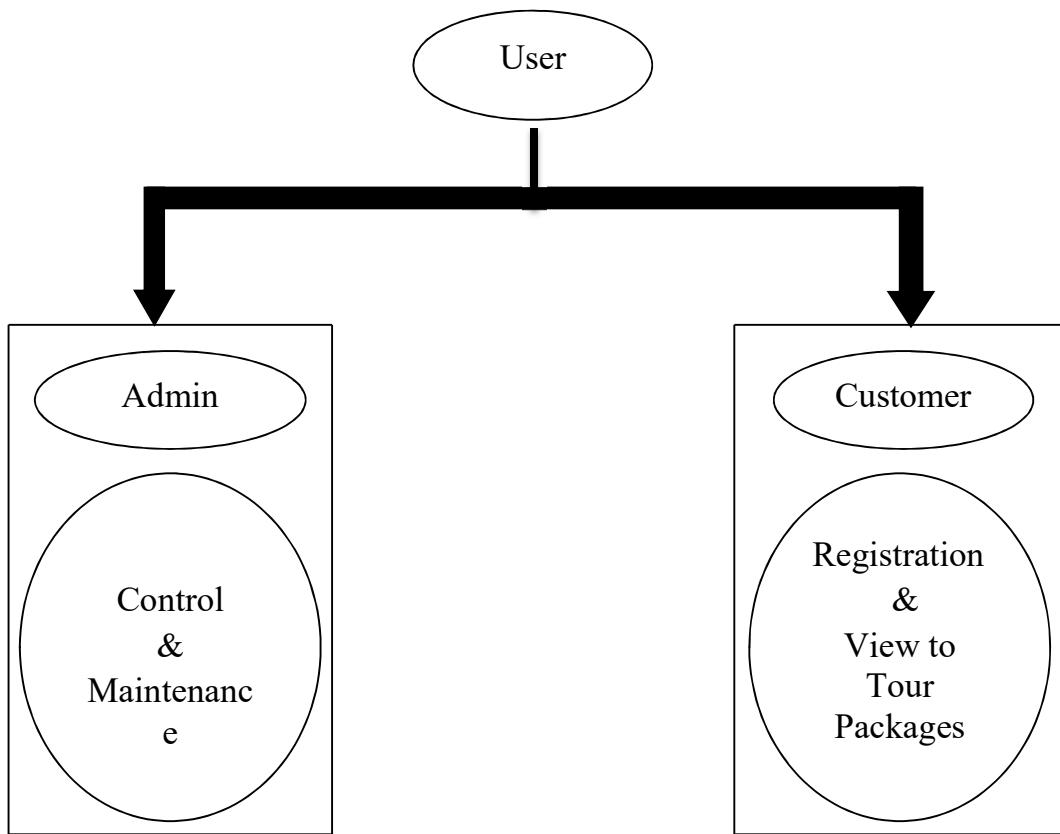


Figure: 4.2 General Overview Model

#### 4.3. USE CASE DIAGRAM

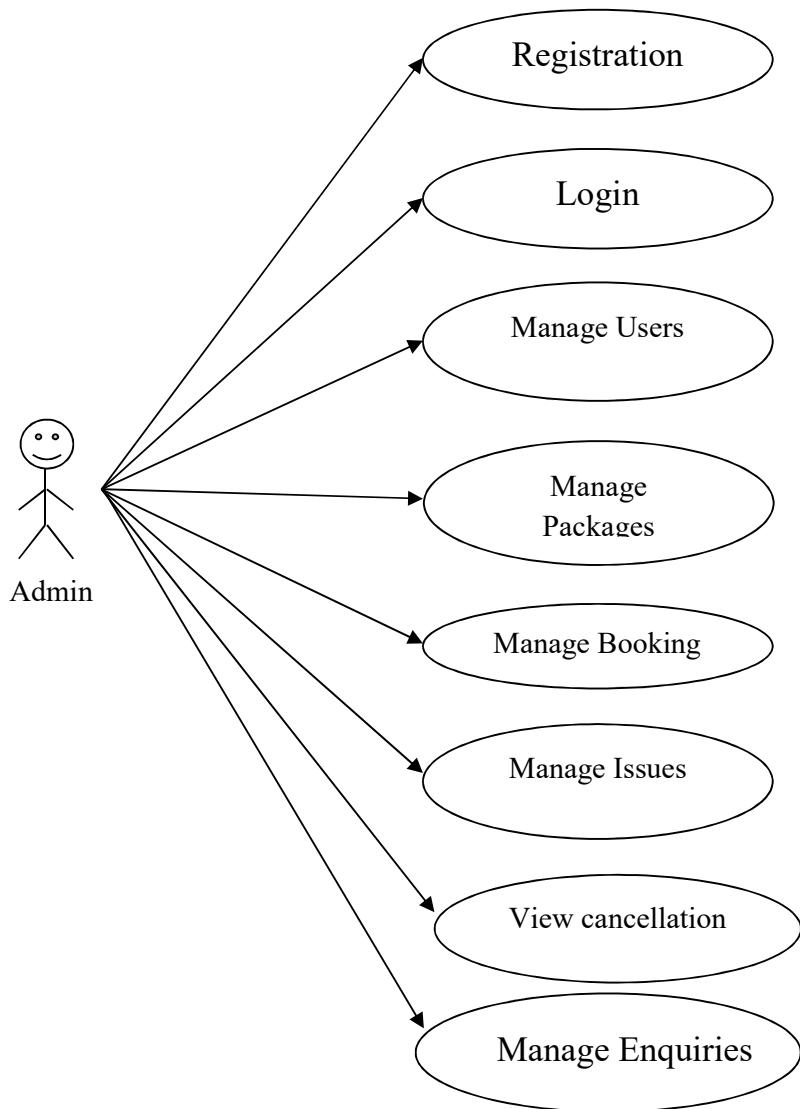


Figure: 4.3 Admin Module

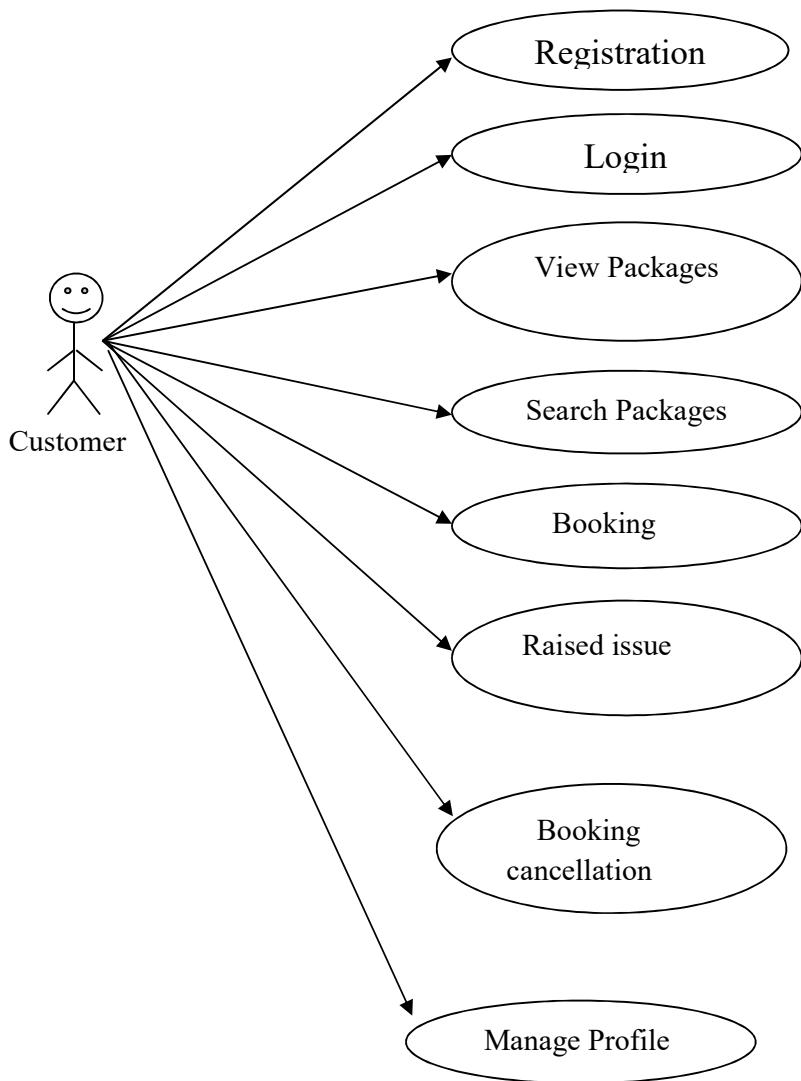
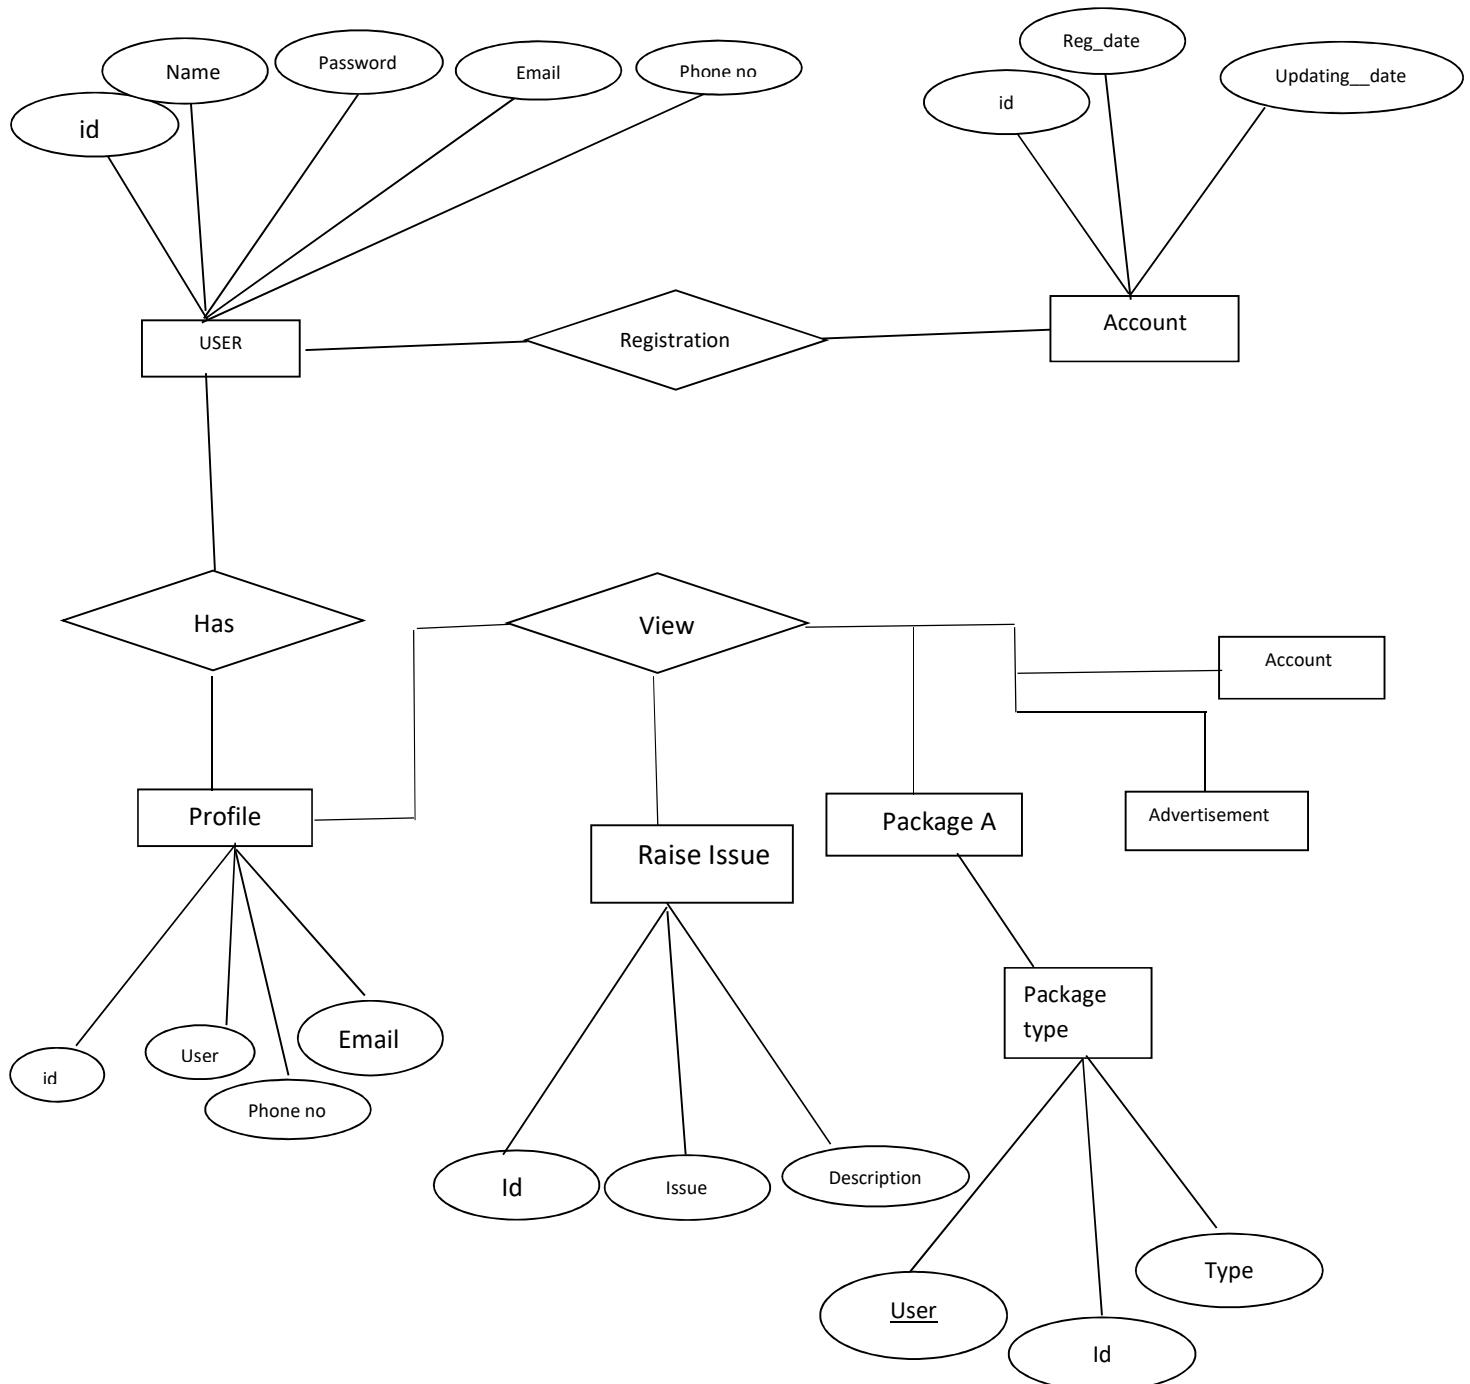


Figure: 4.4 Customer Module

#### 4.4. ER DIAGRAM



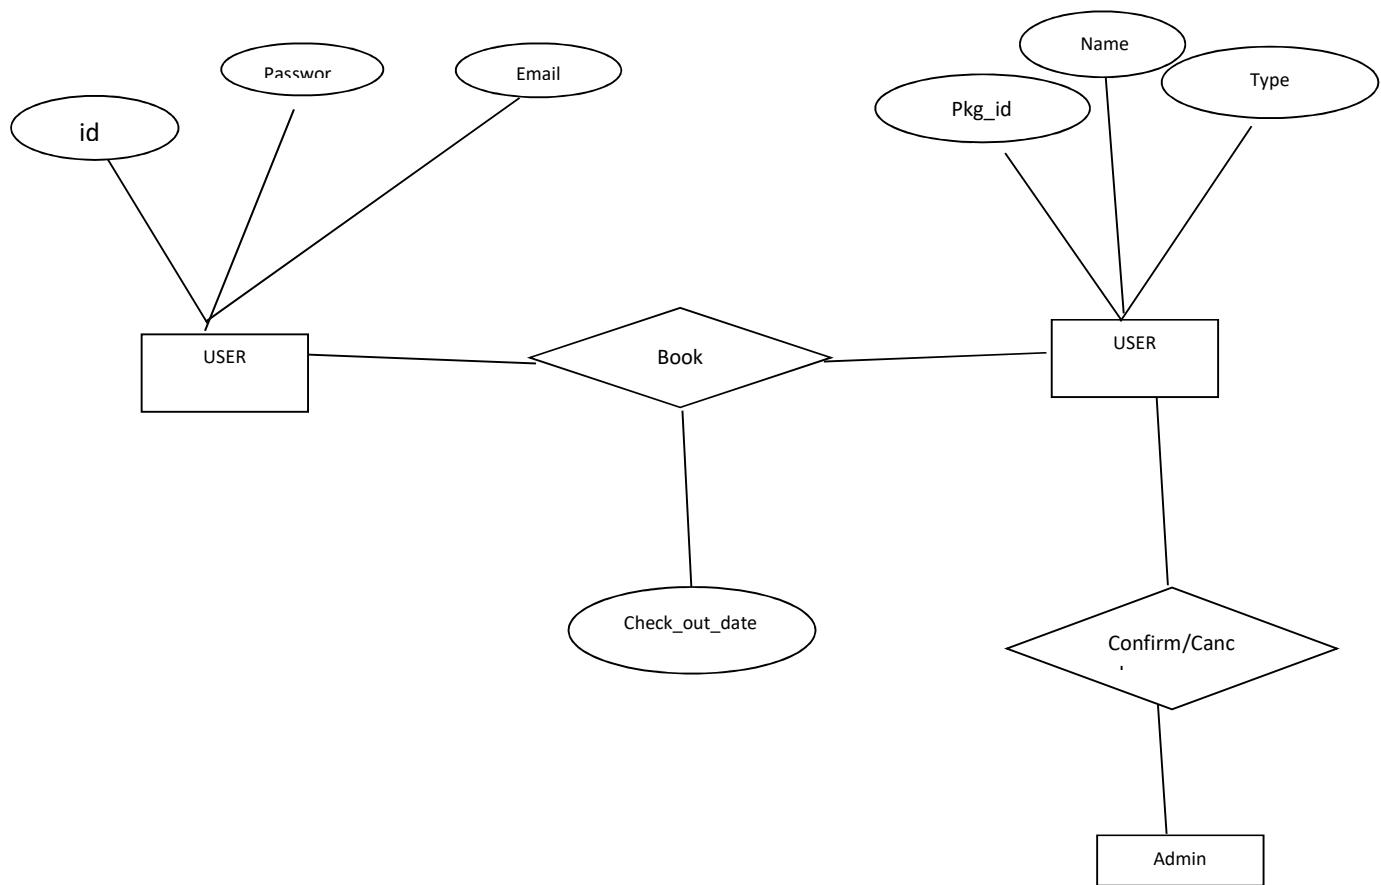


Figure 4.5 ER Diagram(Users)

## ER Diagram(Admin)


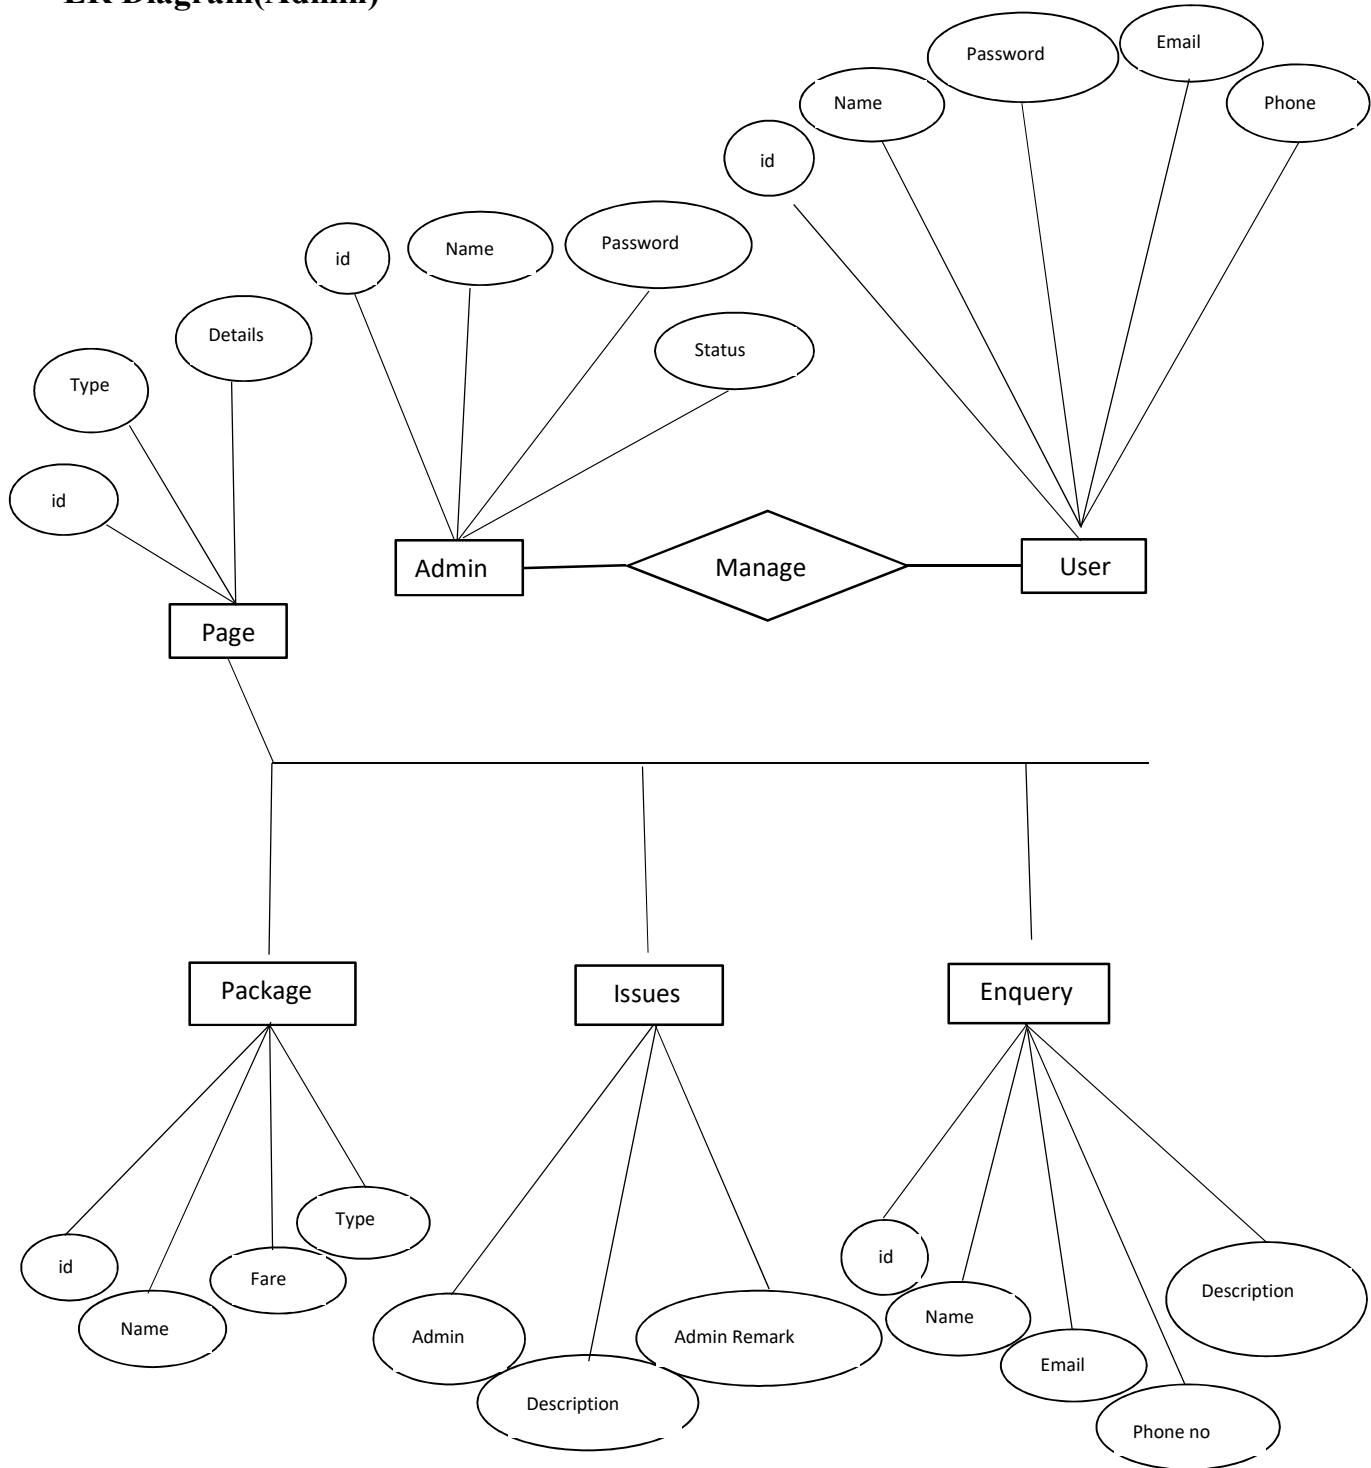


Figure 4.6 ER Diagram(Admin)

## ER Diagram(Package)

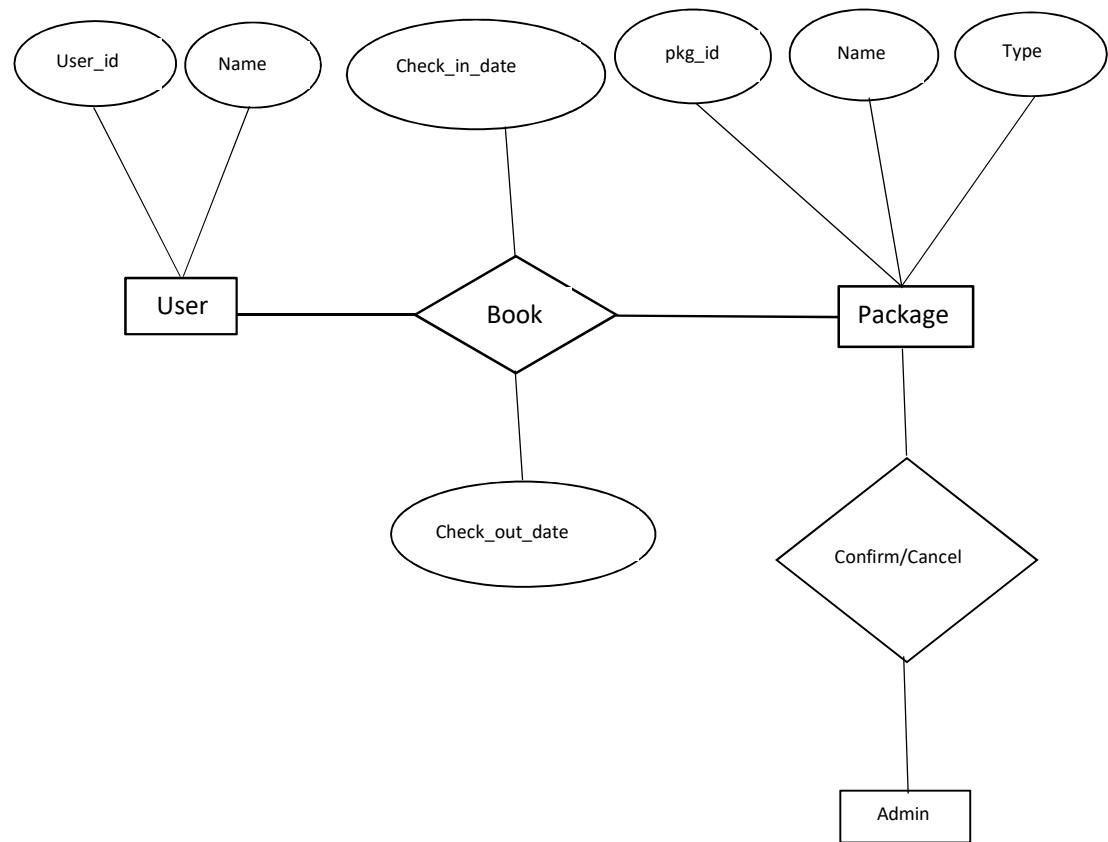

#### 4.5. DFD DIAGRAM

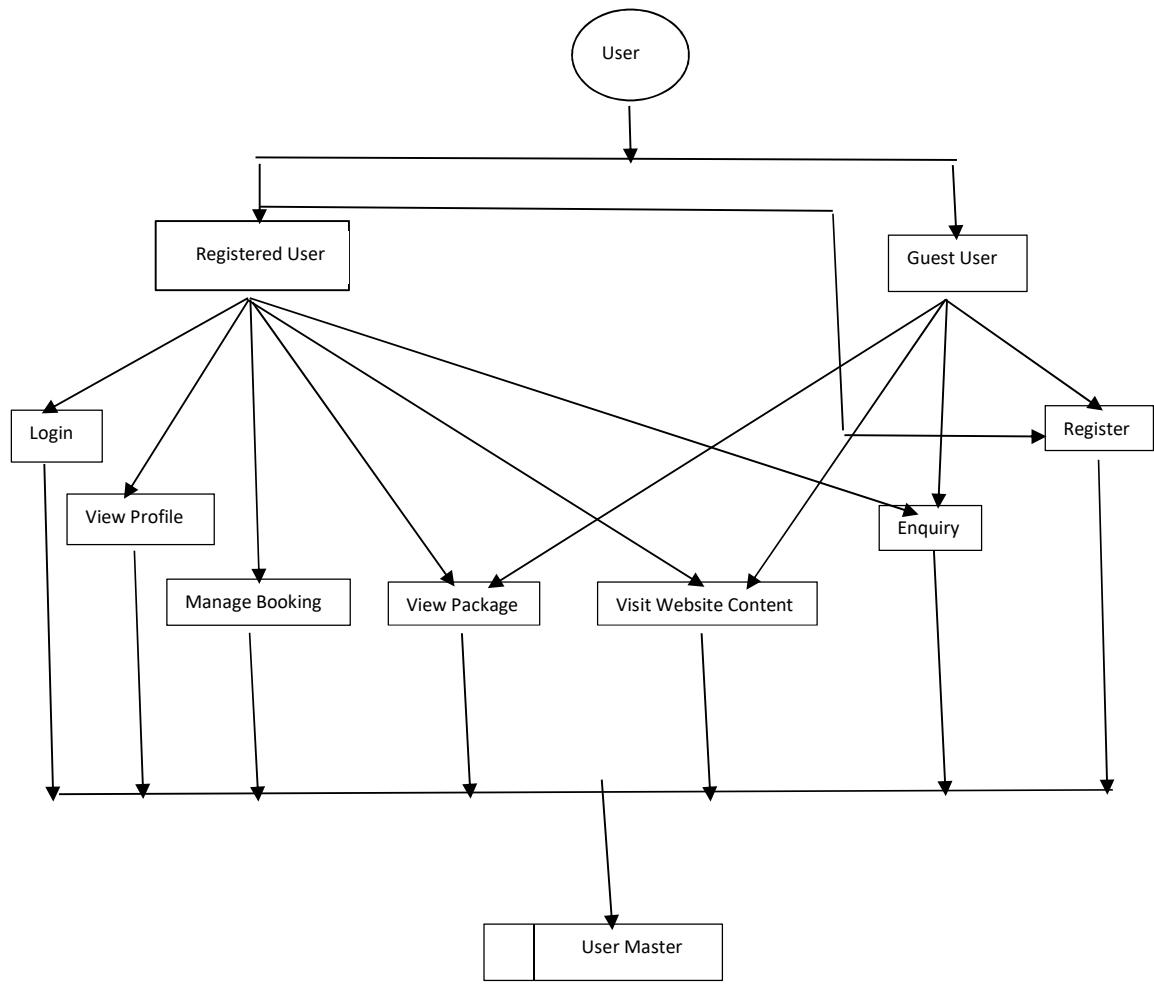


Figure: 4.7 Users DFD Diagram

## Admin

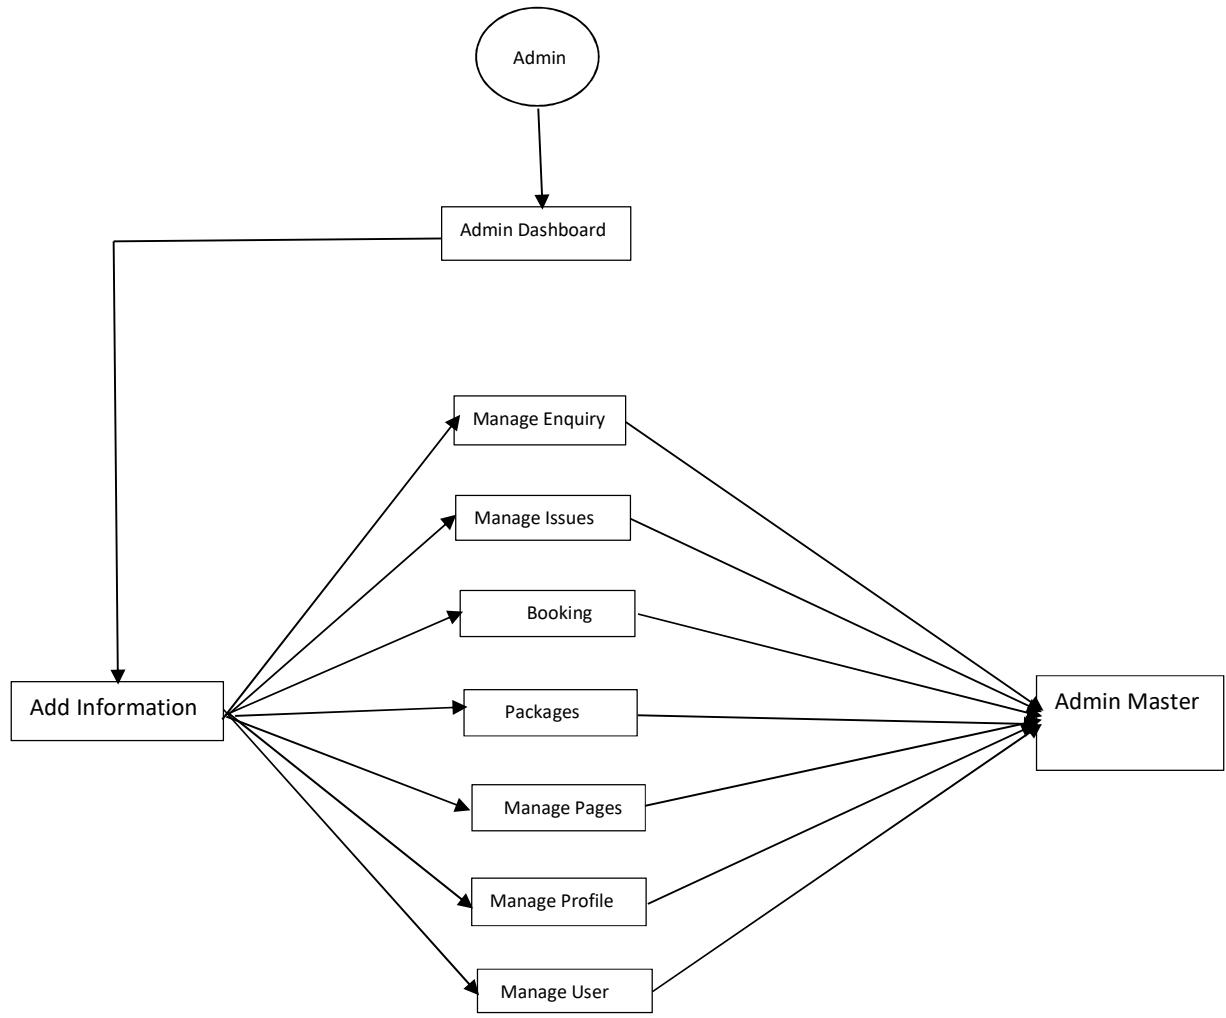


Figure: 4.8 Admin DFD Diagram

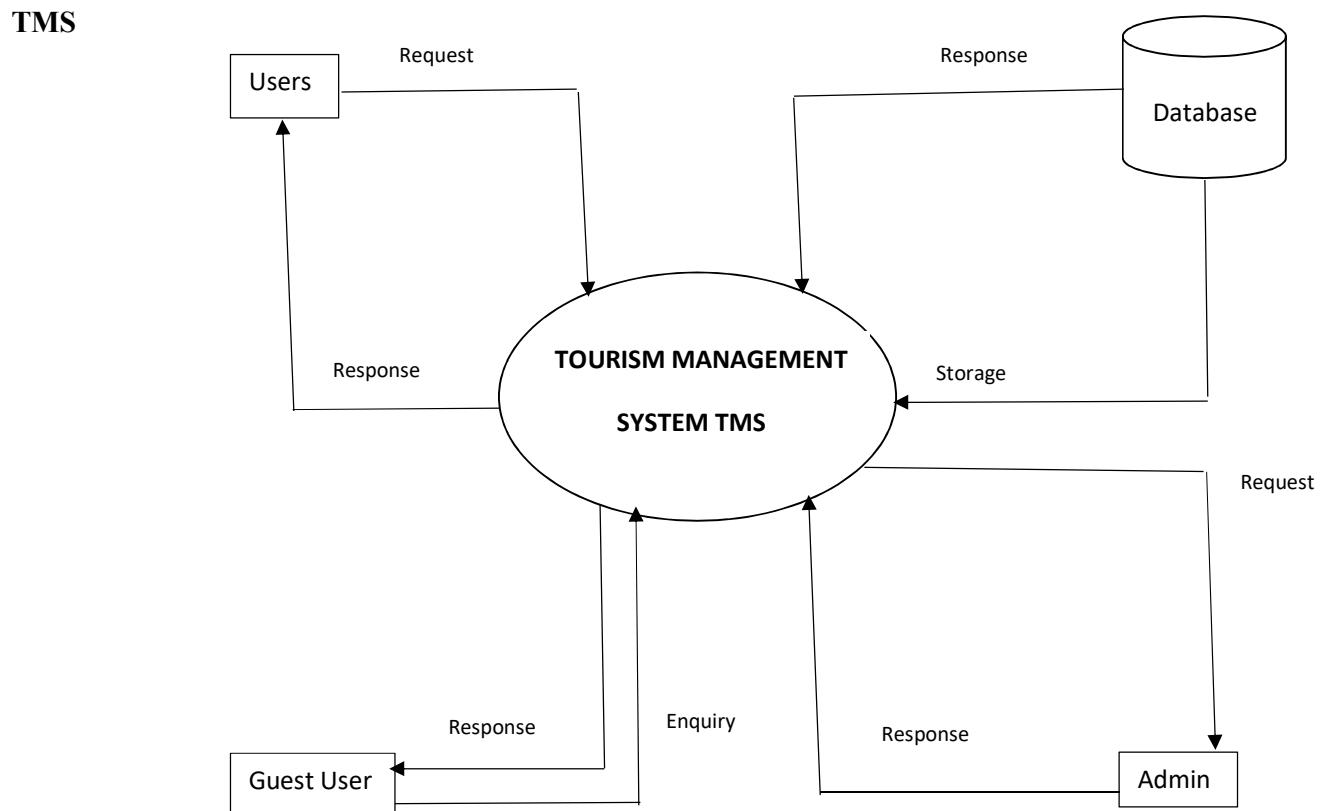


Figure: 4.9 TMS DFD Diagram

### Packages

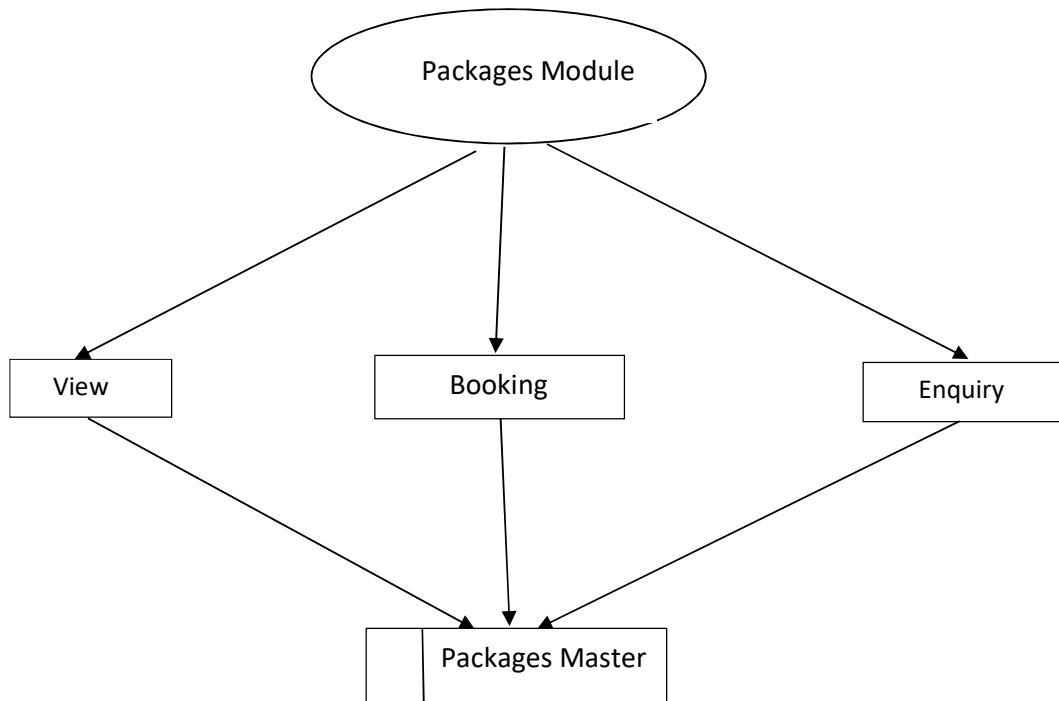


Figure: 4.10 Packages DFD Diagram

## IMPLEMENTATION

In this Section we will do Analysis of Technologies to use for implementing the project.

### 5.1. FRONT END

Let's start at the beginning. So what is front-end web development, also called client-side development, refers to writing Hyper Text Markup Language (HTML), Cascading Style Sheets (CSS) and JavaScript code for a website or web application so that users can see and interact directly with them.

To delve further into this subject, it is important to know the basic differences between front-end development, back-end development and full-stack development. Simply put, a front end developer works on the parts / aspects of an app or website that users get to see and interact with. Whereas a back-end developer handles the behind-the-scenes aspects of the said app or website, say the infrastructure and databases. On the other hand, a full-stack developer does both, so it's someone who deals with the whole design process from start to finish.

The main front-end development languages, as we have seen already, are HTML, CSS and JavaScript. JQuery has also been used but it is said to be going out of style whereas many legacy projects still use the JavaScript library, ensuring it continues to be taught at front-end boot camps. Front-end development also deals extensively with responsive design along with typography, layouts, grid system, and color theory. Now we are further going to discuss the languages that are used in front-end development of this project.

#### 5.1.1. HTML

Hypertext Markup Language (HTML) is the standard markup language for documents designed to be displayed in a web browser. It can be assisted by technologies such as Cascading Style Sheets (CSS) and scripting languages such as JavaScript. Web browsers receive HTML documents from a web server or from local storage and render the documents into multimedia web pages. HTML describes the structure of a web page semantically and originally included cues for the appearance of the document.

HTML elements are the building blocks of HTML pages. With HTML constructs, images and other objects such as interactive forms may be embedded into the rendered page. HTML provides a means to create structured documents by denoting structural semantics for text such as headings, paragraphs, lists, links, quotes and other items. HTML elements are delineated by tags, written using angle brackets. Tags such as `<img />` and `<input />` directly introduce content into the page. Other tags

such as <p> surround and provide information about document text and may include other tags as sub-elements. Browsers do not display the HTML tags, but use them to interpret the content of the page. HTML can embed programs written in a scripting language such as JavaScript, which affects the behavior and content of web pages. Inclusion of CSS defines the look and layout of content. The World Wide Web Consortium (W3C), former maintainer of the HTML and current maintainer of the CSS standards, has encouraged the use of CSS over explicit presentational HTML since 1997.

### **5.1.2. CSS**

Cascading Style Sheets (CSS) is a style sheet language used for describing the presentation of a document written in a markup language like HTML. CSS is a cornerstone technology of the World Wide Web, alongside HTML and JavaScript. CSS is designed to enable the separation of presentation and content, including layout, colors, and fonts. This separation can improve content accessibility, provide more flexibility and control in the specification of presentation characteristics, enable multiple web pages to share formatting by specifying the relevant CSS in a separate .css file, and reduce complexity and repetition in the structural content.

CSS information can be provided from various sources. These sources can be the web browser, the user and the author. The information from the author can be further classified into inline, media type, importance, selector specificity, rule order, inheritance and property definition. CSS style information can be in a separate document or it can be embedded into an HTML document. Multiple style sheets can be imported. Different styles can be applied depending on the output device being used; for example, the screen version can be quite different from the printed version, so that authors can tailor the presentation appropriately for each medium. The style sheet with the highest priority controls the content display. Declarations not set in the highest priority source are passed on to a source of lower priority, such as the user agent style. The process is called cascading.

One of the goals of CSS is to allow users greater control over presentation. Someone who finds red italic headings difficult to read may apply a different style sheet. Depending on the browser and the web site, a user may choose from various style sheets provided by the designers, or may remove all added styles and view the site using the browser's default styling, or may override just the red italic heading style without altering other attributes.

### **5.1.3. jQuery**

jQuery is a JavaScript library designed to simplify HTML DOM tree traversal and manipulation, as well as event handling, CSS animation, and Ajax. It is free, open-source software using the permissive MIT License. As of May 2019, jQuery is used by 73% of the 10 million most

popular websites. Web analysis indicates that it is the most widely deployed JavaScript library by a large margin, having 3 to 4 times more usage than any other JavaScript library.

JQuery's syntax is designed to make it easier to navigate a document, select DOM elements, create animations, handle events, and develop Ajax applications. jQuery also provides capabilities for developers to create plug-ins on top of the JavaScript library. This enables developers to create abstractions for low-level interaction and animation, advanced effects and high-level, themeable widgets. The modular approach to the jQuery library allows the creation of powerful dynamic web pages and Web applications.

The set of jQuery core features—DOM element selections, traversal and manipulation-enabled by its selector engine (named "Sizzle" from v1.3), created a new "programming style", fusing algorithms and DOM data structures. This style influenced the architecture of other JavaScript frameworks like YUI v3 and Dojo, later stimulating the creation of the standard Selectors API. Microsoft and Nokia bundle jQuery on their platforms.

#### **5.1.4. Bootstrap**

Bootstrap is a free and open-source CSS framework directed at responsive, mobile-first front-end web development. It contains CSS- and (optionally) JavaScript-based design templates for typography, forms, buttons, navigation and other interface components. Bootstrap is the third-most starred project on GitHub, with more than 135,000 stars, behind only free Code Camp (almost 305,000 stars) and marginally behind Vue.js framework. According to Alexa Rank, Bootstrap getbootstrap.com is in the top-2000 in US while vuejs.org is in top-7000 in US.

Bootstrap is a web framework that focuses on simplifying the development of informative web pages (as opposed to web apps). The primary purpose of adding it to a web project is to apply Bootstrap's choices of color, size, font and layout to that project. As such, the primary factor is whether the developers in charge find those choices to their liking. Once added to a project, Bootstrap provides basic style definitions for all HTML elements. The result is a uniform appearance for prose, tables and form elements across web browsers. In addition, developers can take advantage of CSS classes defined in Bootstrap to further customize the appearance of their contents. For example, Bootstrap has provisioned for light- and dark-colored tables, page headings, more prominent pull quotes, and text with a highlight.

Bootstrap is a web framework that focuses on simplifying the development of informative web pages (as opposed to web apps). The primary purpose of adding it to a web project is to apply Bootstrap's choices of color, size, font and layout to that project. As such, the primary factor is whether the developers in charge find those choices to their liking. Once added to a project, Bootstrap provides basic style definitions for all HTML elements. The result is a uniform appearance for prose, tables and form elements across web browsers. In addition, developers can take advantage of CSS classes defined

in Bootstrap to further customize the appearance of their contents. For example, Bootstrap has provisioned for light- and dark-colored tables, page headings, more prominent pull quotes, and text with a highlight.

## 5.2. BACK END

Back-end development, also called server-side development, alludes to the behind-the-scenes activities that take place when an action is performed on a website. This action could be logging in to one's account or purchasing a watch from an online store. So a backend developer trains his/her sights on databases, scripting and the architecture of websites. The code written by such a back-end developer helps in passing on the database information to the browser.

Now there are some websites and web applications that only need front end development. For instance, a single page info website. However, anything functional generally needs back-end development. So all that you see on the page – and by that we are referring to anything happening on the user's computer – is a result of front-end development. Anything that provides data from a server comes under back-end development. So when in use, an app's front-end (the page) has requests sent to the back-end (i.e. server) which then send across information in plain format. The front end then renders it with styling, whereas the backend is the code on the server, and its job is to communicate with database.

So in the client-server model, the client is the front end and the server is considered the back end, even in scenarios where some presentation work is actually done on the server itself.

Back-end development thus work in tandem with front-end developers they make web applications functional by offering server-side logic. They do so using server-side scripting languages such as Ruby or PHP. Back-end developers also optimize the application for speed and efficiency. Often they build a data storage solution with a database, which in turn is a major component for all web applications since that is where the information – thinks users, comments, posts, etc. – is stored. Common databases include MySQL, MongoDB, and PostgreSQL.

Let us look at an example: Say you are reading an article on the blog. Here the fonts, colors, designs, etc represent the frontend of this page. But bear in mind that the content of the article is being rendered from a server and fetched from a database. This is the backend part of the application. Further we are going to discuss the languages that are used in back-end development of this project.

### 5.2.1. PHP

PHP is a server side scripting language that is used to develop Static websites or Dynamic websites or Web applications. PHP stands for Hypertext Pre-processor, that earlier stood for Personal Home Pages. PHP scripts can only be interpreted on a server that has PHP installed. The client

computers accessing the PHP scripts require a web browser only. A PHP file contains PHP tags and ends with the extension ".php".

The term PHP is an acronym for PHP: Hypertext Preprocessor. PHP is a server-side scripting language designed specifically for web development. PHP can be easily embedded in HTML files and HTML codes can also be written in a PHP file. The thing that differentiates PHP with client side language like HTML is, PHP codes are executed on the server whereas HTML codes are directly rendered on the browser.

PHP: Hypertext Preprocessor (or simply PHP) is a general-purpose programming language originally designed for web development. It was originally created by Rasmus Lerdorf in 1994. PHP code may be executed with a command line interface (CLI), embedded into HTML code, or used in combination with various web template systems, web content management systems, and web frameworks. PHP code is usually processed by a PHP interpreter implemented as a module in a web server or as a Common Gateway Interface (CGI) executable. The web server outputs the results of the interpreted and executed PHP code, which may be any type of data, such as generated HTML code or binary image data. PHP can be used for many programming tasks outside of the web context, such as standalone graphical applications and robotic drone control.

### **5.2.2. MySQL**

MySQL is an open-source relational database management system (RDBMS) based on Structured Query Language (SQL). Its name is a combination of "My", the name of co-founder Michael Widenius's daughter, and "SQL", the abbreviation for Structured Query Language. A relational database organizes data into one or more data tables in which data types may be related to each other; these relations help structure the data. SQL is a language programmers use to create, modify and extract data from the relational database, as well as control user access to the database. In addition to relational databases and SQL, an RDBMS like MySQL works with an operating system to implement a relational database in a computer's storage system, manages users, allows for network access and facilitates testing database integrity and creation of backups.

MySQL is pretty easy to master in comparison with other database software like Oracle Database, or Microsoft SQL Server. MySQL can run on various platforms UNIX, Linux, Windows, etc. You can install it on a server or even in a desktop. Besides, MySQL is reliable, scalable, and fast. The official way to pronounce MySQL is My Ess Que Ell, not My Sequel. However, you can pronounce it whatever you like, who cares?

MySQL is free and open-source software under the terms of the GNU General Public License, and is also available under a variety of proprietary licenses. MySQL was owned and sponsored by the Swedish company MySQL AB, which was bought by Sun Microsystems (now Oracle Corporation). In 2010, when Oracle acquired Sun, Widenius forked the open-source MySQL project to create MariaDB.

MySQL is a component of the LAMP web application software stack (and others), which is an acronym for Linux, Apache, MySQL, Perl/PHP/Python.

# TESTING

## 6.1. UNIT TESTING

### 6.1.1. INTRODUCTION

In computer programming, unit testing is a software testing method by which individual units of source code, sets of one or more computer program modules together with associated control data, usage procedures, and operating procedures, are tested to determine whether they are fit for use. Intuitively, one can view a unit as the smallest testable part of an application. In procedural programming, a unit could be an entire module, but it is more commonly an individual function or procedure. In object-oriented programming, a unit is often an entire interface, such as a class, but could be an individual method. Unit tests are short code fragments created by programmers or occasionally by white box testers during the development process. It forms the basis for component testing. Ideally, each test case is independent from the others. Substitutes such as method stubs, mock objects, fakes, and test harnesses can be used to assist testing a module in isolation. Unit tests are typically written and run by software developers to ensure that code meets its design and behaves as intended.

### 6.1.2. BENEFITS

The goal of unit testing is to isolate each part of the program and show that the individual parts are correct. A unit test provides a strict, written contract that the piece of code must satisfy. As a result, it affords several benefits.

- 1. FIND PROBLEMS EARLY:** Unit testing finds problems early in the development cycle. In test-driven development (TDD), which is frequently used in both extreme programming and scrum, unit tests are created before the code itself is written. When the tests pass, that code is considered complete. The same unit tests are run against that function frequently as the larger code base is developed either as the code is changed or via an automated process with the build. If the unit tests fail, it is considered to be a bug either in the changed code or the tests themselves. The unit tests then allow the location of the fault or failure to be easily traced. Since the unit tests alert the development team of the problem before handing the code off to testers or clients, it is still early in the development process.
- 2. FACILITATES CHANGE:** Unit testing allows the programmer to refactor code or upgrade system libraries at a later date, and make sure the module still works correctly (e.g., in regression testing). The procedure is to write test cases for all functions and methods so that whenever a change causes a fault, it can be quickly identified. Unit tests detect changes which may break a design contract.

- 3. SIMPLIFIES INTEGRATION:** Unit testing may reduce uncertainty in the units themselves and can be used in a bottom-up testing style approach. By testing the parts of a program first and then testing the sum of its parts, integration testing becomes much easier.
- 4. DOCUMENTATION:** Unit testing provides a sort of living documentation of the system. Developers looking to learn what functionality is provided by a unit, and how to use it, can look at the unit tests to gain a basic understanding of the unit's interface (API). Unit test cases embody characteristics that are critical to the success of the unit. These characteristics can indicate appropriate/inappropriate use of a unit as well as negative behaviors that are to be trapped by the unit.

## 6.2. INTEGRATION TESTING

Integration testing (sometimes called integration and testing, abbreviated I&T) is the phase in software testing in which individual software modules are combined and tested as a group. It occurs after unit testing and before validation testing. Integration testing takes as its input modules that have been unit tested, groups them in larger aggregates, applies tests defined in an integration test plan to those aggregates, and delivers as its output the integrated system ready for system testing.

### 6.2.1. PURPOSE

The purpose of integration testing is to verify functional, performance, and reliability requirements placed on major design items. These "design items", i.e., assemblages (or groups of units), are exercised through their interfaces using black-box testing, success and error cases being simulated via appropriate parameter and data inputs. Simulated usage of shared data areas and inter-process communication is tested and individual subsystems are exercised through their input interface. Test cases are constructed to test whether all the components within assemblages interact correctly, for example across procedure calls or process activations, and this is done after testing individual modules, i.e., unit testing. The overall idea is a "building block" approach, in which verified assemblages are added to a verified base which is then used to support the integration testing of further assemblages. Software integration testing is performed according to the software development life cycle (SDLC) after module and functional tests. The cross dependencies for software integration testing are: schedule for integration testing, strategy and selection of the tools used for integration, define the cyclomatic complexity of the software and software architecture, reusability of modules and life-cycle and versioning management. Some different types of integration testing are big-bang, top-down, and bottom-up, mixed (sandwich) and risky-hardest. Other Integration Patterns [2] are: collaboration integration, backbone integration, layer integration, client-server integration, distributed services integration and high-frequency integration.

### **6.2.1.1. BIG BANG**

In the big-bang approach, most of the developed modules are coupled together to form a complete software system or major part of the system and then used for integration testing. This method is very effective for saving time in the integration testing process. However, if the test cases and their results are not recorded properly, the entire integration process will be more complicated and may prevent the testing team from achieving the goal of integration testing. A type of big-bang integration testing is called "usage model testing" which can be used in both software and hardware integration testing. The basis behind this type of integration testing is to run user-like workloads in integrated user-like environments. In doing the testing in this manner, the environment is proofed, while the individual components are proofed indirectly through their use. Usage Model testing takes an optimistic approach to testing, because it expects to have few problems with the individual components. The strategy relies heavily on the component developers to do the isolated unit testing for their product. The goal of the strategy is to avoid redoing the testing done by the developers, and instead flesh-out problems caused by the interaction of the components in the environment.

### **6.2.1.2. TOP - DOWN AND BOTTOM - DOWN**

Bottom-up testing is an approach to integrated testing where the lowest level components are tested first, then used to facilitate the testing of higher level components. The process is repeated until the component at the top of the hierarchy is tested. All the bottom or low-level modules, procedures or functions are integrated and then tested. After the integration testing of lower level integrated modules, the next level of modules will be formed and can be used for integration testing. This approach is helpful only when all or most of the modules of the same development level are ready. This method also helps to determine the levels of software developed and makes it easier to report testing progress in the form of a percentage. Top-down testing is an approach to integrated testing where the top integrated modules are tested and the branch of the module is tested step by step until the end of the related module. Sandwich testing is an approach to combine top down testing with bottom up testing.

## **6.3. VERIFICATION AND VALIDATION**

### **6.3.1. INTRODUCTION**

In software project management, software testing, and software engineering, verification and validation (V&V) is the process of checking that a software system meets specifications and that it fulfills its intended purpose. It may also be referred to as software quality control. It is normally the responsibility of software testers as part of the software development lifecycle. Validation checks that the product design satisfies or fits the intended use (high-level checking), i.e., the software meets the user requirements. This is done through dynamic testing and other forms of review. Verification and validation are not the same thing, although they are often confused. Boehm succinctly expressed the difference between

- Validation: Are we building the right product?
- Verification: Are we building the product right?

According to the Capability Maturity Model (CMMI-SW v1.1)

Software Verification: The process of evaluating software to determine whether the products of a given development phase satisfy the conditions imposed at the start of that phase.

Software Validation: The process of evaluating software during or at the end of the development process to determine whether it satisfies specified requirements.

In other words, software verification is ensuring that the product has been built according to the requirements and design specifications, while software validation ensures that the product meets the user's needs, and that the specifications were correct in the first place. Software verification ensures that "you built it right". Software validation ensures that "you built the right thing". Software validation confirms that the product, as provided, will fulfill its intended use.

From Testing Perspective

- Fault – wrong or missing function in the code.
- Failure – the manifestation of a fault during execution.
- Malfunction – according to its specification the system does not meet its specified functionality

Both verification and validation are related to the concepts of quality and of software quality assurance. By themselves, verification and validation do not guarantee software quality; planning, traceability, configuration management and other aspects of software engineering are required. Within the modeling and simulation (M&S) community, the definitions of verification, validation and accreditation are similar:

- M&S Verification is the process of determining that a computer model, simulation, or federation of models and simulations implementations and their associated data accurately represent the developer's conceptual description and specifications.

- M&S Validation is the process of determining the degree to which a model, simulation, or federation of models and simulations, and their associated data are accurate representations of the real world from the perspective of the intended use(s).

### **6.3.2. CLASSIFICATION OF METHODS**

In mission-critical software systems, where flawless performance is absolutely necessary, formal methods may be used to ensure the correct operation of a system. However, often for non-mission critical software systems, formal methods prove to be very costly and an alternative method of software V&V must be sought out. In such cases, syntactic methods are often used.

### **6.3.3. TEST CASES**

A test case is a tool used in the process. Test cases may be prepared for software verification and software validation to determine if the product was built according to the requirements of the user. Other methods, such as reviews, may be used early in the life cycle to provide for software validation.

## **6.4. BLACK-BOX TESTING**

Black-box testing is a method of software testing that examines the functionality of an application without peering into its internal structures or workings. This method of test can be applied virtually to every level of software testing: unit, integration, system and acceptance. It typically comprises most if not all higher level testing, but can also dominate unit testing as well.

### **6.4.1. TEST PROCEDURES**

Specific knowledge of the application's code/internal structure and programming knowledge in general is not required. The tester is aware of what the software is supposed to do but is not aware of how it does it. For instance, the tester is aware that a particular input returns a certain, invariable output but is not aware of how the software produces the output in the first place.

### **6.4.2. TEST CASES**

Test cases are built around specifications and requirements, i.e., what the application is supposed to do. Test cases are generally derived from external descriptions of the software, including specifications, requirements and design parameters. Although the tests used are primarily functional in nature, non-functional tests may also be used. The test designer selects both valid and invalid inputs and determines the correct output, often with the help of an oracle or a previous result that is known to be good, without any knowledge of the test object's internal structure.

## **6.5. WHITE-BOX TESTING**

White-box testing (also known as clear box testing, glass box testing, transparent box testing, and structural testing) is a method of testing software that tests internal structures or workings of an

application, as opposed to its functionality (i.e. black-box testing). In white-box testing an internal perspective of the system, as well as programming skills, are used to design test cases. The tester chooses inputs to exercise paths through the code and determine the appropriate outputs. This is analogous to testing nodes in a circuit, e.g. in-circuit testing (ICT). White-box testing can be applied at the unit, integration and system levels of the software testing process. Although traditional testers tended to think of white-box testing as being done at the unit level, it is used for integration and system testing more frequently today. It can test paths within a unit, paths between units during integration, and between subsystems during a system-level test. Though this method of test design can uncover many errors or problems, it has the potential to miss unimplemented parts of the specification or missing requirements.

### 6.5.1. LEVELS

1. **UNIT TESTING:** White-box testing is done during unit testing to ensure that the code is working as intended, before any integration happens with previously tested code. White-box testing during unit testing catches any defects early on and aids in any defects that happen later on after the code is integrated with the rest of the application and therefore prevents any type of errors later on.
2. **INTEGRATION TESTING:** White-box testing at this level are written to test the interactions of each interface with each other. The Unit level testing made sure that each code was tested and working accordingly in an isolated environment and integration examines the correctness of the behavior in an open environment through the use of white-box testing for any interactions of interfaces that are known to the programmer.
3. **REGRESSION TESTING:** White-box testing during regression testing is the use of recycled white-box test cases at the unit and integration testing levels.

### 6.5.2. PROCEDURES

White-box testing's basic procedures involves the tester having a deep level of understanding of the source code being tested. The programmer must have a deep understanding of the application to know what kinds of test cases to create so that every visible path is exercised for testing. Once the source code is understood then the source code can be analyzed for test cases to be created. These are the three basic steps that white-box testing takes in order to create test cases:

- Input involves different types of requirements, functional specifications, detailed designing of documents, proper source code, security specifications. This is the preparation stage of white box testing to layout all of the basic information.
- Processing involves performing risk analysis to guide whole testing process, proper test plan, execute test cases and communicate results. This is the phase of building test cases

to make sure they thoroughly test the application the given results are recorded accordingly.

- Output involves preparing final report that encompasses all of the above preparations and results.

## **6.6. SYSTEM TESTING**

System testing of software or hardware is testing conducted on a complete, integrated system to evaluate the system's compliance with its specified requirements. System testing falls within the scope of black-box testing, and as such, should require no knowledge of the inner design of the code or logic. As a rule, system testing takes, as its input, all of the "integrated" software components that have passed integration testing and also the software system itself integrated with any applicable hardware system(s). The purpose of integration testing is to detect any inconsistencies between the software units that are integrated together (called assemblages) or between any of the assemblages and the hardware.

System testing is a more limited type of testing; it seeks to detect defects both within the "inter-assemblages" and also within the system as a whole. System testing is performed on the entire system in the context of a Functional Requirement Specification(s) (FRS) and/or a System Requirement Specification (SRS). System testing tests not only the design, but also the behavior and even the believed expectations of the customer.

## **FUTURE ENHANCEMENT**

- In future we will enhance our work by providing Tour and Travels Management System for multiple cities in our website.
- In future, we will include more functionalities as per user requirement.
- In future , multiple package can be booked by one customer at a time.
- In future , updated features will be enhanced for all modules.
- In future , real-time feedback facility will be available on our website.
- In future , more facilities will be enhanced in our project, such as:
  - Online payment option.
  - Create Manual package by need of customers.

## **CONCLUSION**

Here we have presented the design of a tousim management system that can provide the users with the required tourism guidance required anytime and anywhere. This is a combination of smartphone and Internet services. The tour management website contributes a reasonable way for the users to schedule their trips, since it provides detailed information about the tourist places including description, image and map. This method includes various features/services such as delivering customized packages, the distance between the source and destination location, Google maps, online ticket booking, etc. This process achieves its main goal by pertaining to real-time data.

## **REFERENCES**

- <https://www.tutorialspoint.com/index.html>
- <https://www.javatpoint.com>
- <https://www.w3schools.com>
- <https://html.com>
- <https://github.com>

## APPENDIXES

### SOURCE CODE

#### index.php

```
<?php
session_start();
error_reporting(0);
include('includes/config.php');
?>
<!DOCTYPE HTML>
<html>
<head>
<title>WELCOME TO WORLD TOURISM</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<script type="applijewelleryion/x-javascript"> addEventListener("load", function()
{ setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>
<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet' type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
<script src="js/wow.min.js"></script>
<script>
    new WOW().init();
```

```

</script>

<!--/end-animate-->

</head>

<body>

<?php include('includes/header.php');?>

<div class="banner">

    <div class="container">

        <h1 class="wow zoomIn animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: zoomIn;"> WELCOME TO WORLD TOURISM
    </h1>

    </div>

</div>

<!-- rupes ---->

<div class="container">

    <div class="rupes">

        <div class="col-md-4 rupes-left wow fadeInDown animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: fadeInDown;">

            <div class="rup-left">

                <a href="offers.html"><i class="fa fa-usd"></i></a>

            </div>

            <div class="rup-rgt">

                <h3>UP TO INR. 50 OFF</h3>

                <h4><a href="offers.html">TRAVEL SMART</a></h4>

            </div>

        </div>

        <div class="clearfix"></div>

    </div>

        <div class="col-md-4 rupes-left wow fadeInDown animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: fadeInDown;">

            <div class="rup-left">

                <a href="offers.html"><i class="fa fa-h-square"></i></a>

            </div>

            <div class="rup-rgt">

```

```

<h3>UP TO 70% OFF</h3>
<h4><a href="offers.html">ON HOTELS ACROSS
WORLD</a></h4>

</div>
<div class="clearfix"></div>
</div>

<div class="col-md-4 rupes-left wow fadeInDown animated animated" data-wow-
delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: fadeInDown;">
<div class="rup-left">
<a href="offers.html"><i class="fa fa-mobile"></i></a>
</div>
<div class="rup-rgt">
<h3>FLAT INR. 50 OFF</h3>
<h4><a href="offers.html">US APP OFFER</a></h4>

</div>
<div class="clearfix"></div>
</div>
</div>

<!-- /rupes ---->
<!--holiday---->
<div class="container">
<div class="holiday">
<h3>Package List</h3>
<?php $sql = "SELECT * from tbltourpackages order by rand() limit 4";
$query = $dbh->prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)

```

```

{
foreach($results as $result)
{
    ?>
        <div class="rom-btm">
            <div class="col-md-3 room-left wow fadeInLeft animated" data-wow-delay=".5s">
                
            </div>
            <div class="col-md-6 room-midle wow fadeInUp animated" data-wow-delay=".5s">
                <h4>Package Name: <?php echo htmlentities($result->PackageName);?></h4>
                <h6>Package Type : <?php echo htmlentities($result->PackageType);?></h6>
                <p><b>Package Location :</b> <?php echo htmlentities($result->PackageLocation);?></p>
                <p><b>Features</b> <?php echo htmlentities($result->PackageFetures);?></p>
            </div>
            <div class="col-md-3 room-right wow fadeInRight animated" data-wow-delay=".5s">
                <h5>INR <?php echo htmlentities($result->PackagePrice);?></h5>
                <a href="package-details.php?pkgid=<?php echo htmlentities($result->PackageId);?>" class="view">Details</a>
            </div>
            <div class="clearfix"></div>
        </div>
    <?php } } ?>
        <div><a href="package-list.php" class="view">View More Packages</a></div>
    </div>
        <div class="clearfix"></div>
    </div>
<!-- routes ---->
<div class="routes">
```

```

<div class="container">

    <div class="col-md-4 routes-left wow fadeInRight animated" data-wow-delay=".5s">
        <div class="rou-left">
            <a href="#"><i class="glyphicon glyphicon-list-alt"></i></a>
        </div>
        <div class="rou-rgt wow fadeInDown animated" data-wow-delay=".5s">
            <h3>80</h3>
            <p>Enquiries</p>
        </div>
        <div class="clearfix"></div>
    </div>

    <div class="col-md-4 routes-left">
        <div class="rou-left">
            <a href="#"><i class="fa fa-user"></i></a>
        </div>
        <div class="rou-rgt">
            <h3>19</h3>
            <p>Regestered users</p>
        </div>
        <div class="clearfix"></div>
    </div>

    <div class="col-md-4 routes-left wow fadeInRight animated" data-wow-delay=".5s">
        <div class="rou-left">
            <a href="#"><i class="fa fa-ticket"></i></a>
        </div>
        <div class="rou-rgt">
            <h3>70+</h3>
            <p>Booking</p>
        </div>
        <div class="clearfix"></div>
    </div>

```

```
<div class="clearfix"></div>
```

```
</div>
```

```
</div>
```

```
<?php include('includes/footer.php');?>
```

```
<!-- signup -->
```

```
<?php include('includes/signup.php');?>
```

```
<!-- //signu -->
```

```
<!-- signin -->
```

```
<?php include('includes/signin.php');?>
```

```
<!-- //signin -->
```

```
<!-- write us -->
```

```
<?php include('includes/write-us.php');?>
```

```
<!-- //write us -->
```

```
</body>
```

```
</html>
```

```
}
```

### Package-details.php

```
<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(isset($_POST['submit2']))
{
$pid=intval($_GET['pkgid']);
$useremail=$_SESSION['login'];
$fromdate=$_POST['fromdate'];
$todate=$_POST['todate'];
$comment=$_POST['comment'];
$status=0;
$sql="INSERT INTO tblbooking(PackageId,UserEmail,FromDate,ToDate,Comment,status)
VALUES(:pid,:useremail,:fromdate,:todate,:comment,:status)";
$query = $dbh->prepare($sql);
$query->bindParam(':pid',$pid,PDO::PARAM_STR);
$query->bindParam(':useremail',$useremail,PDO::PARAM_STR);
$query->bindParam(':fromdate',$fromdate,PDO::PARAM_STR);
$query->bindParam(':todate',$todate,PDO::PARAM_STR);
$query->bindParam(':comment',$comment,PDO::PARAM_STR);
$query->bindParam(':status',$status,PDO::PARAM_STR);
$query->execute();
```

```

$lastInsertId = $dbh->lastInsertId();
if($lastInsertId)
{
}
$msg="Booked Successfully";
}
else
{
$error="Something went wrong. Please try again";
}

}
?>
<!DOCTYPE HTML>
<html>
<head>
<title>WT | Package Details</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<script type="applijewelleryion/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>
<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet' type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
<script src="js/wow.min.js"></script>
<link rel="stylesheet" href="css/jquery-ui.css" />
<script>
    new WOW().init();
</script>
<script src="js/jquery-ui.js"></script>
<script>
    $(function() {
        $( "#datepicker,#datepicker1" ).datepicker();
    });
</script>
<style>
.errorWrap {
padding: 10px;
margin: 0 0 20px 0;
background: #fff;
border-left: 4px solid #dd3d36;
-webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
.succWrap {

```

```

padding: 10px;
margin: 0 0 20px 0;
background: #fff;
border-left: 4px solid #5cb85c;
-webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
</style>
</head>
<body>
<!-- top-header -->
<?php include('includes/header.php');?>
<div class="banner-3">
    <div class="container">
        <h1 class="wow zoomIn animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: zoomIn;"> WT -Package Details</h1>
    </div>
</div>
<!-- /banner ---->
<!-- selectroom ---->
<div class="selectroom">
    <div class="container">
        <?php if($error){?><div class="errorWrap"><strong>ERROR</strong><?php echo htmlentities($error); ?> </div><?php }>
        <?php else if($msg){?><div class="succWrap"><strong>SUCCESS</strong><?php echo htmlentities($msg); ?> </div><?php }?>
        <?php
$pid=intval($_GET['pkgid']);
$sql = "SELECT * from tbltourpackages where PackageId=:pid";
$query = $dbh->prepare($sql);
$query -> bindParam(':pid', $pid, PDO::PARAM_STR);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
{
foreach($results as $result)
{
    ?>

<form name="book" method="post">
    <div class="selectroom_top">
        <div class="col-md-4 selectroom_left wow fadeInLeft animated" data-wow-delay=".5s">
            
        </div>
        <div class="col-md-8 selectroom_right wow fadeInRight animated" data-wow-delay=".5s">
            <h2><?php echo htmlentities($result->PackageName);?></h2>
            <p class="dow">#PKG-<?php echo htmlentities($result->PackageId);?></p>
            <p><b>Package Type :</b> <?php echo htmlentities($result->PackageType);?></p>

```

```

<p><b>Package Location :</b> <?php echo htmlentities($result->PackageLocation);?></p>
<p><b>Features</b> <?php echo htmlentities($result->PackageFetures);?></p>
<div class="ban-bottom">
<div class="bnr-right">
<label class="inputLabel">From</label>
<input class="date" id="datepicker" type="text" placeholder="dd-mm-yyyy" name="fromdate" required="">
</div>
<div class="bnr-right">
<label class="inputLabel">To</label>
<input class="date" id="datepicker1" type="text" placeholder="dd-mm-yyyy" name="todate" required="">
</div>
</div>
<div class="clearfix"></div>
<div class="grand">
<p>Grand Total</p>
<h3>INR.800</h3>
</div>
</div>
<h3>Package Details</h3>
<p style="padding-top: 1%"><?php echo htmlentities($result->PackageDetails);?> </p>
<div class="clearfix"></div>
</div>
<div class="selectroom_top">
<h2>Travels</h2>
<div class="selectroom-info animated wow fadeInUp animated" data-wow-duration="1200ms" data-wow-delay="500ms" style="visibility: visible; animation-duration: 1200ms; animation-delay: 500ms; animation-name: fadeInUp; margin-top: -70px">
<ul>
<li class="spe">
<label class="inputLabel">Comment</label>
<input class="special" type="text" name="comment" required="">
</li>
<?php if($_SESSION['login']) {?>
<li class="spe" align="center">
<button type="submit" name="submit2" class="btn-primary btn">Book</button>
</li>
<?php } else {?>
<li class="sigi" align="center" style="margin-top: 1%">
<a href="#" data-toggle="modal" data-target="#myModal4" class="btn-primary btn" > Book</a></li>
<?php } ?>
<div class="clearfix"></div>
</ul>
</div>

```

```

        </div>
        </form>
<?php }} ?>

        </div>
</div>
<!-- /selectroom ---->
<<!!-- /footer-top ---->
<?php include('includes/footer.php');?>
<!-- signup -->
<?php include('includes/signup.php');?>
<!-- //signu -->
<!-- signin -->
<?php include('includes/signin.php');?>
<!-- //signin -->
<!-- write us -->
<?php include('includes/write-us.php');?>
</body>
</html>

```

### **Package-list.php**

```

<?php
session_start();
error_reporting(0);
include('includes/config.php');
?>
<!DOCTYPE HTML>
<html>
<head>
<title>WT | Package List</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<script type="applijewelleryion/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>
<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet' type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
<script src="js/wow.min.js"></script>
<script>
    new WOW().init();
</script>
<!--/end-animate-->

```

```

</head>
<body>
<?php include('includes/header.php');?>
<!-- banner ---->
<div class="banner-3">
    <div class="container">
        <h1 class="wow zoomIn animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: zoomIn;"> WT- Package List</h1>
    </div>
</div>
<!-- /banner ---->
<!-- rooms ---->
<div class="rooms">
    <div class="container">

        <div class="room-bottom">
            <h3>Package List</h3>

<?php $sql = "SELECT * from tbltourpackages";
$query = $dbh->prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
{
foreach($results as $result)
{
    ?>
            <div class="rom-btm">
                <div class="col-md-3 room-left wow fadeInLeft animated" data-wow-delay=".5s">
                    
                </div>
                <div class="col-md-6 room-midle wow fadeInUp animated" data-wow-delay=".5s">
                    <h4>Package Name: <?php echo htmlentities($result->PackageName);?></h4>
                    <h6>Package Type : <?php echo htmlentities($result->PackageType);?></h6>
                    <p><b>Package Location :</b> <?php echo htmlentities($result->PackageLocation);?></p>
                    <p><b>Features</b> <?php echo htmlentities($result->PackageFetures);?></p>
                </div>
                <div class="col-md-3 room-right wow fadeInRight animated" data-wow-delay=".5s">
                    <h5>INR <?php echo htmlentities($result->PackagePrice);?></h5>
                    <a href="package-details.php?pkgid=<?php echo htmlentities($result->PackageId);?>" class="view">Details</a>
                </div>
                <div class="clearfix"></div>
            </div>
        </div>
    </div>
</div>

```

```

<?php }} ?>
    </div>
</div>
<!-- /rooms ---->

<!-- /footer-top ---->
<?php include('includes/footer.php');?>
<!-- signup -->
<?php include('includes/signup.php');?>
<!-- //signu -->
<!-- signin -->
<?php include('includes/signin.php');?>
<!-- //signin -->
<!-- write us -->
<?php include('includes/write-us.php');?>
<!-- //write us -->
</body>
</html>

```

### **Page.php**

```

<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(isset($_POST['submit1']))
{
$fname=$_POST['fname'];
$email=$_POST['email'];
$mobile=$_POST['mobileno'];
$subject=$_POST['subject'];
getDescription=$_POST['description'];
$sql="INSERT INTO tblenquiry(FullName,EmailId,MobileNumber,Subject,Description)
VALUES(:fname,:email,:mobile,:subject,:description)";
$query = $dbh->prepare($sql);
$query->bindParam(':fname',$fname,PDO::PARAM_STR);
$query->bindParam(':email',$email,PDO::PARAM_STR);
$query->bindParam(':mobile',$mobile,PDO::PARAM_STR);
$query->bindParam(':subject',$subject,PDO::PARAM_STR);
$query->bindParam(':description',$description,PDO::PARAM_STR);
$query->execute();
$lastInsertId = $dbh->lastInsertId();
if($lastInsertId)
{
$msg="Enquiry Successfully submitted";
}
else
{
$error="Something went wrong. Please try again";
}
}

```

```

?>
<!DOCTYPE HTML>
<html>
<head>
<title>WT | WORLD TOURISM</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<meta name="keywords" content="Tourism Management System In PHP" />
<script type="applijewelleryion/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>
<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet' type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
<script src="js-wow.min.js"></script>
<script>
    new WOW().init();
</script>
<style>
.errorWrap {
    padding: 10px;
    margin: 0 0 20px 0;
    background: #fff;
    border-left: 4px solid #dd3d36;
    -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
.succWrap{
    padding: 10px;
    margin: 0 0 20px 0;
    background: #fff;
    border-left: 4px solid #5cb85c;
    -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
</style>
</head>
<body>
<!-- top-header -->
<div class="top-header">
<?php include('includes/header.php');?>
<div class="banner-1 ">
    <div class="container">
        <h1 class="wow zoomIn animated animated" data-wow-delay=".5s" style="visibility:
visible; animation-delay: 0.5s; animation-name: zoomIn;">WT - WORLD Tourism</h1>

```

```

        </div>
    </div>
    <!-- /banner-1 ---->
    <!-- privacy ---->
    <div class="privacy">
        <div class="container">
            <?php
                $pagetype=$_GET['type'];
                $sql = "SELECT type,detail from tblpages where type=:pagetype";
                $query = $dbh -> prepare($sql);
                $query->bindParam(':pagetype',$pagetype,PDO::PARAM_STR);
                $query->execute();
                $results=$query->fetchAll(PDO::FETCH_OBJ);
                $cnt=1;
                if($query->rowCount() > 0)
                {
                    foreach($results as $result)
                    {
                        ?>
                        <h3 class="wow fadeInDown animated animated" data-wow-delay=".5s"
                            style="visibility: visible; animation-delay: 0.5s; animation-name: fadeInDown;"><?php echo
                            $_GET['type'] ?></h3>

                        <p>
                            <?php echo $result->detail; ?>
                        </p>
                    <?php } }?>

                    </div>
                </div>
                <!-- /privacy ---->
                <!-- footer-top ---->
                <!-- /footer-top ---->
                <?php include('includes/footer.php');?>
                <!-- signup -->
                <?php include('includes/signup.php');?>
                <!-- //signu -->
                <!-- signin -->
                <?php include('includes/signin.php');?>
                <!-- //signin -->
                <!-- write us -->
                <?php include('includes/write-us.php');?>
            </body>
        </html>
profile.php
<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['login'])==0)
{
    header('location:index.php');
}

```

```

else{
if(isset($_POST['submit6']))
{
$name=$_POST['name'];
$mobileno=$_POST['mobileno'];
$email=$_SESSION['login'];
$nation=$_POST['nationality'];
$sql="update tblusers set FullName=:name,Nationality=:nation,MobileNumber=:mobileno where
EmailId=:email";
$query = $dbh->prepare($sql);
$query->bindParam(':name',$name,PDO::PARAM_STR);
$query->bindParam(':nation',$nation,PDO::PARAM_STR);
$query->bindParam(':mobileno',$mobileno,PDO::PARAM_STR);
$query->bindParam(':email',$email,PDO::PARAM_STR);
$query->execute();
$msg="Profile Updated Successfully";
}

?>
<!DOCTYPE HTML>
<html>
<head>
<title> WT | WORLD TOURISM</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<meta name="keywords" content="Tourism Management System In PHP" />
<script type="applijewelleryion/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar() { window.scrollTo(0,1); } </script>
<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet' type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
<script src="js/wow.min.js"></script>
<script>
    new WOW().init();
</script>

<style>
.errorWrap {
padding: 10px;
margin: 0 0 20px 0;
background: #fff;
border-left: 4px solid #dd3d36;
-webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);

```

```

        }
.succWrap{
    padding: 10px;
    margin: 0 0 20px 0;
    background: #fff;
    border-left: 4px solid #5cb85c;
    -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
        </style>
</head>
<body>
<!-- top-header -->
<div class="top-header">
<?php include('includes/header.php');?>
<div class="banner-1 ">
    <div class="container">
        <h1 class="wow zoomIn animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: zoomIn;"> WT - WORLD TOURISM</h1>
    </div>
</div>
<!-- /banner-1 ---->
<!-- privacy ---->
<div class="privacy">
    <div class="container">
        <h3 class="wow fadeInDown animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: fadeInDown;">My Profile!!</h3>
        <form name="chngpwd" method="post">
            <?php if($error){?><div class="errorWrap"><strong>ERROR</strong><?php echo htmlentities($error); ?> </div><?php }>
            <?php else if($msg){?><div
class="succWrap"><strong>SUCCESS</strong><?php echo htmlentities($msg); ?> </div><?php }?>
        <?php
$useremail=$_SESSION['login'];
$sql = "SELECT * from tblusers where EmailId=:useremail";
$query = $dbh -> prepare($sql);
$query -> bindParam(':useremail',$useremail, PDO::PARAM_STR);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
{
foreach($results as $result)
{
    ?>
<p style="width: 350px;">
    <b>Name</b> <input type="text" name="name" value="<?php echo
htmlentities($result->FullName);?>" class="form-control" id="name" required="">
</p>
<p style="width: 350px;">

```

```

<b>Nationality</b> <select name="nationality" autocomplete="off"
required="" class="form-control" id="nationality">
<option value=<?php echo htmlentities($result->Nationality);?>><?php echo
htmlentities($result->Nationality);?></option>
<option value="afghan">Afghan</option>
<option value="albanian">Albanian</option>
<option value="algerian">Algerian</option>
<option value="american">American</option>
<option value="andorran">Andorran</option>
<option value="angolan">Angolan</option>
<option value="antiguans">Antiguans</option>
<option value="argentinean">Argentinean</option>
<option value="armenian">Armenian</option>
<option value="australian">Australian</option>
<option value="austrian">Austrian</option>
<option value="azerbaijani">Azerbaijani</option>
<option value="bahamian">Bahamian</option>
<option value="bahraini">Bahraini</option>
<option value="bangladeshi">Bangladeshi</option>
<option value="barbadian">Barbadian</option>
<option value="barbudans">Barbudans</option>
<option value="batswana">Batswana</option>
<option value="belarusian">Belarusian</option>
<option value="belgian">Belgian</option>
<option value="belizean">Belizean</option>
<option value="beninese">Beninese</option>
<option value="bhutanese">Bhutanese</option>
<option value="bolivian">Bolivian</option>
<option value="bosnian">Bosnian</option>
<option value="brazilian">Brazilian</option>
<option value="british">British</option>
<option value="bruneian">Bruneian</option>
<option value="bulgarian">Bulgarian</option>
<option value="burkinabe">Burkinabe</option>
<option value="burmese">Burmese</option>
<option value="burundian">Burundian</option>
<option value="cambodian">Cambodian</option>
<option value="cameroonian">Cameroonian</option>
<option value="canadian">Canadian</option>
<option value="cape verdean">Cape Verdean</option>
<option value="central african">Central African</option>
<option value="chadian">Chadian</option>
<option value="chilean">Chilean</option>
<option value="chinese">Chinese</option>
<option value="colombian">Colombian</option>
<option value="comoran">Comoran</option>
<option value="congolesee">Congolese</option>
<option value="costa rican">Costa Rican</option>
<option value="croatian">Croatian</option>
<option value="cuban">Cuban</option>
<option value="cypriot">Cypriot</option>
<option value="czech">Czech</option>
<option value="danish">Danish</option>
<option value="djibouti">Djibouti</option>

```

```
<option value="dominican">Dominican</option>
<option value="dutch">Dutch</option>
<option value="east timorese">East Timorese</option>
<option value="ecuadorean">Ecuadorean</option>
<option value="egyptian">Egyptian</option>
<option value="emirian">Emirian</option>
<option value="equatorial guinean">Equatorial Guinean</option>
<option value="eritrean">Eritrean</option>
<option value="estonian">Estonian</option>
<option value="ethiopian">Ethiopian</option>
<option value="fijian">Fijian</option>
<option value="filipino">Filipino</option>
<option value="finnish">Finnish</option>
<option value="french">French</option>
<option value="gabonese">Gabonese</option>
<option value="gambian">Gambian</option>
<option value="georgian">Georgian</option>
<option value="german">German</option>
<option value="ghanaian">Ghanaian</option>
<option value="greek">Greek</option>
<option value="grenadian">Grenadian</option>
<option value="guatemalan">Guatemalan</option>
<option value="guinea-bissauan">Guinea-Bissauan</option>
<option value="guinean">Guinean</option>
<option value="guyanese">Guyanese</option>
<option value="haitian">Haitian</option>
<option value="herzegovinian">Herzegovinian</option>
<option value="honduran">Honduran</option>
<option value="hungarian">Hungarian</option>
<option value="icelander">Icelander</option>
<option value="indian">Indian</option>
<option value="indonesian">Indonesian</option>
<option value="iranian">Iranian</option>
<option value="iraqi">Iraqi</option>
<option value="irish">Irish</option>
<option value="israeli">Israeli</option>
<option value="italian">Italian</option>
<option value="ivoran">Ivorian</option>
<option value="jamaican">Jamaican</option>
<option value="japanese">Japanese</option>
<option value="jordanian">Jordanian</option>
<option value="kazakhstani">Kazakhstani</option>
<option value="kenyan">Kenyan</option>
<option value="kittian and nevisian">Kittian and Nevisian</option>
<option value="kuwaiti">Kuwaiti</option>
<option value="kyrgyz">Kyrgyz</option>
<option value="laotian">Laotian</option>
<option value="latvian">Latvian</option>
<option value="lebanese">Lebanese</option>
<option value="liberian">Liberian</option>
<option value="libyan">Libyan</option>
<option value="liechtensteiner">Liechtensteiner</option>
<option value="lithuanian">Lithuanian</option>
<option value="luxembourger">Luxembourger</option>
```

```
<option value="macedonian">Macedonian</option>
<option value="malagasy">Malagasy</option>
<option value="malawian">Malawian</option>
<option value="malaysian">Malaysian</option>
<option value="maldivan">Maldivan</option>
<option value="malian">Malian</option>
<option value="maltese">Maltese</option>
<option value="marshallse">Marshallse</option>
<option value="mauritanian">Mauritanian</option>
<option value="mauritian">Mauritian</option>
<option value="mexican">Mexican</option>
<option value="micronesian">Micronesian</option>
<option value="moldovan">Moldovan</option>
<option value="monacan">Monacan</option>
<option value="mongolian">Mongolian</option>
<option value="moroccan">Moroccan</option>
<option value="mosotho">Mosotho</option>
<option value="motswana">Motswana</option>
<option value="mozambican">Mozambican</option>
<option value="namibian">Namibian</option>
<option value="nauruan">Nauruan</option>
<option value="nepalese">Nepalese</option>
<option value="new zealander">New Zealander</option>
<option value="ni-vanuatu">Ni-Vanuatu</option>
<option value="nicaraguan">Nicaraguan</option>
<option value="nigerien">Nigerien</option>
<option value="north korean">North Korean</option>
<option value="northern irish">Northern Irish</option>
<option value="norwegian">Norwegian</option>
<option value="omani">Omani</option>
<option value="pakistani">Pakistani</option>
<option value="palauan">Palauan</option>
<option value="panamanian">Panamanian</option>
<option value="papua new guinean">Papua New Guinean</option>
<option value="paraguayan">Paraguayan</option>
<option value="peruvian">Peruvian</option>
<option value="polish">Polish</option>
<option value="portuguese">Portuguese</option>
<option value="qatari">Qatari</option>
<option value="romanian">Romanian</option>
<option value="russian">Russian</option>
<option value="rwandan">Rwandan</option>
<option value="saint lucian">Saint Lucian</option>
<option value="salvadoran">Salvadoran</option>
<option value="samoan">Samoan</option>
<option value="san marinese">San Marinese</option>
<option value="sao tomean">Sao Tomean</option>
<option value="saudi">Saudi</option>
<option value="scottish">Scottish</option>
<option value="senegalese">Senegalese</option>
<option value="serbian">Serbian</option>
<option value="seychellois">Seychellois</option>
<option value="sierra leonean">Sierra Leonean</option>
<option value="singaporean">Singaporean</option>
```

```

<option value="slovakian">Slovakian</option>
<option value="slovenian">Slovenian</option>
<option value="solomon islander">Solomon Islander</option>
<option value="somali">Somali</option>
<option value="south african">South African</option>
<option value="south korean">South Korean</option>
<option value="spanish">Spanish</option>
<option value="sri lankan">Sri Lankan</option>
<option value="sudanese">Sudanese</option>
<option value="surinamer">Surinamer</option>
<option value="swazi">Swazi</option>
<option value="swedish">Swedish</option>
<option value="swiss">Swiss</option>
<option value="syrian">Syrian</option>
<option value="taiwanese">Taiwanese</option>
<option value="tajik">Tajik</option>
<option value="tanzanian">Tanzanian</option>
<option value="thai">Thai</option>
<option value="togolese">Togolese</option>
<option value="tongan">Tongan</option>
<option value="trinidadian or tobagonian">Trinidadian or Tobagonian</option>
<option value="tunisian">Tunisian</option>
<option value="turkish">Turkish</option>
<option value="tuvaluan">Tuvaluan</option>
<option value="ugandan">Ugandan</option>
<option value="ukrainian">Ukrainian</option>
<option value="uruguayan">Uruguayan</option>
<option value="uzbekistani">Uzbekistani</option>
<option value="venezuelan">Venezuelan</option>
<option value="vietnamese">Vietnamese</option>
<option value="welsh">Welsh</option>
<option value="yemenite">Yemenite</option>
<option value="zambian">Zambian</option>
<option value="zimbabwean">Zimbabwean</option>
</select>
</p>
<p style="width: 350px;">
<b>Mobile Number</b>
<input type="text" class="form-control" name="mobileno" maxlength="10" value="<?php echo
htmlentities($result->MobileNumber);?>" id="mobileno" required="">
</p>

<p style="width: 350px;">
<b>Email Id</b>
<input type="email" class="form-control" name="email" value="<?php echo
htmlentities($result->EmailId);?>" id="email" readonly>
</p>
<p style="width: 350px;">
<b>Last Updation Date : </b>
<?php echo htmlentities($result->UpdationDate);?>
</p>

<p style="width: 350px;">
<b>Reg Date :</b>

```

```

<?php echo htmlentities($result->RegDate);?>
        </p>
<?php } } ?>

        <p style="width: 350px;">
<button type="submit" name="submit6" class="btn-primary btn">Update</button>
        </p>
        </form>
    </div>
</div>
<!-- /privacy ---->
<!-- footer-top ---->
<!-- /footer-top ---->
<?php include('includes/footer.php');?>
<!-- signup -->
<?php include('includes/signup.php');?>
<!-- //signu -->
<!-- signin -->
<?php include('includes/signin.php');?>
<!-- //signin -->
<!-- write us -->
<?php include('includes/write-us.php');?>
</body>
</html>
<?php } ?>
change-password.php
<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['login'])==0)
{
header('location:index.php');
}
else{
if(isset($_POST['submit5']))
{
$password=md5($_POST['password']);
$newpassword=md5($_POST['newpassword']);
$email=$_SESSION['login'];
$sql ="SELECT Password FROM tblusers WHERE EmailId=:email and
Password=:password";
$query= $dbh -> prepare($sql);
$query-> bindParam(':email', $email, PDO::PARAM_STR);
$query-> bindParam(':password', $password, PDO::PARAM_STR);
$query-> execute();
$results = $query -> fetchAll(PDO::FETCH_OBJ);
if($query -> rowCount() > 0)
{
$con="update tblusers set Password=:newpassword where EmailId=:email";
$chngpwd1 = $dbh->prepare($con);
$chngpwd1-> bindParam(':email', $email, PDO::PARAM_STR);
$chngpwd1-> bindParam(':newpassword', $newpassword, PDO::PARAM_STR);
$chngpwd1->execute();
}
}

```

```

$msg="Your Password successfully changed";
}
else {
$error="Your current password is wrong";
}
}

?>
<!DOCTYPE HTML>
<html>
<head>
<title>WT | WORLD TOURISM</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<meta name="keywords" content="Tourism Management System In PHP" />
<script type="applijewelleryion/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar() { window.scrollTo(0,1); } </script>
<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet' type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
<script src="js/wow.min.js"></script>
<script>
    new WOW().init();
</script>
<script type="text/javascript">
function valid()
{
if(document.chngpwd.newpassword.value!= document.chngpwd.confirmpassword.value)
{
alert("New Password and Confirm Password Field do not match !!");
document.chngpwd.confirmpassword.focus();
return false;
}
return true;
}
</script>
<style>
.errorWrap {
padding: 10px;
margin: 0 0 20px 0;
background: #fff;
border-left: 4px solid #dd3d36;
-webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);

```

```

}
.succWrap{
    padding: 10px;
    margin: 0 0 20px 0;
    background: #fff;
    border-left: 4px solid #5cb85c;
    -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
</style>
</head>
<body>
<!-- top-header -->
<div class="top-header">
<?php include('includes/header.php');?>
<div class="banner-1 ">
    <div class="container">
        <h1 class="wow zoomIn animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: zoomIn;">TMS-Tourism Management System</h1>
    </div>
</div>
<!-- /banner-1 ---->
<!-- privacy ---->
<div class="privacy">
    <div class="container">
        <h3 class="wow fadeInDown animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: fadeInDown;">Change Password</h3>
        <form name="chngpwd" method="post" onSubmit="return valid();">
            <?php if($error){?><div class="errorWrap"><strong>ERROR</strong>:<?php echo htmlentities($error); ?> </div><?php }>
            <else if($msg){?><div class="succWrap"><strong>SUCCESS</strong>:<?php echo htmlentities($msg); ?> </div><?php }?>
        <p style="width: 350px;">
            <b>Current Password</b> <input type="password" name="password" class="form-control" id="exampleInputPassword1" placeholder="Current Password" required="">
        </p>
        <p style="width: 350px;">
            <b>New Password</b>
            <input type="password" class="form-control" name="newpassword" id="newpassword" placeholder="New Password" required="">
        </p>
        <p style="width: 350px;">
            <b>Confirm Password</b>
            <input type="password" class="form-control" name="confirmpassword" id="confirmpassword" placeholder="Confrim Password" required="">
        </p>
        <p style="width: 350px;">

```

```

<button type="submit" name="submit5" class="btn-primary btn">Change</button>
</p>
</form>

</div>
</div>
<!-- /privacy ---->
<!-- footer-top ---->
<!-- /footer-top ---->
<?php include('includes/footer.php');?>
<!-- signup -->
<?php include('includes/signup.php');?>
<!-- //signu -->
<!-- signin -->
<?php include('includes/signin.php');?>
<!-- //signin -->
<!-- write us -->
<?php include('includes/write-us.php');?>
</body>
</html>
<?php } ?>
check_availability.php
<?php
require_once("includes/config.php");
// code admin email availability
if(!empty($_POST["emailid"])) {
    $email= $_POST["emailid"];
    if(filter_var($email, FILTER_VALIDATE_EMAIL)==false) {

        echo "error : You did not enter a valid email.";
    }
    else {
        $sql ="SELECT EmailId FROM tblusers WHERE EmailId=:email";
        $query= $dbh -> prepare($sql);
        $query-> bindParam(':email', $email, PDO::PARAM_STR);
        $query-> execute();
        $results = $query -> fetchAll(PDO::FETCH_OBJ);
        $cnt=1;
        if($query -> rowCount() > 0)
        {
            echo "<span style='color:red'> Email already exists .</span>";
            echo "<script>$('#submit').prop('disabled',true);</script>";
        } else{

            echo "<span style='color:green'> Email available for Registration .</span>";
            echo "<script>$('#submit').prop('disabled',false);</script>";
        }
    }
}
?>
Enquiry.php
<?php
session_start();

```

```

error_reporting(0);
include('includes/config.php');
if(isset($_POST['submit1']))
{
$fname=$_POST['fname'];
$email=$_POST['email'];
$mobile=$_POST['mobileno'];
$subject=$_POST['subject'];
getDescription=$_POST['description'];
$sql="INSERT INTO tblenquiry(FullName,EmailId,MobileNumber,Subject,Description)
VALUES(:fname,:email,:mobile,:subject,:description)";
$query = $dbh->prepare($sql);
$query->bindParam(':fname',$fname,PDO::PARAM_STR);
$query->bindParam(':email',$email,PDO::PARAM_STR);
$query->bindParam(':mobile',$mobile,PDO::PARAM_STR);
$query->bindParam(':subject',$subject,PDO::PARAM_STR);
$query->bindParam(':description',$description,PDO::PARAM_STR);
$query->execute();
$lastInsertId = $dbh->lastInsertId();
if($lastInsertId)
{
$msg="Enquiry Successfully submitted";
}
else
{
$error="Something went wrong. Please try again";
}

}

?>
<!DOCTYPE HTML>
<html>
<head>
<title>WT | WORLD TOURISM</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<meta name="keywords" content="Tourism Management System In PHP" />
<script type="applijewelleryion/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>
<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet' type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
<script src="js/wow.min.js"></script>

```

```

<script>
    new WOW().init();
</script>
<style>
    .errorWrap {
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #dd3d36;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
    .succWrap{
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #5cb85c;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
</style>
</head>
<body>
<!-- top-header -->
<div class="top-header">
<?php include('includes/header.php');?>
<div class="banner-1 ">
    <div class="container">
        <h1 class="wow zoomIn animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: zoomIn;">WT | WORLD TOURISM</h1>
    </div>
</div>
<!-- /banner-1 ---->
<!-- privacy ---->
<div class="privacy">
    <div class="container">
        <h3 class="wow fadeInDown animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: fadeInDown;">Enquiry Form Password</h3>
        <form name="enquiry" method="post">
            <?php if($error){?><div class="errorWrap"><strong>ERROR</strong><?php echo htmlentities($error); ?></div><?php
            else if($msg){?><div
            class="succWrap"><strong>SUCCESS</strong><?php echo htmlentities($msg); ?></div><?php
            }?>
            <p style="width: 350px;">
                <b>Full name</b> <input type="text" name="fname" class="form-control" id="fname" placeholder="Full Name" required="">
            </p>
<p style="width: 350px;">
<b>Email</b> <input type="email" name="email" class="form-control" id="email" placeholder="Valid Email id" required="">
            </p>

```

```

<p style="width: 350px;">
<b>Mobile No</b> <input type="text" name="mobileno" class="form-control" id="mobileno" maxlength="10" placeholder="10 Digit mobile No" required="">
</p>

<p style="width: 350px;">
<b>Subject</b> <input type="text" name="subject" class="form-control" id="subject" placeholder="Subject" required="">
</p>
<p style="width: 350px;">
<b>Description</b> <textarea name="description" class="form-control" rows="6" cols="50" id="description" placeholder="Description" required=""></textarea>
</p>

<p style="width: 350px;">
<button type="submit" name="submit1" class="btn-primary btn">Submit</button>
</p>
</form>

</div>
</div>
<!-- /privacy ---->
<!-- footer-top ---->
<!-- /footer-top ---->
<?php include('includes/footer.php');?>
<!-- signup -->
<?php include('includes/signup.php');?>
<!-- //signu -->
<!-- signin -->
<?php include('includes/signin.php');?>
<!-- //signin -->
<!-- write us -->
<?php include('includes/write-us.php');?>
</body>
</html>
forgot-password.php
<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(isset($_POST['submit50']))
{
$email=$_POST['email'];
$mobile=$_POST['mobile'];
$newpassword=md5($_POST['newpassword']);
$sql ="SELECT EmailId FROM tblusers WHERE EmailId=:email and MobileNumber=:mobile";
$query= $dbh -> prepare($sql);
$query-> bindParam(':email', $email, PDO::PARAM_STR);
$query-> bindParam(':mobile', $mobile, PDO::PARAM_STR);
$query-> execute();
$results = $query -> fetchAll(PDO::FETCH_OBJ);
if($query -> rowCount() > 0)

```

```

{
$con="update tblusers set Password=:newpassword where EmailId=:email and
MobileNumber=:mobile";
$chngpwd1 = $dbh->prepare($con);
$chngpwd1-> bindParam(':email', $email, PDO::PARAM_STR);
$chngpwd1-> bindParam(':mobile', $mobile, PDO::PARAM_STR);
$chngpwd1-> bindParam(':newpassword', $newpassword, PDO::PARAM_STR);
$chngpwd1->execute();
$msg="Your Password successfully changed";
}
else {
$error="Email id or Mobile no is invalid";
}
}

?>
<!DOCTYPE HTML>
<html>
<head>
<title>WT | WORLD TOURISM</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<meta name="keywords" content="Tourism Management System In PHP" />
<script type="applijewelleryion/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>
<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet' type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
<script src="js/wow.min.js"></script>
<script>
    new WOW().init();
</script>
<script type="text/javascript">
function valid()
{
if(document.chngpwd.newpassword.value!= document.chngpwd.confirmpassword.value)
{
alert("New Password and Confirm Password Field do not match !!");
document.chngpwd.confirmpassword.focus();
return false;
}
return true;
}
</script>

```

```

<style>
    .errorWrap {
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #dd3d36;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
    .succWrap{
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #5cb85c;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
</style>
</head>
<body>
<!-- top-header -->
<div class="top-header">
<?php include('includes/header.php');?>
<div class="banner-1 ">
    <div class="container">
        <h1 class="wow zoomIn animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: zoomIn;">WT- WORLD TOURISM</h1>
    </div>
</div>
<!-- /banner-1 ---->
<!-- privacy ---->
<div class="privacy">
    <div class="container">
        <h3 class="wow fadeInDown animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: fadeInDown;">Recover Password</h3>
        <form name="chngpwd" method="post" onSubmit="return valid();">
            <?php if($error){?><div class="errorWrap"><strong>ERROR</strong><?php echo htmlentities($error); ?> </div><?php }>
            <?php else if($msg){?><div
class="succWrap"><strong>SUCCESS</strong><?php echo htmlentities($msg); ?> </div><?php }?>
        <p style="width: 350px;">
            <b>Email id</b> <input type="email" name="email" class="form-control" id="email" placeholder="Reg Email id" required="">
        </p>
        <p style="width: 350px;">
            <b>Mobile No</b> <input type="text" name="mobile" class="form-control" id="mobile" placeholder="Reg Mobile no" required="">
        </p>
    </div>
</div>

```

```

<p style="width: 350px;">
<b>New Password</b>
<input type="password" class="form-control" name="newpassword" id="newpassword"
placeholder="New Password" required="">
</p>

<p style="width: 350px;">
<b>Confirm Password</b>
    <input type="password" class="form-control" name="confirmpassword"
id="confirmpassword" placeholder="Confrim Password" required="">
</p>

    <p style="width: 350px;">
<button type="submit" name="submit50" class="btn-primary btn">Change</button>
    </p>
    </form>

</div>
</div>
<!-- /privacy ---->
<!-- footer-top ---->
<!-- /footer-top ---->
<?php include('includes/footer.php');?>
<!-- signup -->
<?php include('includes/signup.php');?>
<!-- //signu -->
<!-- signin -->
<?php include('includes/signin.php');?>
<!-- //signin -->
<!-- write us -->
<?php include('includes/write-us.php');?>
</body>
</html>

```

### **Issuetickets.php**

```

<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['login'])==0)
{
header('location:index.php');
}
else{
?>
<!DOCTYPE HTML>
<html>
<head>
<title>WT | WORLD TOURSIM</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<meta name="keywords" content="Tourism Management System In PHP" />
<script type="applijewelleryion/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>

```

```

<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet' type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
<script src="js/wow.min.js"></script>
<script>
    new WOW().init();
</script>

<style>
    .errorWrap {
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #dd3d36;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
    .succWrap {
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #5cb85c;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
</style>
</head>
<body>
<!-- top-header -->
<div class="top-header">
<?php include('includes/header.php');?>
<div class="banner-1 ">
    <div class="container">
        <h1 class="wow zoomIn animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: zoomIn;">WT- WORLD TOURISM</h1>
    </div>
</div>
<!-- /banner-1 ---->
<!-- privacy ---->
<div class="privacy">
    <div class="container">
        <h3 class="wow fadeInDown animated animated" data-wow-delay=".5s"
        style="visibility: visible; animation-delay: 0.5s; animation-name: fadeInDown;">Issue Tickets</h3>
        <form name="chngpwd" method="post" onSubmit="return valid();">

```

```

<?php if($error){?><div class="errorWrap"><strong>ERROR</strong>:<?php echo
htmlentities($error); ?> </div><?php }
else if($msg){?><div
class="succWrap"><strong>SUCCESS</strong>:<?php echo htmlentities($msg); ?> </div><?php
?>
<p>
<table border="1" width="100%">
<tr align="center">
<th>#</th>
<th>Ticket Id</th>
<th>Issue</th>
<th>Description</th>
<th>Admin Remark</th>
<th>Reg Date</th>
<th>Remark date</th>

</tr>
<?php

$uemail=$_SESSION['login'];
$sql = "SELECT * from tblissues where UserEmail=:uemail";
$query = $dbh->prepare($sql);
$query -> bindParam(':uemail', $uemail, PDO::PARAM_STR);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
{
foreach($results as $result)
{
    ?>
<tr align="center">
<td ><?php echo htmlentities($cnt);?></td>
<td width="100">#TKT-<?php echo htmlentities($result->id);?></td>
<td><?php echo htmlentities($result->Issue);?></td>
<td width="300"><?php echo htmlentities($result->Description);?></td>
<td><?php echo htmlentities($result->AdminRemark);?></td>
<td width="100"><?php echo htmlentities($result->PostingDate);?></td>
<td width="100"><?php echo htmlentities($result->AdminremarkDate);?></td>
</tr>
<?php $cnt=$cnt+1; ?>
</table>

</p>
</form>

</div>
</div>
<!-- /privacy ---->
<!-- footer-top ---->
<!-- /footer-top ---->
<?php include('includes/footer.php');?>
<!-- signup -->
<?php include('includes/signup.php');?>

```

```

<!-- //signu -->
<!-- signin -->
<?php include('includes/signin.php');?>
<!-- //signin -->
<!-- write us -->
<?php include('includes/write-us.php');?>
</body>
</html>
<?php } ?>

```

### **Logout.php**

```

<?php
session_start();
$_SESSION = array();
if (ini_get("session.use_cookies")) {
    $params = session_get_cookie_params();
    setcookie(session_name(), " , time() - 60*60,
        $params["path"], $params["domain"],
        $params["secure"], $params["httponly"]
    );
}
unset($_SESSION['login']);
session_destroy(); // destroy session
header("location:index.php");
?>

```

### **Thankyou.php**

```

<?php
session_start();
error_reporting(0);
include('includes/config.php');
?>
<!DOCTYPE HTML>
<html>
<head>
<title> | Confirmation </title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<script type="applijewelleryion/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar() { window.scrollTo(0,1); } </script>
<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet' type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
<script src="js/wow.min.js"></script>
<script>
```

```

        new WOW().init();
    </script>
<!--/end-animate-->
</head>
<body>
<?php include('includes/header.php');?>
<div class="banner-1 ">
    <div class="container">
        <h1 class="wow zoomIn animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: zoomIn;"> WT- WORLD TOURISM</h1>
    </div>
</div>
<!-- /banner-1 ---->
<!-- contact ---->
<div class="contact">
    <div class="container">
        <h3> Confirmation</h3>
        <div class="col-md-10 contact-left">
            <div class="con-top animated wow fadeInUp animated" data-wow-duration="1200ms" data-wow-delay="500ms" style="visibility: visible; animation-duration: 1200ms; animation-delay: 500ms; animation-name: fadeInUp;">
                <h4> <?php echo htmlspecialchars($_SESSION['msg']);?></h4>
                </div>
                <div class="clearfix"></div>
            </div>
        </div>
        <!-- /contact ---->
        <?php include('includes/footer.php');?>
        <!-- sign -->
        <?php include('includes/signup.php');?>
        <!-- signin -->
        <?php include('includes/signin.php');?>
        <!-- //signin -->
        <!-- write us -->
        <?php include('includes/write-us.php');?>
        <!-- //write us -->
    </body>
</html>
tour-history.php
<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['login'])==0)
{
header('location:index.php');
}
else{
if(isset($_REQUEST['bkid']))
{

```

```

        $bid=intval($_GET['bkid']);
$email=$_SESSION['login'];
        $sql ="SELECT FromDate FROM tblbooking WHERE UserEmail=:email and
BookingId=:bid";
$query= $dbh -> prepare($sql);
$query-> bindParam(':email', $email, PDO::PARAM_STR);
$query-> bindParam(':bid', $bid, PDO::PARAM_STR);
$query-> execute();
$results = $query -> fetchAll(PDO::FETCH_OBJ);
if($query->rowCount() > 0)
{
foreach($results as $result)
{
        $fdate=$result->FromDate;

        $a=explode("/",$fdate);
        $val=array_reverse($a);
        $mydate =implode("/", $val);
$cdate=date('Y/m/d');
$date1=date_create("$cdate");
$date2=date_create("$fdate");
$diff=date_diff($date1,$date2);
echo $df=$diff->format("%a");
if($df>1)
{
$status=2;
$cancelby='u';
$sql = "UPDATE tblbooking SET status=:status,CancelledBy=:cancelby WHERE
UserEmail=:email and BookingId=:bid";
$query = $dbh->prepare($sql);
$query -> bindParam(':status',$status, PDO::PARAM_STR);
$query -> bindParam(':cancelby',$cancelby , PDO::PARAM_STR);
$query-> bindParam(':email',$email, PDO::PARAM_STR);
$query-> bindParam(':bid',$bid, PDO::PARAM_STR);
$query -> execute();

$msg="Booking Cancelled successfully";
}
else
{
$error="You can't cancel booking before 24 hours";
}
}
}

?>
<!DOCTYPE HTML>
<html>
<head>
<title>WT | WORLD TOURISM </title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<meta name="keywords" content="Tourism Management System In PHP" />
```

```

<script type="applijewelleryion/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar() { window.scrollTo(0,1); } </script>
<link href="css/bootstrap.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Open+Sans:400,700,600' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700,300' rel='stylesheet'
type='text/css'>
<link href='//fonts.googleapis.com/css?family=Oswald' rel='stylesheet' type='text/css'>
<link href="css/font-awesome.css" rel="stylesheet">
<!-- Custom Theme files -->
<script src="js/jquery-1.12.0.min.js"></script>
<script src="js/bootstrap.min.js"></script>
<!--animate-->
<link href="css/animate.css" rel="stylesheet" type="text/css" media="all">
<script src="js/wow.min.js"></script>
<script>
    new WOW().init();
</script>

<style>
.errorWrap {
    padding: 10px;
    margin: 0 0 20px 0;
    background: #fff;
    border-left: 4px solid #dd3d36;
    -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
.succWrap{
    padding: 10px;
    margin: 0 0 20px 0;
    background: #fff;
    border-left: 4px solid #5cb85c;
    -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
</style>
</head>
<body>
<!-- top-header -->
<div class="top-header">
<?php include('includes/header.php');?>
<div class="banner-1 ">
    <div class="container">
        <h1 class="wow zoomIn animated animated" data-wow-delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: zoomIn;">WT - WORLD TOURISM</h1>
    </div>
</div>
<!-- /banner-1 ---->
<!-- privacy ---->
<div class="privacy">
    <div class="container">

```

```

<h3 class="wow fadeInDown animated animated" data-wow-delay=".5s"
style="visibility: visible; animation-delay: 0.5s; animation-name: fadeInDown;">My Tour
History</h3>
<form name="chngpwd" method="post" onSubmit="return valid();">
    <?php if($error){?><div class="errorWrap"><strong>ERROR</strong>:<?php echo
htmlentities($error); ?> </div><?php }
        else if($msg){?><div
class="succWrap"><strong>SUCCESS</strong>:<?php echo htmlentities($msg); ?> </div><?php
?>
    <p>
        <table border="1" width="100%">
<tr align="center">
<th>#</th>
<th>Booking Id</th>
<th>Package Name</th>
<th>From</th>
<th>To</th>
<th>Comment</th>
<th>Status</th>
<th>Booking Date</th>
<th>Action</th>
</tr>
<?php
$uemail=$_SESSION['login'];
$sql = "SELECT tblbooking.BookingId as bookid,tblbooking.PackageId as
pkgid,tbltourpackages.PackageName as packagename,tblbooking.FromDate as
fromdate,tblbooking.ToDate as todate,tblbooking.Comment as comment,tblbooking.status as
status,tblbooking.RegDate as regdate,tblbooking.CancelledBy as cancelby,tblbooking.UpdationDate
as upddate from tblbooking join tbltourpackages on
tbltourpackages.PackageId=tblbooking.PackageId where UserEmail=:uemail";
$query = $dbh->prepare($sql);
$query -> bindParam(':uemail', $uemail, PDO::PARAM_STR);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
{
foreach($results as $result)
{
    ?>
<tr align="center">
<td><?php echo htmlentities($cnt);?></td>
<td>#BK<?php echo htmlentities($result->bookid);?></td>
<td><a href="package-details.php?pkgid=<?php echo htmlentities($result->pkgid);?>"><?php echo
htmlentities($result->packagename);?></a></td>
<td><?php echo htmlentities($result->fromdate);?></td>
<td><?php echo htmlentities($result->todate);?></td>
<td><?php echo htmlentities($result->comment);?></td>
<td><?php if($result->status==0)
{
echo "Pending";
}
if($result->status==1)
{

```

```

echo "Confirmed";
}
if($result->status==2 and $result->cancelby=='u')
{
echo "Canceled by you at " . $result->upddate;
}
if($result->status==2 and $result->cancelby=='a')
{
echo "Canceled by admin at " . $result->upddate;

}

?></td>
<td><?php echo htmlentities($result->regdate);?></td>
<?php if($result->status==2)
{
    ?><td>Cancelled</td>
<?php } else {?>
<td><a href="tour-history.php?bkid=<?php echo htmlentities($result->bookid);?>" onclick="return confirm('Do you really want to cancel booking!')" >Cancel</a></td>
<?php }?>
</tr>
<?php $cnt=$cnt+1; } } ?>
</table>
</p>
</form>

</div>
</div>
<!-- /privacy -->
<!-- footer-top -->
<!-- /footer-top -->
<?php include('includes/footer.php');?>
<!-- signup -->
<?php include('includes/signup.php');?>
<!-- //signu -->
<!-- signin -->
<?php include('includes/signin.php');?>
<!-- //signin -->
<!-- write us -->
<?php include('includes/write-us.php');?>
</body>
</html>
<?php } ?>

```

### **config.php**

```

<?php
// DB credentials.
define('DB_HOST','localhost');
define('DB_USER','root');
define('DB_PASS','');
define('DB_NAME','tms');
// Establish database connection.
try
{

```

```

$dbh = new PDO("mysql:host=".DB_HOST.";dbname=".DB_NAME,DB_USER,
DB_PASS,array(PDO::MYSQL_ATTR_INIT_COMMAND => "SET NAMES 'utf8'"));
}
catch (PDOException $e)
{
exit("Error: " . $e->getMessage());
}
?>
footer.php
<!-- /footer-top ---->
<!--copy-right ---->
<div class="copy-right">
<div class="container">

    <div class="footer-social-icons wow fadeInDown animated animated" data-wow-
delay=".5s" style="visibility: visible; animation-delay: 0.5s; animation-name: fadeInDown;">
        <ul>
            <li><a class="facebook" href="#"><span>Facebook</span></a></li>
            <li><a class="twitter" href="#"><span>Twitter</span></a></li>
            <li><a class="flickr" href="#"><span>Flickr</span></a></li>
            <li><a class="googleplus" href="#"><span>Google+</span></a></li>
            <li><a class="dribbble" href="#"><span>Dribbble</span></a></li>
        </ul>
    </div>
    <p class="wow zoomIn animated animated" data-wow-delay=".5s" style="visibility:
visible; animation-delay: 0.5s; animation-name: zoomIn;">© 2020 WT . All Rights Reserved </p>
</div>
</div>
header.php
<?php if($_SESSION['login'])
{?>
<div class="top-header">
<div class="container">
    <ul class="tp-hd-lft wow fadeInLeft animated" data-wow-delay=".5s">
        <li class="hm"><a href="index.html"><i class="fa fa-home"></i></a></li>
        <li class="prnt"><a href="profile.php">My Profile</a></li>
        <li class="prnt"><a href="change-password.php">Change
Password</a></li>
        <li class="prnt"><a href="tour-history.php">My Tour History</a></li>
        <li class="prnt"><a href="issuetickets.php">Issue Tickets</a></li>
    </ul>
    <ul class="tp-hd-rgt wow fadeInRight animated" data-wow-delay=".5s">
        <li class="tol">Welcome :</li>
        <li class="sig"><?php echo htmlentities($_SESSION['login']);?></li>
        <li class="sigi"><a href="logout.php" /> Logout</a></li>
    </ul>
</div>
<div class="clearfix"></div>
</div>
</div><?php } else {?>
<div class="top-header">
<div class="container">
    <ul class="tp-hd-lft wow fadeInLeft animated" data-wow-delay=".5s">
        <li class="hm"><a href="index.php"><i class="fa fa-home"></i></a></li>
        <li class="hm"><a href="admin/index.php">Admin Login</a></li>

```

```

        </ul>
        <ul class="tp-hd-rgt wow fadeInRight animated" data-wow-delay=".5s">
            <li class="tol">Toll-Free Number : 123-4568790</li>

            <li class="sig"><a href="#" data-toggle="modal" data-target="#myModal">
>Sign Up</a></li>
            <li class="sigi"><a href="#" data-toggle="modal" data-target="#myModal4">
/> Sign In</a></li>
        </ul>
        <div class="clearfix"></div>
    </div>
<?php }?>
<!-- /top-header ---->
<!-- header ---->
<div class="header">
    <div class="container">
        <div class="logo wow fadeInDown animated" data-wow-delay=".5s">
            <a href="index.php">WORLD <span> TOURISM </span></a>
        </div>

        <div class="lock fadeInDown animated" data-wow-delay=".5s">
            <li><i class="fa fa-lock"></i></li>
        <li><div class="securetxt">SAFE & SECURE </div></li>
            <div class="clearfix"></div>
        </div>
        <div class="clearfix"></div>
    </div>
<!-- /header ---->
<!-- footer-btm ---->
<div class="footer-btm wow fadeInLeft animated" data-wow-delay=".5s">
    <div class="container">
        <div class="navigation">
            <nav class="navbar navbar-default">
                <!-- Brand and toggle get grouped for better mobile display -->
                <div class="navbar-header">
                    <button type="button" class="navbar-toggle collapsed" data-
toggle="collapse" data-target="#bs-example-navbar-collapse-1">
                        <span class="sr-only">Toggle navigation</span>
                        <span class="icon-bar"></span>
                        <span class="icon-bar"></span>
                        <span class="icon-bar"></span>
                    </button>
                </div>
                <!-- Collect the nav links, forms, and other content for toggling -->
                <div class="collapse navbar-collapse" id="bs-example-
navbar-collapse-1">
                    <nav class="cl-effect-1">
                        <ul class="nav navbar-nav">
                            <li><a href="index.php">Home</a></li>
                            <li><a
href="page.php?type=aboutus">About</a></li>

```

```

    <li><a href="package-list.php">Tour
    Packages</a></li>
    <li><a href="page.php?type=privacy">Privacy Policy</a></li>
    <li><a href="page.php?type=terms">Terms of Use</a></li>
    <li><a href="page.php?type=contact">Contact Us</a></li>
    {?>
        <li><a href="#" data-toggle="modal" data-target="#myModal3"> / Write Us </a> </li>
        <li>Need Help?<a href="#" data-
        <?php if($_SESSION['login']) ?>
        <?php } else { ?>
        <li><a href="enquiry.php"> Enquiry
        <?php } ?>
        <div class="clearfix"></div>

        </ul>
        </nav>
        </div><!-- /.navbar-collapse -->
        </nav>
    </div>

    <div class="clearfix"></div>
</div>
</div>

```

## Signin.php

```

<?php
session_start();
if(isset($_POST['signin']))
{
    $email=$_POST['email'];
    $password=md5($_POST['password']);
    $sql ="SELECT EmailId,Password FROM tblusers WHERE EmailId=:email and
    Password=:password";
    $query= $dbh -> prepare($sql);
    $query-> bindParam(':email', $email, PDO::PARAM_STR);
    $query-> bindParam(':password', $password, PDO::PARAM_STR);
    $query-> execute();
    $results=$query->fetchAll(PDO::FETCH_OBJ);
    if(!filter_var($email,FILTER_VALIDATE_EMAIL)) {
        $error = true;
        $email_error = "Please Enter Valid Email ID";
    }
    if($query->rowCount() > 0 && !$error)
    {
        $_SESSION['login']=$_POST['email'];
        echo "<script type='text/javascript'> document.location = 'package-list.php'; </script>";
    } else{
        echo "<script>alert('Invalid Details');</script>";
    }
}

```

```

}

}

?>

<div class="modal fade" id="myModal4" tabindex="-1" role="dialog" aria-
labelledby="myModalLabel">
    <div class="modal-dialog" role="document">
        <div class="modal-content modal-info">
            <div class="modal-header">
                <button type="button" class="close" data-
dismiss="modal" aria-label="Close"><span aria-hidden="true">×</span></button>
            </div>
            <div class="modal-body modal-spa">
                <div class="login-grids">
                    <div class="login">
                        <div class="login-left">
                            <ul>
                                <li><a class="fb"
href="https://www.facebook.com/profile.php?id=100070204127450"><i></i>Facebook</a></li>
                                <li><a class="goog" href="https://myaccount.google.com/?utm_source=chrome-profile-
chooser&pli=1"><i></i>Google</a></li>
                            </ul>
                        </div>
                    <div class="login-right">
                        <form method="post">
                            <h3>Signin with
your account </h3>
                            <input type="text" name="email" id="email" placeholder="Enter your Email" required="">
                            <span style="color:red;font-size:16px;"><?php if (isset($email_error)) echo $email_error;
?></span>
                            <input type="password" name="password" id="password" placeholder="Password" value="" value=""
required="">
                            <h4><a
href="forgot-password.php">Forgot password</a></h4>
                            <input
type="submit" name="signin" value="SIGNIN">
                        </form>
                    </div>
                    <div class="clearfix"></div>
                </div>
                <p>By logging in you agree to our <a
href="page.php?type=terms">Terms and Conditions</a> and <a
href="page.php?type=privacy">Privacy Policy</a></p>
            </div>
        </div>
    </div>

```

```

        </div>
    </div>
</div>

Signup.php
<?php
error_reporting(0);
if(isset($_POST['submit']))
{
$fname=$_POST['fname'];
$nation=$_POST['nationality'];
$mnumber=$_POST['mobilenumbers'];
$email=$_POST['email'];
$password=md5($_POST['password']);
$sql="INSERT INTO tblusers(FullName,Nationality,MobileNumber,EmailId,Password)
VALUES(:fname,:nation,:mnumber,:email,:password)";
$query = $dbh->prepare($sql);
$query->bindParam(':fname',$fname,PDO::PARAM_STR);
$query->bindParam(':nation',$nation,PDO::PARAM_STR);
$query->bindParam(':mnumber',$mnumber,PDO::PARAM_STR);
$query->bindParam(':email',$email,PDO::PARAM_STR);
$query->bindParam(':password',$password,PDO::PARAM_STR);
$query->execute();
$lastInsertId = $dbh->lastInsertId();
if($lastInsertId)
{
$_SESSION['msg']="You are successfully registered. Now you can login ";
header('location:thankyou.php');
}
else
{
$_SESSION['msg']="Something went wrong. Please try again.";
header('location:thankyou.php');
}
}
?>
<!--Javascript for check email availability-->
<script>
function checkAvailability() {

$("#loaderIcon").show();
jQuery.ajax({
url: "check_availability.php",
data:'emailid='+$("#email").val(),
type: "POST",
success:function(data){
$("#user-availability-status").html(data);
$("#loaderIcon").hide();
},
error:function (){}
});

}

function validateName(name) {
var nameRegex = /^[a-zA-Z ]+$/;

```

```

var nameError = document.getElementById("nameError");
var submitBtn = document.getElementsByName("submit")[0];

if (!nameRegex.test(name)) {
    nameError.innerHTML = "Name should only contain letters and spaces";
    nameError.style.color = "red";
    submitBtn.hidden = true;
} else {
    nameError.innerHTML = "";
    nameError.style.color = "green";
    submitBtn.hidden = false;
}
}

</script>

<div class="modal fade" id="myModal" tabindex="-1" role="dialog" aria-labelledby="myModalLabel">
    <div class="modal-dialog" role="document">
        <div class="modal-content">
            <div class="modal-header">
                <button type="button" class="close" data-dismiss="modal" aria-label="Close"><span aria-hidden="true">&times;</span></button>
            </div>
            <section>
                <div class="modal-body modal-spa">
                    <div class="login-grids">
                        <div class="login">
                            <div class="login-left">
                                <ul>
                                    <li><a class="fb" href="#"><i></i>Facebook</a></li>
                                    <li><a class="goog" href="#"><i></i>Google</a></li>
                                </ul>
                            </div>
                            <div class="login-right">
                                <form name="signup" method="post">
                                    <h3>Create your account </h3>
                                    <input type="text" value="" placeholder="Full Name" name="fname" autocomplete="off" required="" oninput="validateName(this.value)">
                                    <div id="nameError"></div>
                                    <select name="nationality" autocomplete="off" required="">
                                        <option value="">-- select one --</option>
                                        <option value="afghan">Afghan</option>
                                        <option value="albanian">Albanian</option>
                                    </select>
                                </form>
                            </div>
                        </div>
                    </div>
                </div>
            </section>
        </div>
    </div>
</div>

```

```
<option value="algerian">Algerian</option>
<option value="american">American</option>
<option value="andorran">Andorran</option>
<option value="angolan">Angolan</option>
<option value="antiguans">Antiguans</option>
<option value="argentinean">Argentinean</option>
<option value="armenian">Armenian</option>
<option value="australian">Australian</option>
<option value="austrian">Austrian</option>
<option value="azerbaijani">Azerbaijani</option>
<option value="bahamian">Bahamian</option>
<option value="bahraini">Bahraini</option>
<option value="bangladeshi">Bangladeshi</option>
<option value="barbadian">Barbadian</option>
<option value="barbudans">Barbudans</option>
<option value="batswana">Batswana</option>
<option value="belarusian">Belarusian</option>
<option value="belgian">Belgian</option>
<option value="belizean">Belizean</option>
<option value="beninese">Beninese</option>
<option value="bhutanese">Bhutanese</option>
<option value="bolivian">Bolivian</option>
<option value="bosnian">Bosnian</option>
<option value="brazilian">Brazilian</option>
<option value="british">British</option>
<option value="bruneian">Bruneian</option>
<option value="bulgarian">Bulgarian</option>
<option value="burkinabe">Burkinabe</option>
<option value="burmese">Burmese</option>
<option value="burundian">Burundian</option>
<option value="cambodian">Cambodian</option>
<option value="cameroonian">Cameroonian</option>
<option value="canadian">Canadian</option>
<option value="cape verdean">Cape Verdean</option>
<option value="central african">Central African</option>
<option value="chadian">Chadian</option>
<option value="chilean">Chilean</option>
<option value="chinese">Chinese</option>
<option value="colombian">Colombian</option>
<option value="comoran">Comoran</option>
<option value="congoleser">Congolese</option>
<option value="costa rican">Costa Rican</option>
<option value="croatian">Croatian</option>
<option value="cuban">Cuban</option>
<option value="cypriot">Cypriot</option>
<option value="czech">Czech</option>
<option value="danish">Danish</option>
<option value="djibouti">Djibouti</option>
<option value="dominican">Dominican</option>
<option value="dutch">Dutch</option>
<option value="east timorese">East Timorese</option>
<option value="ecuadorean">Ecuadorean</option>
<option value="egyptian">Egyptian</option>
<option value="emirian">Emirian</option>
```

```
<option value="equatorial guinean">Equatorial Guinean</option>
<option value="eritrean">Eritrean</option>
<option value="estonian">Estonian</option>
<option value="ethiopian">Ethiopian</option>
<option value="fijian">Fijian</option>
<option value="filipino">Filipino</option>
<option value="finnish">Finnish</option>
<option value="french">French</option>
<option value="gabonese">Gabonese</option>
<option value="gambian">Gambian</option>
<option value="georgian">Georgian</option>
<option value="german">German</option>
<option value="ghanaian">Ghanaian</option>
<option value="greek">Greek</option>
<option value="grenadian">Grenadian</option>
<option value="guatemalan">Guatemalan</option>
<option value="guinea-bissauan">Guinea-Bissauan</option>
<option value="guinean">Guinean</option>
<option value="guyanese">Guyanese</option>
<option value="haitian">Haitian</option>
<option value="herzegovinian">Herzegovinian</option>
<option value="honduran">Honduran</option>
<option value="hungarian">Hungarian</option>
<option value="icelander">Icelander</option>
<option value="indian">Indian</option>
<option value="indonesian">Indonesian</option>
<option value="iranian">Iranian</option>
<option value="iraqi">Iraqi</option>
<option value="irish">Irish</option>
<option value="israeli">Israeli</option>
<option value="italian">Italian</option>
<option value="ivorian">Ivorian</option>
<option value="jamaican">Jamaican</option>
<option value="japanese">Japanese</option>
<option value="jordanian">Jordanian</option>
<option value="kazakhstani">Kazakhstani</option>
<option value="kenyan">Kenyan</option>
<option value="kittian and nevisian">Kittian and Nevisian</option>
<option value="kuwaiti">Kuwaiti</option>
<option value="kyrgyz">Kyrgyz</option>
<option value="laotian">Laotian</option>
<option value="latvian">Latvian</option>
<option value="lebanese">Lebanese</option>
<option value="liberian">Liberian</option>
<option value="libyan">Libyan</option>
<option value="liechtensteiner">Liechtensteiner</option>
<option value="lithuanian">Lithuanian</option>
<option value="luxembourger">Luxembourger</option>
<option value="macedonian">Macedonian</option>
<option value="malagasy">Malagasy</option>
<option value="malawian">Malawian</option>
<option value="malaysian">Malaysian</option>
<option value="maldivan">Maldivan</option>
<option value="malian">Malian</option>
```

```
<option value="maltese">Maltese</option>
<option value="marshallse">Marshallse</option>
<option value="mauritanian">Mauritanian</option>
<option value="mauritian">Mauritian</option>
<option value="mexican">Mexican</option>
<option value="micronesian">Micronesian</option>
<option value="moldovan">Moldovan</option>
<option value="monacan">Monacan</option>
<option value="mongolian">Mongolian</option>
<option value="moroccan">Moroccan</option>
<option value="mosotho">Mosotho</option>
<option value="motswana">Motswana</option>
<option value="mozambican">Mozambican</option>
<option value="namibian">Namibian</option>
<option value="nauruan">Nauruan</option>
<option value="nepalese">Nepalese</option>
<option value="new zealander">New Zealander</option>
<option value="ni-vanuatu">Ni-Vanuatu</option>
<option value="nicaraguan">Nicaraguan</option>
<option value="nigerien">Nigerien</option>
<option value="north korean">North Korean</option>
<option value="northern irish">Northern Irish</option>
<option value="norwegian">Norwegian</option>
<option value="omani">Omani</option>
<option value="pakistani">Pakistani</option>
<option value="palauan">Palauan</option>
<option value="panamanian">Panamanian</option>
<option value="papua new guinean">Papua New Guinean</option>
<option value="paraguayan">Paraguayan</option>
<option value="peruvian">Peruvian</option>
<option value="polish">Polish</option>
<option value="portuguese">Portuguese</option>
<option value="qatari">Qatari</option>
<option value="romanian">Romanian</option>
<option value="russian">Russian</option>
<option value="rwandan">Rwandan</option>
<option value="saint lucian">Saint Lucian</option>
<option value="salvadoran">Salvadoran</option>
<option value="samoan">Samoan</option>
<option value="san marinese">San Marinese</option>
<option value="sao tomean">Sao Tomean</option>
<option value="saudi">Saudi</option>
<option value="scottish">Scottish</option>
<option value="senegalese">Senegalese</option>
<option value="serbian">Serbian</option>
<option value="seychellois">Seychellois</option>
<option value="sierra leonean">Sierra Leonean</option>
<option value="singaporean">Singaporean</option>
<option value="slovakian">Slovakian</option>
<option value="slovenian">Slovenian</option>
<option value="solomon islander">Solomon Islander</option>
<option value="somali">Somali</option>
<option value="south african">South African</option>
<option value="south korean">South Korean</option>
```

```

<option value="spanish">Spanish</option>
<option value="sri lankan">Sri Lankan</option>
<option value="sudanese">Sudanese</option>
<option value="surinamer">Surinamer</option>
<option value="swazi">Swazi</option>
<option value="swedish">Swedish</option>
<option value="swiss">Swiss</option>
<option value="syrian">Syrian</option>
<option value="taiwanese">Taiwanese</option>
<option value="tajik">Tajik</option>
<option value="tanzanian">Tanzanian</option>
<option value="thai">Thai</option>
<option value="togolese">Togolese</option>
<option value="tongan">Tongan</option>
<option value="trinidadian or tobagonian">Trinidadian or Tobagonian</option>
<option value="tunisian">Tunisian</option>
<option value="turkish">Turkish</option>
<option value="tuvaluan">Tuvaluan</option>
<option value="ugandan">Ugandan</option>
<option value="ukrainian">Ukrainian</option>
<option value="uruguayan">Uruguayan</option>
<option value="uzbekistani">Uzbekistani</option>
<option value="venezuelan">Venezuelan</option>
<option value="vietnamese">Vietnamese</option>
<option value="welsh">Welsh</option>
<option value="yemenite">Yemenite</option>
<option value="zambian">Zambian</option>
<option value="zimbabwean">Zimbabwean</option>
</select>

          <input type="text" value="" placeholder="Mobile number" maxlength="10" name="mobilenumber" autocomplete="off" required="">
          <input type="text" value="" placeholder="Email id" name="email" id="email" onBlur="checkAvailability()" autocomplete="off" required="">
          <span id="user-availability-status" style="font-size:12px;"></span>
          <input type="password" name="password" required pattern="(?=.*\d)(?=.*[a-z])(?=.*[A-Z])(?=.*[\W_]).{8,}" title="Password must contain at least 8 characters, including at least one uppercase letter, one lowercase letter, one digit, and one special character." placeholder="Password">

<input type="submit" name="submit" id="submit" value="CREATE ACCOUNT">
          </form>
        </div>
      <div
class="clearfix"></div>
          </div>
        <p>By logging in you agree to our <a href="page.php?type=terms">Terms and Conditions</a> and <a href="page.php?type=privacy">Privacy Policy</a></p>
          </div>
        </div>
      </section>

```

```

        </div>
    </div>
</div>

style.css

html, body{
    font-size: 100%;
    background: #fff;
    font-family: 'Open Sans', sans-serif;
}
body a,.grid_1,plan_1,plan_1.one,plan_1.two,i.icon1, i.icon2, i.icon3, i.icon4, i.icon5, i.icon6 {
    transition:0.5s all;
    -webkit-transition:0.5s all;
    -moz-transition:0.5s all;
    -o-transition:0.5s all;
    -ms-transition:0.5s all;
}
a:hover{
    text-decoration:none;
}
input[type="button"],input[type="submit"],li.parallelogram{
    transition:0.5s all;
    -webkit-transition:0.5s all;
    -moz-transition:0.5s all;
    -o-transition:0.5s all;
    -ms-transition:0.5s all;
}
h1,h2,h3,h4,h5,h6{
    margin:0;
    font-family: 'Roboto Condensed', sans-serif;
}
p{
    margin:0;
}
ul{
    margin:0;
    padding:0;
}
label{
    margin:0;
}
/*-- top-header --*/
.logo a {
    color: #3F84B1;
    letter-spacing: 1px;
    font-size: 2em;
    font-weight: 400;
    display: block;
    text-decoration: none;
    font-family: 'Oswald', sans-serif;
}
.logo span {
    color:#34ad00;
}
}

```

```

.i.fa.fa-home {
    font-size: 24px;
}
.top-header {
    background-color: #3F84B1;
    border-bottom: 0 none;
    height: 36px;
    line-height: 35px;
}
ul.tp-hd-lft{
    float: left;
}
ul.tp-hd-lft li {
    display: inline-block;
}
li.hm,li.prnt {
    margin-right: 12px;
}
ul.tp-hd-lft a {
    font-size: 13px;
    font-weight: 600;
    color:#fff;
}
ul.tp-hd-rgt{
    float:right;
}
ul.tp-hd-rgt li {
    display: inline-block;
    font-size: 13px;
    font-weight: 600;
    color:#fff;
}
ul.tp-hd-rgt a {
    font-size: 13px;
    font-weight: 600;
    color:#fff;
}
li.ned,li.wrt,li.tol{
    margin-right: 12px;
}
/*-- /top-header --*/
/*-- header --*/
.header {
    background-color: #fff;
    margin: 0;
    padding: 10px 0 8px;
}
.logo a {
    display: block;
}
.logo {
    float: left;
    margin-right: 60px;
}

```

```

.bus {
    float: left;
    padding-top: 17px;
}
.bus a {
    color: #1f8dd6;
    font-weight: 600;
    font-size: 14px;
    letter-spacing: .05em;
    padding: 0 15px;
}
.lock {
    float: right;
    margin-top: 7px;
}
.securetxt {
    color: #1f8dd6;
    line-height: 18px;
    margin-top: 0px;
    font-size: 14px;
    font-weight: 600;
}
.lock li {
    display: inline-block;
}
.i.fa.fa-lock {
    color: #1f8dd6;
    font-size: 2em;
    padding-right: 10px;
}
/*-- /offers-1 --*/
/*-- hotels --*/
.banner-2 {
    background: url(../images/6.jpg) no-repeat;
    background-size: cover;
    -webkit-background-size: cover;
    -o-background-size: cover;
    -ms-background-size: cover;
    -moz-background-size: cover;
    min-height: 430px;
}
.banner-3 {
    background: url(../images/6.jpg) no-repeat;
    background-size: cover;
    -webkit-background-size: cover;
    -o-background-size: cover;
    -ms-background-size: cover;
    -moz-background-size: cover;
    min-height: 200px;
}
.banner-2 h1 {
    font-size: 50px;
    margin-bottom: 40px;
    padding: 2em 0 0;
}

```

```

    text-align: center;
    color: #fff;
}
.banner-3 h1 {
    font-size: 50px;
    margin-bottom: 40px;
    padding: 1.5em 0 0;
    text-align: center;
    color: #fff;
}
.hotes-left {
    text-align: center;
}
.room-map iframe {
    min-height: 450px;
}
.hotels-top h3{
    font-size: 26px;
    margin-bottom: 50px;
    color: #34ad00;
    font-weight: 700;
    text-align:center;
}
.hotels-top {
    padding: 4em 0;
}
.hotel-top {
    margin-top: 2em;
}
.view1 {
    width: 100%;
    height: 100%;
    float: left;
    overflow: hidden;
    position: relative;
    text-align: center;
    -webkit-box-shadow: 1px 1px 2px #e6e6e6;
    -moz-box-shadow: 1px 1px 2px #e6e6e6;
    box-shadow: 1px 1px 2px #e6e6e6;
    cursor: default;
    background: #fff url(..../images/bgimg.jpg) no-repeat center center;
}
.view1 .mask,.view1 .content {
    width: 100%;
    height: 100%;
    position: absolute;
    overflow: hidden;
    top: 0;
    left: 0;
    cursor:pointer;
}
.view1 img {
    display: block;
    position: relative;

```

```

}

.view1 h2 {
    text-transform: uppercase;
    color: #fff;
    text-align: center;
    position: relative;
    font-size: 17px;
    padding: 10px;
    background: rgba(0, 0, 0, 0.8);
    margin: 20px 0 0 0;
}

.view1-sixth img {
    -webkit-transition: all 0.4s ease-in-out 0.5s;
    -moz-transition: all 0.4s ease-in-out 0.5s;
    -o-transition: all 0.4s ease-in-out 0.5s;
    -ms-transition: all 0.4s ease-in-out 0.5s;
    transition: all 0.4s ease-in-out 0.5s;
}

.view1-sixth .mask {
    background-color:rgba(63, 132, 177, 0.72);
    -ms-filter: "progid: DXImageTransform.Microsoft.Alpha(Opacity=0)";
    filter: alpha(opacity=0);
    opacity: 0;
    -webkit-transition: all 0.3s ease-in 0.4s;
    -moz-transition: all 0.3s ease-in 0.4s;
    -o-transition: all 0.3s ease-in 0.4s;
    -ms-transition: all 0.3s ease-in 0.4s;
    transition: all 0.3s ease-in 0.4s;
}

.view1-sixth h2 {
    -ms-filter: "progid: DXImageTransform.Microsoft.Alpha(Opacity=0)";
    filter: alpha(opacity=0);
    opacity: 0;
    background: transparent;
    margin: 130px 40px 0px 40px;
    -webkit-transform: scale(10);
    -moz-transform: scale(10);
    -o-transform: scale(10);
    -ms-transform: scale(10);
    transform: scale(10);
    -webkit-transition: all 0.3s ease-in-out 0.1s;
    -moz-transition: all 0.3s ease-in-out 0.1s;
    -o-transition: all 0.3s ease-in-out 0.1s;
    -ms-transition: all 0.3s ease-in-out 0.1s;
    transition: all 0.3s ease-in-out 0.1s;
}

.view1-sixth:hover .mask {
    -ms-filter: "progid: DXImageTransform.Microsoft.Alpha(Opacity=100)";
    filter: alpha(opacity=100);
    opacity: 1;
    -webkit-transition-delay: 0s;
    -moz-transition-delay: 0s;
    -o-transition-delay: 0s;
    -ms-transition-delay: 0s;
}

```

```

        transition-delay: 0s;
    }
    .view1-sixth:hover img {
        -webkit-transition-delay: 0s;
        -moz-transition-delay: 0s;
        -o-transition-delay: 0s;
        -ms-transition-delay: 0s;
        transition-delay: 0s;
    }
    .view1-sixth:hover h2 {
        -ms-filter: "progid: DXImageTransform.Microsoft.Alpha(Opacity=100)";
        filter: alpha(opacity=100);
        opacity: 1;
        -webkit-transform: scale(1);
        -moz-transform: scale(1);
        -o-transform: scale(1);
        -ms-transform: scale(1);
        transform: scale(1);
        -webkit-transition-delay: 0.1s;
        -moz-transition-delay: 0.1s;
        -o-transition-delay: 0.1s;
        -ms-transition-delay: 0.1s;
        transition-delay: 0.1s;
    }
}
/*-- /hotels --*/
.travel {
    padding: 3em 0 5em;
}
/*-- terms --*/
.terms h3 {
    font-size: 1.5em;
    color: #34ad00;
    font-weight: 700;
}
.terms h6 {
    font-size: 1.2em;
    color: #1f8dd6;
    font-weight: 700;
    margin: 1em 0;
}
.terms p {
    font-size: 15px;
    line-height: 1.6em;
    font-weight: 300;
    color: #999;
    margin: 1em 0;
}
.terms {
    padding: 5em 0;
}
.terms span {
    color: #000;
    font-weight: 700;
    font-size: 1.3em;
}

```

```

}

.terms-bottom {
    margin-top: 3em;
}
/*-- /terms --*/
/*-- agent --*/
.agent-left input[type="text"] {
    width: 80%;
    color: #9E9E9E;
    outline: none;
    font-size: 14px;
    padding: 10px 10px;
    border: 1px solid #464646;
    -webkit-appearance: none;
    margin-top: 10px;
}
.agent-left {
    text-align: center;
}
.agent {
    padding: 5em 0;
}
.ag-bt {
    margin-bottom: 2em;
}
a.regist {
    padding: 10px 32px!important;
    color: #fff;
    background-color: #34ad00;
    border: 0;
    border-radius: 2px;
    -webkit-transition: all .2s;
    -moz-transition: all .2s;
    transition: all .2s;
    font-size: 16px;
    text-decoration: none;
    display: inline-block;
}
a.regist:hover{
    background-color:#1f8dd6;
}
.agent-left textarea {
    width: 80%;
    margin: 22px 0;
    resize: none;
    height: 150px;
    outline: none;
    padding: 10px 10px;
    border: 1px solid #464646;
    background: none;
    font-size: 14px;
    color: #000;
}
.agent-left input[type="submit"] {

```

```

outline: none;
background: #34ad00;
transition: 0.5s all;
-webkit-transition: 0.5s all;
-moz-transition: 0.5s all;
-o-transition: 0.5s all;
-ms-transition: 0.5s all;
color: #fff;
font-weight: 600;
padding: 6px 18px;
font-size: 15px;
border: none;
border-radius: 2px;
}
.agent-left input[type="submit"]:hover{
    background: #1f8dd6;
}
.sub {
    text-align: right;
    margin-right: 3em;
}
select {
    padding: 4px 5px!important;
    width: 80%;
    color: #9E9E9E;
    margin-top: 18px;
    border: 1px solid #464646;
    padding: 5px 10px;
    vertical-align: middle;
}
.agent-right {
    padding-left: 3.4em;
}
.agent h3 {
    font-size: 1.5em;
    color: #34ad00;
    font-weight: 700;
    margin-top: 1em;
}
.agent p {
    font-size: 15px;
    margin: 1em 0;
    color: #999;
    line-height: 1.6em;
}
/*-- /agent --*/
/*-- contact --*/
.contact {
    padding: 5em 0;
}
.contact h3 {
    font-size: 2em;
    color: #34ad00;
    margin-bottom: 1.5em;
}

```

```

    font-weight: 700;
}
.contact h4 {
    font-size: 1.4em;
    color: #1f8dd6;
    margin-bottom:0.6em;
    font-weight: 700;
}
.contact-left li {
    display: block;
    line-height: 1.7em;
    font-size: 13px;
    color: #999;
}
.con-top {
    margin-top: 2em;
}
/*-- /contact --*/
/*-- details --*/
.details-middle li {
    display: inline-block;
    float: left;
    margin: 0 12px 0 0px;
    font-size: 15px;
    color: #999;
}
.login-left ul li{
    list-style-type:none;
    display:block;
    margin: 22px 0;
    font-size: 16px;
}
.login-left ul li a {
    padding: 9px 12px;
    display: block;
    text-align: left;
    color: #fff;
    text-decoration: none;
}
.login-left ul li a:hover{
    opacity:.7;
}
.login-left ul li a.fb{
    background:#3b5998;
}
.login-left ul li a.goog{
    background:#dc4e41;
}
.login-left ul li a.linkin{
    background:#00a0dc;
}
.login-left ul li a.fb i{
    background: url(..../images/social.png) no-repeat -45px -1px;
    width: 24px;
}

```

```

height: 23px;
display: inline-block;
vertical-align: text-bottom;
}
.login-left ul li a.goog i{
background: url(..../images/social.png) no-repeat -84px 0px;
width: 26px;
height: 23px;
display: inline-block;
vertical-align: text-bottom;
}
.login-left ul li a.linkin i{
background: url(..../images/social.png) no-repeat -3px 0px;
width: 25px;
height: 23px;
display: inline-block;
vertical-align: text-bottom;
}
/*
-- //login --*/
.privacy h3 {
color: #34AD00;
font-size: 1.7em;
font-weight: 700;
margin-bottom: 1em;
}
.privacy {
padding: 5em 0;
}
.privacy p {
font-size: 1em;
line-height: 1.8em;
color: #999;
margin: 1em 0;
}
.privacy h4 {
font-size: 1.3em;
color: #34AD00;
font-weight: 400;
margin: 1em 0;
}
/*
-- faq --*/
.faq {
padding: 5em 0;
}
.faq h2 {
font-size: 2em;
font-weight: 700;
color:#34ad00;
line-height: 1.8em;
}
.faq h3 {
font-size: 1.7em;
color:#34ad00;
font-weight: 600;
}

```

```

margin-bottom: 0.5em;
line-height: 1.8em;
}
.faq p {
font-size: 1em;
line-height: 1.8em;
color: #999;
margin: 1em 0;
}
.faq li {
display: block;
color: #999;
font-size: 1em;
margin: 1em 0;
}
/*-- //faq --*/
/*--mobile-app--*/

.mobile-app {
padding: 5em 0;
}
.app-right {
margin-top: 50px;
}
.app-right h3 {
font-size: 28px;
color: #34ad00;
line-height: 35px;
}
.app-right h3 span {
color: #3F84B1;
margin: 0 7px;
}
.app-right p {
margin: 15px 0 30px 0;
color: #999;
font-size: 1em;
line-height: 25px;
}
.app-button {
float: left;
}
.app-button a {
display: block;
}
.app-button img {
width: 90%;
}
/*-- banner-bottom --*/
.banner-bottom {
padding: 5em 0;
}
.banner-text {
text-align: center;
}

```

```
}

.banner-text h3{
  color: #34ad00;
  font-size: 3em;
  font-weight: 400;
  margin: 0;
}

.banner-text p{
  color: #999;
  font-size: 1em;
  margin: 2em auto 0 auto;
  width: 72%;
  line-height: 1.8em;
}

.banner-bottom-grids{
  margin: 6em 0 0 0;
}

.banner-bottom-grid{
  text-align:center;
}

.banner-bottom-grid h4 {
  color: #34ad00;
  margin: 2em 0 1em 0;
  font-size: 1.6em;
  font-weight: 700;
}

.banner-bottom-grid p{
  color:#999;
  font-size:1em;
  margin: 0 auto;
  width: 80%;
  line-height: 1.8em;
}

.services-icon {
  background: #3F84B1;
  width: 120px;
  height: 120px;
  line-height: 136px;
  margin: 0 auto;
  border-radius: 50%;
  -webkit-border-radius: 50%;
  -ms-border-radius: 50%;
  -moz-border-radius: 50%;
  -o-border-radius: 50%;
}

.glyphicon {
  position: relative;
  top: 1px;
  display: inline-block;
  font-family: 'Glyphicons Halflings';
  font-style: normal;
  font-weight: normal;
  line-height: 1;
  -webkit-font-smoothing: antialiased;
```

```

-moz-osx-font-smoothing: grayscale;
}
.glyphicon-th-large{
    font-size: 2.5em;
    color: #FFFFFF;
    top: 5px;
}
.red h4{
    color: #34ad00;
}
.green h4{
    color: #34ad00;
}
ul.callbacks_tabs.callbacks2_tabs a:after{
    border:2px solid #505b6f;
}
ul.callbacks_tabs.callbacks2_tabs .callbacks_here a:after{
    background: #505b6f;
    left:10%;
}
ul.callbacks_tabs.callbacks2_tabs {
    left: 82%;
    top: 102%;
}
/*-- //mobile-app--*/
/*-- blog --*/
/*-- responsive design --*/
@media (max-width:1024px){
.footer-btm li {
    margin: 0 6px;
    font-size: 14px;
}
ul.nav.navbar-nav li a {
    font-size: 14px;
    padding: 5px 7px;
}
.banner h1 {
    padding: 2.8em 0 0;
    font-size: 46px;
}
.banner {
    min-height: 320px;
}
.bann-info1 {
    padding: 4em 5em 0em;
}
.rupes {
    padding: 3em 0;
}
.i.fa.fa-h-square,i.fa.fa-usd,i.fa.fa-mobile {
    font-size: 4em;
}
.rupes h4 {
    font-size: 18px;
}

```

```
    line-height: 1.5em;
}
.holiday {
    padding: 3em 0;
}
.holiday h3 {
    font-size: 1.7em;
}
.holiday p {
    font-size: 1em;
}
.track {
    padding: 3em 0;
}
.track h3 {
    font-size: 1.7em;
}
.track p {
    font-size: 1em;
}
}
.a.learn {
    padding: 6px 20px!important;
    font-size: 15px;
}
.routes {
    padding: 3em 0;
}
.i.fa.fa-truck, i.fa.fa-user, i.fa.fa-ticket {
    font-size: 3em;
}
.routes p {
    font-size: 1em;
}
.routes h3 {
    font-size: 1.7em;
}
}
button.seabtn {
    padding: 6px 20px!important;
    font-size: 15px;
}
.faq p {
    font-size: 15px;
}
.faq li {
    font-size: 15px;
}
.faq {
    padding: 3em 0;
}
.faq h2 {
    font-size: 1.8em;
}
.faq h3 {
    font-size: 1.5em;
```

```
}

.banner-1 h1,.banner-2 h1,.banner-3 h1 {
    padding: 1.8em 0 0;
    font-size: 46px;
}
.about {
    padding: 3em 0;
}
.about h2 {
    font-size: 2em;
}
.about h3 {
    font-size: 1.7em;
}
.app-right {
    margin-top: 0px;
}
.app-right h3 {
    font-size: 25px;
}
.mobile-app {
    padding: 3em 0;
}
.banner-bottom {
    padding: 2em 0;
}
.banner-bottom-grids {
    margin: 3em 0 0 0;
}
.banner-bottom-grid h4 {
    margin: 1em 0 0.5em 0;
    font-size: 1.6em;
}
.banner-bottom-grid p {
    width: 100%;
}
.terms {
    padding: 3em 0;
}
.privacy {
    padding: 3em 0;
}
.agent {
    padding: 3em 0;
}
.agent-right iframe {
    width: 390px;
    height: 286px;
}
.contact {
    padding: 3em 0;
}
.contact h3 {
    margin-bottom: 0em;
```

```

}
.bann-info1 {
  padding: 3em 4em 0em;
}
.bann-info {
  padding: 3em 0;
}
.bann-info1 h3 {
  font-size: 1.7em;
}
.blog {
  padding: 3em 0;
}
.leave-comment input[type="text"], .leave-comment input[type="email"], .leave-comment textarea {
  width: 49%;
}
.hotels-top {
  padding: 2em 0;
}
.view1-sixth h2 {
  margin: 96px 30px 0px 30px;
}
.banner-2 {
  min-height: 320px;
}
.rooms-top {
  min-height: 295px;
  padding: 12em 0 0;
}
.details {
  padding: 2em 0;
}
.details-middle {
  padding: 1em 1em;
}
.details-middle h3 {
  font-size: 1.4em;
  font-weight: 700;
}
.selectroom {
  padding: 3em 0 1em;
}
.tracking-top, .tracking-bottom {
  padding: 3em 2em;
}
.tracking {
  padding: 3em 0;
}
.offers-1 {
  padding: 3em 0;
}
}

@media (max-width:991px){
ul.nav.navbar-nav li a {

```

```

    font-size: 13px;
    padding: 5px 0px;
}
.footer-btm li {
    margin: 0px 4px;
    font-size: 13px;
}
.banner h1 {
    padding: 2.8em 0 0;
    font-size: 43px;
}
.banner {
    min-height: 300px;
}
.bann-info1 {
    padding: 4em 2em 0em 0em;
    float: left;
    width: 30%;
}
.bann-info {
    padding: 4em 0;
    float: left;
    width: 70%;
}
.bann-info1 h3 {
    font-size: 1.5em;
    font-weight: 700;
    color: #34ad00;
    text-align: center;
    margin-top: 25px;
}
.rupes-left {
    float: left;
    width: 33.33%;
}
i.fa.fa-h-square, i.fa.fa-usd, i.fa.fa-mobile {
    font-size: 3.2em;
}
.rupes h4 {
    font-size: 17px;
    margin: 5px 0 0;
}
.rupes p {
    font-size: 13px;
}
.holiday-left {
    float: left;
    width: 28%;
}
.holiday-mid {
    float: left;
    width: 44%;
}
.holiday p {

```

```
    font-size: 14px;
}
.track-right {
    float: left;
    width: 40%;
}
.track-left {
    float: left;
    width: 60%;
}
.routes-left {
    float: left;
    width: 33.33%;
}
.i.fa.fa-truck, i.fa.fa-user, i.fa.fa-ticket {
    font-size: 2.5em;
}
.routes p {
    font-size: 14px;
}
.footer-left {
    margin-top: 2em;
}
.footer-top {
    padding: 1em 0 3em;
}
.banner-1 h1,.banner-2 h1,.banner-3 h1 {
    padding: 1.8em 0 0;
    font-size: 43px;
}
.about h2 {
    margin-bottom: 0.5em;
}
.about-mid {
    margin: 3em 0;
}
.privacy p {
    font-size: 15px;
}
.agent-left input[type="text"] {
    width: 100%;
}
select {
    width: 100%;
}
.agent-left textarea {
    width: 100%;
}
.agent-right {
    padding-left: 1em;
}
.agent-right iframe {
    width: 687px;
    height: 500px;
```

```
    margin-top: 2em;
}
.con-top {
    margin-top: 2em;
    float: left;
    width: 33.33%;
}
.app-left {
    float: left;
    width: 40%;
}
.app-right {
    float: right;
    width: 60%;
}
.banner-text h3 {
    font-size: 2.5em;
}
.banner-text p {
    width: 100%;
}
.banner-bottom-grid {
    float: left;
    width: 33.33%;
}
.banner-bottom-grid h4 {
    font-size: 1.5em;
}
.travel {
    padding: 0em 0 3em;
}
li.trav {
    width: 27%;
}
li.dept {
    width: 19%;
}
li.seat {
    width: 21%;
}
.bus-txt3 {
    float: right;
    width: 74%;
}
.bus-ic3 {
    width: 20%;
}
.bus-txt1 {
    width: 75%;
}
.bus-ic1 {
    width: 24%;
}
.comments-list h3 {
```

```
margin: 0 0 0em;
}
.comments-list:nth-child(2) {
    margin: 2em 0;
    padding: 2em 0 2em;
}
.blog-right {
    margin-top: 1em;
}
.leave-comment input[type="text"], .leave-comment input[type="email"], .leave-comment textarea {
    width: 49.1%;
}
.hotels-right {
    float: left;
    width: 50%;
}
.hotels-left {
    float: left;
    width: 33.33%;
}
.view1-sixth h2 {
    margin: 60px 0px 0px 0px;
}
.hotes-left {
    float: left;
    width: 33.33%;
}
.banner-2 {
    min-height: 250px;
}
.rom-info h3 {
    font-size: 1.5em;
}
.rooms-top {
    min-height: 247px;
    padding: 9em 0 0;
}
.details-left {
    padding-left: 0;
    float: left;
    width: 35%;
}
.details-middle {
    padding: 1em 1em;
    float: left;
    width: 49%;
}
.details-right {
    text-align: center;
    float: left;
}
.details-middle h3 {
    font-size: 1.3em;
}
```

```
.room-midle {  
    padding: 0.5em 0.5em;  
    float: left;  
    width: 51%;  
}  
.room-left {  
    float: left;  
    width: 30%;  
}  
.room-right {  
    padding: 2em 1em;  
    float: left;  
    width: 19%;  
}  
.selectroom_left {  
    padding: 0;  
    margin-bottom: 1.5em;  
}  
.selectroom_right {  
    padding: 0;  
}  
.tracking-left {  
    float: left;  
    width: 50%;  
}  
.tracking-right {  
    float: left;  
    width: 50%;  
}  
.tracking-top, .tracking-bottom {  
    padding: 3em 1em;  
}  
.bus-tp {  
    padding: 0.5em 0;  
}  
.app-right p, .banner-text p, .banner-bottom-grid p {  
    font-size: 0.9em;  
}  
}  
}  
@media (max-width:768px){  
.logo {  
    margin-right: 30px;  
}  
.banner h1 {  
    padding: 2.5em 0 0;  
    font-size: 40px;  
}  
.banner {  
    min-height: 250px;  
}  
}  
}  
@media (max-width:736px){  
.footer-btm li {  
    display: block;
```

```

        margin: 10px 0;
    }
    .footer-btm {
        padding: 0;
    }
    .navbar-toggle {
        margin-top: 2px;
        margin-bottom: 2px;
        background-color: transparent;
        background-image: none;
        border: 1px solid transparent;
        border-radius: 4px;
        margin-right: 0px;
    }
    .navbar-default .navbar-toggle {
        border-color: #4CB320;
    }
    .navbar-toggle .icon-bar {
        width: 26px;
        height: 3px;
    }
    .navbar-default .navbar-toggle:hover, .navbar-default .navbar-toggle:focus {
        background-color: #4CB320;
    }
    .navbar-default .navbar-toggle .icon-bar {
        background-color: #fff;
    }
    .navbar-default .navbar-collapse, .navbar-default .navbar-form {
        border-color: #4CB320;
    }
    ul.nav.navbar-nav li a {
        font-size: 15px;
        padding: 5px 0px;
        display: block;
    }
    .navbar-nav {
        margin: 7.5px 0px;
    }
    nav.cl-effect-1 {
        padding: 0em 0 1em;
    }
    .banner-1 h1,.banner-2 h1,.banner-3 h1 {
        padding: 1.5em 0 0;
        font-size: 40px;
    }
    .agent-right iframe {
        width: 654px;
        height: 485px;
    }
    .banner-2 h1 {
        padding: 2.5em 0 0;
    }
    .rom-info p {
        font-size: 13px;
    }

```

```

}
.room-right {
  padding: 2em 0.5em;
}
}
@media (max-width:667px){
.banner h1 {
  padding: 2.2em 0 0;
  font-size: 36px;
}
.banner {
  min-height: 200px;
}
.bann-info {
  padding: 3em 0;
}
.bann-info1 {
  padding: 3em 2em 0em 0em;
}
}
.bn-left input[type="text"] {
  padding: 6px 10px;
}
.bn-right input[type="text"] {
  padding: 6px 10px;
}
}
.i.fa.fa-h-square,i.fa.fa-usd,i.fa.fa-mobile {
  font-size: 2.8em;
}
}
.rupes h3 {
  font-size: 17px;
}
.rupes h4 {
  font-size: 15px;
}
}
.holiday h3 {
  font-size: 1.5em;
}
}
.holiday p {
  font-size: 13px;
}
}
.routes h3 {
  font-size: 1.5em;
}
}
.i.fa.fa-truck, i.fa.fa-user, i.fa.fa-ticket {
  font-size: 2.2em;
}
}
.banner-1 h1,.banner-2 h1,.banner-3 h1 {
  padding: 1.2em 0 0;
  font-size: 36px;
}
}
.agent-right iframe {
  width: 587px;
  height: 449px;
}
}

```

```
.app-right h3 {
    font-size: 22px;
}
.app-button {
    width: 50%;
}
.mobile-app {
    padding: 3em 0 1em;
}
.banner-bottom-grid h4 {
    font-size: 1.3em;
}
.bus-midd h4 {
    font-size: 17px;
}
.bus-midd h4 a {
    font-size: 17px;
}
.bus-ic {
    width: 12%;
}
.bus-txt {
    float: right;
    width: 84%;
}
.view1-sixth h2 {
    margin: 46px 0px 0px 0px;
}
.banner-2 h1 {
    padding: 2.2em 0 0;
}
.rt-left {
    width: 77%;
}
.rom-info h3 {
    font-size: 1.3em;
}
.rom-info p {
    font-size: 14px;
}
.details-left {
    width: 34%;
}
.details-middle {
    padding: 1em 0em;
}
.room-right {
    width: 20%;
}
.room-left {
    width: 29%;
}
li.nam {
    width: 37%;
```

```
margin-bottom: 1em;
}
li.mr {
    width: 24%;
}
li.spe {
    margin-top: 1em;
}
}
        font-size: 16px;
}
li.las {
    text-align: left;
    font-size: 16px;
}
}
li.rou {
    text-align: left;
    font-size: 16px;
}
}
li.dat {
    text-align: center;
    font-size: 16px;
}
}
li.fir {
    width: 15%;
    font-size: 16px;
}
}
.travel p {
    font-size: 12px;
}
}
a.det {
    padding: 6px 6px;
    font-size: 11px;
}
}
span.sen {
    display: none;
}
}
.bus-midd p {
    font-size: 10px;
}
}
.bus-midd h4 a {
    font-size: 12px;
}
}
a.view {
    font-size: 10px;
}
}
.bus-tp h2 {
    font-size: 14px;
}
}
.bus-tp P {
    font-size: 11px;
}
}
.comments-list h3 {
    font-size: 1.4em;
```

```
}

.leave-comment input[type="email"] {
    margin: 0.5em 0 0;
    width: 100%;
}

.admin {
    padding: 1em;
    margin: 1em 0 2em;
}

.leave-comment input[type="text"], .leave-comment input[type="email"], .leave-comment textarea {
    width: 100%;
}

.hotels-right {
    width: 100%;
    margin-bottom: 1em;
}

.view1-sixth h2 {
    margin: 78px 0px 0px 0px;
}

.hotels-left {
    margin-bottom: 1em;
    width: 100%;
}

.hotel-top {
    margin-top: 0em;
}

.hotels-top h3 {
    margin-bottom: 20px;
}

.hotels-top {
    padding: 1em 0;
}

.routes p {
    font-size: 14px;
}

.routes h3 {
    font-size: 1.3em;
}

.routes {
    padding: 0em 0 1em;
}

.banner-2 h1 {
    padding: 3em 0 0;
    font-size: 22px;
}

.banner-2 {
    min-height: 190px;
}

.room-info {
    padding: 0.7em;
}

.rooms-top {
    min-height: 186px;
    padding: 5em 0 0;
```

```
}

.banner-3 {
    min-height: 160px;
}
.similar_hotel {
    margin-bottom: 2em;
}
.details-right {
    text-align: center;
    float: right;
    padding: 0;
}
.details-middle {
    width: 70%;
}
.details-left {
    width: 30%;
}
.details {
    padding: 0em 0 2em;
}
.room-left {
    width: 100%;
    padding: 0;
}
.room-midle {
    width: 100%;
    padding-left: 12px;
}
.room-right {
    width: 100%;
    padding: 0;
}
li.nam {
    width: 100%;
    margin-bottom: 1em;
}
li.mr {
    width: 46%;
    margin-bottom: 1em;
}
.selectroom_right li {
    width: 33.33%;
}
.selectroom_right p {
    font-size: 14px;
}
.selectroom {
    padding: 2em 0 0em;
}
.tracking h3 {
    margin-bottom: 0.5em;
}
.tracking p {
```

```
    font-size: 14px;  
}  
.login-right input[type="submit"] {  
    font-size: 14px;  
}  
.writ input[type="text"] {  
    font-size: 14px;  
    width: 100%;  
}  
li.na-me {  
    width: 100%;  
}  
li.na-me select {  
    font-size: 14px;  
    width: 100%;  
}  
.lightbox .box {  
    min-width: 386px;  
}  
ul.set-1 {  
    margin-left: 166px;  
}  
.footer-top h3 {  
    font-size: 1.4em;  
}  
.login-left {  
    width: 63%;  
}  
}  
}  
}@media (max-width:384px){  
ul.tp-hd-rgt a {  
    font-size: 10px;  
}  
ul.tp-hd-rgt li {  
    font-size: 10px;  
}  
ul.tp-hd-lft a {  
    font-size: 10px;  
}  
i.fa.fa-home {  
    font-size: 18px;  
}  
.ban-top .InputLabel, .ban-bottom .InputLabel {  
    font-size: 12px;  
}  
.bann-info h2 {  
    font-size: 20px;  
    margin-bottom: 15px;  
}  
.agent-right iframe {  
    width: 296px;  
    height: 229px;  
}  
.app-right h3 {
```

```
    font-size: 20px;
}
.bann-info1 {
    padding: 2em 0.4em 0em;
}
.bus-midd h5 {
    font-size: 15px;
}
.a.view {
    font-size: 11px;
    text-align: center;
}
li.fare {
    width: 22%;
    text-align: center;
}
li.seat {
    width: 24%;
    text-align: center;
}
.bus-midd p {
    font-size: 10px;
    text-align: center;
}
.bus-txt3 {
    float: right;
    width: 100%;
}
li.arriv {
    width: 16%;
    text-align: center;
}
li.dept {
    width: 18%;
    text-align: center;
}
.bus-ic1 {
    width: 100%;
    text-align: center;
}
.a.view {
    padding: 5px 7px;
}
.i.fa.fa-clock-o {
    margin-top: 10px;
}
li.arriv h4 {
    margin-top: 30px;
}
.bus-ic3 {
    width: 100%;
    text-align: center;
}
.bus-ic3 img{
```

```
    display:inline-block;
}
.bus-txt4 {
    margin-top: 13px;
}
.bus-txt1 {
    width: 100%;
}
li.trav {
    width: 20%;
    text-align: center;
}
.bus-tp h2 {
    font-size: 12px;
}
.bus-tp P {
    line-height: 1.2em;
}
.bus-ic {
    width: 100%;
    text-align: center;
}
.bus-ic img{
    display:inline-block;
}
.bus-txt {
    width: 100%;
}
}
.bus-midd h4 {
    font-size: 13px;
    text-align: center;
}
.comments-list h3 {
    font-size: 1.3em;
}
.banner-2 {
    min-height: 180px;
}
.set-left {
    float: left;
    width: 100%;
}
.set-right {
    padding-left: 0px;
    margin-top: 1em;
    width: 100%;
}
lightbox .box {
    min-width: 349px;
}
ul.set-1 {
    margin-left: 254px;
}
p.aval {
```

```

        font-size: 13px;
    }
    .login-left {
        width: 68%;
    }
}
@media (max-width:375px){
li.ned, li.wrt, li.tol {
    margin-right: 6px;
}
.banner h1,.banner-2 h1,.banner-3 h1 {
    padding: 1.7em 0 0;
    font-size: 25px;
}
.bann-info h2 {
    font-size: 19px;
    margin-bottom: 15px;
}
.track h3 {
    font-size: 1.5em;
}
.track p {
    width: 100%;
    font-size: 14px;
}
.routes h3 {
    font-size: 1.8em;
}
.rou-left {
    width: 31%;
}
.rou-rgt {
    width: 69%;
}
.a.view {
    padding: 5px 6px;
}
.hotes-left {
    float: left;
    width: 100%;
    text-align: left;
    margin-bottom: 1em;
}
.banner-2 h1 {
    padding: 2.7em 0 0;
}
.banner-2 {
    min-height: 180px;
}
.login-left {
    width: 71%;
}
}
@media (max-width:320px){

```

```
i.fa.fa-home {
    font-size: 20px;
}
ul.tp-hd-lft a {
    font-size: 12px;
}
ul.tp-hd-lft {
    float: left;
    width: 100%;
    text-align: center;
}
.logo {
    margin-bottom: 2px;
}
ul.tp-hd-rgt {
    float: left;
    width: 100%;
}
ul.tp-hd-rgt li {
    font-size: 12px;
}
ul.tp-hd-rgt a {
    font-size: 12px;
}
li.ned, li.wrt, li.tol {
    margin-right: 20px;
}
.top-header {
    height: 62px;
    line-height: 23px;
    padding: 0.5em 0;
}
.bus a {
    font-size: 12px;
    padding: 0 3px;
}
.securetxt {
    line-height: 17px;
    font-size: 12px;
}
.banner h1,.banner-2 h1,.banner-3 h1 {
    padding: 1.7em 0 0;
    font-size: 22px;
}
.bann-info1 {
    width: 100%;
    padding: 1em 0 0;
}
i.fa.fa-columns {
    font-size: 6em;
}
.bann-info1 h3 {
    font-size: 1.2em;
    margin-top: 12px;
```

```
}

.bann-info {
    padding: 1em 0px;
}
.bann-info h2 {
    font-size: 17px;
    margin-bottom: 15px;
}
.ban-top .InputLabel, .ban-bottom .InputLabel {
    font-size: 11px;
}
button.seabtn {
    padding: 6px 13px!important;
    font-size: 13px;
}
.sear {
    margin-top: 20px;
}
.ban-bottom {
    margin-top: 20px;
}
.i.fa.fa-h-square, i.fa.fa-usd, i.fa.fa-mobile {
    font-size: 4em;
}
.rupes h3 {
    font-size: 20px;
}
.rupes h4 {
    font-size: 16px;
}
.rupes-left {
    padding: 0;
}
.holiday {
    padding: 2em 0;
}
.holiday-left {
    padding: 0;
}
.holiday-mid {
    padding: 0;
}
.track {
    padding: 2em 0;
}
.track-left {
    padding: 0;
}
.track-right {
    padding-left: 0;
}
.routes-left {
    padding: 0;
}
```

```
.routes {
    padding: 2em 0 0em;
}
.routes h3 {
    font-size: 1.6em;
}
.routes p {
    font-size: 14px;
}
.i.fa.fa-truck, i.fa.fa-user, i.fa.fa-ticket {
    font-size: 3em;
}
.footer-left {
    padding: 0;
}
.footer-top h3 {
    margin-bottom: 0.5em;
}
.banner-1 h1,.banner-2 h1,.banner-3 h1{
    font-size: 22px;
}
.banner-1 {
    min-height: 120px;
}
.faq h2 {
    font-size: 1.4em;
}
.faq h3 {
    font-size: 1.2em;
}
.faq p {
    font-size: 13px;
}
.faq {
    padding: 1em 0;
}
.about {
    padding: 1em 0;
}
.about h2 {
    font-size: 1.7em;
    margin-bottom:0.3em;
}
.about p {
    font-size: 13px;
}
.about h3 {
    font-size: 1.5em;
}
.abt-lft {
    padding: 0;
}
.ab-lt {
    padding: 0;
```

```
}

.ab-tp {
    margin-bottom: 1em;
}
.ab-rt {
    padding: 0;
}
.ab-rt ul li a {
    font-size: 13px;
    padding: 0px 0px 0px 22px;
}
.terms h3 {
    font-size: 1.4em;
}
.terms h6 {
    margin: 0.5em 0;
}
.terms p {
    font-size: 13px;
}
.terms-bottom {
    margin-top: 2em;
}
.terms {
    padding: 1.5em 0;
}
.privacy p {
    font-size: 13px;
}
.privacy {
    padding: 1.5em 0;
}
.privacy h4 {
    margin: 1em 0 0;
}
.agent {
    padding: 1.5em 0;
}
.agent-left {
    text-align: center;
    padding: 0;
}
.ag-bt {
    margin-bottom: 1em;
}
.agent-right iframe {
    width: 272px;
    height: 212px;
    margin-top: 1.5em
}
.agent-right {
    padding: 0;
}
.agent p {
```

```
    font-size: 13px;
}
.con-top {
    width: 100%;
    margin-top: 1em;
}
.contact {
    padding: 1.5em 0;
}
.contact h4 {
    margin-bottom: 0.3em;
}
.contact-left {
    padding: 0;
}
.app-left {
    padding: 0;
}
.app-right h3 {
    font-size: 19px;
    line-height: 25px;
}
.app-right {
    padding: 0;
}
.banner-bottom {
    padding: 0.5em 0 0;
}
.banner-text p {
    font-size: 13px;
    margin: 1em auto 0 auto;
}
.banner-text h3 {
    font-size: 2.2em;
}
.app-right p {
    font-size: 13px;
}
.banner-bottom-grid p {
    font-size: 13px;
}
.banner-bottom-grid {
    margin-bottom: 1.5em;
    padding: 0;
}
.glyphicon-th-large {
    font-size: 1.7em;
}
.services-icon {
    width: 100px;
    height: 100px;
    line-height: 111px;
}
.banner-text h3 {
```

```
    font-size: 2em;
}
ul.rout {
    padding: 0.5em;
}
.tra-top h6 a {
    font-size: 12px;
}
.bann-info1 {
    padding: 2em 0em 0em;
}
.bann-info {
    padding: 1em 0px;
}
.tra-top h4 {
    font-size: 18px;
}
.tra-top {
    margin-top: 1em;
}
.bus-tp {
    padding: 0.5em 0;
    background: #34ad00;
}
.bus-tp P {
    font-size: 13px;
    text-align: center;
    float: none;
    margin-bottom: 0.5em;
}
.bus-tp h2 {
    font-size: 15px;
    float: none;
    text-align: center;
}
.bus-btm li a {
    font-size: 13px;
}
.bus-midd h4 {
    font-size: 12px;
}
li.trav {
    width: 23%;
}
li.arriv {
    width: 17%;
    text-align: center;
}
li.seat {
    width: 22%;
    text-align: center;
}
li.fare {
    width: 20%;
```

```

    text-align: center;
}
.bus-midd h5 {
    font-size: 13px;
}
.blog-left {
    padding: 0;
}
.comments-list p {
    font-size: 13px;
}
}
.blog {
    padding: 1.5em 0;
}
.comments-list:nth-child(2) {
    margin: 1em 0;
    padding: 1em 0 1em;
}
}
.blog-right {
    margin-top: 1em;
    padding: 0;
}
.popular h3, .subscribe h3, .categories h3, .instagram h2, .tags h3 {
    padding: 0.5em;
}
}
.admin-right p {
    font-size: 13px;
}
}

```

## **Admin Page**

### **Index.php**

```

<?php
session_start();
include('includes/config.php');
if(isset($_POST['login']))
{
$uname=$_POST['username'];
$password=md5($_POST['password']);
$sql ="SELECT UserName,Password FROM admin WHERE UserName=:uname and
Password=:password";
$query= $dbh -> prepare($sql);
$query-> bindParam(':uname', $uname, PDO::PARAM_STR);
$query-> bindParam(':password', $password, PDO::PARAM_STR);
$query-> execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
if($query->rowCount() > 0)
{
$_SESSION['alogin']=$_POST['username'];
echo "<script type='text/javascript'> document.location = 'dashboard.php'; </script>";
} else{
}
}

```

```

echo "<script>alert('Invalid Details');</script>";
}

}

?>

<!DOCTYPE HTML>
<html>
<head>
<title>WT | Admin Sign in</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<script type="application/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>
<!-- Bootstrap Core CSS -->
<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />
<!-- Custom CSS -->
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<!-- Graph CSS -->
<link href="css/font-awesome.css" rel="stylesheet">
<link rel="stylesheet" href="css/jquery-ui.css">
<!-- jQuery -->
<script src="js/jquery-2.1.4.min.js"></script>
<!-- //jQuery -->
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400'
rel='stylesheet' type='text/css'/>
<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css'>
<!-- lined-icons -->
<link rel="stylesheet" href="css/icon-font.min.css" type='text/css' />
<!-- //lined-icons -->
</head>
<body>
    <div class="main-wthree">
        <div class="container">
            <div class="sin-w3-agile">
                <h2>Sign In</h2>
                <form method="post">
                    <div class="username">
                        <span class="username">Username:</span>
                        <input type="text" name="username" class="name" placeholder="" required="">
                        <div class="clearfix"></div>
                    </div>
                    <div class="password-agileits">
                        <span class="username">Password:</span>
                        <input type="password" name="password" class="password" placeholder="" required="">
                        <div class="clearfix"></div>
                    </div>
                <div class="login-w3">

```

```

        <input type="submit" class="login" name="login" value="Sign
In">
        </div>
        <div class="clearfix"></div>
</form>
        <div class="back">
            <a href="../index.php">Back to home</a>
        </div>

    </div>
    </div>
    </div>
</body>
</html>
change-image.php
<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
{
header('location:index.php');
}
else{
    $imgid=intval($_GET['imgid']);
if(isset($_POST['submit']))
{
    $pimage=$_FILES["packageimage"]["name"];
move_uploaded_file($_FILES["packageimage"]["tmp_name"],"pacakgeimages/".$_FILES["packag
eimage"]["name"]);
$sql="update TblTourPackages set PackageImage=:pimage where PackageId=:imgid";
$query = $dbh->prepare($sql);

$query->bindParam(':imgid',$imgid,PDO::PARAM_STR);
$query->bindParam(':pimage',$pimage,PDO::PARAM_STR);
$query->execute();
$msg="Package Created Successfully";
}

}
?>
<!DOCTYPE HTML>
<html>
<head>
<title>TMS | Admin Package Creation</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<meta name="keywords" content="Pooled Responsive web template, Bootstrap Web Templates,
Flat Web Templates, Android Compatible web template,
Smartphone Compatible web template, free webdesigns for Nokia, Samsung, LG, SonyEricsson,
Motorola web design" />

```

```

<script type="application/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar() { window.scrollTo(0,1); } </script>
<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<link href="css/font-awesome.css" rel="stylesheet">
<script src="js/jquery-2.1.4.min.js"></script>
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400'
rel='stylesheet' type='text/css'/>
<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css'>
<link rel="stylesheet" href="css/icon-font.min.css" type='text/css' />
<style>
    .errorWrap {
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #dd3d36;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
    .succWrap{
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #5cb85c;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
</style>

</head>
<body>
    <div class="page-container">
        <!--content-inner-->
        <div class="left-content">
            <div class="mother-grid-inner">
                <!--header start here-->
                <?php include('includes/header.php');?>
                    <div class="clearfix"></div>
                </div>
            <!--heder end here-->
            <ol class="breadcrumb">
                <li class="breadcrumb-item"><a href="index.html">Home</a><i class="fa fa-angle-right"></i>Update Package Image </li>
            </ol>
            <!--grid-->
            <div class="grid-form">
                <!--grid-->
                <div class="grid-form1">
                    <h3>Update Package Image </h3>
                    <?php if($error){?><div class="errorWrap"><strong>ERROR</strong><?php echo
htmlentities($error); ?> </div><?php }>

```

```

        else if($msg){?><div
class="succWrap"><strong>SUCCESS</strong>:<?php echo htmlentities($msg); ?> </div><?php
?>
<div class="tab-content">
    <div class="tab-pane active" id="horizontal-form">
        <form class="form-horizontal" name="package"
method="post" enctype="multipart/form-data">
            <?php
$imgid=intval($_GET['imgid']);
$sql = "SELECT PackageImage from TblTourPackages where PackageId=:imgid";
$query = $dbh -> prepare($sql);
$query -> bindParam(':imgid', $imgid, PDO::PARAM_STR);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
{
foreach($results as $result)
{
    ?>
<div class="form-group">
    <label for="focusedinput" class="col-sm-2 control-label"> Package Image </label>
    <div class="col-sm-8">
        
    </div>
</div>

<div class="form-group">
    <label for="focusedinput" class="col-sm-2 control-label">New Image</label>
    <div class="col-sm-8">
        <input type="file" name="packageimage" id="packageimage" required>
    </div>
    <?php } } ?>

        <div class="row">
            <div class="col-sm-8 col-sm-offset-2">
                <button type="submit" name="submit" class="btn-primary
btn">Update</button>
            </div>
        </div>
    </div>
</form>

```

```

<div class="panel-footer">
    </div>
</form>
</div>
    </div>
    <!--//grid-->

<!-- script-for sticky-nav -->
<script>
$(document).ready(function() {
    var navoffeset($(".header-main").offset().top);
    $(window).scroll(function(){
        var scrollpos=$(window).scrollTop();
        if(scrollpos >=navoffeset){
            $(".header-main").addClass("fixed");
        }else{
            $(".header-main").removeClass("fixed");
        }
    });
});
</script>
<!-- /script-for sticky-nav -->
<!--inner block start here-->
<div class="inner-block">

</div>
<!--inner block end here-->
<!--copy rights start here-->
<?php include('includes/footer.php');?>
<!--COPY rights end here-->
</div>
</div>
<!--/content-inner-->
<!--/sidebar-menu-->
    <?php include('includes/sidebarmenu.php');?>
        <div class="clearfix"></div>
    </div>
    <script>
var toggle = true;

$(".sidebar-icon").click(function() {
    if (toggle)
    {
        $(".page-container").addClass("sidebar-
collapsed").removeClass("sidebar-collapsed-back");
        $("#menu
span").css({"position":"absolute"});
    }
    else

```

```

        {
            $(".page-
container").removeClass("sidebar-collapsed").addClass("sidebar-collapsed-back");
            setTimeout(function() {
                $("#menu
span").css({"position":"relative"});
            }, 400);
        }
    });

    toggle = !toggle;
});

</script>

<!--js -->
<script src="js/jquery.nicescroll.js"></script>
<script src="js/scripts.js"></script>
<!-- Bootstrap Core JavaScript -->
<script src="js/bootstrap.min.js"></script>
<!-- /Bootstrap Core JavaScript -->

</body>
</html>
<?php } ?>
change-password.php
<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
{
header('location:index.php');
}
else{
// Code for change password
if(isset($_POST['submit']))
{
$password=md5($_POST['password']);
$newpassword=md5($_POST['newpassword']);
$username=$_SESSION['alogin'];
$sql ="SELECT Password FROM admin WHERE UserName=:username and
Password=:password";
$query= $dbh -> prepare($sql);
$query-> bindParam(':username', $username, PDO::PARAM_STR);
$query-> bindParam(':password', $password, PDO::PARAM_STR);
$query-> execute();
$results = $query -> fetchAll(PDO::FETCH_OBJ);
if($query -> rowCount() > 0)
{
$con="update admin set Password=:newpassword where UserName=:username";
$chngpwd1 = $dbh->prepare($con);
$chngpwd1-> bindParam(':username', $username, PDO::PARAM_STR);
$chngpwd1-> bindParam(':newpassword', $newpassword, PDO::PARAM_STR);
$chngpwd1->execute();
$msg="Your Password successfully changed";
}
}

```

```

else {
$error="Your current password is wrong";
}
}
?>

<!DOCTYPE HTML>
<html>
<head>
<title>TMS | Admin Change Password</title>

<script type="application/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar() { window.scrollTo(0,1); } </script>

<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<link href="css/font-awesome.css" rel="stylesheet">
<script src="js/jquery-2.1.4.min.js"></script>
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400' rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/icon-font.min.css" type='text/css' />
<script type="text/javascript">
function valid()
{
if(document.chngpwd.newpassword.value!= document.chngpwd.confirmpassword.value)
{
alert("New Password and Confirm Password Field do not match !!");
document.chngpwd.confirmpassword.focus();
return false;
}
return true;
}
</script>
<style>
.errorWrap {
padding: 10px;
margin: 0 0 20px 0;
background: #fff;
border-left: 4px solid #dd3d36;
-webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
.succWrap {
padding: 10px;
margin: 0 0 20px 0;
background: #fff;
border-left: 4px solid #5cb85c;
-webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
</style>

```

```

</head>
<body>
    <div class="page-container">
        <!--/content-inner-->
    <div class="left-content">
        <div class="mother-grid-inner">
            <!--header start here-->
<?php include('includes/header.php');?>

                <div class="clearfix"></div>
            </div>
<!--heder end here-->
            <ol class="breadcrumb">
                <li class="breadcrumb-item"><a href="dashboard.php">Home</a><i class="fa fa-angle-right"></i>Change Password</li>
            </ol>
            <!--grid-->
            <div class="grid-form">

<div class="grid-form1">

                <?php if($error){?><div class="errorWrap"><strong>ERROR</strong><?php echo htmlentities($error); ?></div><?php }>
                else if($msg){?><div class="succWrap"><strong>SUCCESS</strong><?php echo htmlentities($msg); ?></div><?php }?>

<div class="panel-body">
    <form name="chngpwd" method="post" class="form-horizontal" onSubmit="return valid();">

        <div class="form-group">
            <label class="col-md-2 control-label">Current Password</label>
            <div class="col-md-8">
                <div class="input-group">
                    <span class="input-group-addon">
                        <i class="fa fa-key"></i>
                    </span>
                    <input type="password" name="password" class="form-control" id="exampleInputPassword1" placeholder="Current Password" required="">
                </div>
            </div>
        </div>

        <div class="form-group">
            <label class="col-md-2 control-label">New Password</label>
            <div class="col-md-8">
                <div class="input-group">
                    <span class="input-group-

```

```

        <i class="fa fa-key"></i>
    </span>
    <input type="password"
class="form-control1" name="newpassword" id="newpassword" placeholder="New Password"
required="">
        </div>
    </div>
</div>

<div class="form-group">
    <label class="col-md-2 control-label">Confirm
    Password</label>
    <div class="col-md-8">
        <div class="input-group">
            <span class="input-group-
addon">
                <i class="fa fa-key"></i>
            </span>
            <input type="password"
class="form-control1" name="confirmpassword" id="confirmpassword" placeholder="Confrim
    Password" required="">
                </div>
            </div>
        </div>
    </div>

    <div class="col-sm-8 col-sm-offset-2">
        <button type="submit" name="submit" class="btn-primary
    btn">Submit</button>
        <button type="reset" class="btn-inverse btn">Reset</button>
    </div>
</div>
</div>
</div>
<!--//grid-->

<!-- script-for sticky-nav -->
<script>
$(document).ready(function() {
    var navoffeset=$("#.header-main").offset().top;
    $(window).scroll(function(){
        var scrollpos=$(window).scrollTop();
        if(scrollpos >=navoffeset){
            $(".header-main").addClass("fixed");
        }else{
            $(".header-main").removeClass("fixed");
        }
    });
});</script>

```

```

<!-- /script-for sticky-nav -->
<!--inner block start here-->
<div class="inner-block">

</div>
<!--inner block end here-->
<!--copy rights start here-->
<?php include('includes/footer.php');?>
<!--COPY rights end here-->
</div>
</div>
<!--/content-inner-->
<!--/sidebar-menu-->
    <?php include('includes/sidemenu.php');?>
        <div class="clearfix"></div>
    </div>
    <script>
        var toggle = true;

        $(".sidebar-icon").click(function() {
            if (toggle)
            {
                $(".page-container").addClass("sidebar-
collapsed").removeClass("sidebar-collapsed-back");
                $("#menu
span").css({"position":"absolute"});
            }
            else
            {
                $(".page-
container").removeClass("sidebar-collapsed").addClass("sidebar-collapsed-back");
                setTimeout(function() {
                    $("#menu
span").css({"position":"relative"});
                }, 400);
            }
        });
        toggle = !toggle;
    </script>
<script src="js/jquery.nicescroll.js"></script>
<script src="js/scripts.js"></script>
<script src="js/bootstrap.min.js"></script>

</body>
</html>
<?php } ?>
create-package.php
<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
{

```

```

header('location:index.php');
}
else{
if(isset($_POST['submit']))
{
$pname=$_POST['packagename'];
$pctype=$_POST['packagetype'];
$plocation=$_POST['packagelocation'];
$pprice=$_POST['packageprice'];
$pfeatures=$_POST['packagefeatures'];
$pdetails=$_POST['packagedetails'];
$pimage=$_FILES["packageimage"]["name"];
move_uploaded_file($_FILES["packageimage"]["tmp_name"],"pacakgeimages/".$_FILES["packageimage"]["name"]);
$sql="INSERT INTO
tbltourpackages(PackageName,PackageType,PackageLocation,PackagePrice,PackageFetures,PackageDetails,PackageImage) VALUES(:pname,:pctype,:plocation,:pprice,:pfeatures,:pdetails,:pimage)";
$query = $dbh->prepare($sql);
$query->bindParam(':pname',$pname,PDO::PARAM_STR);
$query->bindParam(':pctype',$pctype,PDO::PARAM_STR);
$query->bindParam(':plocation',$plocation,PDO::PARAM_STR);
$query->bindParam(':pprice',$pprice,PDO::PARAM_STR);
$query->bindParam(':pfeatures',$pfeatures,PDO::PARAM_STR);
$query->bindParam(':pdetails',$pdetails,PDO::PARAM_STR);
$query->bindParam(':pimage',$pimage,PDO::PARAM_STR);
$query->execute();
$lastInsertId = $dbh->lastInsertId();
if($lastInsertId)
{
$msg="Package Created Successfully";
}
else
{
$error="Something went wrong. Please try again";
}

}

?>
<!DOCTYPE HTML>
<html>
<head>
<title>TMS | Admin Package Creation</title>

<script type="application/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar() { window.scrollTo(0,1); } </script>
<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<link href="css/font-awesome.css" rel="stylesheet">
<script src="js/jquery-2.1.4.min.js"></script>
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400'
rel='stylesheet' type='text/css'/>
<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css'>

```

```

<link rel="stylesheet" href="css/icon-font.min.css" type="text/css" />
<style>
    .errorWrap {
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #dd3d36;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
    .succWrap{
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #5cb85c;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
</style>

</head>
<body>
    <div class="page-container">
        <!--/content-inner-->
        <div class="left-content">
            <div class="mother-grid-inner">
                <!--header start here-->
                <?php include('includes/header.php');?>
                    <div class="clearfix"></div>
                </div>
            <!--heder end here-->
            <ol class="breadcrumb">
                <li class="breadcrumb-item"><a href="index.php">Home</a><i class="fa fa-angle-right"></i>Create Package </li>
            </ol>
            <!--grid-->
            <div class="grid-form">
                <!--grid-->
                <div class="grid-form1">
                    <h3>Create Package</h3>
                    <?php if($error){?><div class="errorWrap"><strong>ERROR</strong><?php echo htmlentities($error); ?> </div><?php }>
                    <?php else if($msg){?><div class="succWrap"><strong>SUCCESS</strong><?php echo htmlentities($msg); ?> </div><?php }?>
                    <div class="tab-content">
                        <div class="tab-pane active" id="horizontal-form">
                            <form class="form-horizontal" name="package" method="post" enctype="multipart/form-data">
                                <div class="form-group">
                                    <label for="focusedinput" class="col-sm-2 control-label">Package Name</label>

```

```

<div class="col-sm-8">
    <input type="text"
class="form-control1" name="packagename" id="packagename" placeholder="Create Package
required>
</div>
</div>

<div class="form-group">
    <label for="focusedinput"
class="col-sm-2 control-label">Package Type</label>
    <div class="col-sm-8">
        <input type="text"
class="form-control1" name="packagetype" id="packagetype" placeholder=" Package Type eg-
Family Package / Couple Package" required>
        </div>
    </div>

<div class="form-group">
    <label for="focusedinput"
class="col-sm-2 control-label">Package Location</label>
    <div class="col-sm-8">
        <input type="text"
class="form-control1" name="packagelocation" id="packagelocation" placeholder=" Package
Location" required>
        </div>
    </div>

<div class="form-group">
    <label for="focusedinput"
class="col-sm-2 control-label">Package Price in USD</label>
    <div class="col-sm-8">
        <input type="text"
class="form-control1" name="packageprice" id="packageprice" placeholder=" Package Price is
USD" required>
        </div>
    </div>

<div class="form-group">
    <label for="focusedinput"
class="col-sm-2 control-label">Package Features</label>
    <div class="col-sm-8">
        <input type="text"
class="form-control1" name="packagefeatures" id="packagefeatures" placeholder="Package
Features Eg-free Pickup-drop facility" required>
        </div>
    </div>

<div class="form-group">
    <label for="focusedinput"
class="col-sm-2 control-label">Package Details</label>
    <div class="col-sm-8">
        <textarea class="form-
control" rows="5" cols="50" name="packagedetails" id="packagedetails" placeholder="Package
Details" required></textarea>
    </div>

```

```

</div>
</div>

<div class="form-group">
    <label for="focusedinput">
        Package Image
    </label>
    <input type="file" name="packageimage" id="packageimage" required>
</div>

<div class="row">
    <div class="col-sm-8 col-sm-offset-2">
        <button type="submit" name="submit" class="btn-primary btn">Create</button>
        <button type="reset" class="btn-inverse btn">Reset</button>
    </div>
</div>

```

</div>

</form>

```

<div class="panel-footer">
    </div>
</form>
</div>
</div>
<!--//grid-->

<!-- script-for sticky-nav -->
<script>
$(document).ready(function() {
    var navoffeset($(".header-main").offset().top);
    $(window).scroll(function(){
        var scrollpos=$(window).scrollTop();
        if(scrollpos >=navoffeset){
            $(".header-main").addClass("fixed");
        }else{
            $(".header-main").removeClass("fixed");
        }
    });
});
```

```

    });
    </script>
    <!-- /script-for sticky-nav -->
<!--inner block start here-->
<div class="inner-block">

</div>
<!--inner block end here-->
<!--copy rights start here-->
<?php include('includes/footer.php');?>
<!--COPY rights end here-->
</div>
</div>
<!--//content-inner-->
<!--sidebar-menu-->
    <?php include('includes/sidebarmenu.php');?>
        <div class="clearfix"></div>
    </div>
    <script>
        var toggle = true;

        $(".sidebar-icon").click(function() {
            if (toggle)
            {
                $(".page-container").addClass("sidebar-collapsed").removeClass("sidebar-collapsed-back");
                $("#menu span").css({"position": "absolute"});
            }
            else
            {
                $(".page-container").removeClass("sidebar-collapsed").addClass("sidebar-collapsed-back");
                setTimeout(function() {
                    $("#menu span").css({"position": "relative"});
                }, 400);
            }
        });
        toggle = !toggle;
    </script>
<!--js -->
<script src="js/jquery.nicescroll.js"></script>
<script src="js/scripts.js"></script>
<!-- Bootstrap Core JavaScript -->
    <script src="js/bootstrap.min.js"></script>
<!-- /Bootstrap Core JavaScript -->

</body>
</html>
<?php } ?>
Dashboard.php
<?php

```

```

session_start();
include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
{
header('location:index.php');
}
else{
?>
<!DOCTYPE HTML>
<html>
<head>
<title>WT | Admin Dashboard</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<script type="application/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>
<!-- Bootstrap Core CSS -->
<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />
<!-- Custom CSS -->
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<!-- Graph CSS -->
<link href="css/font-awesome.css" rel="stylesheet">
<!-- jQuery -->
<script src="js/jquery-2.1.4.min.js"></script>
<!-- //jQuery -->
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400'
rel='stylesheet' type='text/css'/>
<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css'>
<!-- lined-icons -->
<link rel="stylesheet" href="css/icon-font.min.css" type='text/css' />
<!-- //lined-icons -->
</head>
<body>
<div class="page-container">
<!--/content-inner-->
<div class="left-content">
    <div class="mother-grid-inner">
<!--header start here-->
<?php include('includes/header.php');?>
<!--header end here-->
    <ol class="breadcrumb">
        <li class="breadcrumb-item"><a href="index.html">Home</a> <i class="fa fa-angle-right"></i></li>
    </ol>
<!--four-grids here-->
    <div class="four-grids">
        <div class="col-md-3 four-grid">
            <div class="four-agileits">
                <div class="icon">
                    <i class="glyphicon glyphicon-user" aria-hidden="true"></i>
                </div>
            <div class="four-text">

```

```

<h3>User</h3>

<?php $sql = "SELECT id from
tblusers";
$query = $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=$query->rowCount();
?> <?php echo htmlentities($cnt);?>
</h4>

</div>

</div>
</div>
<div class="col-md-3 four-grid">
<div class="four-agileinfo">
<div class="icon">
<i class="glyphicon glyphicon-list-alt"
aria-hidden="true"></i>
</div>
<div class="four-text">
<h3>Bookings</h3>
<?php $sql1 = "SELECT
BookingId from tblbooking";
$query1 = $dbh -> prepare($sql1);
$query1->execute();
$results1=$query1->fetchAll(PDO::FETCH_OBJ);
$cnt1=$query1->rowCount();
?>
<?php echo
htmlentities($cnt1);?></h4>

</div>

</div>
</div>
<div class="col-md-3 four-grid">
<div class="four-w3ls">
<div class="icon">
<i class="glyphicon glyphicon-folder-
open" aria-hidden="true"></i>
</div>
<div class="four-text">
<h3>Enquiries</h3>
<?php
$sql2 = "SELECT id from tlenquiry";
$query2= $dbh -> prepare($sql2);
$query2->execute();
$results2=$query2->fetchAll(PDO::FETCH_OBJ);
$cnt2=$query2->rowCount();
?>

```

```

<h4><?php echo
htmlentities($cnt2);?></h4>

</div>

</div>
</div>
<div class="col-md-3 four-grid">
<div class="four-wthree">
<div class="icon">
<i class="glyphicon glyphicon-
briefcase" aria-hidden="true"></i>
</div>
<div class="four-text">
<h3>Toatal packages</h3>

<?php $sql3 = "SELECT PackageId from tbltourpackages";
$query3= $dbh -> prepare($sql3);
$query3->execute();
$results3=$query3->fetchAll(PDO::FETCH_OBJ);
$cnt3=$query3->rowCount();
?>
<h4><?php echo
htmlentities($cnt3);?></h4>

</div>

</div>
</div>
<div class="clearfix"></div>
</div>

<div class="four-grids">
<div class="col-md-3 four-grid">
<div class="four-w3ls">
<div class="icon">
<i class="glyphicon glyphicon-folder-
open" aria-hidden="true"></i>
</div>
<div class="four-text">
<h3>Issues Riaised</h3>
<?php
$sql5 = "SELECT id from tblissues";
$query5= $dbh -> prepare($sql5);
$query5->execute();
$results5=$query5->fetchAll(PDO::FETCH_OBJ);
$cnt5=$query5->rowCount();
?>
<h4><?php echo
htmlentities($cnt5);?></h4>

</div>

</div>

```

```

</div>

<!--//four-grids here-->

<div class="inner-block">

</div>
<!--inner block end here-->
<!--copy rights start here-->
<?php include('includes/footer.php');?>
</div>
</div>

<!--/sidebar-menu-->
<?php include('includes/sidemenu.php');?>
<div class="clearfix"></div>
</div>
<script>
var toggle = true;

$(".sidebar-icon").click(function() {
    if (toggle)
    {
        $(".page-container").addClass("sidebar-
collapsed").removeClass("sidebar-collapsed-back");
        $("#menu
span").css({"position":"absolute"});
    }
    else
    {
        $(".page-
container").removeClass("sidebar-collapsed").addClass("sidebar-collapsed-back");
        setTimeout(function() {
            $("#menu
span").css({"position":"relative"});
        }, 400);
    }
    toggle = !toggle;
});
</script>

<!--js -->
<script src="js/jquery.nicescroll.js"></script>
<script src="js/scripts.js"></script>
<!-- Bootstrap Core JavaScript -->
<script src="js/bootstrap.min.js"></script>
<!-- /Bootstrap Core JavaScript -->
<!-- morris JavaScript -->
<script src="js/raphael-min.js"></script>
<script src="js/morris.js"></script>

```

```

<script>
$(document).ready(function() {
    //BOX BUTTON SHOW AND CLOSE
    jQuery('.small-graph-box').hover(function() {
        jQuery(this).find('.box-button').fadeIn('fast');
    }, function() {
        jQuery(this).find('.box-button').fadeOut('fast');
    });
    jQuery('.small-graph-box .box-close').click(function() {
        jQuery(this).closest('.small-graph-box').fadeOut(200);
        return false;
    });

    //CHARTS
    function gd(year, day, month) {
        return new Date(year, month - 1, day).getTime();
    }

    graphArea2 = Morris.Area({
        element: 'hero-area',
        padding: 10,
        behaveLikeLine: true,
        gridEnabled: false,
        gridLineColor: '#dddddd',
        axes: true,
        resize: true,
        smooth:true,
        pointSize: 0,
        lineWidth: 0,
        fillOpacity:0.85,
        data: [
            {period: '2014 Q1', iphone: 2668, ipad: null, itouch: 2649},
            {period: '2014 Q2', iphone: 15780, ipad: 13799, itouch: 12051},
            {period: '2014 Q3', iphone: 12920, ipad: 10975, itouch: 9910},
            {period: '2014 Q4', iphone: 8770, ipad: 6600, itouch: 6695},
            {period: '2015 Q1', iphone: 10820, ipad: 10924, itouch: 12300},
            {period: '2015 Q2', iphone: 9680, ipad: 9010, itouch: 7891},
            {period: '2015 Q3', iphone: 4830, ipad: 3805, itouch: 1598},
            {period: '2015 Q4', iphone: 15083, ipad: 8977, itouch: 5185},
            {period: '2016 Q1', iphone: 10697, ipad: 4470, itouch: 2038},
            {period: '2016 Q2', iphone: 8442, ipad: 5723, itouch: 1801}
        ],
        lineColors:[ '#ff4a43', '#a2d200', '#22beef'],
        xkey: 'period',
        redraw: true,
        ykeys: ['iphone', 'ipad', 'itouch'],
        labels: ['All Visitors', 'Returning Visitors', 'Unique Visitors'],
        pointSize: 2,
        hideHover: 'auto',
        resize: true
    });
});

```

```

        </script>
</body>
</html>
<?php } ?>
Logout.php
<?php
session_start();
$_SESSION = array();
if (ini_get("session.use_cookies")) {
    $params = session_get_cookie_params();
    setcookie(session_name(), " , time() - 60*60,
        $params["path"], $params["domain"],
        $params["secure"], $params["httponly"]
    );
}
unset($_SESSION['alogin']);
session_destroy(); // destroy session
header("location:index.php");
?>
manage-bookings.php
<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
{
header('location:index.php');
}
else{
    // code for cancel
if(isset($_REQUEST['bkid']))
{
$bid=intval($_GET['bkid']);
$status=2;
$cancelby='a';
$sql = "UPDATE tblbooking SET status=:status,CancelledBy=:cancelby WHERE BookingId=:bid";
$query = $dbh->prepare($sql);
$query -> bindParam(':status',$status, PDO::PARAM_STR);
$query -> bindParam(':cancelby',$cancelby , PDO::PARAM_STR);
$query-> bindParam(':bid',$bid, PDO::PARAM_STR);
$query -> execute();

$msg="Booking Cancelled successfully";
}

if(isset($_REQUEST['bckid']))
{
$bcid=intval($_GET['bckid']);
$status=1;
$cancelby='a';
$sql = "UPDATE tblbooking SET status=:status WHERE BookingId=:bcid";
$query = $dbh->prepare($sql);

```

```

$query -> bindParam(':status',$status, PDO::PARAM_STR);
$query-> bindParam(':bcid',$bcid, PDO::PARAM_STR);
$query -> execute();
$msg="Booking Confirm successfully";
}

?>
<!DOCTYPE HTML>
<html>
<head>
<title>TMS | Admin manage Bookings</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<script type="application/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>
<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<link href="css/font-awesome.css" rel="stylesheet">
<script src="js/jquery-2.1.4.min.js"></script>
<link rel="stylesheet" type="text/css" href="css/table-style.css" />
<link rel="stylesheet" type="text/css" href="css/basicTable.css" />
<script type="text/javascript" src="js/jquery.basicTable.min.js"></script>
<script type="text/javascript">
$(document).ready(function() {
 $('#table').basicTable();

 $('#table-breakpoint').basicTable({
   breakpoint: 768
 });

 $('#table-swap-axis').basicTable({
   swapAxis: true
 });

 $('#table-force-off').basicTable({
   forceResponsive: false
 });

 $('#table-no-resize').basicTable({
   noResize: true
 });

 $('#table-two-axis').basicTable();

 $('#table-max-height').basicTable({
   tableWrapper: true
 });
});
</script>

```

```

<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400'
rel='stylesheet' type='text/css'/>
<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/icon-font.min.css" type='text/css' />
<style>
    .errorWrap {
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #dd3d36;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
    .succWrap{
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #5cb85c;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
</style>
</head>
<body>
    <div class="page-container">
        <!--content-inner-->
        <div class="left-content">
            <div class="mother-grid-inner">
                <!--header start here-->
                    <?php include('includes/header.php');?>
                    <div class="clearfix"> </div>
                </div>
                <!--heder end here-->
                <ol class="breadcrumb">
                    <li class="breadcrumb-item"><a href="index.html">Home</a><i class="fa fa-angle-right"></i>Manage Bookings</li>
                </ol>
                <div class="agile-grids">
                    <!-- tables -->
                    <?php if($error){?><div
class="errorWrap"><strong>ERROR</strong>:<?php echo htmlentities($error); ?> </div><?php }>
                    else if($msg){?><div
class="succWrap"><strong>SUCCESS</strong>:<?php echo htmlentities($msg); ?> </div><?php
?>
                    <div class="agile-tables">
                        <div class="w3l-table-info">
                            <h2>Manage Bookings</h2>
                            <table id="table">
                                <thead>
                                    <tr>
                                        <th>Bookn id</th>
                                        <th>Name</th>
                                        <th>Mobile No.</th>
                                        <th>Email Id</th>

```

```

<th>RegDate </th>
<th>From /To </th>
<th>Comment </th>
<th>Status </th>
<th>Action </th>
</tr>
</thead>
<tbody>

<?php $sql = "SELECT tblbooking.BookingId as bookid,tblusers.FullName as
fname,tblusers.MobileNumber as mnumber,tblusers.EmailId as email,tbltourpackages.PackageName
as pckname,tblbooking.PackageId as pid,tblbooking.FromDate as fdate,tblbooking.ToDate as
tdate,tblbooking.Comment as comment,tblbooking.status as status,tblbooking.CancelledBy as
cancelby,tblbooking.UpdationDate as upddate from tblusers join tblbooking on
tblbooking.UserEmail=tblusers.EmailId join tbltourpackages on
tbltourpackages.PackageId=tblbooking.PackageId";
$query = $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
{
foreach($results as $result)
{
    ?>
        <tr>
            <td>#BK-<?php echo htmlentities($result-
>bookid);?></td>
            <td><?php echo htmlentities($result-
>fname);?></td>
            <td><?php echo htmlentities($result-
>mnumber);?></td>
            <td><?php echo htmlentities($result-
>email);?></td>
            <td><a href="update-package.php?pid=<?php
echo htmlentities($result->pid);?>"><?php echo htmlentities($result->pckname);?></a></td>
            <td><?php echo htmlentities($result->fdate);?>
To <?php echo htmlentities($result->tdate);?></td>
            <td><?php echo htmlentities($result-
>comment);?></td>
            <td><?php if($result->status==0)
{
    echo "Pending";
}
if($result->status==1)
{
    echo "Confirmed";
}
if($result->status==2 and $result->cancelby=='a')
{
    echo "Canceled by you at " . $result->upddate;
}
if($result->status==2 and $result->cancelby=='u')
{
    echo "Canceled by User at " . $result->upddate;
}

```

```

        }
    ?></td>

<?php if($result->status==2)
{
    ?><td>Cancelled</td>
<?php } else {?>
<td><a href="manage-bookings.php?bkid=<?php echo htmlentities($result->bookid);?>" onclick="return confirm('Do you really want to cancel booking')" >Cancel</a> / <a href="manage-bookings.php?bckid=<?php echo htmlentities($result->bookid);?>" onclick="return confirm('booking has been confirm')" >Confirm</a></td>
<?php }?>

                </tr>
                <?php $cnt=$cnt+1; } }?>
            </tbody>
        </table>
    </div>
</table>

        </div>
<!-- script-for sticky-nav -->
<script>
$(document).ready(function() {
    var navoffeset($(".header-main").offset().top);
    $(window).scroll(function(){
        var scrollpos=$(window).scrollTop();
        if(scrollpos >=navoffeset){
            $(".header-main").addClass("fixed");
        }else{
            $(".header-main").removeClass("fixed");
        }
    });
});
</script>
<!-- /script-for sticky-nav -->
<!--inner block start here-->
<div class="inner-block">

</div>
<!--inner block end here-->
<!--copy rights start here-->
<?php include('includes/footer.php');?>
<!--COPY rights end here-->
</div>
</div>
<!--/content-inner-->
<!--/sidebar-menu-->
<?php include('includes/sidebarmenu.php');?>
    <div class="clearfix"></div>
    </div>
    <script>

```

```

        var toggle = true;

        $(".sidebar-icon").click(function() {
            if (toggle)
            {
                $(".page-container").addClass("sidebar-
collapsed").removeClass("sidebar-collapsed-back");
                $("#menu
span").css({"position":"absolute"});
            }
            else
            {
                $(".page-
container").removeClass("sidebar-collapsed").addClass("sidebar-collapsed-back");
                setTimeout(function() {
                    $("#menu
span").css({"position":"relative"});
                }, 400);
            }
        });

        toggle = !toggle;
    });
</script>

<!--js -->
<script src="js/jquery.nicescroll.js"></script>
<script src="js/scripts.js"></script>
<!-- Bootstrap Core JavaScript -->
<script src="js/bootstrap.min.js"></script>
<!-- /Bootstrap Core JavaScript -->

</body>
</html>
<?php } ?>
manage-enquires.php
<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
{
header('location:index.php');
}
else{
    // code for cancel
if(isset($_REQUEST['eid']))
{
$eid=intval($_GET['eid']);
$status=1;

$sql = "UPDATE tblenquiry SET Status=:status WHERE id=:eid";
$query = $dbh->prepare($sql);
$query -> bindParam(':status',$status, PDO::PARAM_STR);
$query-> bindParam(':eid',$eid, PDO::PARAM_STR);
$query -> execute();
}

```

```

$msg="Enquiry successfully read";
}

?>
<!DOCTYPE HTML>
<html>
<head>
<title>TMS | Admin manage Bookings</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<script type="application/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar() { window.scrollTo(0,1); } </script>
<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<link href="css/font-awesome.css" rel="stylesheet">
<script src="js/jquery-2.1.4.min.js"></script>
<link rel="stylesheet" type="text/css" href="css/table-style.css" />
<link rel="stylesheet" type="text/css" href="css/basicTable.css" />
<script type="text/javascript" src="js/jquery.basicTable.min.js"></script>
<script type="text/javascript">
$(document).ready(function() {
 $('#table').basicTable();

 $('#table-breakpoint').basicTable({
   breakpoint: 768
 });

 $('#table-swap-axis').basicTable({
   swapAxis: true
 });

 $('#table-force-off').basicTable({
   forceResponsive: false
 });

 $('#table-no-resize').basicTable({
   noResize: true
 });

 $('#table-two-axis').basicTable();

 $('#table-max-height').basicTable({
   tableWrapper: true
 });
});

</script>
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400'
rel='stylesheet' type='text/css'/>

```

```

<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css'>
<link rel="stylesheet" href="css/icon-font.min.css" type='text/css' />
<style>
    .errorWrap {
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #dd3d36;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
    .succWrap{
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #5cb85c;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
</style>
</head>
<body>
    <div class="page-container">
        <!--/content-inner-->
        <div class="left-content">
            <div class="mother-grid-inner">
                <!--header start here-->
                <?php include('includes/header.php');?>
                    <div class="clearfix"></div>
                </div>
                <!--heder end here-->
                <ol class="breadcrumb">
                    <li class="breadcrumb-item"><a href="index.html">Home</a><i class="fa fa-angle-right"></i>Manage Enquiries</li>
                </ol>
                <div class="agile-grids">
                    <!-- tables -->
                    <?php if($error){?><div
class="errorWrap"><strong>ERROR</strong>:<?php echo htmlentities($error); ?> </div><?php }>
                    <?php else if($msg){?><div
class="succWrap"><strong>SUCCESS</strong>:<?php echo htmlentities($msg); ?> </div><?php }?>
                    <div class="agile-tables">
                        <div class="w3l-table-info">
                            <h2>Manage Enquiries</h2>
                            <table id="table">
                                <thead>
                                    <tr>
                                        <th>Ticket id</th>
                                        <th>Name</th>
                                        <th>Mobile No./ Email</th>
                                        <th>Subject </th>
                                        <th>Description </th>

```

```

<th>Posting date </th>
<th>Action </th>

</tr>
</thead>
<tbody>

<?php $sql = "SELECT * from tlenquiry";
$query = $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);

if($query->rowCount() > 0)
{
foreach($results as $result)
{
    ?>
    <tr>
        <td width="120">#TCKT-<?php echo
            htmlentities($result->id);?></td>
        <td width="50"><?php echo
            htmlentities($result->FullName);?></td>
        <td width="50"><?php echo
            htmlentities($result->MobileNumber);?> /<br />
            <?php echo $result->EmailId;?></td>

        <td width="200"><?php echo
            htmlentities($result->Subject);?></a></td>
        <td width="400"><?php echo
            htmlentities($result->Description);?></td>

        <td width="50"><?php echo
            htmlentities($result->PostingDate);?></td>
            {
                ?><td>Read</td>
            <?php } else {?>

                <td><a href="manage-enquires.php?eid=<?php echo htmlentities($result->id);?>" onclick="return
                    confirm('Do you really want to read')" >Pending</a>
                </td>
            <?php } ?>
        </tr>
    <?php } ?>
    </tbody>
</table>
</div>

<!-- script-for sticky-nav -->
<script>
$(document).ready(function() {
    var navoffset=$("#.header-main").offset().top;

```

```

$(window).scroll(function(){
    var scrollpos=$(window).scrollTop();
    if(scrollpos >=navoffeset){
        $(".header-main").addClass("fixed");
    }else{
        $(".header-main").removeClass("fixed");
    }
});

</script>
<!-- /script-for sticky-nav -->

<!--inner block start here-->
<div class="inner-block">

</div>
<!--inner block end here-->
<!--copy rights start here-->
<?php include('includes/footer.php');?>
<!--COPY rights end here-->
</div>
</div>
<!--//content-inner-->
<!--/sidebar-menu-->
<?php include('includes/sidebarmenu.php');?>
    <div class="clearfix"></div>
    </div>
    <script>
        var toggle = true;

        $(".sidebar-icon").click(function() {
            if (toggle)
            {
                $(".page-container").addClass("sidebar-collapsed").removeClass("sidebar-collapsed-back");
                $("#menu span").css({"position":"absolute"});
            }
            else
            {
                $(".page-container").removeClass("sidebar-collapsed").addClass("sidebar-collapsed-back");
                setTimeout(function() {
                    $("#menu span").css({"position":"relative"});
                }, 400);
            }
        });
        toggle = !toggle;
    </script>
<!--js -->
<script src="js/jquery.nicescroll.js"></script>
<script src="js/scripts.js"></script>

```

```

<!-- Bootstrap Core JavaScript -->
<script src="js/bootstrap.min.js"></script>
<!-- /Bootstrap Core JavaScript -->

</body>
</html>
<?php } ?>
```

### **Manageissues.php**

```

<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
{
header('location:index.php');
}
else{
    // code for cancel
if(isset($_REQUEST['eid']))
{
$eid=intval($_GET['eid']);
$status=1;

$sql = "UPDATE tblenquiry SET Status=:status WHERE id=:eid";
$query = $dbh->prepare($sql);
$query ->bindParam(':status',$status, PDO::PARAM_STR);
$query->bindParam(':eid',$eid, PDO::PARAM_STR);
$query ->execute();

$msg="Enquiry successfully read";
}
```

```

    ?>
<!DOCTYPE HTML>
<html>
<head>
<title>TMS | Admin manage Issues</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<script type="application/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar() { window.scrollTo(0,1); } </script>
<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<link href="css/font-awesome.css" rel="stylesheet">
<script src="js/jquery-2.1.4.min.js"></script>
<link rel="stylesheet" type="text/css" href="css/table-style.css" />
<link rel="stylesheet" type="text/css" href="css/basicTable.css" />
<script type="text/javascript" src="js/jquery.basicTable.min.js"></script>
```

```

<script type="text/javascript">
$(document).ready(function() {
  $('#table').basictable();

  $('#table-breakpoint').basictable({
    breakpoint: 768
  });

  $('#table-swap-axis').basictable({
    swapAxis: true
  });

  $('#table-force-off').basictable({
    forceResponsive: false
  });

  $('#table-no-resize').basictable({
    noResize: true
  });

  $('#table-two-axis').basictable();

  $('#table-max-height').basictable({
    tableWrapper: true
  });
});

</script>
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400' rel='stylesheet' type='text/css'/>
<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/icon-font.min.css" type='text/css' />
<style>
  .errorWrap {
    padding: 10px;
    margin: 0 0 20px 0;
    background: #fff;
    border-left: 4px solid #dd3d36;
    -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
  }
  .succWrap {
    padding: 10px;
    margin: 0 0 20px 0;
    background: #fff;
    border-left: 4px solid #5cb85c;
    -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
  }
</style>
<script language="javascript" type="text/javascript">
var popUpWin=0;
function popUpWindow(URLStr, left, top, width, height)
{
  if(popUpWin)

```

```

{
if(!popUpWin.closed) popUpWin.close();
}
popUpWin = open(URLStr,'popUpWin',
'toolbar=no,location=no,directories=no,status=no,menubar=no,scrollbars=yes,resizable=no,copyhistory=yes,width='+600+',height='+600+',left='+left+', top='+top+',screenX='+left+',screenY='+top+");
}

</script>
</head>
<body>
<div class="page-container">
<!--content-inner-->
<div class="left-content">
    <div class="mother-grid-inner">
        <!--header start here-->
            <?php include('includes/header.php');?>
                <div class="clearfix"> </div>
            </div>
<!--heder end here-->
<ol class="breadcrumb">
    <li class="breadcrumb-item"><a href="index.html">Home</a><i class="fa fa-angle-right"></i>Manage Issues</li>
</ol>
<div class="agile-grids">
    <!-- tables -->
    <?php if($error){?><div
class="errorWrap"><strong>ERROR</strong>:<?php echo htmlentities($error); ?> </div><?php }>
    else if($msg){?><div
class="succWrap"><strong>SUCCESS</strong>:<?php echo htmlentities($msg); ?> </div><?php
?>
    <div class="agile-tables">
        <div class="w3l-table-info">
            <h2>Manage Issues</h2>
            <table id="table">
                <thead>
                    <tr>
                        <th>#</th>
                        <th>Name</th>
                        <th>Mobile No.</th>
                        <th>Email Id</th>
                        <th>Issues </th>
                        <th>Description </th>
                        <th>Posting date </th>
                        <th>Action </th>
                </thead>
                <tr>
                </thead>
                <tbody>
<?php $sql = "SELECT tblissues.id as id,tblusers.FullName as fname,tblusers.MobileNumber as
mnumber,tblusers.EmailId as email,tblissues.Issue as issue,tblissues.Description as
Description,tblissues.PostingDate as PostingDate from tblissues join tblusers on
tblusers.EmailId=tblissues.UserEmail";
$query = $dbh -> prepare($sql);

```

```

$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);

if($query->rowCount() > 0)
{
foreach($results as $result)
{
    ?>
    <tr>
        <td width="120">#00<?php echo
        <td width="50"><?php echo
        <td width="50"><?php echo
        <td width="50"><?php echo
        <td width="200"><?php echo
        <td width="400"><?php echo
        <td width="50"><?php echo
    htmlentities($result->id);?></td>
    htmlentities($result->fname);?></td>
    htmlentities($result->mnumber);?></td>
    htmlentities($result->email);?></td>
    htmlentities($result->issue);?></a></td>
    htmlentities($result->Description);?></td>
    htmlentities($result->PostingDate);?></td>

    <td><a href="javascript:void(0);" onClick="popUpWindow('updateissue.php?iid=<?php echo
    ($result->id);?>');">View </a>
    </td>
</tr>
    <?php } }?>
    </tbody>
    </table>
    </div>
</table>

</div>
<!-- script-for sticky-nav -->
<script>
$(document).ready(function() {
    var navoffeset($(".header-main").offset().top);
    $(window).scroll(function(){
        var scrollpos=$(window).scrollTop();
        if(scrollpos >=navoffeset){
            $(".header-main").addClass("fixed");
        }else{
            $(".header-main").removeClass("fixed");
        }
    });
});
```

```

<!-- /script-for sticky-nav -->
<!--inner block start here-->
<div class="inner-block">

</div>
<!--inner block end here-->
<!--copy rights start here-->
<?php include('includes/footer.php');?>
<!--COPY rights end here-->
</div>
</div>
<!--/content-inner-->
<!--/sidebar-menu-->
<?php include('includes/sidebarmenu.php');?>
<div class="clearfix"></div>
</div>
<script>
var toggle = true;

$(".sidebar-icon").click(function() {
    if (toggle)
    {
        $(".page-container").addClass("sidebar-
collapsed").removeClass("sidebar-collapsed-back");
        $("#menu
span").css({"position":"absolute"});
    }
    else
    {
        $(".page-
container").removeClass("sidebar-collapsed").addClass("sidebar-collapsed-back");
        setTimeout(function() {
            $("#menu
span").css({"position":"relative"});
        }, 400);
    }
    toggle = !toggle;
});
</script>

<!--js -->
<script src="js/jquery.nicescroll.js"></script>
<script src="js/scripts.js"></script>
<!-- Bootstrap Core JavaScript -->
<script src="js/bootstrap.min.js"></script>
<!-- /Bootstrap Core JavaScript -->

</body>
</html>
<?php } ?>
manage-packages.php
<?php
session_start();
error_reporting(0);

```

```

include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
{
header('location:index.php');
}
else{
    ?>
<!DOCTYPE HTML>
<html>
<head>
<title>TMS | admin manage packages</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<script type="application/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar() { window.scrollTo(0,1); } </script>
<!-- Bootstrap Core CSS -->
<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />
<!-- Custom CSS -->
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<!-- Graph CSS -->
<link href="css/font-awesome.css" rel="stylesheet">
<!-- jQuery -->
<script src="js/jquery-2.1.4.min.js"></script>
<!-- //jQuery -->
<!-- tables -->
<link rel="stylesheet" type="text/css" href="css/table-style.css" />
<link rel="stylesheet" type="text/css" href="css/basicTable.css" />
<script type="text/javascript" src="js/jquery.basicTable.min.js"></script>
<script type="text/javascript">
$(document).ready(function() {
    $('#table').basicTable();

    $('#table-breakpoint').basicTable({
        breakpoint: 768
    });

    $('#table-swap-axis').basicTable({
        swapAxis: true
    });

    $('#table-force-off').basicTable({
        forceResponsive: false
    });

    $('#table-no-resize').basicTable({
        noResize: true
    });

    $('#table-two-axis').basicTable();

    $('#table-max-height').basicTable({
        tableWrapper: true
    });
}

```

```

    });
</script>
<!-- //tables -->
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400'
rel='stylesheet' type='text/css'/>
<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css'>
<!-- lined-icons -->
<link rel="stylesheet" href="css/icon-font.min.css" type="text/css" />
<!-- //lined-icons -->
</head>
<body>
<div class="page-container">
<!--content-inner-->
<div class="left-content">
    <div class="mother-grid-inner">
        <!--header start here-->
        <?php include('includes/header.php');?>
            <div class="clearfix"></div>
        </div>
<!--heder end here-->
<ol class="breadcrumb">
    <li class="breadcrumb-item"><a href="index.html">Home</a><i class="fa fa-angle-right"></i>Manage Packages</li>
</ol>
<div class="agile-grids">
    <!-- tables -->

        <div class="agile-tables">
            <div class="w3l-table-info">
                <h2>Manage Packages</h2>
                <table id="table">
                    <thead>
                        <tr>
                            <th>#</th>
                            <th>Name</th>
                            <th>Type</th>
                            <th>Location</th>
                            <th>Price</th>
                            <th>Creation Date</th>
                            <th>Action</th>
                        </tr>
                    </thead>
                    <tbody>
<?php $sql = "SELECT * from TblTourPackages";
$query = $dbh -> prepare($sql);
//Query -> bindParam(':city', $city, PDO::PARAM_STR);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
{
foreach($results as $result)
{
                ?>
                    <tr>

```

```

>PackageName);?></td>
<td><?php echo htmlentities($cnt);?></td>
<td><?php echo htmlentities($result-
>PackageType);?></td>
<td><?php echo htmlentities($result-
>PackageLocation);?></td>
<td><?php echo htmlentities($result-
>PackagePrice);?></td>
<td><?php echo htmlentities($result-
>Creationdate);?></td>
<td><a href="update-package.php?pid=<?php
echo htmlentities($result->PackageId);?>"><button type="button" class="btn btn-primary btn-
block">View Details</button></a></td>
</tr>
<?php $cnt=$cnt+1; } ?>
</tbody>
</table>
</div>
</table>

</div>
<!-- script-for sticky-nav -->
<script>
$(document).ready(function() {
    var navoffeset($(".header-main").offset().top);
    $(window).scroll(function(){
        var scrollpos=$(window).scrollTop();
        if(scrollpos >=navoffeset){
            $(".header-main").addClass("fixed");
        }else{
            $(".header-main").removeClass("fixed");
        }
    });
});
</script>
<!-- /script-for sticky-nav -->
<!--inner block start here-->
<div class="inner-block">

</div>
<!--inner block end here-->
<!--copy rights start here-->
<?php include('includes/footer.php');?>
<!--COPY rights end here-->
</div>
</div>
<!--/content-inner-->
<!--sidebar-menu-->
<?php include('includes/sidebarmenu.php');?>
<div class="clearfix"></div>
</div>

```

```

<script>
var toggle = true;

$(".sidebar-icon").click(function() {
    if (toggle)
    {
        $(".page-container").addClass("sidebar-collapsed").removeClass("sidebar-collapsed-back");
        $("#menu span").css({"position": "absolute"});
    }
    else
    {
        $(".page-container").removeClass("sidebar-collapsed").addClass("sidebar-collapsed-back");
        setTimeout(function() {
            $("#menu span").css({"position": "relative"});
        }, 400);
    }
    toggle = !toggle;
});
</script>

<!--js -->
<script src="js/jquery.nicescroll.js"></script>
<script src="js/scripts.js"></script>
<!-- Bootstrap Core JavaScript -->
<script src="js/bootstrap.min.js"></script>
<!-- /Bootstrap Core JavaScript -->

</body>
</html>
<?php } ?>
manage-pages.php
<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
{
header('location:index.php');
}
else{
if($_POST['submit']=="Update")
{
    $pagetype=$_GET['type'];
    $pagedetails=$_POST['pgedetails'];
$sql = "UPDATE tblpages SET detail=:pagedetails WHERE type=:pagetype";
$query = $dbh->prepare($sql);
$query -> bindParam(':pagetype',$pagetype, PDO::PARAM_STR);
$query-> bindParam(':pagedetails',$pagedetails, PDO::PARAM_STR);
$query -> execute();
$msg="Page data updated successfully";
}

```

```

}

?>
<!DOCTYPE HTML>
<html>
<head>
<title>TMS | Admin Package Creation</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<meta name="keywords" content="Pooled Responsive web template, Bootstrap Web Templates, Flat Web Templates, Android Compatible web template, Smartphone Compatible web template, free webdesigns for Nokia, Samsung, LG, SonyEricsson, Motorola web design" />
<script type="application/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar(){ window.scrollTo(0,1); } </script>
<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<link href="css/font-awesome.css" rel="stylesheet">
<script src="js/jquery-2.1.4.min.js"></script>
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400' rel='stylesheet' type='text/css'/>
<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css'>
<link rel="stylesheet" href="css/icon-font.min.css" type='text/css' />
<style>
    .errorWrap {
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #dd3d36;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
    .succWrap{
        padding: 10px;
        margin: 0 0 20px 0;
        background: #fff;
        border-left: 4px solid #5cb85c;
        -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
        box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    }
</style>

<script type="text/JavaScript">
<!--
function MM_findObj(n, d) { //v4.01
    var p,i,x; if(!d) d=document; if((p=n.indexOf("?"))>0&&parent.frames.length) {
        d=parent.frames[n.substring(p+1)].document; n=n.substring(0,p);}
    if(!(x=d[n])&&d.all) x=d.all[n]; for (i=0;!x&&i<d.forms.length;i++) x=d.forms[i][n];
    for(i=0;!x&&d.layers&&i<d.layers.length;i++) x=MM_findObj(n,d.layers[i].document);
    if(!x && d.getElementById) x=d.getElementById(n); return x;
}
-->
```

```

function MM_validateForm() { //v4.0
var i,p,q,nm,test,num,min,max,errors="",args=MM_validateForm.arguments;
for (i=0; i<(args.length-2); i+=3) { test=args[i+2]; val=MM_findObj(args[i]);
if (val) { nm=val.name; if ((val.value)!="") {
if (test.indexOf('isEmail')!=-1) { p=val.indexOf('@');
if (p<1 || p==(val.length-1)) errors+='- '+nm+' must contain an e-mail address.\n';
} else if (test!='R') { num = parseFloat(val);
if (isNaN(val)) errors+='- '+nm+' must contain a number.\n';
if (test.indexOf('inRange') != -1) { p=test.indexOf(':');
min=test.substring(8,p); max=test.substring(p+1);
if (num<min || max<num) errors+='- '+nm+' must contain a number between '+min+' and '+max+'.\n';
} } } else if (test.charAt(0) == 'R') errors += '- '+nm+' is required.\n'; }
} if (errors) alert('The following error(s) occurred:\n'+errors);
document.MM_returnValue = (errors == "");
}

function MM_jumpMenu(targ,selObj,restore){ //v3.0
eval(targ+".location='"+selObj.options[selObj.selectedIndex].value+"'");
if (restore) selObj.selectedIndex=0;
}
//-->
</script>
<script type="text/javascript" src="nicEdit.js"></script>
<script type="text/javascript">
    bkLib.onDomLoaded(function() { nicEditors.allTextAreas() });
</script>

</head>
<body>
    <div class="page-container">
        <!--content-inner-->
        <div class="left-content">
            <div class="mother-grid-inner">
                <!--header start here-->
                <?php include('includes/header.php');?>
                    <div class="clearfix"> </div>
                </div>
            <!--heder end here-->
            <ol class="breadcrumb">
                <li class="breadcrumb-item"><a href="index.html">Home</a><i class="fa fa-angle-right"></i>Update Page Data </li>
            </ol>
            <!--grid-->
            <div class="grid-form">
                <!--grid-form1-->
                <div class="grid-form1">
                    <h3>Update Page Data</h3>
                    <?php if($error){?><div class="errorWrap"><strong>ERROR</strong><?php echo htmlentities($error); ?> </div><?php }>

```

```

else if($msg){?><div
class="succWrap"><strong>SUCCESS</strong><?php echo htmlentities($msg); ?> </div><?php
?>
<div class="tab-content">
    <div class="tab-pane active" id="horizontal-form">
        <form class="form-horizontal" name="package"
method="post" enctype="multipart/form-data">
            <div class="form-group">
                <label for="focusedinput"
class="col-sm-2 control-label">Select page</label>
                <div class="col-sm-8">
                    <select name="menu1"
onChange="MM_jumpMenu('parent',this,0)">
                        <option value="" selected="selected" class="form-control">***Select One***</option>
                        <option value="manage-pages.php?type=terms">terms and condition</option>
                        <option value="manage-pages.php?type=privacy">privacy and policy</option>
                        <option value="manage-pages.php?type=aboutus">aboutus</option>
                        <option value="manage-pages.php?type=contact">Contact us</option>
                    </select>
                </div>
            </div>
</div>
<div class="form-group">
    <label for="focusedinput"
class="col-sm-2 control-label">Selected Page</label>
    <div class="col-sm-8">
        <?php
            switch($_GET['type'])
            {
                case "terms" :
                    echo "Terms and Conditions";
                    break;
                case "privacy" :
                    echo "Privacy And Policy";
                    break;
                case "aboutus" :
                    echo "About US";
                    break;
                case "software" :
                    echo "Offers";
                    break;
                case "aspnet" :
                    echo "Vission And MISSION";
                    break;
                case "objectives" :
                    echo "Objectives";
                    break;
                case "disclaimer" :
                    echo "Disclaimer";
                    break;
                case "vbnet" :

```

```

echo "Partner With Us";
break;
case "candc" :
echo "Super Brand";
break;
case "contact" :
echo "Contact Us";
break;

default :
echo "";
break;
}

?>
</div>
</div>

<div class="form-group">
    <label for="focusedinput"
        class="col-sm-2 control-label">Package Details</label>
    <div class="col-sm-8">
        <textarea class="form-control" rows="5" cols="50" name="pgedetails" id="pgedetails" placeholder="Package Details" required>
        <?php
$pagetype=$_GET['type'];
$sql = "SELECT detail from tblpages where type=:pagetype";
$query = $dbh -> prepare($sql);
$query->bindParam(':pagetype',$pagetype,PDO::PARAM_STR);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
{
foreach($results as $result)
{
echo htmlentities($result->detail);
}}>
    </div>
</div>

```

```

?>

</textarea>
</div>
</div>



Update



<div class="panel-footer">


</div>
</form>
<!--//grid-->

<!-- script-for sticky-nav -->
<script>
$(document).ready(function() {
    var navoffeset($(".header-main").offset().top);
    $(window).scroll(function(){
        var scrollpos=$(window).scrollTop();
        if(scrollpos >=navoffeset){
            $(".header-main").addClass("fixed");
        }else{
            $(".header-main").removeClass("fixed");
        }
    });
});
</script>
<!-- /script-for sticky-nav -->

<!--inner block start here-->
<div class="inner-block">

</div>
<!--inner block end here-->
<!--copy rights start here-->
<?php include('includes/footer.php');?>
<!--COPY rights end here-->
</div>
</div>
<!--/content-inner-->
<!--/sidebar-menu-->
<?php include('includes/sidebarmenu.php');?>
<div class="clearfix"></div>


```

```

        </div>
        <script>
        var toggle = true;

        $(".sidebar-icon").click(function() {
            if (toggle)
            {
                $(".page-container").addClass("sidebar-
collapsed").removeClass("sidebar-collapsed-back");
                $("#menu
span").css({"position":"absolute"});
            }
            else
            {
                $(".page-
container").removeClass("sidebar-collapsed").addClass("sidebar-collapsed-back");
                setTimeout(function() {
                    $("#menu
span").css({"position":"relative"});
                }, 400);
            }
        });

        toggle = !toggle;
    });
</script>

<!--js -->
<script src="js/jquery.nicescroll.js"></script>
<script src="js/scripts.js"></script>
<!-- Bootstrap Core JavaScript -->
<script src="js/bootstrap.min.js"></script>
<!-- /Bootstrap Core JavaScript -->

</body>
</html>
<?php } ?>
manage-users.php
<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
{
header('location:index.php');
}
else{
    ?>
<!DOCTYPE HTML>
<html>
<head>
<title>TMS | Admin manage Users</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<script type="application/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar() { window.scrollTo(0,1); } </script>

```

```

<!-- Bootstrap Core CSS -->
<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />
<!-- Custom CSS -->
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<!-- Graph CSS -->
<link href="css/font-awesome.css" rel="stylesheet">
<!-- jQuery -->
<script src="js/jquery-2.1.4.min.js"></script>
<!-- //jQuery -->
<!-- tables -->
<link rel="stylesheet" type="text/css" href="css/table-style.css" />
<link rel="stylesheet" type="text/css" href="css/basicTable.css" />
<script type="text/javascript" src="js/jquery.basicTable.min.js"></script>
<script type="text/javascript">
$(document).ready(function() {
    $('#table').basicTable();

    $('#table-breakpoint').basicTable({
        breakpoint: 768
    });

    $('#table-swap-axis').basicTable({
        swapAxis: true
    });

    $('#table-force-off').basicTable({
        forceResponsive: false
    });

    $('#table-no-resize').basicTable({
        noResize: true
    });

    $('#table-two-axis').basicTable();

    $('#table-max-height').basicTable({
        tableWrapper: true
    });
});
</script>
<!-- //tables -->
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400'
rel='stylesheet' type='text/css' />
<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css' />
<!-- lined-icons -->
<link rel="stylesheet" href="css/icon-font.min.css" type='text/css' />
<!-- //lined-icons -->
</head>
<body>
    <div class="page-container">
        <!--/content-inner-->
    <div class="left-content">
        <div class="mother-grid-inner">

```

```

<!--header start here-->
    <?php include('includes/header.php');?>
        <div class="clearfix"> </div>
    </div>

<!--heder end here-->
<ol class="breadcrumb">
    <li class="breadcrumb-item"><a href="index.html">Home</a><i class="fa fa-angle-right"></i>Manage Users</li>
</ol>
<div class="agile-grids">
    <!-- tables -->

        <div class="agile-tables">
            <div class="w3l-table-info">
                <h2>Manage Users</h2>
                <table id="table">
                    <thead>
                        <tr>
                            <th>#</th>
                            <th>Name</th>
                            <th>Mobile No.</th>
                            <th>Email Id</th>
                            <th>RegDate </th>
                            <th>Updation Date</th>
                        </tr>
                    </thead>
                    <tbody>
<?php $sql = "SELECT * from tblusers";
$query = $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
{
foreach($results as $result)
{
    ?>
                    <tr>
                        <td><?php echo htmlentities($cnt);?></td>
                        <td><?php echo htmlentities($result-
>FullName);?></td>
                        <td><?php echo htmlentities($result-
>MobileNumber);?></td>
                        <td><?php echo htmlentities($result-
>EmailId);?></td>
                        <td><?php echo htmlentities($result-
>RegDate);?></td>
                        <td><?php echo htmlentities($result-
>UpdationDate);?></td>
                    </tr>
                    <?php $cnt=$cnt+1; } ?>
                </tbody>
            </table>
        </div>
    </div>

```

```

        </div>
<!-- script-for sticky-nav -->
<script>
$(document).ready(function() {
    var navoffeset($(".header-main").offset().top);
    $(window).scroll(function(){
        var scrollpos=$(window).scrollTop();
        if(scrollpos >=navoffeset){
            $(".header-main").addClass("fixed");
        }else{
            $(".header-main").removeClass("fixed");
        }
    });
})
</script>
<!-- /script-for sticky-nav -->
<!--inner block start here-->
<div class="inner-block">

</div>
<!--inner block end here-->
<!--copy rights start here-->
<?php include('includes/footer.php');?>
<!--COPY rights end here-->
</div>
</div>
<!--//content-inner-->
<!--sidebar-menu-->
<?php include('includes/sidebarmenu.php');?>
    <div class="clearfix"></div>
    </div>
    <script>
        var toggle = true;

        $(".sidebar-icon").click(function() {
            if (toggle)
            {
                $(".page-container").addClass("sidebar-
collapsed").removeClass("sidebar-collapsed-back");
                $("#menu
span").css({"position":"absolute"});
            }
            else
            {
                $(".page-
container").removeClass("sidebar-collapsed").addClass("sidebar-collapsed-back");
                setTimeout(function() {
                    $("#menu
span").css({"position":"relative"});
                }, 400);
            }
        });
    </script>

```

```

        toggle = !toggle;
    });
</script>
<!--js -->
<script src="js/jquery.nicescroll.js"></script>
<script src="js/scripts.js"></script>
<!-- Bootstrap Core JavaScript -->
<script src="js/bootstrap.min.js"></script>
<!-- /Bootstrap Core JavaScript -->

</body>
</html>
<?php } ?>
Updateissue.php
<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
{
header('location:index.php');
}
else{
    $iid=intval($_GET['iid']);
    if(isset($_POST['submit2']))
    {
        $remark=$_POST['remark'];

$sql = "UPDATE tblissues SET AdminRemark=:remark WHERE id=:iid";
$query = $dbh->prepare($sql);
$query -> bindParam(':remark',$remark, PDO::PARAM_STR);
$query-> bindParam(':iid',$iid, PDO::PARAM_STR);
$query -> execute();

$msg="Remark successfully Updated";
}

?>
<script language="javascript" type="text/javascript">
function f2()
{
window.close();
}ser
function f3()
{
window.print();
}
</script>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">

```

```

<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />
<title>Update Compliant</title>
<link href="style.css" rel="stylesheet" type="text/css" />
<link href="anuj.css" rel="stylesheet" type="text/css">
</head>
<body>

<div style="margin-left:50px;">
<form name="updateticket" id="updateticket" method="post">
<table width="100%" border="0" cellspacing="0" cellpadding="0">

    <tr height="50">
        <td colspan="2" class="fontkink2" style="padding-left:0px;"><div class="fontpink2">
<b>Update Remark !</b></div></td>
    </tr>

    <tr>
        <td colspan="2" "> <?php if($error){?><div
class="errorWrap"><strong>ERROR</strong>:<?php echo htmlentities($error); ?> </div><?php }>
        else if($msg){?><div class="succWrap"><strong>SUCCESS</strong>:<?php echo
htmlentities($msg); ?> </div><?php }?></td>
    </tr>

    <tbody>
<?php
$sql = "SELECT * from tblissues where id=:iid";
$query = $dbh -> prepare($sql);
$query-> bindParam(':iid',$iid, PDO::PARAM_STR);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);

if($query->rowCount() > 0)
{
foreach($results as $result)
{
    if($result->AdminRemark=="")
    {
?>

        <tr style="">
            <td class="fontkink1" >Remark:</td>
            <td class="fontkink" align="justify" ><span class="fontkink">
                <textarea cols="50" rows="7" name="remark" required="required" ></textarea>
            </span></td>
        </tr>
        <tr>
            <td class="fontkink1">&nbsp;</td>

```

```

<td >&nbsp;</td>
</tr>
<tr>
  <td class="fontkink">    </td>
  <td class="fontkink"><input type="submit" name="submit2" value="update" size="40"
style="cursor: pointer;" /></td>
</tr>
<?php } else { ?>
<tr>
  <td class="fontkink1" ><b>Remark:</b></td>
  <td class="fontkink" align="justify" ><?php echo htmlentities($result->AdminRemark);?></td>
</tr>
<tr>
  <td class="fontkink1" ><b>Remark Date:</b></td>
  <td class="fontkink" align="justify" ><?php echo htmlentities($result-
>AdminremarkDate);?></td>
</tr>
<?php }}?>

</table>
</form>
</div>

</body>
</html>
<?php } ?>

```

**update-package.php**

```

<?php
session_start();
error_reporting(0);
include('includes/config.php');
if(strlen($_SESSION['alogin'])==0)
{
header('location:index.php');
}
else{
$pid=intval($_GET['pid']);
if(isset($_POST['submit']))
{
$pname=$_POST['packagename'];
$pctype=$_POST['packagetype'];
$plocation=$_POST['packagelocation'];
$pprice=$_POST['packageprice'];
$pfeatures=$_POST['packagefeatures'];
$pdetails=$_POST['packagedetails'];
$pimage=$_FILES["packageimage"]["name"];
$sql="update TblTourPackages set
PackageName=:pname,PackageType=:pctype,PackageLocation=:plocation,PackagePrice=:pprice,Pac
kageFetures=:pfeatures,PackageDetails=:pdetails where PackageId=:pid";
$query = $dbh->prepare($sql);

```

```

$query->bindParam(':pname',$pname,PDO::PARAM_STR);
$query->bindParam(':ptype',$ptype,PDO::PARAM_STR);
$query->bindParam(':plocation',$plocation,PDO::PARAM_STR);
$query->bindParam(':pprice',$pprice,PDO::PARAM_STR);
$query->bindParam(':pfeatures',$pfeatures,PDO::PARAM_STR);
$query->bindParam(':pdetails',$pdetails,PDO::PARAM_STR);
$query->bindParam(':pid',$pid,PDO::PARAM_STR);
$query->execute();
$msg="Package Updated Successfully";
}

?>
<!DOCTYPE HTML>
<html>
<head>
<title>TMS | Admin Package Creation</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<meta name="keywords" content="Pooled Responsive web template, Bootstrap Web Templates, Flat Web Templates, Android Compatible web template, Smartphone Compatible web template, free webdesigns for Nokia, Samsung, LG, SonyEricsson, Motorola web design" />
<script type="application/x-javascript"> addEventListener("load", function() {
setTimeout(hideURLbar, 0); }, false); function hideURLbar() { window.scrollTo(0,1); } </script>
<link href="css/bootstrap.min.css" rel='stylesheet' type='text/css' />
<link href="css/style.css" rel='stylesheet' type='text/css' />
<link rel="stylesheet" href="css/morris.css" type="text/css"/>
<link href="css/font-awesome.css" rel="stylesheet">
<script src="js/jquery-2.1.4.min.js"></script>
<link href='//fonts.googleapis.com/css?family=Roboto:700,500,300,100italic,100,400' rel='stylesheet' type='text/css'/>
<link href='//fonts.googleapis.com/css?family=Montserrat:400,700' rel='stylesheet' type='text/css'>
<link rel="stylesheet" href="css/icon-font.min.css" type='text/css' />
<style>
.errorWrap {
    padding: 10px;
    margin: 0 0 20px 0;
    background: #fff;
    border-left: 4px solid #dd3d36;
    -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
.succWrap{
    padding: 10px;
    margin: 0 0 20px 0;
    background: #fff;
    border-left: 4px solid #5cb85c;
    -webkit-box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
    box-shadow: 0 1px 1px 0 rgba(0,0,0,.1);
}
</style>

</head>
<body>

```

```

<div class="page-container">
    <!--/content-inner-->
<div class="left-content">
    <div class="mother-grid-inner">
        <!--header start here-->
<?php include('includes/header.php');?>

                <div class="clearfix"></div>
            </div>
<!--heder end here-->
    <ol class="breadcrumb">
        <li class="breadcrumb-item"><a href="index.html">Home</a><i class="fa fa-angle-right"></i>Update Tour Package </li>
    </ol>
        <!--grid-->
    <div class="grid-form">

<!-->
<div class="grid-form1">
    <h3>Update Package</h3>
        <?php if($error){?><div class="errorWrap"><strong>ERROR</strong><?php echo htmlentities($error); ?> </div><?php }>
        else if($msg){?><div class="succWrap"><strong>SUCCESS</strong><?php echo htmlentities($msg); ?> </div><?php }?>
    <div class="tab-content">
        <div class="tab-pane active" id="horizontal-form">

<?php
$pid=intval($_GET['pid']);
$sql = "SELECT * from TblTourPackages where PackageId=:pid";
$query = $dbh -> prepare($sql);
$query -> bindParam(':pid', $pid, PDO::PARAM_STR);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
{
foreach($results as $result)
{      ?>

                <form class="form-horizontal" name="package"
method="post" enctype="multipart/form-data">
                    <div class="form-group">
                        <label for="focusedinput"
class="col-sm-2 control-label">Package Name</label>
                        <div class="col-sm-8">
                            <input type="text"
class="form-control1" name="packagename" id="packagename" placeholder="Create Package"
value="<?php echo htmlentities($result->PackageName);?>" required>
                        </div>
                    </div>
<div class="form-group">

```

```

        <label for="focusedinput">
class="col-sm-2 control-label">Package Type</label>
        <div class="col-sm-8">
            <input type="text"
class="form-control" name="packagetype" id="packagetype" placeholder=" Package Type eg-
Family Package / Couple Package" value="<?php echo htmlentities($result->PackageType);?>" required>
        </div>
    </div>

<div class="form-group">
        <label for="focusedinput">
class="col-sm-2 control-label">Package Location</label>
        <div class="col-sm-8">
            <input type="text"
class="form-control" name="packagelocation" id="packagelocation" placeholder=" Package
Location" value="<?php echo htmlentities($result->PackageLocation);?>" required>
        </div>
    </div>

<div class="form-group">
        <label for="focusedinput">
class="col-sm-2 control-label">Package Price in USD</label>
        <div class="col-sm-8">
            <input type="text"
class="form-control" name="packageprice" id="packageprice" placeholder=" Package Price is
USD" value="<?php echo htmlentities($result->PackagePrice);?>" required>
        </div>
    </div>

<div class="form-group">
        <label for="focusedinput">
class="col-sm-2 control-label">Package Features</label>
        <div class="col-sm-8">
            <input type="text"
class="form-control" name="packagefeatures" id="packagefeatures" placeholder="Package
Features Eg-free Pickup-drop facility" value="<?php echo htmlentities($result-
>PackageFetures);?>" required>
        </div>
    </div>

<div class="form-group">
        <label for="focusedinput">
class="col-sm-2 control-label">Package Details</label>
        <div class="col-sm-8">
            <textarea class="form-
control" rows="5" cols="50" name="packagedetails" id="packagedetails" placeholder="Package
Details" required><?php echo htmlentities($result->PackageDetails);?></textarea>
        </div>
    </div>

<div class="form-group">
<label for="focusedinput" class="col-sm-2 control-label">Package Image</label>

```

```

<div class="col-sm-8">
&nbsp;&nbsp;&nbsp;<a href="change-image.php?imgid=<?php echo htmlentities($result->PackageId);?>">Change Image</a>
</div>
</div>

<div class="form-group">
    <label for="focusedinput" class="col-sm-2 control-label">Last Updation Date</label>
    <?php echo htmlentities($result->UpdationDate);?>
    <div class="col-sm-8">
        <div class="row">
            <div class="col-sm-8 col-sm-offset-2">
                <button type="submit" name="submit" class="btn-primary btn">Update</button>
            </div>
        </div>
    </div>
</div>

</form>

<div class="panel-footer">
    </div>
</form>
</div>
</div>
<!--//grid-->

<!-- script-for sticky-nav -->
<script>
$(document).ready(function() {
    var navoffeset($(".header-main").offset().top);
    $(window).scroll(function(){
        var scrollpos=$(window).scrollTop();
        if(scrollpos >=navoffeset){
            $(".header-main").addClass("fixed");
        }else{
            $(".header-main").removeClass("fixed");
        }
    })
})
```

```

    });

    });
    </script>
    <!-- /script-for sticky-nav -->
<!--inner block start here-->
<div class="inner-block">

</div>
<!--inner block end here-->
<!--copy rights start here-->
<?php include('includes/footer.php');?>
<!--COPY rights end here-->
</div>
</div>
<!--/content-inner-->
<!--/sidebar-menu-->
    <?php include('includes/sidebarmenu.php');?>
        <div class="clearfix"></div>
    </div>
    <script>
var toggle = true;

$(".sidebar-icon").click(function() {
    if (toggle)
    {
        $(".page-container").addClass("sidebar-
collapsed").removeClass("sidebar-collapsed-back");
        $("#menu
span").css({"position":"absolute"});
    }
    else
    {
        $(".page-
container").removeClass("sidebar-collapsed").addClass("sidebar-collapsed-back");
        setTimeout(function() {
            $("#menu
span").css({"position":"relative"});
        }, 400);
    }
    toggle = !toggle;
});
</script>
<!--js -->
<script src="js/jquery.nicescroll.js"></script>
<script src="js/scripts.js"></script>
<!-- Bootstrap Core JavaScript -->
    <script src="js/bootstrap.min.js"></script>
<!-- /Bootstrap Core JavaScript -->

</body>
</html>
<?php } ?>
```

```

Sidebarmenu.php
<div class="sidebar-menu">
    <header class="logo1">
        <a href="#" class="sidebar-icon"> <span class="fa fa-bars"></span> </a>
    </header>
    <div style="border-top:1px ridge rgba(255, 255, 255, 0.15)"></div>
    <div class="menu">
        <ul id="menu" >
            <li><a href="dashboard.php"><i class="fa fa-tachometer"></i> <span>Dashboard</span><div class="clearfix"></div></a></li>

            <li id="menu-academico" ><a href="#"><i class="fa fa-list-ul" aria-hidden="true"></i><span> Tour Packages</span> <span class="fa fa-angle-right" style="float: right"></span><div class="clearfix"></div></a>
                <ul id="menu-academico-sub" >
                    <li id="menu-academico-avaliacoes" ><a href="create-package.php">Create</a></li>
                    <li id="menu-academico-avaliacoes" ><a href="manage-packages.php">Manage</a></li>
                </ul>
            </li>
            <li id="menu-academico" ><a href="manage-users.php"><i class="fa fa-users" aria-hidden="true"></i><span>Manage Users</span><div class="clearfix"></div></a></li>

            <li><a href="manage-bookings.php"><i class="fa fa-list" aria-hidden="true"></i> <span>Manage Booking</span><div class="clearfix"></div></a></li>
            <li><a href="manageissues.php"><i class="fa fa-table"></i> <span>Manage Issues</span><div class="clearfix"></div></a></li>
            <li><a href="manage-enquires.php"><i class="fa fa-file-text-o" aria-hidden="true"></i> <span>Manage Enquiries</span><div class="clearfix"></div></a></li>
            <li><a href="manage-pages.php"><i class="fa fa-file-text-o" aria-hidden="true"></i> <span>Manage Pages</span><div class="clearfix"></div></a></li>
        </ul>
    </div>
</div>

```

## **Footer.php**

```

<div class="copyrights">
    <p>© 2020 WT . All Rights Reserved | <a href="#">WORLD TOURISM </a> </p>
</div>

```

## **Config.php**

```

<?php
// DB credentials.
define('DB_HOST','localhost');
define('DB_USER','root');
define('DB_PASS','');
define('DB_NAME','tms');
// Establish database connection.
try
{
$dh = new PDO("mysql:host=".DB_HOST.";dbname=".DB_NAME,DB_USER,
DB_PASS,array(PDO::MYSQL_ATTR_INIT_COMMAND => "SET NAMES 'utf8'"));
}
catch (PDOException $e)
{
exit("Error: " . $e->getMessage());
}
?>
Style.css


/*
Author: W3layout
Author URL: http://w3layouts.com
License: Creative Commons Attribution 3.0 Unported
License URL: http://creativecommons.org/licenses/by/3.0/
*/
html, body{
    font-family: 'Roboto', sans-serif;
    font-size: 100%;
    overflow-x: hidden;
    background-color: #edecfc;
}
body a{
    transition:0.5s all;
    -webkit-transition:0.5s all;
    -moz-transition:0.5s all;
    -o-transition:0.5s all;
    -ms-transition:0.5s all;
    background:#011D4A!important;
}
a:focus, a:active, a:hover ,a.dropdown-toggle{
    outline: none;
    -webkit-transition: all 0.3s;
    -moz-transition: all 0.3s;
    transition: all 0.3s;
    text-decoration:none;
}
a {
    background-color:none;
}
body p{
    font-family: 'Roboto', sans-serif;
}
h1, h2, h3, h4, h5 {
    font-family: 'Montserrat', sans-serif;
}

```

```
        }
      a {
        color: #008DE7;
        font-weight:400;
      }
      a:hover { transition: all 200ms ease-in-out; }

.page-container {
  min-width: 1260px;
  position: relative;
  top: 0;
  left: 0;
  right: 0;
  bottom: 0;
  width: 100%;
  height: 100%;
  margin: 0px auto;
}
.left-content {
  float: right;
  width: 87%;
}
.a.sidebar-icon:hover{
  color:#1b93e1;
}
.page-container.sidebar-collapsed {
  transition: all 100ms linear;
  transition-delay: 300ms;
}
```

## 11. SCREENSHOTS

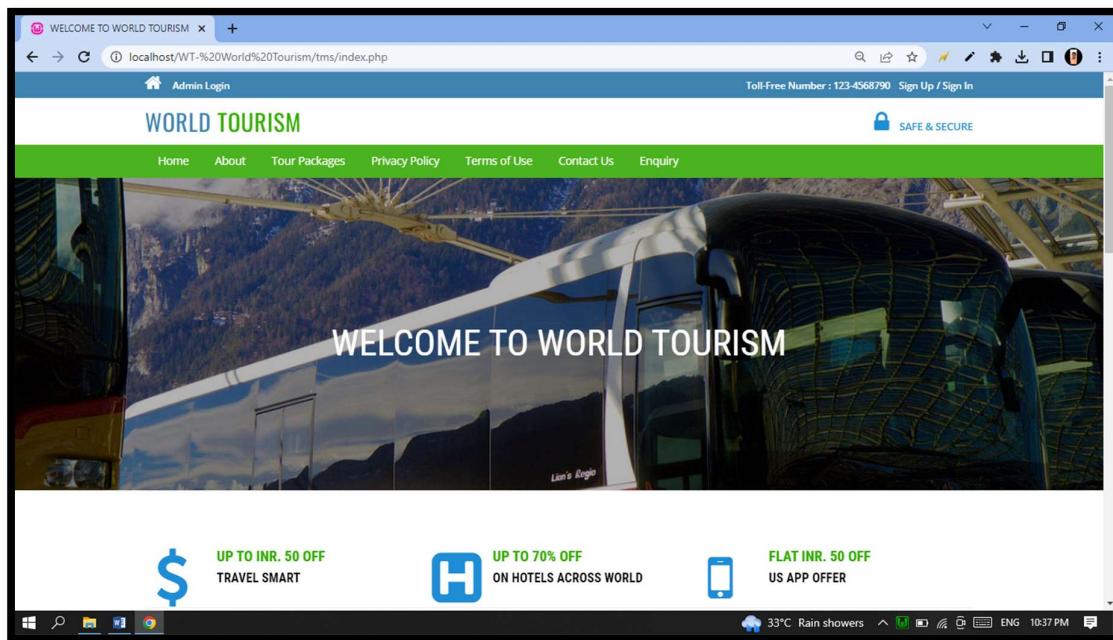

The screenshot displays a "Package List" page from the "WORLD TOURISM" website. The page title is "Package List" in green. It lists three travel packages:

- Package Name: Gangtok & Darjeeling Holiday (Without Flights)**  
Package Type: Family Package  
Package Location: Sikkim  
Features: Free Wi-fi, Free pickup and drop facility  
Price: INR 1000  
Details button
- Package Name: Short Trip To Dubai**  
Package Type: Family  
Package Location: Dubai  
Features: Free pick up and drop facility, Free Wi-fi, Free breakfast  
Price: INR 4500  
Details button
- Package Name: Bhutan Holidays - Thimphu and Paro Special**  
Package Type: Family Package  
Package Location: Bhutan  
Features: Free Wi-fi, Free Breakfast, Free Pickup and drop facility  
Price: INR 3000  
Details button

The bottom of the screen shows a Windows taskbar with various icons and a weather widget indicating 33°C Rain showers.

WELCOME TO WORLD TOURISM

localhost/WT-%20World%20Tourism/tms/index.php

**Package Name:** Sikkim Delight with Darjeeling (customizable)

**Package Type :** Group

**Package Location :** Sikkim

**Features:** Free Breakfast, Free Pick up drop facility

INR 3500

Details

**View More Packages**

**Enquiries:** 80

**Registered users:** 19

**Booking:** 70+

© 2023 WT . All Rights Reserved

33°C Rain showers ENG 10:37 PM

WELCOME TO WORLD TOURISM

localhost/WT-%20World%20Tourism/tms/index.php

Admin Login

Toll-Free Number : 123-4568790 Sign Up / Sign In

Create your account

**Facebook**

**Google**

pratieshkumar

Afghan

9345275693

pratieshkumar@gmail.com

Email available for Registration .

.....

CREATE ACCOUNT

By logging in you agree to our Terms and Conditions and Privacy Policy


**SAFE & SECURE**

**UP TO INR. 50 OFF**  
TRAVEL SMART

**UP TO 70% OFF**  
ON HOTELS ACROSS WORLD

**FLAT INR. 50 OFF**  
US APP OFFER

33°C Rain showers ENG 10:38 PM

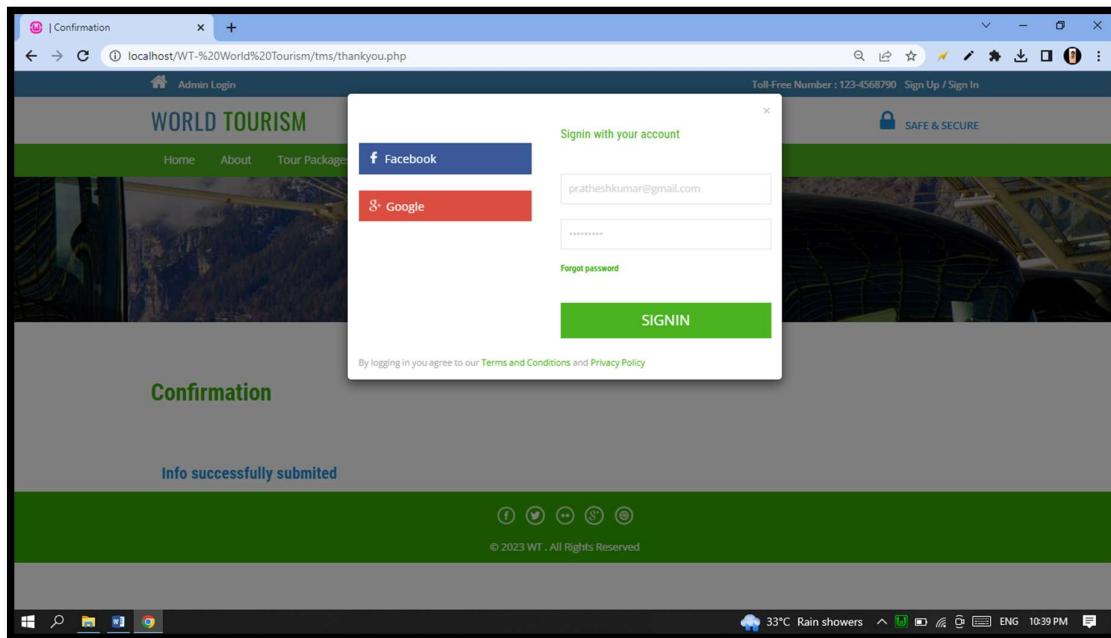

The screenshot shows a web browser window titled "WT | Package List". The URL is "localhost/WT-%20World%20Tourism/tms/package-list.php". The top navigation bar includes "My Profile", "Change Password", "My Tour History", "Issue Tickets", "Welcome : pratheshkumar@gmail.com / Logout", and a "SAFE & SECURE" lock icon. The main content area has a banner with "WT- Package List" and palm trees. Below it is a section titled "Package List" with a thumbnail for a "Paris & Switzerland" package. The package details are: **Package Name: Swiss Paris Delight Premium 2020 (Group Package)**, **INR 6000**, **Package Type : Group Package**. The description mentions "Features Round trip Economy class airfare valid for the duration of the holiday - Airport taxes - Accommodation for 3 nights in Paris and 3 nights in scenic Switzerland - Enjoy continental breakfasts every morning - Enjoy 5 Indian dinners in Mainland Europe - Exp". There is also a "Details" button. Another package thumbnail for "Bhutan" is partially visible below.

The screenshot shows a web browser window titled "WT | WORLD TOURISM". The URL is "localhost/WT-%20World%20Tourism/tms/page.php?type=terms". The top navigation bar includes "Home", "About", "Tour Packages", "Privacy Policy", "Terms of Use", "Contact Us", and "Need Help? / Write Us". The main content area has a section titled "terms" and "ACCEPTANCE OF TERMS". The text discusses the importance of tourism and the acceptance of terms. The bottom of the page has a green footer bar with social media icons and the text "© 2023 WT . All Rights Reserved". The system tray at the bottom right shows the date and time as "33°C Rain showers 10:41 PM".

WT | WORLD TOURISM

Welcome : pratheshkumar@gmail.com / Logout

SAFE & SECURE

Home About Tour Packages Privacy Policy Terms of Use Contact Us Need Help? / Write Us

# WT - WORLD Tourism

## aboutus

**Welcome to World Tourism Management!!!**

Since then, our courteous and committed team members have always ensured a pleasant and enjoyable tour for the clients. This arduous effort has enabled Shreya Tour & Travels to be recognized as a dependable Travel Solutions provider with three offices Delhi. We have got packages to suit the discerning traveler's budget and savor. Book your dream vacation online. Supported quality and proposals of our travel consultants, we have a tendency to welcome you to decide on from holidays packages and customize them according to your plan.

Windows taskbar: 33°C Rain showers ENG 10:41 PM

WT | WORLD TOURISM

Welcome : pratheshkumar@gmail.com / Logout

SAFE & SECURE

Home About Tour Packages Privacy Policy Terms of Use Contact Us Need Help? / Write Us

# WT - WORLD Tourism

## privacy

Share your travel information.  
Before you leave, share your itinerary with someone you trust.  
Research ground transportation. Research taxi and ridesharing companies that are available and reputable in the area. ...  
Familiarize yourself with the destination...  
Plan for safety abroad. Safety and security are vital to providing quality in tourism. More than any other economic activity, the success or failure of a tourism destination depends on being able to provide a safe and secure environment for visitors. Safe and Honorable Tourism' aims to strengthen the critical pillar, of 'Suraksha' (Safety) and ensure that Indian tourism follows international standards of, safe tourism practices, applicable for both tourists and local residents i.e. local people and, communities who may be impacted by tourism in some way.

Windows taskbar: 33°C Rain showers ENG 10:41 PM

WT | WORLD TOURISM

Welcome : pratheshkumar@gmail.com / Logout

SAFE & SECURE

Home About Tour Packages Privacy Policy Terms of Use Contact Us Need Help? / Write Us



# WT - WORLD Tourism

## contact

Address--

5/23g-17 4 th cross street ,  
Gandhi main road,  
New Delhi - 007

Windows taskbar: 33°C Rain showers ENG 10:41 PM

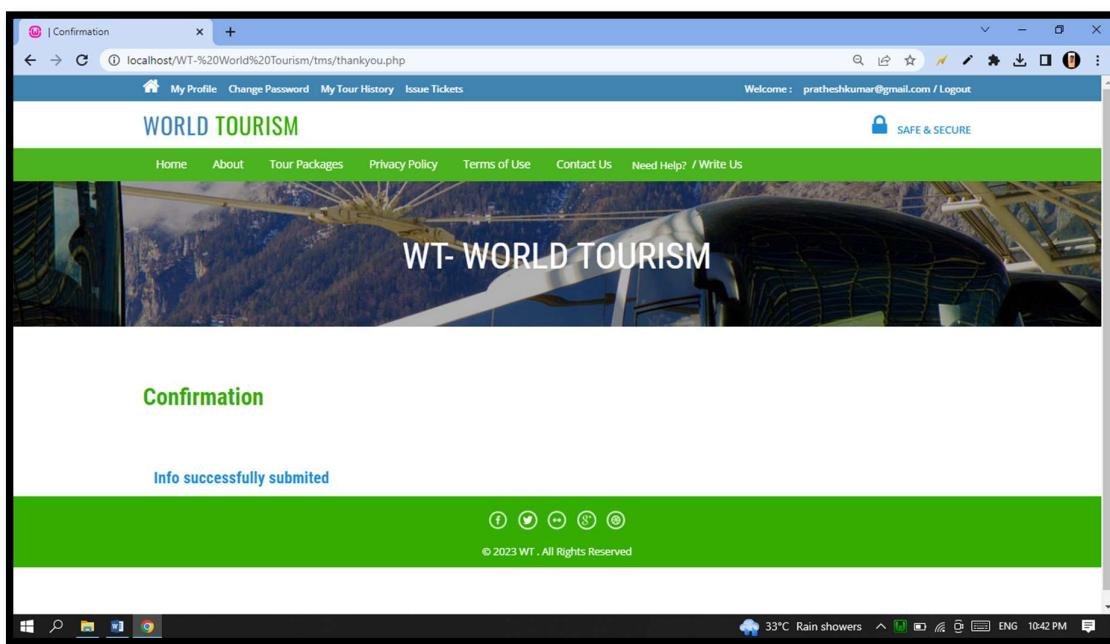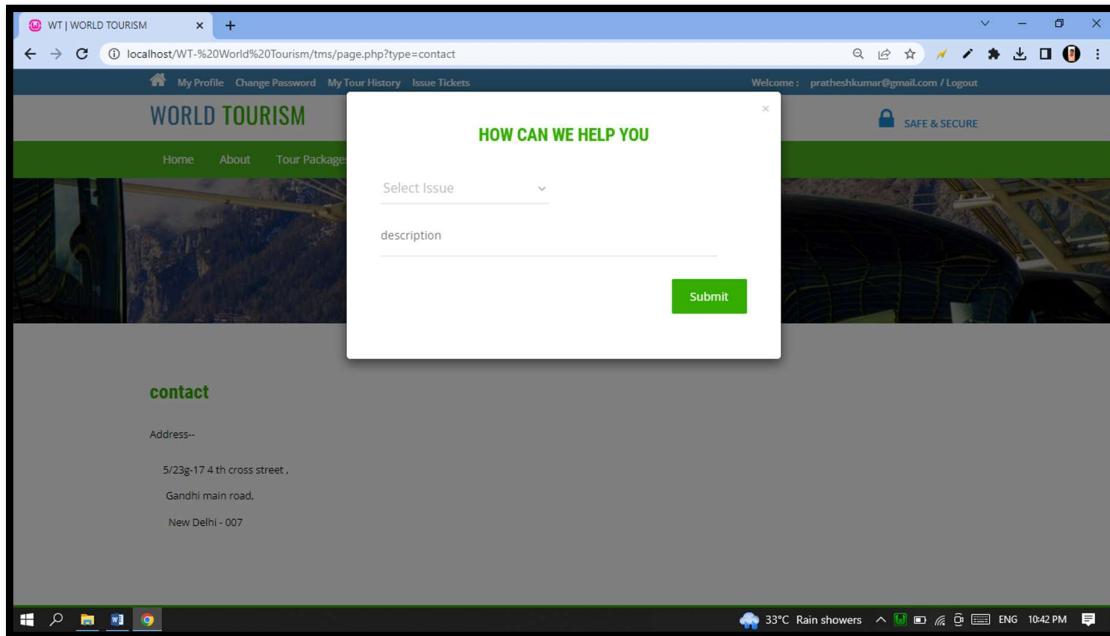

WT | Package Details

localhost/WT-%20World%20Tourism/tms/package-details.php?pkgid=1

Welcome : pratheshkumar@gmail.com / Logout

My Profile Change Password My Tour History Issue Tickets

SAFE & SECURE

## WORLD TOURISM

Home About Tour Packages Privacy Policy Terms of Use Contact Us Need Help? / Write Us

# WT -Package Details



**Swiss Paris Delight Premium 2020 (Group Package)**  
#PKG-1

Package Type : Group Package  
Package Location : Paris and Switzerland  
Features Round trip Economy class airfare valid for the duration of the holiday - Airport taxes - Accommodation for 3 nights in Paris and 3 nights in scenic Switzerland - Enjoy continental breakfasts every morning - Enjoy 5 Indian dinners in Mainland Europe - Exp

From To  
dd-mm-yyyy dd-mm-yyyy

33°C Rain showers ENG 10:42 PM

WT | Package Details

localhost/WT-%20World%20Tourism/tms/package-details.php?pkgid=1

Package Location : Paris and Switzerland



Features Round trip Economy class airfare valid for the duration of the holiday - Airport taxes - Accommodation for 3 nights in Paris and 3 nights in scenic Switzerland - Enjoy continental breakfasts every morning - Enjoy 5 Indian dinners in Mainland Europe - Exp

From To  
dd-mm-yyyy dd-mm-yyyy

Grand Total  
**INR.800**

### Package Details

Pick this holiday for a relaxing vacation in Paris and Switzerland. Your tour embarks from Paris. Enjoy an excursion to popular attractions like the iconic Eiffel Tower. After experiencing the beautiful city, you will drive past mustard fields through Burgundy to reach Switzerland. While there, you can opt for a tour to Interlaken and then to the Trummelbach Falls. Photostop at Zurich Lake and a cable car ride to Mt. Titlis are the main highlights of the holiday.


### Travels

Comment

Book

33°C Rain showers ENG 10:43 PM

## Admin Login

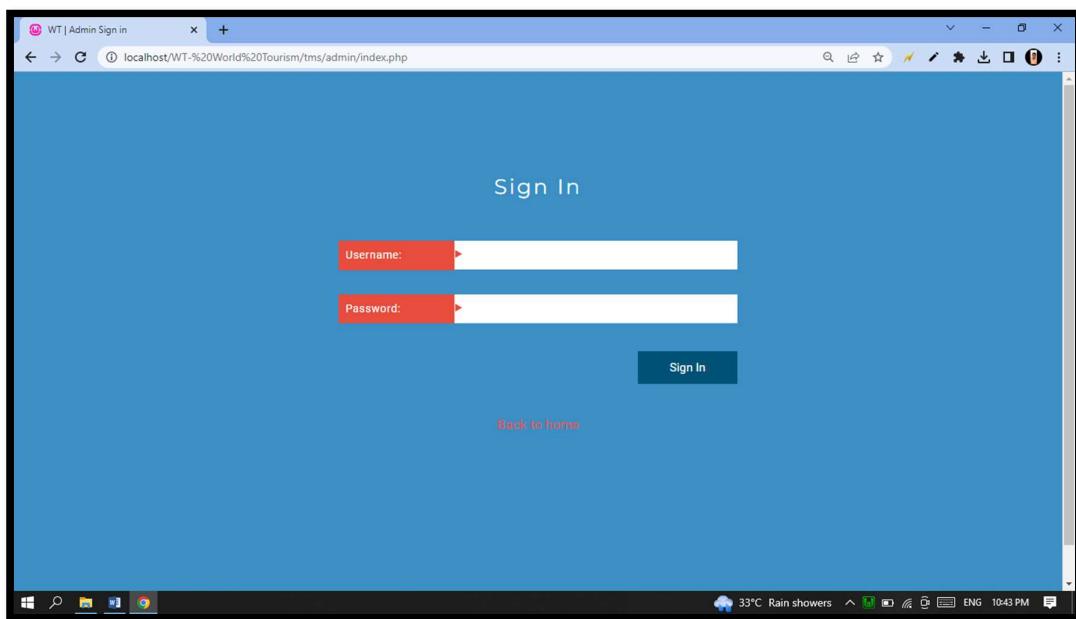

The screenshot shows a web browser window titled "WT | Admin Dashboard". The URL is "localhost/WT-%20World%20Tourism/tms/admin/dashboard.php". The dashboard has a green header with "WORLD TOURISM MANGEMENT" and a welcome message "Welcome Administrator". On the left is a sidebar with links: Dashboard, Tour Packages, Manage Users, Manage Booking, Manage Issues, Manage Enquiries, and Manage Pages. The main area has five cards: "User" (9), "Bookings" (6), "Enquiries" (3), "Total packages" (9), and "Issues Raised" (17). The footer says "© 2023 WT . All Rights Reserved | WORLD TOURISM". The system tray at the bottom right indicates it's 33°C, Rain showers, ENG, and the time is 10:44 PM.

The screenshot shows a web browser window titled "TMS | admin manage packages". The URL is "localhost/WT-%20World%20Tourism/tms/admin/manage-packages.php". The dashboard has a green header with "WORLD TOURISM MANGEMENT" and a welcome message "Welcome Administrator". On the left is a sidebar with links: Dashboard, Tour Packages, Manage Users, Manage Booking, Manage Issues, Manage Enquiries, and Manage Pages. The main area is titled "Manage Packages" and shows a table of packages:

#	NAME	TYPE	LOCATION	PRICE	CREATION DATE	ACTION
1	Swiss Paris Delight Premium 2020 (Group Package)	Group Package	Paris and Switzerland	\$6000	2020-07-08 10:51:58	<a href="#">VIEW DETAILS</a>
2	Bhutan Holidays - Thimphu and Paro Special	Family Package	Bhutan	\$3000	2020-07-08 11:07:40	<a href="#">VIEW DETAILS</a>
3	Soulmate Special Bali - 7 Nights	Couple Package	Indonesia(Bali)	\$5000	2020-07-08 11:11:07	<a href="#">VIEW DETAILS</a>
4	Kerala - A Lovers Paradise - Value Added	Family Package	Kerala	\$1000	2020-07-08 11:15:58	<a href="#">VIEW DETAILS</a>
5	Short Trip To Dubai	Family	Dubai	\$4500	2020-07-08 11:19:13	<a href="#">VIEW DETAILS</a>
6	Sikkim Delight with Darjeeling (customizable)	Group	Sikkim	\$3500	2020-07-08 11:21:26	<a href="#">VIEW DETAILS</a>

The system tray at the bottom right indicates it's 33°C, Rain showers, ENG, and the time is 10:44 PM.

TMS | Admin manage Users

localhost/WT-%20World%20Tourism/tms/admin/manage-users.php

## WORLD TOURISM MANGEMENT

Welcome Administrator

Home > Manage Users

### Manage Users

#	NAME	MOBILE NO.	EMAIL ID	REGDATE	UPDATION DATE
1	Manju Srivastav	4456464654	manju@gmail.com	2020-07-08 12:03:20	
2	Kishan	9871987979	kishan@gmail.com	2020-07-08 12:03:56	
3	Salvi Chandra	1398756416	salvi@gmail.com	2020-07-08 12:04:20	
4	Abir	4789756456	abi@gmail.com	2020-07-08 12:04:38	
5	Test	1987894654	anuj@gmail.com	2020-07-08 12:05:06	2021-05-11 10:07:41
6	sai	9345275693	sai@gmail.com	2023-04-04 12:09:23	
7	Jose	0000000001	jose@gmail.com	2023-04-05 16:38:08	2023-04-05 16:45:15
8	pk	9345679000	pk@gmail.com	2023-04-08 15:37:36	
9	pratheshkumar	9345275693	pratheshkumar@gmail.com	2023-04-17 22:39:25	

© 2023 WT . All Rights Reserved | WORLD TOURISM

33°C Rain showers ENG 10:44 PM

TMS | Admin manage Issues

localhost/WT-%20World%20Tourism/tms/admin/manageissues.php

## WORLD TOURISM MANGEMENT

Welcome Administrator

Home > Manage Issues

### Manage Issues

#	NAME	MOBILE NO.	EMAIL ID	ISSUES	DESCRIPTION	POSTING DATE	ACTION
#0017	pratheshkumar	9345275693	pratheshkumar@gmail.com	Booking Issues	yes	2023-04-17 22:42:10	<a href="#">View</a>

© 2023 WT . All Rights Reserved | WORLD TOURISM

33°C Rain showers ENG 10:45 PM

The screenshot shows a split-screen interface. On the left, a modal window titled "Update Remark!" contains a text area labeled "Remark:" and a "update" button. On the right, a dashboard titled "MANGEMENT" displays a table of issues. The table has columns: ISSUES, DESCRIPTION, POSTING DATE, and ACTION. One row is visible, showing "jone@gmail.com" under ISSUES, "Booking Issues" under DESCRIPTION, "yes" under POSTING DATE (2023-04-17 22:42:10), and a "View" button under ACTION.

ISSUES	DESCRIPTION	POSTING DATE	ACTION
jone@gmail.com	Booking Issues	yes 2023-04-17 22:42:10	<a href="#">View</a>

The screenshot shows a modal dialog box with the message "localhost says Do you really want to read". Below the dialog is a "Manage Enquiries" page. The left sidebar includes "Dashboard", "Tour Packages", "Manage Users", "Manage Booking", "Manage Issues", "Manage Enquiries" (which is selected), and "Manage Pages". The main content area shows a table of enquires. The table has columns: TICKET ID, NAME, MOBILE NO./EMAIL, SUBJECT, DESCRIPTION, POSTING DATE, and ACTION. Three rows are listed:

TICKET ID	NAME	MOBILE NO./EMAIL	SUBJECT	DESCRIPTION	POSTING DATE	ACTION
#TCKT-1	Jone Paarie	4646464646 / jone@gmail.com	Enquiry for Manali Trip	Kindly provide me more offer.	2020-07-08 12:00:32	<a href="#">Read</a>
#TCKT-2	Kishan Twaerea	6797947987 / kishang@gmail.com	Enquiry	Any Offer for North Trip	2020-07-08 12:01:38	<a href="#">Pending</a>
#TCKT-3	Jacob	1646589721 / Jai@gmail.com	Any offer for North	Any Offer for north	2020-07-08 12:02:41	<a href="#">Read</a>

The screenshot shows the 'World Tourism Management' application interface. On the left is a dark sidebar with navigation links: Dashboard, Tour Packages, Manage Users, Manage Booking, Manage Issues, Manage Enquiries, and Manage Pages. The main content area has a green header bar with the title 'WORLD TOURISM MANGEMENT'. A top navigation bar includes a user profile icon, 'Welcome Administrator', and a dropdown menu. Below the header, a breadcrumb trail shows 'Home > Update Page Data'. The main content is titled 'Update Page Data' and displays a form for editing a page. The 'Selected Page' dropdown is set to '\*\*\*SELECT ONE\*\*\*'. The 'Package Details' section contains a rich text editor with a toolbar for bold, italic, underline, etc., and a preview area. The preview area shows the 'ACCEPTANCE OF TERMS' section, which includes a heading 'Welcome to World Tourism ! India.' and a detailed paragraph about tourism's importance and impact. At the bottom right of the content area is a teal 'UPDATE' button. The status bar at the bottom of the screen shows system information: 33°C Rain showers, battery level, ENG, and the time 10:46 PM.

This screenshot shows the same application interface as the previous one, but the content has been updated. The 'Selected Page' dropdown now shows 'About US'. The 'Package Details' section contains a rich text editor with a toolbar and a preview area. The preview area shows the 'About Us' section, which includes a heading 'Welcome to World Tourism Management!!!' and a paragraph describing the company's history and services. At the bottom right of the content area is a teal 'UPDATE' button. A green success message 'SUCCESS: Page data updated successfully' is displayed above the 'Selected Page' dropdown. The status bar at the bottom of the screen shows system information: 33°C Rain showers, battery level, ENG, and the time 10:47 PM.