SmartPot

COMPONENT TECHNICAL DOCUMENTATION

SmartPot-Mail

Dedicated Notification & Mail Services

Mailpit v1.33.0 deployment with authenticated SMTP and Web UI for transactional notifications, welcome sequences, and password recovery workflows, supporting optional upstream SMTP relay.



DOCUMENT / DOCUMENTO VERSION / VERSIÓN
SmartPot-Mail Documentation

TEAM / EQUIPO
1.0 · September 2026

PROJECT / PROYECTO
SmartPotTech smartpot.app

DOCUMENT

Document Sheet

FIELD	VALUE
Project	SmartPot · smartpot.app
Component	SmartPot-Mail
Version	1.0 · September 2026
Scope	Platform emails, inbox protection, relay forwarding, configuration, and smoke tests
Platform Documentation	Technical Documentation, Project Journey, Software Lifecycle, and Global Diagrams
Maintenance	Generated from `docs/` in this repository using `.github/docs/tools`; updated on every component change

SECTION 01

Purpose

In Simple Terms

SmartPot sends two transactional emails: the welcome email upon account registration and the password recovery link. Mailpit v1.33.0 receives them, retains them temporarily, and displays them in a protected web inbox; if an upstream SMTP provider is configured, it forwards them so they reach users' inboxes. Crop alerts do not go over email: they are delivered through the PWA and Telegram.

SECTION 02

Component Architecture

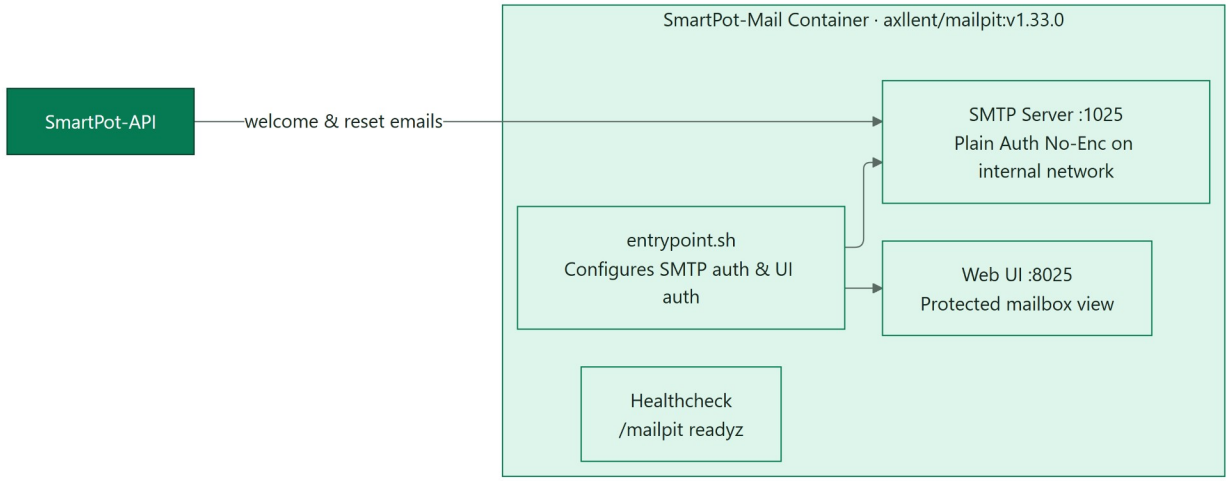


Figure / Figura 1 · *SmartPot-Mail Inside · SmartPot-Mail por dentro*

SECTION 03

Mail Flow




Figure / Figura 2 · *Welcome and Password Recovery · Bienvenida y recuperación de la contraseña*

SECTION 04

Security

CONTROL	DETAIL
SMTP	Requires username and password; without TLS only because traffic stays on internal net
Inbox	`mail.smartpot.app` requires its own username and password
Credentials	Passed via environment variables; never written to files or logs
Container	User `1000`, read-only filesystem; messages in `/tmp` with bounded retention

SECTION 05

Configuration and Tests

VARIABLE	PURPOSE
`MAIL_USERNAME`, `MAIL_PASSWORD`	SMTP account used by the API
`MAILPIT_UI_USERNAME`, `MAILPIT_UI_PASSWORD`	Web inbox credentials
`MP_MAX_MESSAGES`, `MP_MAX_AGE`	Maximum retained messages and age
`MP_SMTP_RELAY_*`	Optional forwarding to a real SMTP provider

`sh tests/smoke.sh smartpot-mail:ci` verifies that both SMTP and the web UI reject unauthenticated access, that an authenticated email is delivered, and that logs do not leak secrets. Every change on `main` runs through CI, publishes `ghcr.io/smartpottech/smartpot-mail`, and triggers the central `.github` deployment.