

Project Report

Name:- Jagruti Bharat Patil.

Email:- patilbjagruti30@gmail.com

Title:- Intelligent Customer Help Desk With Smart Document
Understanding

Category:- Artificial Intelligence

1 .INTRODUCTION

1.1 Overview:

We will be able to write an application that leverages multiple Watson AI Services (Discovery , Assistant, Cloud function and Node Red). By the end of the project, we'll learn best practices of combining Watson services, and how they can build interactive information retrieval systems with Discovery + Assistant.

- Project Requirements: Python, IBM Cloud, IBM Watson,Node-RED
- Functional Requirements: IBM cloud
- Technical Requirements: AI,ML,WATSON AI,PYTHON
- Software Requirements: Watson assistant, Watson discovery.
- Project Deliverables: Smartinternz Internship
- Project Team: Jagruti Bharat Patil
- Project Duration:19 days

1.2 Purpose:

The typical customer care chatbot can answer simple questions, such as store locations and hours, directions, and maybe even making appointments. When a question falls outside of the scope of the pre-determined question set, the option is typically to tell the customer the question isn't valid or offer to speak to a real person. In this project, there will be another option. If the customer question is about the operation of a device, the application shall pass the question onto Watson Discovery Service, which has been pre-loaded with the device's owner's manual. So now, instead of "Would you like to speak to a customer representative?" we can return relevant sections of the owner's manual to help solve our customers' problems. To take it a step further, the project shall use the Smart Document Understanding feature of Watson Discovery to train it on what text in the owner's manual is important and what is not. This will improve the answers returned from the queries.

1.2.1 Scope of Work:

- Create a customer care dialog skill in Watson Assistant
- Use Smart Document Understanding to build an enhanced Watson Discovery collection
- Create an IBM Cloud Functions web action that allows Watson Assistant to post queries to Watson Discovery
- Build a web application with integration to all these services & deploy the same on IBM Cloud Platform

2 .LITERATURE SURVEY

2.1 Existing problem:


Generally Chatbots means getting input from users and getting only response questions and for some questions the output from bot will be like “try again”, “I don’t understand”, “will you repeat again”, and so on... and directs customer to customer agent but a good customer Chatbot should minimize involvement of customer agent to chat with customer to clarify his/her doubts. So to achieve this we should include an virtual agent in chatbot so that it will take care of real involvement of customer agent and customer can clarify his doubts with fast chatbots.

2.2 Proposed solution:

For the above problem to get solved we have to put an virtual agent in chatbot so it can understand the queries that are posted by customers. The virtual agent should be trained from some insight records based on company background so it can answer queries based on the product or related to company. In this project I used Watson Discovery to achieve the above solution. And later including Assistant and Discovery on Node-RED

3 .THEORITICAL ANALYSIS

3.1 Block/Flow Diagram:

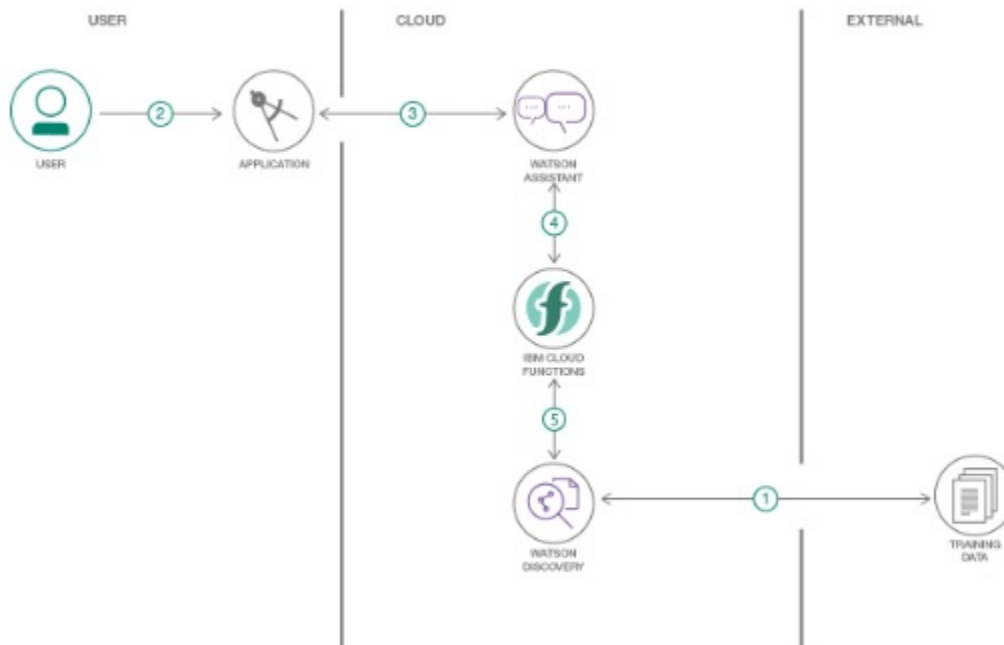

- 1.The document is annotated using Watson Discovery SDU
- 2.The user interacts with the backend server via the app UI. The frontend app UI is a chatbot that engages the user in a conversation.
3. Dialog between the user and backend server is coordinated using a Watson Assistant dialog skill.
4. If the user asks a product operation question, a search query is passed to a predefined IBM Cloud Functions action.
- 5 .The Cloud Functions action will query the Watson Discovery service and return the results.

3.2 Hardware / Software designing:

1. Create IBM Cloud services
2. Configure Watson Discovery
3. Create IBM Cloud Functions action
4. Configure Watson Assistant
5. Create flow and configure node
6. Deploy and run Node Red app

4. EXPERIMENTAL INVESTIGATIONS

1. Create IBM Cloud services

Create the following services:

- Watson Discovery
- Watson Assistant
- Node Red
- IBM cloud function

Creation of Node-RED in IBM cloud:

- Step-1: Login to IBM and go to the catalog
- Step-2: Search for node-red and select “Node-RED Starter “ Service
- Step-3: Enter the Unique name and click on create a button
- Note: Your Node-red service is starting
- Step – 5: We have to configure Node red for the first time. Click on next to continue



- Step – 6: Secure your node red editor by giving a username and password and click on Next

Secure your Node-RED editor

☒ Secure your editor so only authorised users can access it

Username

Password Must be at least 8 characters

☐ Allow anyone to view the editor, but not make any changes

☐ *Not recommended:* Allow anyone to access the editor and make changes

☒ ☐ ☐ ☐

Previous Next

- Step – 7: Click Next to continue

Browse available IBM Cloud nodes

There are lots of nodes available from the community that can be used to add more capabilities to your application. The list below is just a small selection.

You can find many more nodes on the [Flow Library](#).

You can use the Palette Manager built into editor to search for and install nodes. Alternatively, you can also edit your application's package.json file and adding them to the dependencies section.

node-red-dashboard Quickly create dashboards driven by Node-RED	node-red-contrib-ibm-wiotp-device-ops Perform device and gateway operations using the Watson IoT Platform
node-red-contrib-iot-virtual-device Simulate device behavior and use it to run many device instances	node-red-contrib-objectstore Store, delete and restore objects in the ObjectStore service
node-red-contrib-bluemix-hdfs Connects node-red to Bluemix HDFS for Analytics	node-red-contrib-ibmpush Connects node-red to Bluemix Push Notifications service

☒ ☐ ☐ ☐


Previous Next


- Step – 8: Click Finish



7/28


- Step – 9: Click on Go to Node-Red flow editor to launch the flow editor

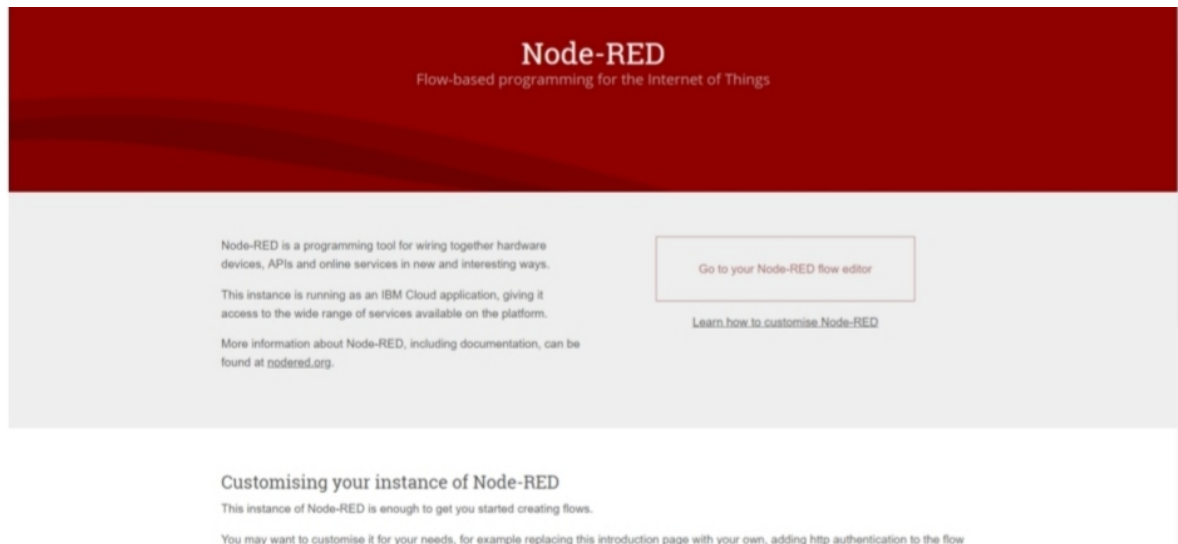

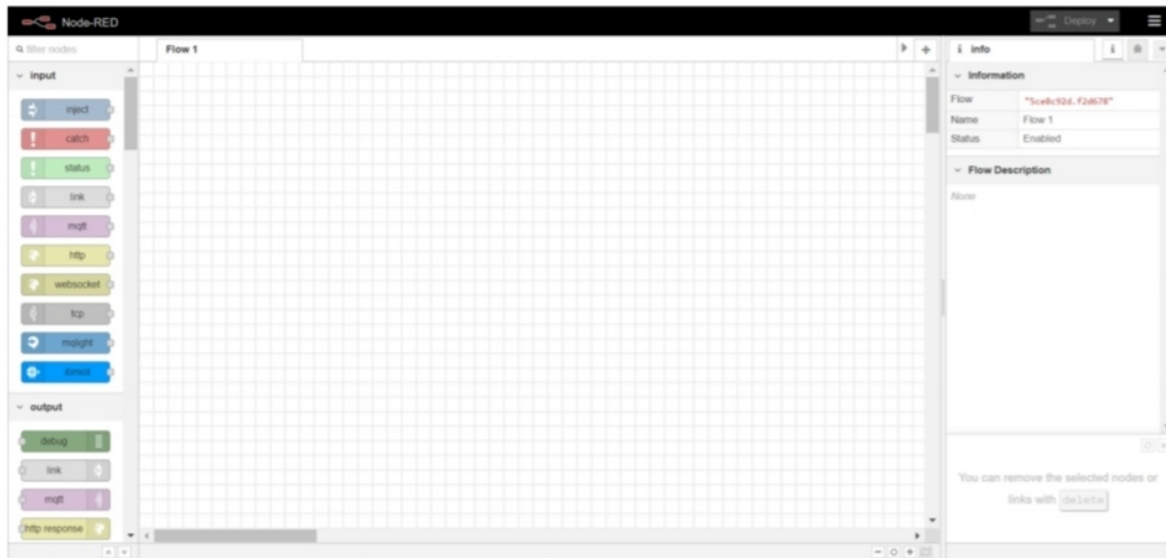


Creation of Watson discovery instance in IBM Cloud:

- Import the document As shown below, launch the Watson Discovery tool and create a new data collection by selecting the Upload your own data option. Give the data collection a unique name. When prompted, select and upload the ecobee3_UserGuide.pdf. The Ecobee is a popular residential thermostat that has a wifi interface and multiple configuration options. Before applying SDU to our document, let's do some simple queries on the data so that we can compare it to results found after applying SDU.

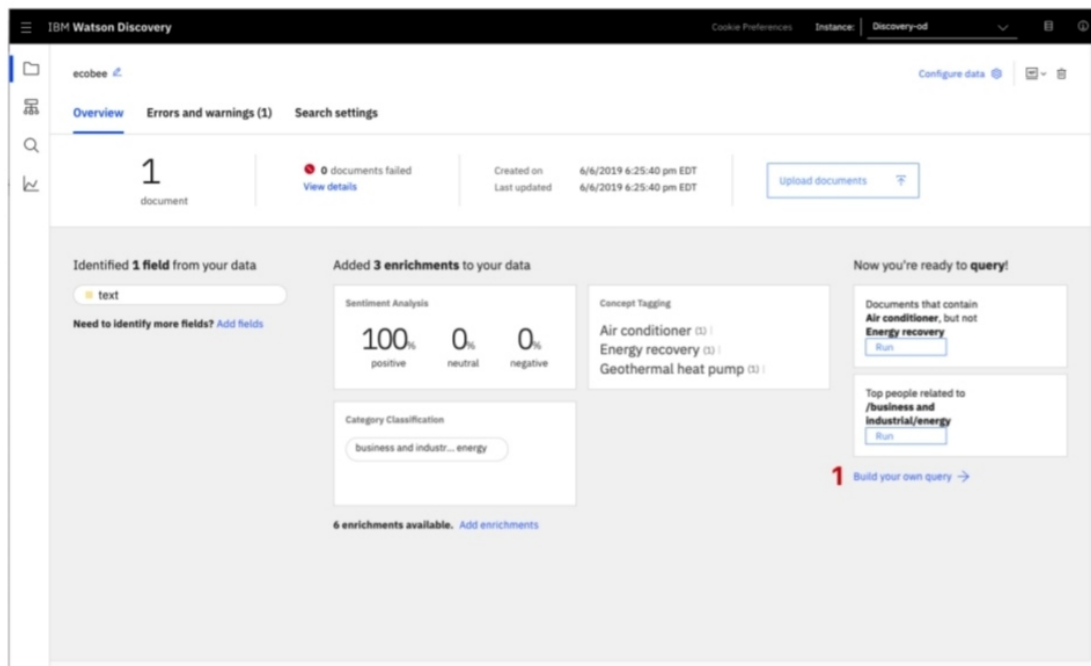


Click the Build your own query [1] button.

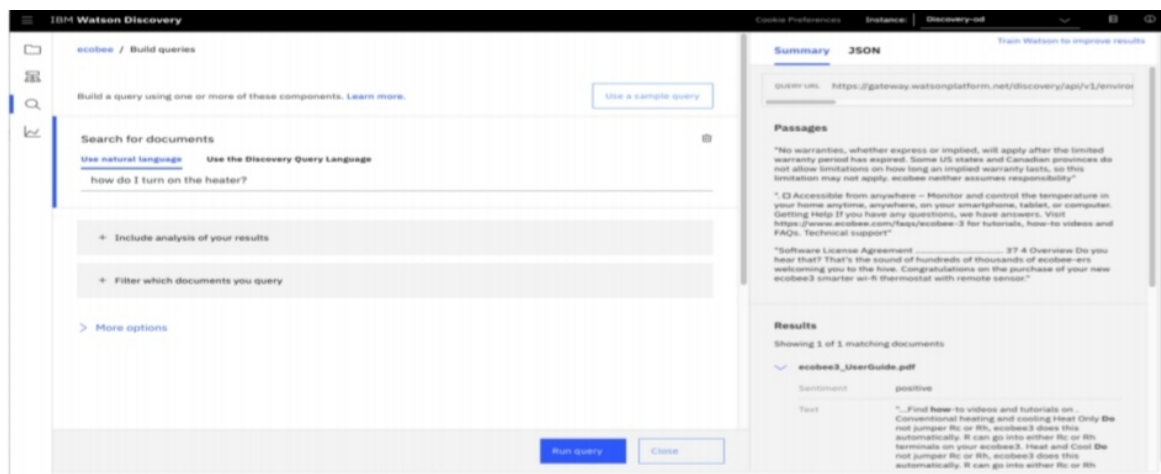

Enter queries related to the operation of the thermostat and view the results. As you will see, the results are not very useful, and in some cases, not even related to the question. Annotate with SDU Now let's apply SDU to our document to see if we can generate some better query responses.


From the Discovery collection panel, click the Configure data button (located in the top right corner) to start the SDU process. Here is the layout of the Identify fields tab of the SDU annotation panel:

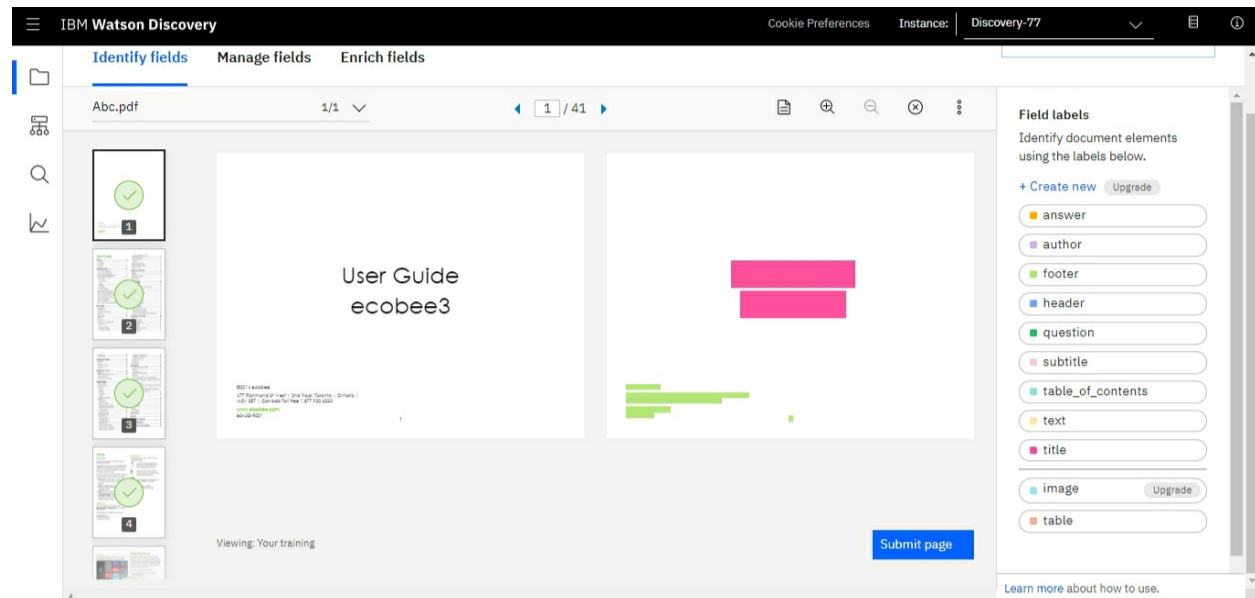

The goal is to annotate all of the pages in the document so Discovery can learn what text is important, and what text can be ignored.

- [1] is the list of pages in the manual. As each is processed, a green check mark will appear on the page.
- [2] is the current page being annotated.
- [3] is where you select text and assign it a label.
- [4] is the list of labels you can assign to the page text.
- Click [5] to submit the page to Discovery.
- Click [6] when you have completed the annotation process. As you go through the annotations one page at a time, Discovery is learning and should start automatically updating the upcoming pages. Once you get to a page that is already correctly annotated, you can stop, or simply click Submit [5] to acknowledge it is correct. The more pages you annotate, the better the model will be trained. For this specific owner's manual, at a minimum, it is suggested to mark the following:
- The main title page as title
- The table of contents (shown in the first few pages) as table_of_contents
- All headers and sub-headers (typed in light green text) as a subtitle
- All page numbers as footers
- All warranty and licensing information (located in the last few pages) as a footer

- All other text should be marked as text. Once you click the Apply changes to collection button [6], you will be asked to reload the document. Choose the same owner's manual .pdf document as before. Next, click on the Manage fields [1] tab.

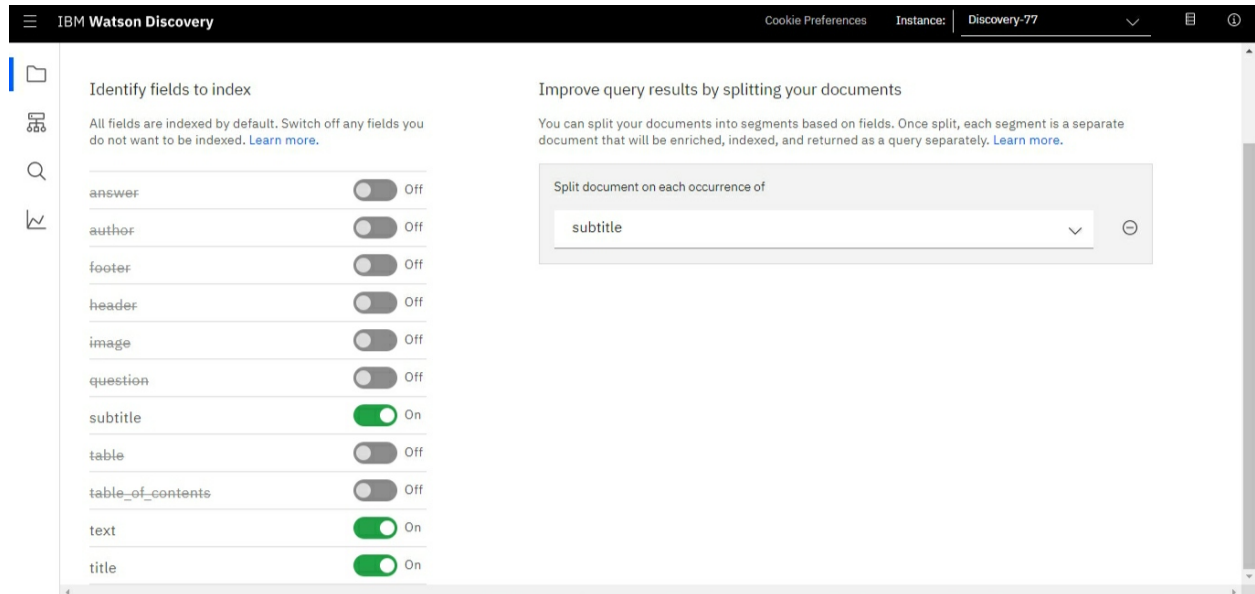

- [2] Here is where you tell Discovery which fields to ignore. Using the on/off buttons, turn off all labels except subtitles and text.
- [3] is telling Discovery to split the document apart, based on subtitle.
- Click [4] to submit your changes. Once again, you will be asked to reload the document. Now, as a result of splitting the document apart, your collection will look very different :


The screenshot shows the IBM Watson Discovery Overview page for a collection named 'jj'. The top navigation bar includes 'Cookie Preferences', 'Instance: Discovery-77', and a dropdown menu. The left sidebar contains icons for Overview, Errors and warnings (128), and Search settings. The main content area displays '128 documents' and '0 documents failed'. It also shows 'Created on' and 'Last updated' timestamps of '5/14/2020 5:46:58 am EDT'. A panel on the right shows 'Collection ID', 'Configuration ID', and 'Environment ID' with their respective values and copy buttons. Below this, there are sections for 'Identified 5 fields from your data' (footer, subtitle, table_of_contents, text, title) and 'Added 4 enrichments to your data' (Entity Extraction, Sentiment Analysis). The Entity Extraction results show '0.3°C (4) | 0.5°F (4) | 10 °F (4) | 900 seconds (4) | 20 min (3)'. The Sentiment Analysis results show '54%', '34%', and '11%'. A 'Run' button is visible for the Sentiment Analysis results.

Return to the query panel (click Build your own query) and see how much better the results are.

The screenshot shows the IBM Watson Discovery Query panel. The left sidebar contains icons for Build queries, Search for documents, and More options. The main content area displays a query for 'how do I turn on the heater?'. It includes options to 'Include analysis of your results' and 'Filter which documents you query'. The right sidebar shows the 'Summary' and 'JSON' tabs. The 'Summary' tab displays the query URL, a 'Passages' section with text from a document, and a 'Results' section showing 'Showing 1 of 1 matching documents'. The results include a document titled 'ecobee3_UserGuide.pdf' with a 'Sentiment' of 'positive' and a 'Text' snippet.

Store credentials for future use

In upcoming steps, you will need to provide the credentials to access your Discovery collection. The values can be found in the following locations. The Collection ID and Environment ID values can be found by clicking the dropdown button [1] located at the top right side of your collection panel:

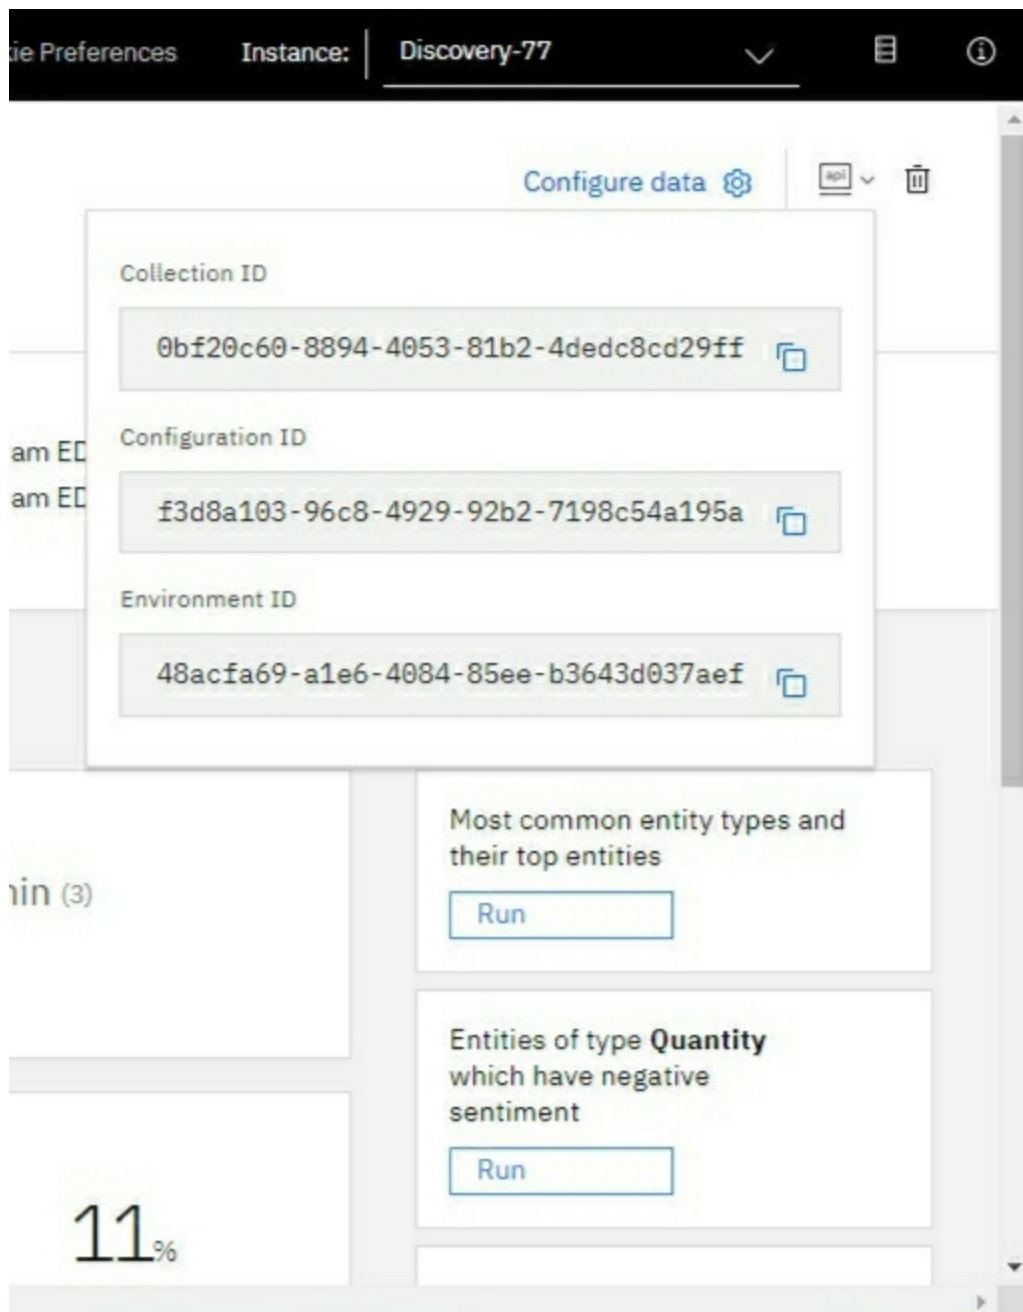

For credentials, return to the main panel of your Discovery service, and click the Service credentials [1] tab:

IBM Cloud

Search resources and offerings...

Resource list / **Discovery-77** Active Add tags

Details Actions...

Manage

Getting started

Service credentials

Plan

Connections

Service credentials

You can generate a new set of credentials for cases where you want to manually connect an app or external consumer to an IBM Cloud™ service. [Learn more](#)

Search credentials...

New credential +

Key name	Date created
Auto-generated service credentials	MAY 14, 2020 - 08:51:12 AM

```
{
  "apikey": "NSiQ0nwYd0nXHnmC0e6UMxprbkT0CpeIbw2cL8q7F0Zk",
  "iam_apikey_description": "Auto-generated for key 2ecd219e-25d3-4db3-9367-6a16a21c9747",
  "iam_apikey_name": "Auto-generated service credentials",
  "iam_role_crn": "crn:v1:bluemix:public:iam:::serviceRole:Manager",
  "iam_serviceid_crn": "crn:v1:bluemix:public:iam-identity:a/ea81726e7bd644d888feca35d3867ae5::serviceid:ServiceId-02d70f07-76be-4703-88a1-ac76e4ec494e",
  "url": "https://api.eu-gb.discovery.watson.cloud.ibm.com/instances/f1c842dc-6294-418f-99b5-a42106705a21"
}
```

Click the View credentials [2] drop-down menu to view the IAM apikey [3] and URL endpoint [4] for your service.

Creating IBM cloud functions:

Now let's create the web action that will make queries against our Discovery collection. Start the IBM Cloud Functions service by selecting Create Resource from the IBM Cloud dashboard. Enter functions as the filter [1], then select the Functions card [2]:

IBM Cloud

Search resources and offerings...

Catalog Docs Support Manage Jagruti Patil's A...

Search function

Search results for 'function' 3 results

Functions
IBM • Services • Compute

IBM Cloud Functions is a Function-as-a-Service (FaaS) platform which executes functions in response to incoming...

IAM-enabled

Magento
Third party • Software • Networking • Developer Tools

A feature-rich flexible e-commerce solution. It includes transaction options, multi-store functionality, loyalty...

Helm charts • IBM Kubernetes Service • Free

Kong
Third party • Software • Networking • Databases • Developer Tools

Kong is a scalable, open source API layer (aka API gateway or API middleware) that runs in front of any...

Helm charts • IBM Kubernetes Service • Free

From the Functions main panel, click on the Actions tab. Then click on Create. From the Create panel, select the Create Action option. On the Create Action panel, provide a unique Action Name [1], keep the default package [2], and select the Node.js 10 [3] runtime. Click the Create button [4] to create the action.


The screenshot shows the 'Create Action' panel in the IBM Cloud Functions console. The left sidebar contains navigation links: Functions, Getting Started, Actions (selected), Triggers, APIs, Monitor, Logs, and Namespace Settings. The main area is titled 'Create Action' and includes a search bar. Below the title, there is a description: 'Actions contain your function code and are invoked by events or REST API calls.' and links to 'Learn more about Actions' and 'Learn more about Packages'. The 'Action Name' field contains 'discoa' with a red error message: 'An action by this name already exists.' The 'Enclosing Package' dropdown is set to '(Default Package)' with a 'Create Package' button next to it. The 'Runtime' dropdown is set to 'Node.js 10'. At the bottom, there are 'Previous', 'Cancel', and 'Create' buttons. A note at the bottom states: 'Looking for Java, .NET or Docker? Docker Actions can be created with the CLI'.

Once your action is created, click on the Code tab [1]:

The screenshot shows the 'discoa' action code editor in the IBM Cloud Functions console. The left sidebar contains navigation links: Code (selected), Parameters, Runtime, Endpoints, Connected Triggers, Enclosing Sequences, and Logs. The main area is titled 'discoa' and includes a search bar. Below the title, there is a description: 'discoa' and a 'Web Action' link. The 'Code' tab is selected, showing a JavaScript code editor with the following code:

```
1 - /**
2  *
3  * @param {object} params
4  * @param {string} params.iam_apikey
5  * @param {string} params.url
6  * @param {string} params.username
7  * @param {string} params.password
8  * @param {string} params.environment_id
9  * @param {string} params.collection_id
10 * @param {string} params.configuration_id
11 * @param {string} params.input
12 *
13 * @return {object}
14 *
15 */
16
17 const assert = require('assert');
18 const DiscoveryV1 = require('watson-developer-cloud/discovery/v1');
19
20 - /**
21  *
22  * main() will be run when you invoke this action
23  *
24  * @param Cloud Functions actions accept a single parameter, which must be a JSON object.
25  *
26  * @return The output of this action, which must be a JSON object.
27  *
28  */
29 - function main(params) {
30 -   return new Promise(function (resolve, reject) {
31     let discovery;
32
33
```


In the code editor window [2], cut and paste in the code from the disco-action.js file found in the actions directory of your local repo. The code is pretty straight-forward - it simply connects to the Discovery service, makes a query against the collection, then returns the response. If you press the Invoke button [3], it will fail due to credentials not being defined yet. We'll do this next. Select the Parameters tab [1]:

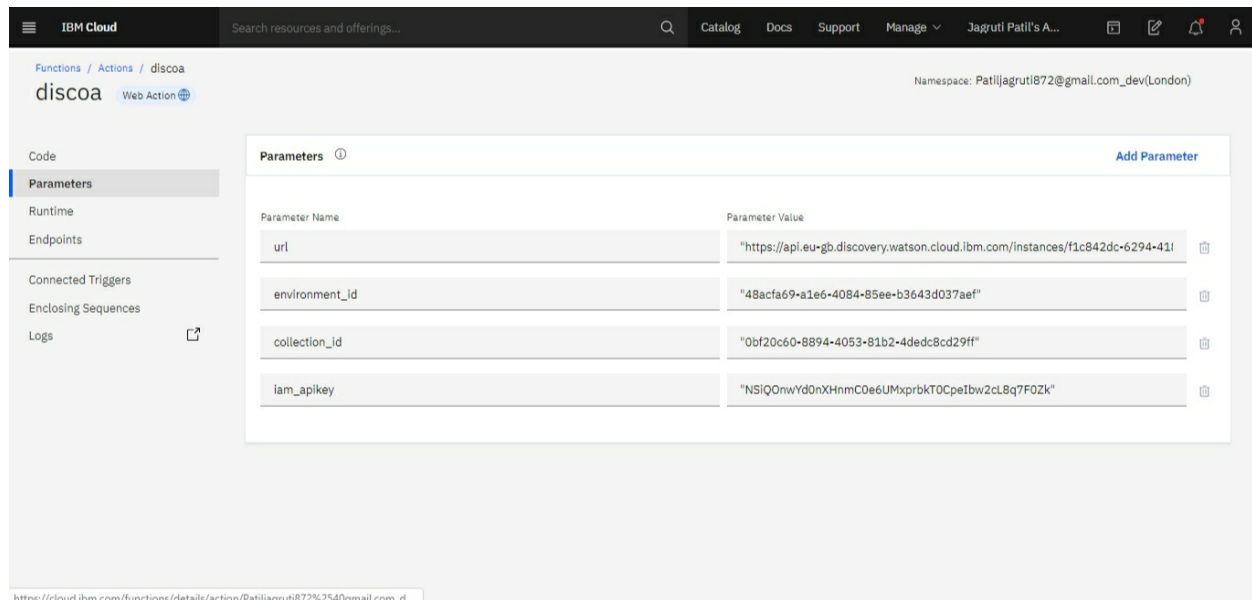

Add the following keys:

- url
- environment_id
- collection_id
- iam_apikey

For values, please use the values associated with the Discovery service you created in the previous step. Note: Make sure to enclose your values in double quotes. Now that the credentials are set, return to the Code panel and press the Invoke button again. Now you should see actual results returned from the Discovery service:

IBM Cloud

Search resources and offerings...

Catalog Docs Support Manage Jagruti Patil's A...

Functions / Actions / discoa

discoa Web Action

Namespace: Patiljagrut1872@gmail.com_dev(London)

Code

Parameters

Runtime

Endpoints

Connected Triggers

Enclosing Sequences

Logs

Code Node.js 10

Invoke with parameters

Invoke

```

1 < /**
2  *
3  * @param (object) params
4  * @param (string) params.iam_apikey
5  * @param (string) params.url
6  * @param (string) params.username
7  * @param (string) params.password
8  * @param (string) params.environment_id
9  * @param (string) params.collection_id
10 * @param (string) params.configuration_id
11 * @param (string) params.input
12  *
13  * @return (object)
14  *
15  */
16
17 const assert = require('assert');
18 const DiscoveryV1 = require('watson-developer-cloud/discovery/v1');
19
20 /**
21  *
22  * main() will be run when you invoke this action
23  *
24  * @param Cloud Functions actions accept a single parameter, which must be a JSON object.
25  *
26  * @return The output of this action, which must be a JSON object.
27  *
28  */
29 * function main(params) {
30  *   return new Promise(function (resolve, reject) {
31  *     let discovery;
32  *
33  *

```

Activations

Collapse

Clear

discoa 1730 ms 5/17/2020, 18:26:27

Activation ID: 9df9caad0a544a35b9caad0a544a3554

Results:

```

{
  "matching_results": 128,
  "passages": [],
  "results": [
    {
      "enriched_text": {
        "categories": {
          "label": "/technology and computing/hardware/computer components",
          "score": 0.793359
        }
      },
      "label": "/technology and computing/hardware/computer peripherals",
      "score": 0.775517
    },
    {
      "label": "/technology and computing/hardware/computer/portable computer",
      "score": 0.74596
    }
  ],
  "concepts": [

```

Next, go to the Endpoints panel [1]:

IBM Cloud

Search resources and offerings...

Catalog Docs Support Manage Jagruti Patil's A...

Functions / Actions / discoa

discoa Web Action

Namespace: Patiljagrut1872@gmail.com_dev(London)

Code

Parameters

Runtime

Endpoints

Connected Triggers

Enclosing Sequences

Logs

Web Action

☒ Enable as Web Action

Allow your Cloud Functions actions to handle HTTP events. Web Actions allow to control the response data and type by using a set of URL extensions, such as .json or .html. Learn more about [Web Actions](#).

☐ Raw HTTP handling

When enabled your Action receives requests in plain text instead of a JSON body

HTTP Method	Auth	URL
ANY	Public	https://eu-gb.functions.cloud.ibm.com/api/v1/web/Patiljagrut1872%40gmail.com_dev/default/discoa

REST API

HTTP Method	Auth	URL
POST	API-KEY	https://eu-gb.functions.cloud.ibm.com/api/v1/namespaces/Patiljagrut1872%40gmail.com_dev/actions/discoa

CURL

Click the checkbox for Enable as Web Action [2]. This will generate a public endpoint URL [3]. Take note of the URL value [3], as this will be needed by Watson Assistant in a future step. To verify you have entered the correct Discovery parameters, execute the provided curl command [4]. If it fails, re-check your parameter values. NOTE: An IBM Cloud Functions service will not show up in your dashboard resource list. To return to your defined Action, you will need to access Cloud Functions by selecting Create Resource from the main dashboard panel (as shown at the beginning of this step).

Configure Watson Assistant:


As shown below, launch the Watson Assistant tool and create a new dialog skill. Select the Use sample skill option as your starting point. This dialog skill contains all of the nodes needed to have a typical call center conversation with a user.

Add new intent:


The default customer care dialog does not have a way to deal with any questions involving outside resources, so we will need to add this. Create a new intent that can detect when the user is asking about operating the Ecobee thermostat. From the Customer Care Sample Skill panel, select the Intents tab. Click the Create intent button. Name the intent #Product_Information, and at a minimum, enter the following example questions to be associated with it.

Create new dialog:


node Now we need to add a node to handle our intent. Click on the Dialog [1] tab, then click on the drop down menu for the Small Talk node [2], and select the Add node below [3] option.

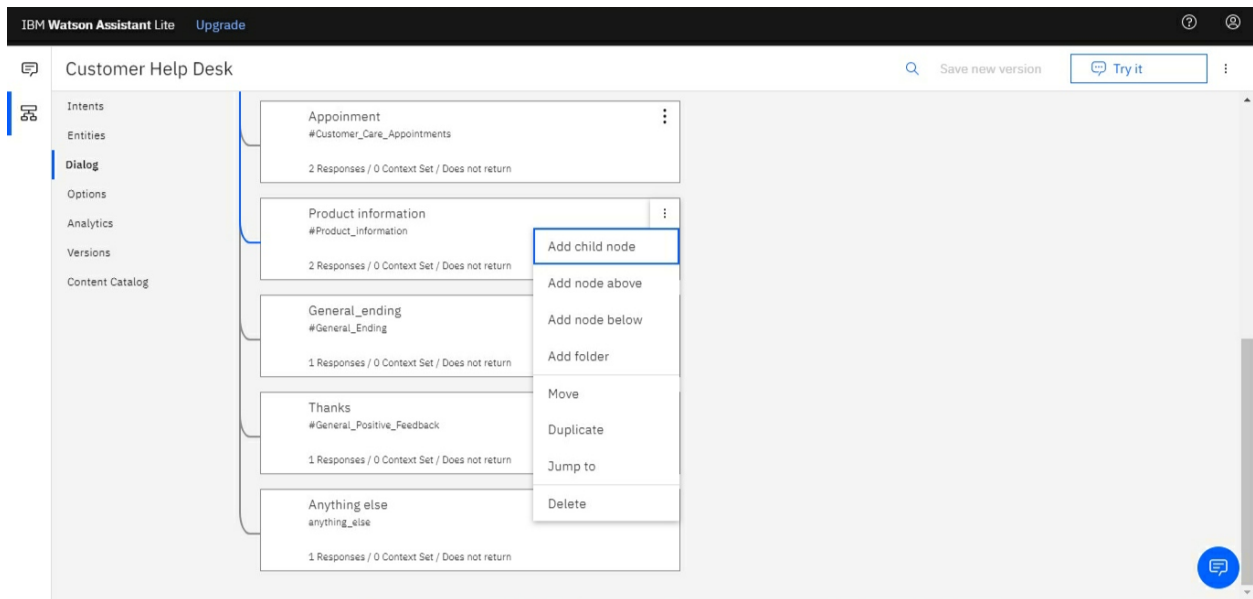


Name the node "Ask about product" [1] and assign it our new intent [2].

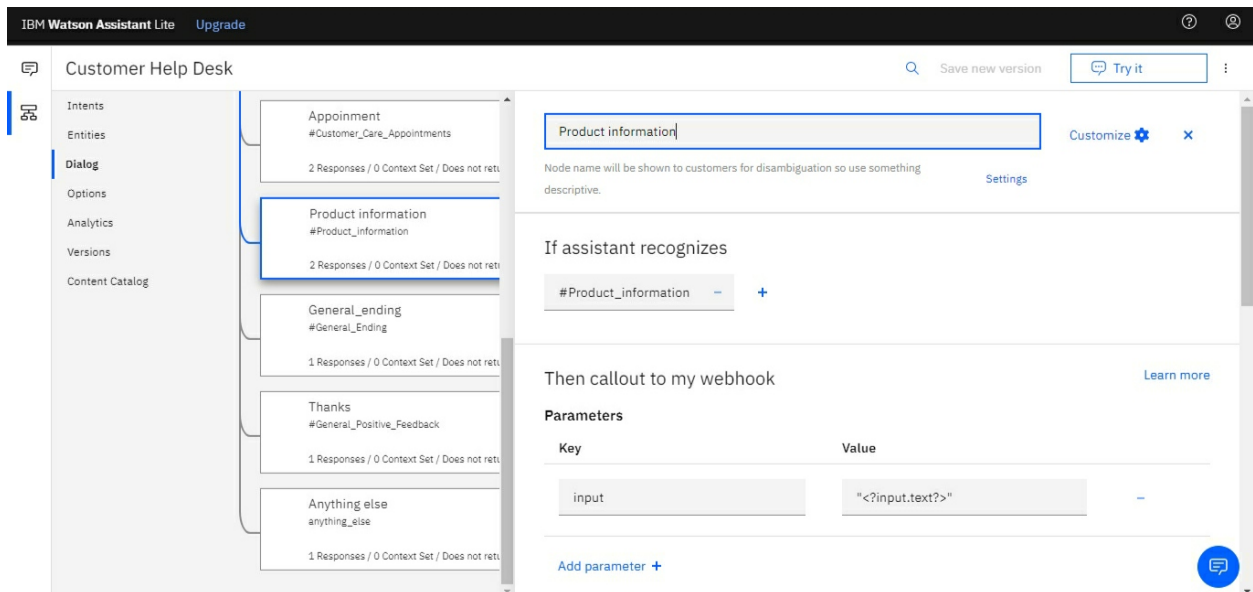


This means that if Watson Assistant recognizes a user input such as "how do I set the time?", it will direct the conversation to this node. Enable webhook from Assistant Set up access to our WebHook for the IBM Cloud Functions action you created in Step #4. Select the Options tab [1]:

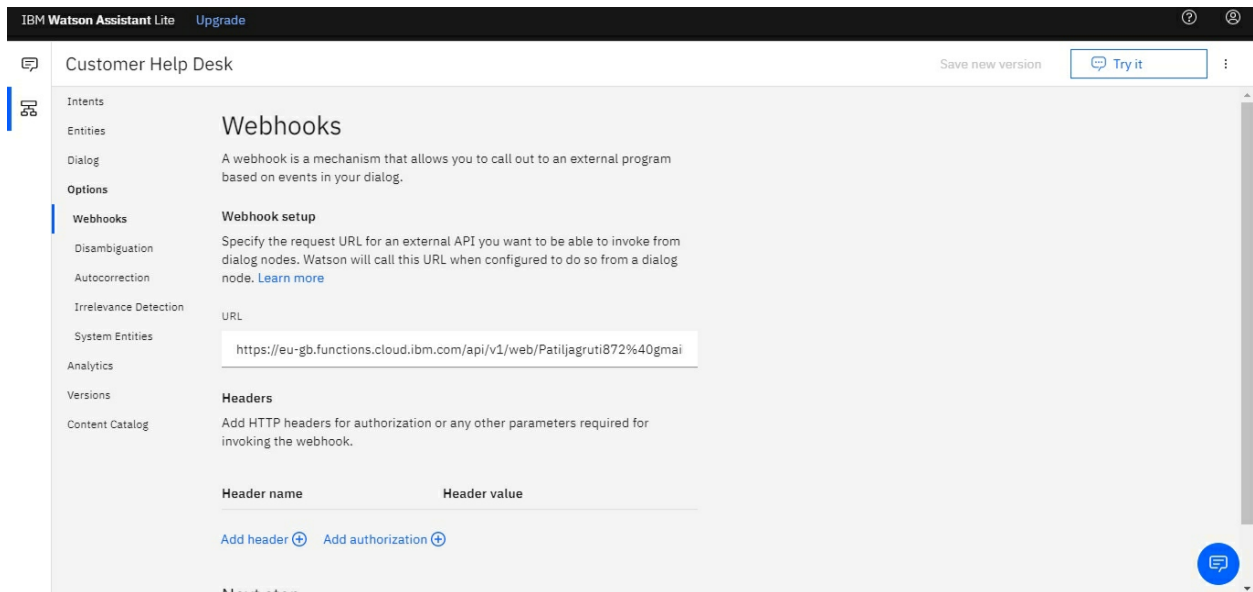


Enter the public URL endpoint for your action [2]. Important: Add .json to the end of the URL to specify the result should be in JSON format. Return to the Dialog tab, and click on the Ask about product node. From the details panel for the node, click on Customize, and enable Webhooks for this node:

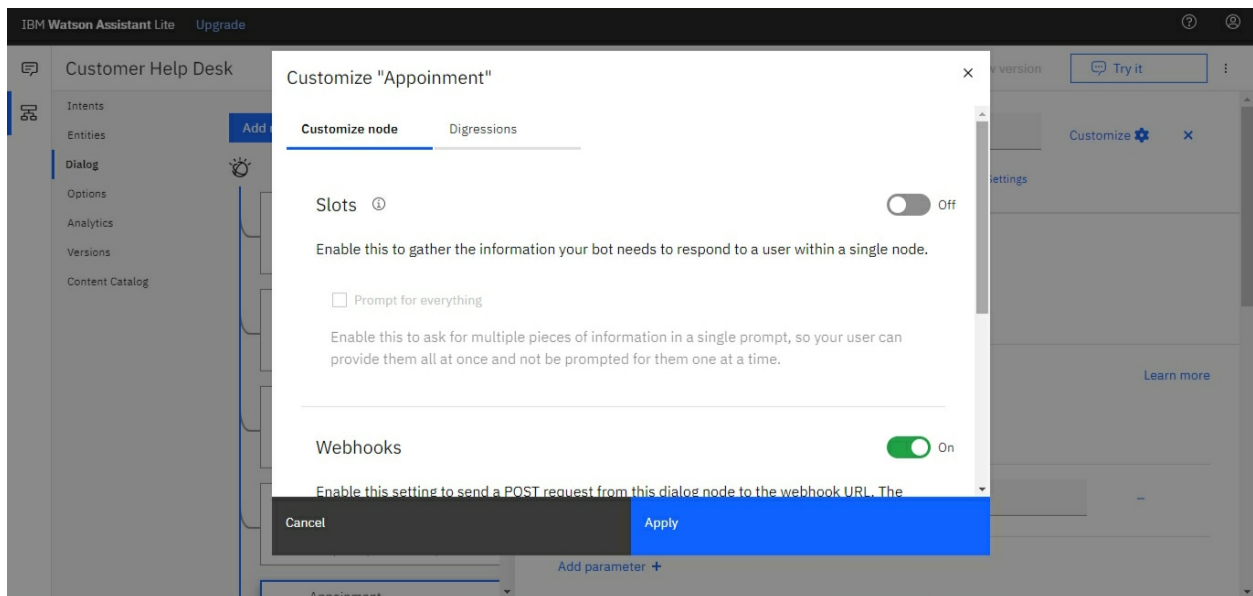

Click Apply. The dialog node should have a Return variable [1] set automatically to \$webhook_result_1. This is the variable name you can use to access the result from the Discovery service query.

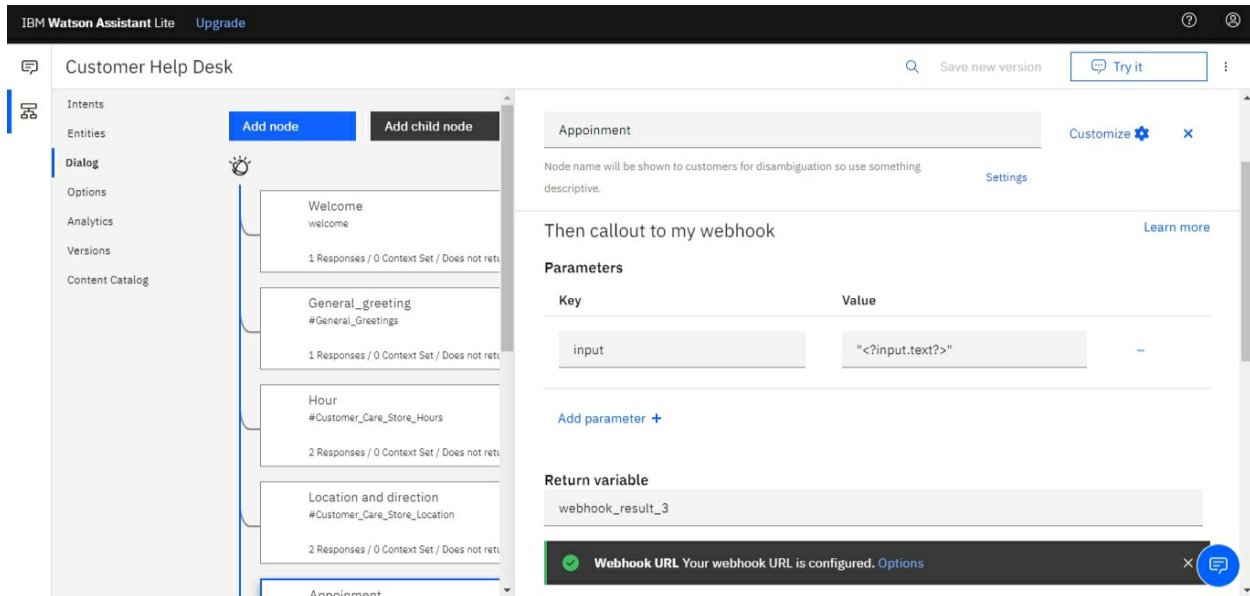


You will also need to pass in the users question via the parameter input [2]. The key needs to be set to the value: "<?input.text?>" If you fail to do this, Discovery will return results based on a blank query. Optionally, you can add these responses to aid in debugging: Add Add "<?webhook_result_1.passages[0].passage_text?>" in respond with in Assistant responds block as shown below.

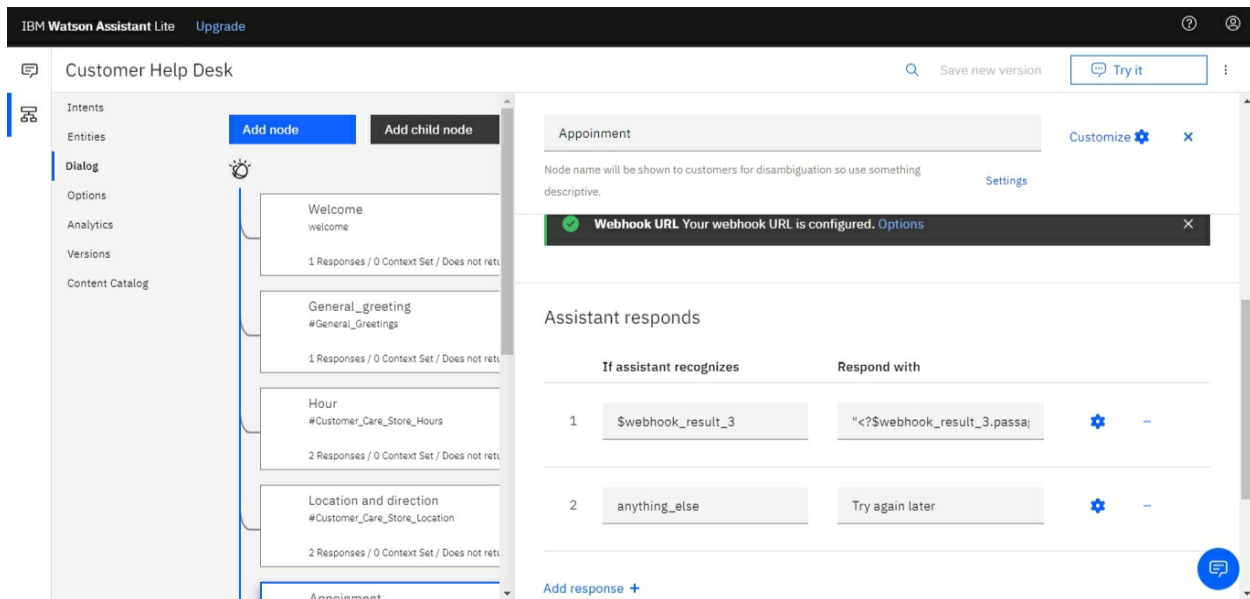


Integration of watson assistant in Node-RED

- Double-click on the Watson assistant node
- Give a name to your node and enter the username, password and workspace id of your Watson assistant service
- After entering all the information click on Done
- Drag inject node on to the flow from the Input section
- Drag Debug on to the flow from the output section
- Double-click on the inject node
- Select the payload as a string
- Enter a sample input to be sent to the assistant service and click on done
- Connect the nodes as shown below and click on Deploy
- Open Debug window as shown below
- Click on the button to send input text to the assistant node
- Observe the output from the assistant service node
- The Bot output is located inside "output.text"
- Drag the function node to parse the JSON data and get the bot response
- Double click on the function node and enter the JSON parsing code as shown below and click on done
- Connect the nodes as shown below and click on Deploy

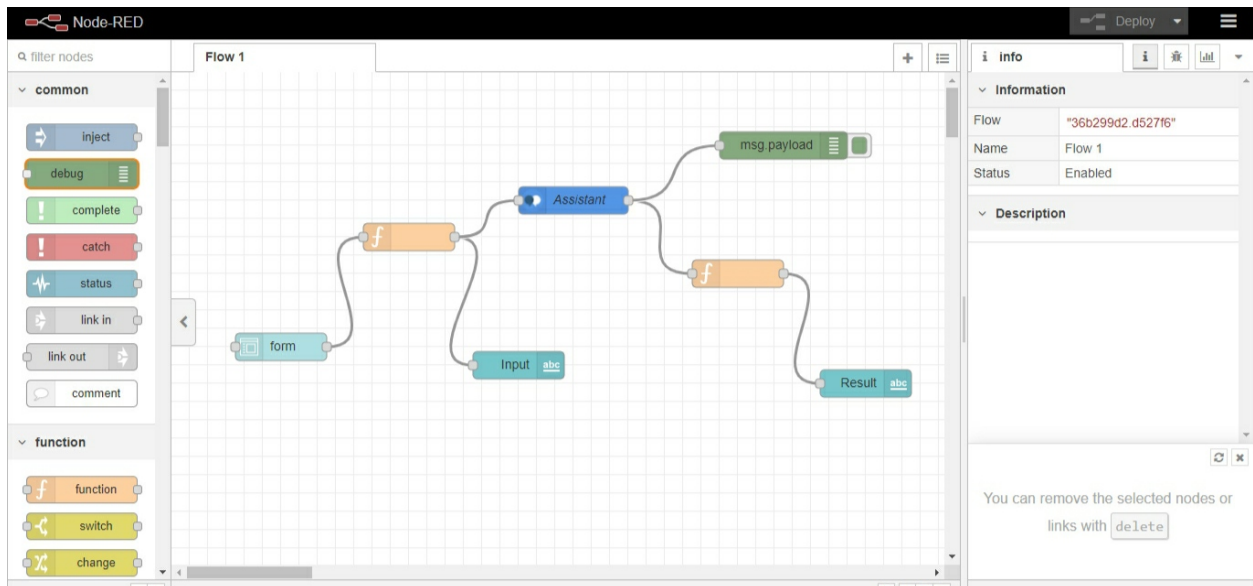

- Re-inject the flow and observe the parsed output We are done integrating Watson assistant service to Node-red. In the next lab, we will create a web application using Node-red for the chatbot. For creating a web application UI we need “dashboard” nodes which should be installed manually.
- Go to navigation pane and click on manage palette
- Click on install
- Search for “node-red-dashboard” and click on install and again click on install on the prompt
- The following message indicates dashboard nodes are installed, close the manage palette
- Search for “Form” node and drag on to the flow
- Double click on the “form” node to configure
- Click on the edit button to add the “Group” name and “Tab” name
- Click on the edit button to add tab name to web application
- Give sample tab name and click on add do the same thing for the group
- Give the label as “Enter your input”, Name as “text” and click on Done
- Drag a function node, double-click on it and enter the input parsing code as shown below

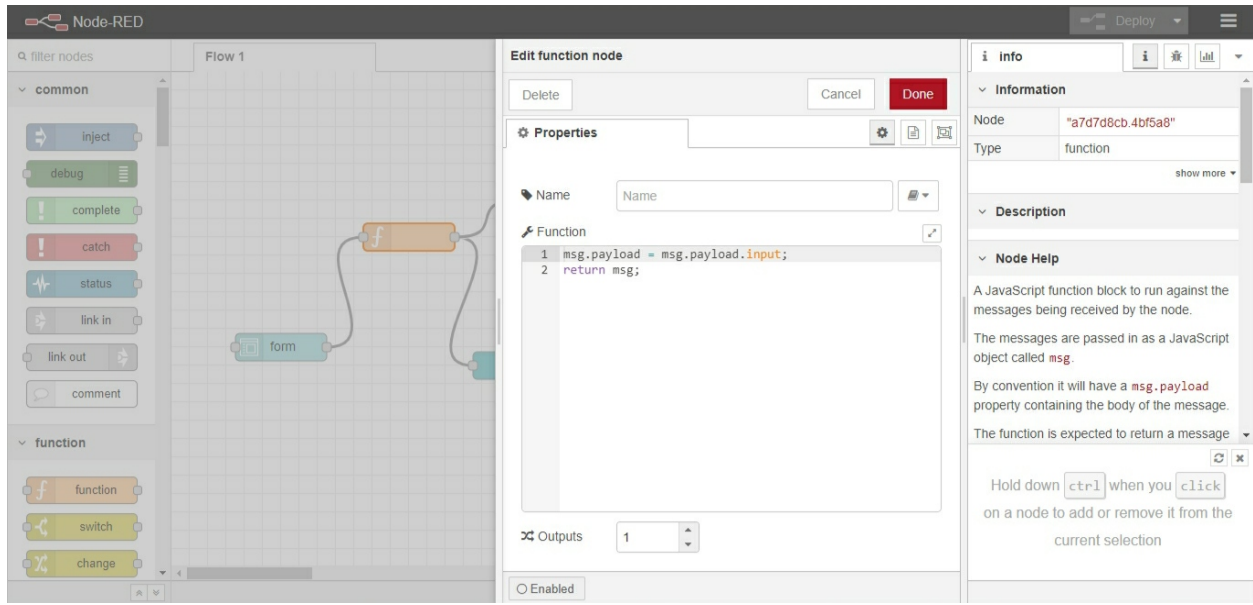

- Click on done
- Connect the form output to the input of the function node and output of the function to input of assistant node
- Search for “text” node from the “dashboard” section
- Drag two “text” nodes on to the flow
- Double click on the first text node, change the label as “You” and click on Done
- Double click on the second text node, change the label as “Bot” and click on Done
- Connect the output of “input parsing” function node to “You” text node and output of “Parsing” function node to the input of “Bot” text node
- Click on Deploy


5.FLOWCHART

1.Create flow and configure node:

At first go to manage palette and install dashboard.


Now,Create the flow with the help of following node:

- Inject
- Assistant
- Debug
- Function
- Ui_Form
- Ui_Text

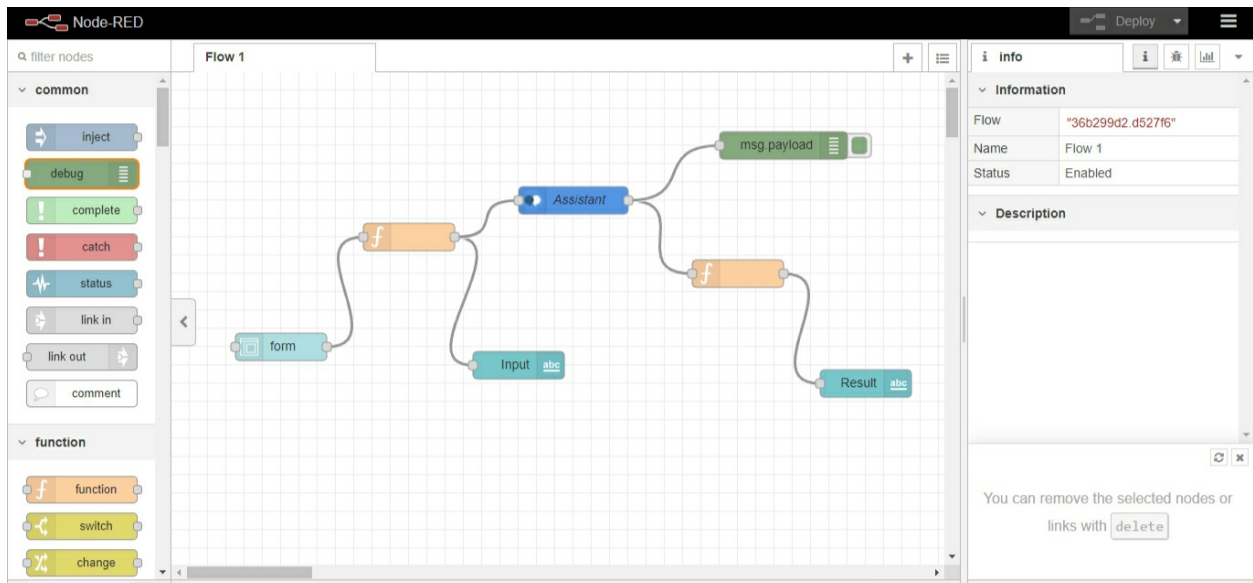

6.RESULTS

Finally our Node-RED dash board integrates all the components and displayed in the Dashboard UI by typing URL <https://node-red-ffoe.eu-gb.mybluemix.net/ui/> in browser

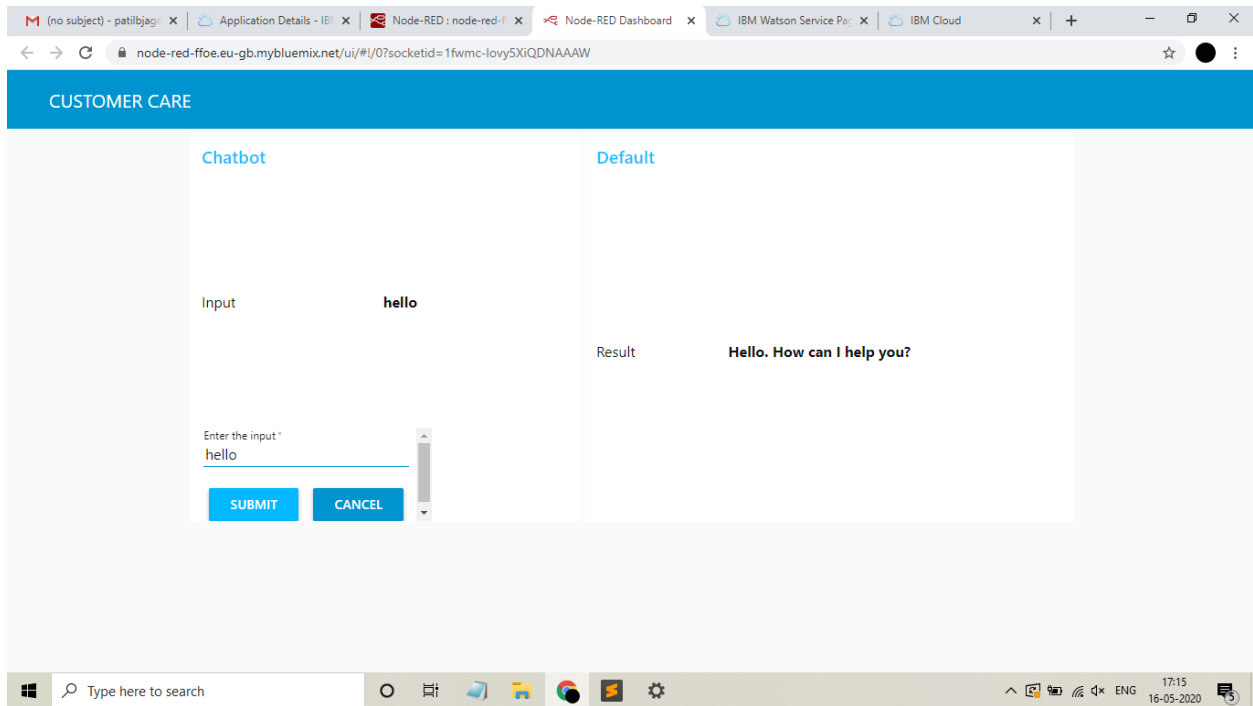

Browser tabs: (no subject) - patilbjag, Application Details - IB, Node-RED : node-red, Node-RED Dashboard, IBM Watson Service Pa, IBM Cloud

URL: node-red-foe.eu-gb.ibmbluemix.net/ui/#/0?socketid=1fwmc-lovy5XiQDNAAAW

CUSTOMER CARE

Chatbot

Input **how do I change my settings?**

Enter the input *

how do I change my settings?

SUBMIT **CANCEL**

Default

"You can configure how long a manual change to the set point will remain in effect. On Thermostat: 1. Select Main Menu > Settings > Preferences 2. Result Select Hold action. 3. Select the hold action from the list: ☐ 2 hours ☒ 4 hours ☐ Until the next scheduled activity ☐ Until you change it (default value) Decide at time of change On Web: 1."

Windows taskbar: Type here to search, 16-05-2020 17:15

Browser tabs: (no subject) - patilbjag, Application Details - IB, Node-RED : node-red, Node-RED Dashboard, IBM Watson Service Pa, IBM Cloud

URL: node-red-foe.eu-gb.ibmbluemix.net/ui/#/0?socketid=1fwmc-lovy5XiQDNAAAW

CUSTOMER CARE

Chatbot

Input **thank you**

Enter the input *

thank you

SUBMIT **CANCEL**

Default

Result You're welcome. Just let me know if anything you want to know

Windows taskbar: Type here to search, 16-05-2020 17:15

7. ADVANTAGES & DISADVANTAGES

Advantages:

- Companies can deploy chatbots to rectify simple and general human queries .
- Reduces man power
- Cost efficient
- No need to divert calls to customer agent and customer agent can look on other works.

Disadvantages:

- Some times chatbot can mislead customers
- Giving same answer for different sentiments.
- Some times cannot connect to customer sentiments and intentions.

8. APPLICATIONS

- It can deploy in popular social media applications like facebook,slack,telegram.
- Chatbot can deploy any website to clarify basic doubts of viewers.

9.CONCLUSION

By doing the above procedure and all we successfully created Intelligent helpdesk smart chatbot using Watson assistant, Watson discovery, Node-RED and cloud-functions.

10.FUTURE SCOPE

We can include watson studio text to speech and speech to text services to access the chatbot handsfree. This is one of the future scope of this project.

11. BIBLIOGRAPHY APPENDIX

Source code:

```
{{"id":"36b299d2.d527f6","type":"tab","label":"Flow
1","disabled":false,"info":"","{"id":"772ec03e.69024","type":"ui_base","z":0,"theme":{"name":"t
heme-light","lightTheme":{"default":"#0094CE","baseColor":"#0094CE","baseFont":"-apple-
system,BlinkMacSystemFont,Segoe UI,Roboto,Oxygen-Sans,Ubuntu,Cantarell,Helvetica
Neue,sans-serif","edited":true,"reset":false},"darkTheme":{"default":"#097479","baseColor":
"#097479","baseFont":"-apple-system,BlinkMacSystemFont,Segoe
UI,Roboto,Oxygen-Sans,Ubuntu,Cantarell,Helvetica
Neue,sans-serif","edited":false},"customTheme":{"name":"Untitled Theme
1","default":"#4B7930","baseColor":"#4B7930","baseFont":"-apple-system,BlinkMacSyste
mFont,Segoe UI,Roboto,Oxygen-Sans,Ubuntu,Cantarell,Helvetica
Neue,sans-serif"},"themeState":{"base-color":{"default":"#0094CE","value":"#0094CE","edit
ed":false},"page-titlebar-backgroundColor":{"value":"#0094CE","edited":false},"page-backg
roundColor":{"value":"#fafafa","edited":false},"page-sidebar-backgroundColor":{"value":"#f
fffff","edited":false},"group-textColor":{"value":"#1bbfff","edited":false},"group-borderColor"
:{"value":"#ffffff","edited":false},"group-backgroundColor":{"value":"#ffffff","edited":false},"
widget-textColor":{"value":"#111111","edited":false},"widget-backgroundColor":{"value":"#
0094ce","edited":false},"widget-borderColor":{"value":"#ffffff","edited":false},"base-font":{"v
alue":"-apple-system,BlinkMacSystemFont,Segoe
UI,Roboto,Oxygen-Sans,Ubuntu,Cantarell,Helvetica
Neue,sans-serif"},"angularTheme":{"primary":"indigo","accents":"blue","warn":"red","backgr
ound":"grey"},"site":{"name":"Node-RED
Dashboard","hideToolbar":"false","allowSwipe":"false","lockMenu":"false","allowTempThe
me":"true","dateFormat":"DD/MM/YYYY","sizes":{"sx":48,"sy":48,"gx":6,"gy":6,"cx":6,"cy":6,"px
":0,"py":0}}},"id":"7ea7523e.26a66c","type":"ui_tab","z":"","name":"CUSTOMER
CARE","icon":"dashboard","disabled":false,"hidden":false},"id":"37fe62b9.53f91e","type":"ui
_group","z":"","name":"Chatbot","tab":"70a85a8f.5909b4","order":1,"disp":true,"width":"8","col
```

```

lapse":false},{id:"70a85a8f.5909b4","type":"ui_tab","z":"","name":"CUSTOMER
CARE","icon":"dashboard","disabled":false,"hidden":false},{id:"2d6ceda3.245b42","type":"
ui_group","z":"","name":"Default","tab":"70a85a8f.5909b4","order":1,"disp":true,"width":"10","c
ollapse":false},{id:"1d6fdb3c.a36934","type":"ui_form","z":"36b299d2.d527f6","name":"","l
abel":"","group":"37fe62b9.53f91e","order":0,"width":"5","height":"5","options":[{"label":"Enter
the
input","value":"input","type":"text","required":true,"rows":null}],formValue":{"input":""},"payloa
d":"","submit":"submit","cancel":"cancel","topic":"","x":120,"y":300,"wires":[["a7d7d8cb.4bf5a
8"]]},{"id":"17ddd39f.62563c","type":"ui_text","z":"36b299d2.d527f6","group":"37fe62b9.53f
91e","order":1,"width":"5","height":"5","name":"","label":"Input","format":"{{msg.payload}}","lay
out":"row-spread","x":380,"y":320,"wires":[]},{id:"a7d7d8cb.4bf5a8","type":"function","z":"36
b299d2.d527f6","name":"","func":"msg.payload = msg.payload.input;\nreturn
msg;","outputs":1,"noerr":0,"x":260,"y":180,"wires":[["17ddd39f.62563c","5654273a.ace718"
]],[{"id":"c13133e.3dc53d","type":"function","z":"36b299d2.d527f6","name":"","func":"msg.p
ayload.text=\"\\\"\\\"\\nif(msg.payload.context.webhook_result_1){\\n  for(var i in
msg.payload.context.webhook_result_1.results){\\n
msg.payload.text=msg.payload.text+\"\\\"\\n\\\"+msg.payload.context.webhook_result_1.re
sults[i].text;\\n}\\n  msg.payload=msg.payload.text;\\n}\\n\\nelse\\nmsg.payload =
msg.payload.output.text[0];\\nreturn
msg;","outputs":1,"noerr":0,"x":620,"y":220,"wires":[["4d657dfc.29da24"]]},{"id":"7217ee97.5
7074","type":"debug","z":"36b299d2.d527f6","name":"","active":true,"tosidebar":true,"consol
e":false,"tostatus":false,"complete":"payload","targetType":"msg","x":670,"y":80,"wires":[]},{id:"5654273a.ace718","type":"watson-conversation-v1","z":"36b299d2.d527f6","name":"As
sistant","workspaceid":"b890ca1a-1e92-4849-8fe0-2b101d286e0c","multiuser":false,"cont
ext":false,"empty-payload":false,"service-endpoint":"","timeout":"","optout-learning":false,"x"
:440,"y":140,"wires":[["c13133e.3dc53d","7217ee97.57074"]]},{"id":"4d657dfc.29da24","typ
e":"ui_text","z":"36b299d2.d527f6","group":"2d6ceda3.245b42","order":2,"width":"7","height"
:"7","name":"","label":"Result","format":"{{msg.payload}}","layout":"row-spread","x":760,"y":34
0,"wires":[]}]

```

Cloud function Node.js 10 code for discovery integration webhook generation:

```

/**
 *
 * @param {object} params
 * @param {string} params.iam_apikey

```

```

* @param {string} params.url
* @param {string} params.username
* @param {string} params.password
* @param {string} params.environment_id
* @param {string} params.collection_id
* @param {string} params.configuration_id
* @param {string} params.input
*
* @return {object}
*
*/

```

```

const assert = require('assert');
const DiscoveryV1 = require('watson-developer-cloud/discovery/v1');

```

```

/**
 *
 * main() will be run when you invoke this action
 *
 * @param Cloud Functions actions accept a single parameter, which must be a JSON
object.
 *
 * @return The output of this action, which must be a JSON object.
 *
*/
function main(params) {
  return new Promise(function (resolve, reject) {

    let discovery;

    if (params.iam_apikey){
      discovery = new DiscoveryV1({
        'iam_apikey': params.iam_apikey,
        'url': params.url,
        'version': '2019-03-25'
      });
    }
  })
}

```



```
else {
  discovery = new DiscoveryV1({
    'username': params.username,
    'password': params.password,
    'url': params.url,
    'version': '2019-03-25'
  });
}

discovery.query({
  'environment_id': params.environment_id,
  'collection_id': params.collection_id,
  'natural_language_query': params.input,
  'passages': true,
  'count': 3,
  'passages_count': 3
}, function(err, data) {
  if (err) {
    return reject(err);
  }
  return resolve(data);
});
});
}
```

