

# 1. Création de Host Pool Multisession

Home

**Azure Virtual Desktop** 

1 Search

2 Overview

Quickstart

Manage

- Host pools
- Application groups
- Workspaces
- App attach
- Scaling plans
- Users
- Custom image templates

> Monitoring

> Licensing

**Abdallah, create a host pool!**

Easily scale your VM deployment. Create host pools to easily manage assignments, application groups, and settings for your entire organization.

**Create a host pool**

**Help and learning**

- Product documentation**  
Learn about the capabilities of Azure Virtual Desktop
- Create your image**  
Learn about creating custom images and using gallery images
- Cost calculator**  
Plan and estimate the cost for your deployment
- Profile containers**  
Learn how to use FSLogix profile containers for user profiles
- What's new**  
Learn about new features and capabilities released

# Create a host pool

Basics Session hosts Workspace Management Tags Review + create

## Project details

A host pool is a collection of one or more identical virtual machines within an Azure Virtual Desktop environment. Here you can give details to create Azure virtual machines for your host pool now, or you can create and add them later, for example if you plan to add virtual machines from Azure Local. [Learn more](#)

|                            |                                                                                                              |
|----------------------------|--------------------------------------------------------------------------------------------------------------|
| Subscription *             | EM50-NPR-MUT                                                                                                 |
| Resource group *           | EM50-NPR-AVD/DAZ-TST-RG02                                                                                    |
|                            | <a href="#">Create new</a>                                                                                   |
| Host pool name *           | AVDMNPRARC1                                                                                                  |
| Location *                 | North Europe                                                                                                 |
|                            | Metadata will be stored in Azure geography associated with (Europe) North Europe. <a href="#">Learn more</a> |
| Validation environment     | <input checked="" type="radio"/> No <input type="radio"/> Yes                                                |
| Preferred app group type * | Desktop                                                                                                      |

## Host pool details

Define how session hosts in this host pool will be created, managed, and assigned.

|                                     |                                                                                                                                                                                                          |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Host pool type *                    | Pooled                                                                                                                                                                                                   |
|                                     | <b>i</b> If you select pooled, users can maintain their personalization and user data with FSLogix. <a href="#">Learn more</a>                                                                           |
| Create Session Host Configuration * | <input type="radio"/> No<br>You manage the lifecycle of the session hosts and don't use Azure Virtual Desktop to update them.                                                                            |
|                                     | <input checked="" type="radio"/> Yes (Preview)<br>Session hosts are created and updated based on the configuration you define. You won't be able to manually add session hosts using a registration key. |
| Load balancing algorithm            | Depth-first                                                                                                                                                                                              |
| Max session limit                   | 5                                                                                                                                                                                                        |

[Review + create](#) [< Previous](#) [Next: Session hosts >](#)

## Create a host pool

Basics Session hosts Workspace Management Tags Review + create

A session host is an Azure virtual machine that has an Azure Virtual Desktop agent installed and is joined to a domain. Automate your host pool to have session hosts automatically created and updated from the configuration you define. [Learn more](#)

Number of session hosts \* 3 ✓

1 All session hosts will be created using session host configuration.

1 You create a session host configuration when creating a host pool even if you don't create session hosts at this time. You can add session hosts to the host pool later using the session host configuration. [Learn more](#)

### Session host configuration

Create a session host configuration that defines the default configuration shared by all the session hosts in the host pool. [Learn more](#)

Resource group EM50-NPR-AVD-02-TST-RG02 ✓

Name prefix \* EMVMNPRARC ✓

1 Session host name must be unique within the Resource Group.

Virtual machine location ⓘ France Central ✓

Availability zones ⓘ 3 selected ✓

Security type \* ⓘ Standard ✓

Image \* ⓘ Windows 11 Enterprise multi-session, version 25H2 + Microsoft 365 ... ✓

[See all images](#)

Virtual machine size \* ⓘ Standard D4as v5  
4 vCPU's, 16 GiB memory  
[Change size](#)

OS disk type \* ⓘ Premium SSD ✓

Ephemeral OS disk ⓘ ☐

1 Ephemeral OS Disk is not supported on the Virtual machine size

[Review + create](#)

[< Previous](#)

[Next: Workspace >](#)

## Create a host pool ...

Ephemeral OS disk ⓘ

☐

**i** Ephemeral OS Disk is not supported on the Virtual machine size selected.

Boot diagnostics ⓘ

- ☐ Enable with managed storage account (recommended)
- ☐ Enable with custom storage account
- ☒ Disable

### Network and security

Use Azure Firewall to secure your VNET and host pool resources. [Learn more](#)

Virtual network \* ⓘ

EMS0-NPR-AVDAAZ-VNET01 ▾

Subnet ⓘ

EMS0-NPR-AVDAAZ-SNET01 ▾

Network security group type ⓘ

None ▾

### Domain to join

Select which directory you would like to join

Microsoft Entra ID ▾

Enroll VM with Intune ⓘ

- ☒ Yes
- ☐ No

### Virtual machine administrator account

Key vault for username \* ⓘ

EMS0-TST-AVDAAZ-KV01 ▾

Secret for username \* ⓘ

Localadmin-Username ▾

Key vault for password \* ⓘ

EMS0-TST-AVDAAZ-KV01 ▾

Secret for password \* ⓘ

Localadmin-Password ▾

### Custom configuration

Provide location of your PowerShell script for custom configuration on your session hosts after they are updated. The script will be run on each individual session host. [Learn more](#)

Custom configuration script url ⓘ

[Review + create](#)

[< Previous](#)

[Next: Workspace >](#)

# Create a host pool ...

Basics   Session hosts   Workspace   Management   Tags   Review + create

To save some time, you can register the default desktop application group from this host pool, with a new or pre-existing workspace.

Register desktop app group   ☐ No   ☒ Yes

To this workspace \* ⓘ

(New) EMVMNPRARC-VDWS

[Create new](#)

Review + create

< Previous

Next: Management >

# Create a host pool

Basics Session hosts Workspace **Management** Tags Review + create

## Identity

Assign Managed Identity ⓘ



Required for host pools with session host configuration.

Type of Managed Identity ⓘ

- ☒ Create new system assigned managed identity
- ☐ Use existing user assigned managed identity

## Permissions

This identity will be given the following permissions.

| Role                                               | Scope                                                      |
|----------------------------------------------------|------------------------------------------------------------|
| Desktop Virtualization Virtual Machine Contributor | Resource group of image gallery in Session Host Config...  |
| Desktop Virtualization Virtual Machine Contributor | Resource Group for session hosts in Session Host Config... |
| Desktop Virtualization Virtual Machine Contributor | Vnet/NSG in Session Host Configuration                     |
| Key Vault Secrets User                             | Domain join key vault in Session Host Configuration        |
| Key Vault Secrets User                             | Admin account key vault in Session Host Configuration      |

Role assignments (permissions) are created based on the parameters in the session host configuration. Admin must have permission to configure RBAC on the relevant scope (typically Owner or User Access Administrator role). The access configuration of the key vault must be set. [Learn more](#)

## Diagnostic Settings

Diagnostic settings are used to configure streaming export of platform logs and metrics for a resource to the destination of your choice. [Learn more](#)

Enable diagnostics settings

☐

[Review + create](#) [< Previous](#) [Next: Tags >](#)

# Create a host pool ...

✔ Validation passed.

BasicsSession hostsWorkspaceManagementTagsReview + create

Basics

Subscription

EM50-NPR-MUT

Resource group

EM50-NPR-AVDAZ-TST-RG02

Host pool name

EMVMNPRARC

Location

North Europe

Preferred app group type

Desktop

Host pool type

Pooled

Create Session Host Configuration

Yes (Preview)

Max session limit

5

Load balancing algorithm

Depth-first

Networking

Public network access

Enabled

Session hosts

Number of session hosts

3

Resource group

EM50-NPR-AVDAZ-TST-RG02

Name prefix

EMVMNPRARC

Virtual machine location

France Central

Availability zones

Zone 1, Zone 2, Zone 3

Security type

Standard

Image

Windows 11 Enterprise multi-session, version 25H2 + Microsoft 365 Apps

Virtual machine size

Standard D4as v5

Hibernate

No

OS disk type

Premium SSD

Confidential compute encryption

No

Virtual network

EM50-NPR-AVDAZ-VNET01

Create

< Previous

Download a template for automation

## Create a host pool ...

✓ Validation passed.

### Session hosts

|                                 |                                                                        |
|---------------------------------|------------------------------------------------------------------------|
| Number of session hosts         | 3                                                                      |
| Resource group                  | EM50-NPR-AVDZ-TST-RG02                                                 |
| Name prefix                     | EMVMNPRARC                                                             |
| Virtual machine location        | France Central                                                         |
| Availability zones              | Zone 1, Zone 2, Zone 3                                                 |
| Security type                   | Standard                                                               |
| Image                           | Windows 11 Enterprise multi-session, version 25H2 + Microsoft 365 Apps |
| Virtual machine size            | Standard D4as v5                                                       |
| Hibernate                       | No                                                                     |
| OS disk type                    | Premium SSD                                                            |
| Confidential compute encryption | No                                                                     |
| Virtual network                 | EM50-NPR-AVDZ-VNET01                                                   |
| Boot diagnostics                | Disable                                                                |
| Subnet                          | EM50-NPR-AVDZ-SNET01(undefined)                                        |
| Network security group type     | None                                                                   |
| Specify domain or unit          | No                                                                     |
| Domain join type                | Microsoft Entra ID                                                     |
| Intune Enrollment               | Yes                                                                    |

### Workspace

|                |                       |
|----------------|-----------------------|
| Workspace name | (New) EMVMNPRARC-VDWS |
|----------------|-----------------------|

### Identity

|                                  |     |
|----------------------------------|-----|
| Managed identity enabled         | Yes |
| System assigned managed identity | Yes |

### Tags

|                            |     |
|----------------------------|-----|
| Use cm-resource-parent tag | Yes |
|----------------------------|-----|

Create

< Previous

[Download a template for automation](#)

- Ajouter le rôle Key vault Secrets User pour le service principale : Azure Virtual Desktop :

▼ Key Vault Secrets User (1)

|                          |                                                                                                                                               |                   |                        |                                                                                                     |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------|-----------------------------------------------------------------------------------------------------|
| <input type="checkbox"/> |  Azure Virtual Desktop<br>9cdead84-a844-4324-93f2-b2e6b... | Service principal | Key Vault Secrets User |  This resource |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------|-----------------------------------------------------------------------------------------------------|

- Ajouter les permissions au groupe de sécurité sur l'Application Group :

EMVMNPRARC-DAG | Assignments ☆ ...

Application group

Search ○ « + Add Refresh Remove

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

Manage

Applications

Assignments

Monitoring

Setup email discovery to help your users discover their resources using an email address instead of the deployment URL. [Learn more](#)

Filter by Name

| Display name      | Email address | Assigned VM |
|-------------------|---------------|-------------|
| CB-GO-AVDAZ-USERS |               | 0           |

- Ajouter le rôle **Virtual Machine User Login** pour être capable de se connecter sur les Session Hosts
- Ajouter le rôle **Desktop Virtualization Power On Off Contributor** pour le SP Azure Virtual desktop sur le RG pour la fonctionnalité **Start VM on connect**.

EM50-NPR-AVDAZ-TST-RG02 | Access control (IAM) ☆ ...

Resource group

Search ○ « + Add Download role assignments Edit columns Refresh Delete Feedback

Overview

Activity log

Access control (IAM)

Tags

Resource visualizer

Events

Settings

Cost Management

Monitoring

Automation

Help

Check access Role assignments Roles Deny assignments

Number of role assignments for this subscription 514 4000 Privileged 65

View assignments

Virtual Machine User Login × Type: All Role: All Scope: All scopes State: All End time: All Group by: Role

All (1) Job function roles (1) Privileged administrator roles (0)

| Name                                            | Type  | Role                       | Scope         | State            | End time  |
|-------------------------------------------------|-------|----------------------------|---------------|------------------|-----------|
| Virtual Machine User Login (1)                  |       |                            |               |                  |           |
| CB-GO-AVDAZ-USERS 66ed21ea-ba73-4de0-9a61-61... | Group | Virtual Machine User Login | This resource | Active Permanent | Permanent |

Showing 1 - 1 of 1 results.

EM50-NPR-AVDAZ-TST-RG02 | Access control (IAM) ☆ ...

Resource group

Search ○ « + Add Download role assignments Edit columns Refresh Delete Feedback

Overview

Activity log

Access control (IAM)

Tags

Resource visualizer

Events

Settings

Cost Management

Monitoring

Automation

Help

Check access Role assignments Roles Deny assignments

Number of role assignments for this subscription 515 4000 Privileged 65

View assignments

Desktop Virtualization Power On Off Contributor × Type: All Role: All Scope: All scopes State: All End time: All Group by: Role

All (2) Job function roles (2) Privileged administrator roles (0)

| Name                                                                      | Type              | Role                                            | Scope         | State            | End time  |
|---------------------------------------------------------------------------|-------------------|-------------------------------------------------|---------------|------------------|-----------|
| Desktop Virtualization Power On Off Contributor (2)                       |                   |                                                 |               |                  |           |
| Azure Virtual Desktop 9c5e9d4-a044-4324-93f2-b2e6b760d07                  | Service principal | Desktop Virtualization Power On Off Contributor | This resource | Active Permanent | Permanent |
| Windows Virtual Desktop ARM Provider 50e95039-b200-4007-bc97-8d5790743a63 | Service principal | Desktop Virtualization Power On Off Contributor | This resource | Active Permanent | Permanent |

## 2. Création de Host Pool Personal

### Create a host pool ...

[Basics](#) [Session hosts](#) [Workspace](#) [Management](#) [Tags](#) [Review + create](#)

#### Project details

A host pool is a collection of one or more identical virtual machines within an Azure Virtual Desktop environment. Here you can give details to create Azure virtual machines for your host pool now, or you can create and add them later, for example if you plan to add virtual machines from Azure Local. [Learn more](#)

|                            |                                                                                                              |
|----------------------------|--------------------------------------------------------------------------------------------------------------|
| Subscription *             | EM50-NPR-MUT                                                                                                 |
| Resource group *           | EM50-NPR-AVD-DAZ-TST-RG02                                                                                    |
|                            | <a href="#">Create new</a>                                                                                   |
| Host pool name *           | EMVPNPRAVD                                                                                                   |
| Location *                 | North Europe                                                                                                 |
|                            | Metadata will be stored in Azure geography associated with (Europe) North Europe. <a href="#">Learn more</a> |
| Validation environment     | <input checked="" type="radio"/> No <input type="radio"/> Yes                                                |
| Preferred app group type * | Desktop                                                                                                      |

#### Host pool details

Define how session hosts in this host pool will be created, managed, and assigned.

|                                           |                                                                                                                                |
|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Host pool type *                          | Personal                                                                                                                       |
|                                           | <b>i</b> If you select pooled, users can maintain their personalization and user data with FSLogix. <a href="#">Learn more</a> |
| Assignment type                           | Automatic                                                                                                                      |
| Assign multiple desktops to a single user | <input type="checkbox"/>                                                                                                       |

[Review + create](#)

[< Previous](#)

[Next: Session hosts >](#)

# Create a host pool ...

Basics Session hosts Workspace Management Tags Review + create

Add virtual machines

- ☐ No  
☒ Yes

Host pools are a collection of one or more identical virtual machines within Azure Virtual Desktop environments. Here you provide a common set of properties to update the Session hosts within your host pool.

Resource group

EM50-NPR-AVDZ-TST-RG02

Name prefix \*

EMVNPRAVD

**i** Session host name must be unique within the Resource Group.

Virtual machine type ⓘ

- ☒ Azure virtual machine  
☐ Azure Local virtual machine

Virtual machine location ⓘ

France Central

Availability options ⓘ

Availability zones

Availability zones \* ⓘ

3 selected

Security type \* ⓘ

Standard

Image \* ⓘ

Windows 11 Enterprise multi-session, version 25H2 + Microsoft 365 ...

[See all images](#)

Virtual machine size \* ⓘ

**Standard D4as v5**  
4 vCPU's, 16 GiB memory  
[Change size](#)

Hibernate ⓘ

☐

# Create a host pool ...

Security type \* ⓘ

Standard

Image \* ⓘ

Windows 11 Enterprise multi-session, version 25H2 + Microsoft 365 ...

[See all images](#)

Virtual machine size \* ⓘ

**Standard D4as v5**

4 vCPU's, 16 GiB memory

[Change size](#)

Hibernate ⓘ

☐

Number of VMs \*

5

OS disk type \* ⓘ

Premium SSD

OS disk size \* ⓘ

Resize to 128 GiB (P10)

Boot diagnostics ⓘ

☐ Enable with managed storage account (recommended)

☐ Enable with custom storage account

☒ Disable

## Network and security

Use Azure Firewall to secure your VNET and host pool resources. [Learn more](#)

Virtual network \* ⓘ

EM50-NPR-AVDAZ-VNET01

Subnet ⓘ

EM50-NPR-AVDAZ-SNET02

Network security group type ⓘ

None

## Create a host pool ...

---

|                               |                        |   |
|-------------------------------|------------------------|---|
| Virtual network * ⓘ           | EM50-NPR-AVDAAZ-VNET01 | ✓ |
| Subnet ⓘ                      | EM50-NPR-AVDAAZ-SNET02 | ✓ |
| Network security group type ⓘ | None                   | ✓ |

### Domain to join

|                                               |                    |   |
|-----------------------------------------------|--------------------|---|
| Select which directory you would like to join | Microsoft Entra ID | ✓ |
|-----------------------------------------------|--------------------|---|

|                         |                                      |
|-------------------------|--------------------------------------|
| Enroll VM with Intune ⓘ | <input checked="" type="radio"/> Yes |
|                         | <input type="radio"/> No             |

### Virtual machine administrator account

|                      |         |   |
|----------------------|---------|---|
| User name * ⓘ        | adm.avd | ✓ |
| Password * ⓘ         | .....   | ✓ |
| Confirm password * ⓘ | .....   | ✓ |

### Custom configuration

Provide location of an ARM template (inline deployment script, desired state configuration, custom script extension) for custom configuration on your session hosts. Provisioning azure resources in the template is not supported.

[Learn more](#)

|                                   |  |
|-----------------------------------|--|
| Custom configuration script url ⓘ |  |
|-----------------------------------|--|

Review + create

< Previous

Next: Workspace >

# Create a host pool ...

Basics   Session hosts   Workspace   Management   Tags   Review + create

To save some time, you can register the default desktop application group from this host pool, with a new or pre-existing workspace.

Register desktop app group   ☐ No   ☒ Yes

To this workspace \* ⓘ

[Create new](#)

## Create new

Workspace name \*

We will also create a display name for this workspace, which you can always edit later.

OK

Cancel

Review + create

< Previous

Next: Management >

# Create a host pool ...

Basics   Session hosts   Workspace   **Management**   Tags   Review + create

## Identity

Assign Managed Identity ⓘ



Type of Managed Identity ⓘ



Create new system assigned managed identity



Use existing user assigned managed identity

## Diagnostic Settings

Diagnostic settings are used to configure streaming export of platform logs and metrics for a resource to the destination of your choice. [Learn more](#) ↗

Enable diagnostics settings



Review + create

< Previous

Next: Tags >

# Create a host pool ...

 Validation passed.

- Basics
- Session hosts
- Workspace
- Management
- Tags
- Review + create

## Basics

|                                           |                         |
|-------------------------------------------|-------------------------|
| Subscription                              | EM50-NPR-MUT            |
| Resource group                            | EM50-NPR-AVDAZ-TST-RG02 |
| Host pool name                            | EMVPNPRAVD              |
| Location                                  | North Europe            |
| Preferred app group type                  | Desktop                 |
| Host pool type                            | Personal                |
| Assignment type                           | Automatic               |
| Create Session Host Configuration         | No                      |
| Assign multiple desktops to a single user | No                      |

## Networking

|                       |         |
|-----------------------|---------|
| Public network access | Enabled |
|-----------------------|---------|

## Virtual Machines

|                          |                                                                        |
|--------------------------|------------------------------------------------------------------------|
| Resource group           | EM50-NPR-AVDAZ-TST-RG02                                                |
| Name prefix              | EMVPNPRAVD                                                             |
| Virtual machine location | France Central                                                         |
| Availability options     | Availability zones                                                     |
| Availability zones       | Zone 1, Zone 2, Zone 3                                                 |
| Security type            | Standard                                                               |
| Image                    | Windows 11 Enterprise multi-session, version 25H2 + Microsoft 365 Apps |
| Virtual machine size     | Standard D4as v5                                                       |

Create

< Previous

[Download a template for automation](#)

## Create a host pool ...

✓ Validation passed.

|                                 |                                                                        |
|---------------------------------|------------------------------------------------------------------------|
| Availability zones              | Zone 1, Zone 2, Zone 3                                                 |
| Security type                   | Standard                                                               |
| Image                           | Windows 11 Enterprise multi-session, version 25H2 + Microsoft 365 Apps |
| Virtual machine size            | Standard D4as v5                                                       |
| Hibernate                       | No                                                                     |
| OS disk size                    | 128                                                                    |
| Number of VMs                   | 5                                                                      |
| OS disk type                    | Premium SSD                                                            |
| Confidential compute encryption | No                                                                     |
| Virtual network                 | EM50-NPR-AVDAZ-VNET01                                                  |
| Boot diagnostics                | Disable                                                                |
| Subnet                          | EM50-NPR-AVDAZ-SNET02(undefined)                                       |
| Network security group type     | None                                                                   |
| Specify domain or unit          | No                                                                     |
| Domain join type                | Microsoft Entra ID                                                     |
| Intune Enrollment               | Yes                                                                    |

### Workspace

|                |                       |
|----------------|-----------------------|
| Workspace name | (New) EMVPNPRAVD-VDWS |
|----------------|-----------------------|

### Identity

|                                  |     |
|----------------------------------|-----|
| Managed identity enabled         | Yes |
| System assigned managed identity | Yes |

### Tags

|                            |     |
|----------------------------|-----|
| Use cm-resource-parent tag | Yes |
|----------------------------|-----|

Create

< Previous

[Download a template for automation](#)

# 3. Scaling Plan

## a. Pooled Host Pool

Home > Scaling plans

### Create a scaling plan ...

Basics Schedules Host pool assignments Tags Review + create

Scaling plan enables you to apply schedules and preset conditions under which the autoscaling should occur for a host pool. [Learn more](#)

#### Project details

Subscription \* ⓘ

EM50-NPR-MUT

Resource group \* ⓘ

EM50-NPR-AVD00-VDSCALING01

Create new

Scaling plan name \* ⓘ

EM50-NPR-AVD00-VDSCALING01

Location \* ⓘ

North Europe

Friendly name ⓘ

Description

Time zone \* ⓘ

(UTC+01:00) Brussels, Copenhagen, Madrid, Paris

Host pool type

Pooled

Exclusion tag ⓘ

Scaling method \*

☐ Power management autoscaling

VMs will only be turned on or off to adjust available capacity. This is the only option available if your host pools are not using session host configuration.

☒ Dynamic autoscaling (preview)

Available capacity is managed by turning on/off existing machines and/or creating/deleting VMs.

## Create a scaling plan

Basics Schedules Host pool assignments Tags Review + create

Schedules enable you to define ramp-up hours, peak hours, ramp-down hours, and off-peak hours for week days and specify autoscaling triggers. Scaling plan must include an associated schedule for at least one day of the week. [Learn more](#) if

**1** [+ Add schedule](#)



### No schedule to display

To create a schedule, enter the days you want your scaling plan to be active. You can create up to 5 schedules.

[Add schedule](#)

[Review + create](#)

[< Previous](#)

[Next: Host pool assignments >](#)

## Add a schedule

**1** General **2** Ramp-up **3** Peak hours **4** Ramp-down **5** Off-peak hours

Time zone **2** (UTC+01:00) Brussels, Copenhagen, Madrid, Paris

Schedule name \* weekdays\_schedule

Repeat on \* 5 selected

Virtual machine limit

Minimum percentage of active hosts (%) 20

**1** If you want scaling service to only create / delete session hosts without turning on / off session hosts, you should have 100% of Minimum host pool size active. [Learn more](#)

Minimum host pool size \* 1

Maximum host pool size \* 3

[< Previous](#)

**3** [Next](#)

## Add a schedule

✓ General

✓ **Ramp-up**

③ Peak hours

④ Ramp-down

⑤ Off-peak hours

Repeats on

Mon, Tue, Wed, Thu, Fri

Time zone

(UTC+01:00) Brussels, Copenhagen, Madrid, Paris

Start time (12 hour system) \* ⓘ

08:00 AM



Load balancing algorithm ⓘ

Breadth-first



Capacity threshold (%) \* ⓘ

60



### Virtual machine limit

Minimum percentage of active hosts (%)

20



\* ⓘ

**i** If you want scaling service to only create / delete session hosts without turning on / off session hosts, you should have 100% of Minimum host pool size active.

[Learn more](#)

Minimum host pool size \* ⓘ

1



Maximum host pool size \* ⓘ

3



Previous

Next

## Add a schedule

✓ General   ✓ Ramp-up   **3 Peak hours**   4 Ramp-down   5 Off-peak hours

Repeats on Mon, Tue, Wed, Thu, Fri

Time zone (UTC+01:00) Brussels, Copenhagen, Madrid, Paris

Start time (12 hour system) \* ⓘ

09:00 AM ✓

Load balancing algorithm ⓘ

Depth-first ▾

Capacity threshold (%) ⓘ

60

### Virtual machine limit

Minimum percentage of active hosts (%) ⓘ

20

**i** If you want scaling service to only create / delete session hosts without turning on / off session hosts, you should have 100% of Minimum host pool size active.  
[Learn more](#)

Minimum host pool size ⓘ

1

Maximum host pool size ⓘ

3

Previous

Next

## Add a schedule

✓ General   ✓ Ramp-up   ✓ Peak hours   **4 Ramp-down**   5 Off-peak hours

Repeats on Mon, Tue, Wed, Thu, Fri

Time zone (UTC+01:00) Brussels, Copenhagen, Madrid, Paris

Start time (12 hour system) \* ⓘ 06:00 PM ✓

Load balancing algorithm ⓘ Depth-first ✓

Capacity threshold (%) \* ⓘ 90 ✓

Force sign out users \* ⓘ  
☒ Yes  
☐ No

Delay time before logging out users and shutting down VMs (min) \* ⓘ 30 ✓

Notification message \*  
You will be logged off in 30 min. Make sure to save your work.

### Virtual machine limit

Minimum percentage of active hosts (%) \* ⓘ 20 ✓

**i** If you want scaling service to only create / delete session hosts without turning on / off session hosts, you should have 100% of Minimum host pool size active.  
[Learn more](#)

Minimum host pool size \* ⓘ 1 ✓

Maximum host pool size \* ⓘ 3 ✓

Previous

Next

# Add a schedule

- ☒ General
- ☒ Ramp-up
- ☒ Peak hours
- ☒ Ramp-down
- 5** Off-peak hours

Repeats on

Mon, Tue, Wed, Thu, Fri

Time zone

(UTC+01:00) Brussels, Copenhagen, Madrid, Paris

Start time (12 hour system) \* ⓘ

Load balancing algorithm ⓘ

▾

Capacity threshold (%) ⓘ

**Virtual machine limit**

Minimum percentage of active hosts (%) ⓘ

ⓘ

**i** If you want scaling service to only create / delete session hosts without turning on / off session hosts, you should have 100% of Minimum host pool size active.  
[Learn more](#)

Minimum host pool size ⓘ

Maximum host pool size ⓘ

# Create a scaling plan ...

Basics   Schedules   Host pool assignments   Tags   Review + create

Schedules enable you to define ramp-up hours, peak hours, ramp-down hours, and off-peak hours for week days and specify autoscaling triggers. Scaling plan must include an associated schedule for at least one day of the week. [Learn more](#)

+ Add schedule

| Schedule name                     | Days                    |                                                                                     |
|-----------------------------------|-------------------------|-------------------------------------------------------------------------------------|
| <a href="#">weekdays_schedule</a> | Mon, Tue, Wed, Thu, Fri |  |

Review + create

< Previous

Next: Host pool assignments >

# Create a scaling plan ...

Basics   Schedules   Host pool assignments   Tags   Review + create

You can assign this scaling plan to any number of host pools. If you don't assign host pools during setup, you can do this assignment later.

Select host pool ⓘ

Enable autoscale

1

EMVMNPRAVD

Filter by Name

EM50-NPR-AVDZ-TST-RG02

☒ EMVMNPRAVD

2

## Create a scaling plan ...

✓ Validation passed.

Basics Schedules Host pool assignments Tags Review + create

### Basics

|                   |                                                 |
|-------------------|-------------------------------------------------|
| Subscription      | EM50-NPR-MUT                                    |
| Resource group    | EM50-NPR-AVDAZ-TST-RG02                         |
| Scaling plan name | EM50-NPR-AVD00-VDSCALING01                      |
| Friendly name     | None                                            |
| Description       | None                                            |
| Time zone         | (UTC+01:00) Brussels, Copenhagen, Madrid, Paris |
| Host pool type    | Pooled                                          |
| Exclusion tag     | None                                            |
| Scaling method    | Dynamic autoscaling (preview)                   |
| Location          | North Europe                                    |

### Schedules

|               |                                   |
|---------------|-----------------------------------|
| Schedule name | <a href="#">weekdays_schedule</a> |
| Repeats on    | Mon, Tue, Wed, Thu, Fri           |

### Host pool assignments

|                  |            |
|------------------|------------|
| Host pool        | EMVMNPRAVD |
| Enable autoscale | Enabled    |

### Tags

|                            |    |
|----------------------------|----|
| Use cm-resource-parent tag | No |
|----------------------------|----|

Create

< Previous

[Download a template for automation](#)

## b. Personal Host Pool

### Create a scaling plan ...

**Basics** Schedules Host pool assignments Tags Review + create

Scaling plan enables you to apply schedules and preset conditions under which the autoscaling should occur for a host pool. [Learn more](#)

#### Project details

Subscription \* ⓘ

Resource group \* ⓘ   
[Create new](#)

Scaling plan name \* ⓘ  ✓

Location \* ⓘ

Friendly name ⓘ

Description

Time zone \* ⓘ

Host pool type

Exclusion tag ⓘ

**Review + create**

< Previous

**Next: Schedules >**

## Create a scaling plan

Basics Schedules Host pool assignments Tags Review + create

Schedules enable you to define ramp-up hours, peak hours, ramp-down hours, and off-peak hours for week days and specify autoscaling triggers. Scaling plan must include an associated schedule for at least one day of the week. [Learn more](#)

+ Add schedule



### No schedule to display

To create a schedule, enter the days you want your scaling plan to be active.

Add schedule

Review + create

< Previous

Next: Host pool assignments >

## Add a schedule

General Ramp-up Peak hours Ramp-down Off-peak hours

Time zone (UTC+01:00) Brussels, Copenhagen, Madrid, Paris

Schedule name \* weekdays\_schedule

Repeat on \* 5 selected

Previous

Next

# Add a schedule

- ☒ General
- ☒ **Ramp-up**
- ☒ Peak hours
- ☒ Ramp-down
- ☐ 5 Off-peak hours

Repeats on

Mon, Tue, Wed, Thu, Fri

Time zone

(UTC+01:00) Brussels, Copenhagen, Madrid, Paris

Start time (12 hour system) \* ⓘ

08:00 AM

✓

Start VM on Connect ⓘ

☒ Yes

☐ No

VMs to start ⓘ

☒ Assigned VMs only

☐ Assigned and unassigned VMs

☐ Don't turn VMs on at start time

Disconnect settings

When disconnected for (min) \* ⓘ

120

✓

Perform ⓘ

Shutdown

▼

Sign out settings

When logged off for (min) \* ⓘ

120

✓

Perform ⓘ

Shutdown

▼

Previous

Add

# Add a schedule

- ☒ General
- ☒ Ramp-up
- ☒ **Peak hours**
- ☒ Ramp-down
- ☐ 5 Off-peak hours

Repeats on

Mon, Tue, Wed, Thu, Fri

Time zone

(UTC+01:00) Brussels, Copenhagen, Madrid, Paris

Start time (12 hour system) \* ⓘ

09:00 AM

✓

Start VM on Connect ⓘ

☒ Yes

☐ No

Disconnect settings

When disconnected for (min) \* ⓘ

120

✓

Perform ⓘ

Shutdown

✓

Sign out settings

When logged off for (min) \* ⓘ

120

✓

Perform ⓘ

Shutdown

✓

Previous

Add

## Add a schedule

☒ General ☒ Ramp-up ☒ Peak hours **☒ 4 Ramp-down** ☐ 5 Off-peak hours

Repeats on Mon, Tue, Wed, Thu, Fri

Time zone (UTC+01:00) Brussels, Copenhagen, Madrid, Paris

Start time (12 hour system) \* ⓘ

06:00 PM



Start VM on Connect ⓘ

☒ Yes

☐ No

### Disconnect settings

When disconnected for (min) \* ⓘ

60



Perform ⓘ

Shutdown



### Sign out settings

When logged off for (min) \* ⓘ

5



Perform ⓘ

Shutdown



Previous

Next

## EM50-NPR-AVD00-VDSCALING02 | Host pool assignments

Scaling plan

Search

+ Assign

Refresh

✓ Enable autoscale

□ Disable autoscale

Unassign

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

Properties

Locks

1 Manage

Host pool assignments

Schedules

&gt; Monitoring

&gt; Automation

&gt; Help

Search by name

Name ↑↓

Autoscale status ↑↓

There are no host pools assigned to this scaling plan.

## Assign host pool

You can apply this scaling plan to any number of host pools that are in the same region as the scaling plan. This will automatically enable autoscaling for the selected hostpools. [Learn more](#)

Select a host pool \*

EMVNPRAVD

Enable autoscale

✓

4

Assign

Cancel

Add or remove members by selecting them in the list.

# Create a scaling plan ...

✔ Validation passed.

Basics   Schedules   Host pool assignments   Tags   Review + create

## Basics

|                   |                                                 |
|-------------------|-------------------------------------------------|
| Subscription      | EM50-NPR-MUT                                    |
| Resource group    | EM50-NPR-AVDAZ-TST-RG02                         |
| Scaling plan name | EM50-NPR-AVD00-VDSCALING02                      |
| Friendly name     | None                                            |
| Description       | None                                            |
| Time zone         | (UTC+01:00) Brussels, Copenhagen, Madrid, Paris |
| Host pool type    | Personal                                        |
| Exclusion tag     | None                                            |
| Location          | North Europe                                    |

## Schedules

|               |                                   |
|---------------|-----------------------------------|
| Schedule name | <a href="#">weekdays_schedule</a> |
| Repeats on    | Mon, Tue, Wed, Thu, Fri           |

## Tags

|                            |    |
|----------------------------|----|
| Use cm-resource-parent tag | No |
|----------------------------|----|

Create

< Previous

[Download a template for automation](#)

## 4. Storage Account

### Create a storage account ...

Basics   Advanced   Networking   **Data protection**   Security   Encryption   Tags   Review + create

Azure Storage is a Microsoft-managed service providing cloud storage that is highly available, secure, durable, scalable, and redundant. Azure Storage includes Azure Blobs (objects), Azure Data Lake Storage Gen2, Azure Files, Azure Queues, and Azure Tables. The cost of your storage account depends on the usage and the options you choose below.

[Learn more about Azure storage accounts](#)

#### Project details

Select the subscription in which to create the new storage account. Choose a new or existing resource group to organize and manage your storage account together with other resources.

|                  |                         |
|------------------|-------------------------|
| Subscription *   | EM50-NPR-MUT            |
| Resource group * | EM50-NPR-AVDAZ-TST-RG02 |

[Create new](#)

#### Instance details

|                          |                         |
|--------------------------|-------------------------|
| Storage account name * ⓘ | em50avdazsta01          |
| Region * ⓘ               | (Europe) France Central |

[Deploy to an Azure Extended Zone](#)

|                        |             |
|------------------------|-------------|
| Preferred storage type | Azure Files |
|------------------------|-------------|

**i** This helps us provide relevant guidance. It doesn't restrict your storage to this resource type. [Learn more](#)

|                      |                                                                                                                                                                                                                                                                                                               |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Performance * ⓘ      | <p><input type="radio"/> <b>Standard:</b> Recommended for general purpose file shares and cost sensitive applications, such as HDD file shares</p> <p><input checked="" type="radio"/> <b>Premium:</b> Recommended for application requiring low-latency or high IOPS/throughput, such as SSD file shares</p> |
| File share billing ⓘ | <p><input type="radio"/> <b>Provisioned v1:</b> Provision only capacity, throughput and IOPS scale accordingly</p> <p><input checked="" type="radio"/> <b>Provisioned v2:</b> Provision capacity, throughput and IOPS individually (new)</p>                                                                  |
| Redundancy * ⓘ       | Locally redundant storage (LRS)                                                                                                                                                                                                                                                                               |

Previous

**Next**

Review + create

## Create a storage account ...

Basics

Advanced

Networking

Data protection

Security

Encryption

Tags

Review + create

### Hierarchical Namespace

Hierarchical namespace, complemented by Data Lake Storage Gen2 endpoint, enables file and directory semantics, accelerates big data analytics workloads, and enables access control lists (ACLs) [Learn more](#)

Enable hierarchical namespace ⓘ

☐

**i** The current combination of storage account kind, performance, replication, and location does not support the hierarchical namespace feature.

### Access protocols

Blob and Data Lake Gen2 endpoints are provisioned by default [Learn more](#)

Enable SFTP ⓘ

☐

**i** SFTP can only be enabled for hierarchical namespace accounts

Enable network file system v3 ⓘ

☐

**i** To enable NFS v3 'hierarchical namespace' must be enabled. [Learn more about NFS v3](#)

### Blob storage

Allow cross-tenant replication ⓘ

☐

### Azure Files

Enable Managed Identity for SMB ⓘ

☐

Require Encryption in Transit for SMB \* ⓘ

☒

Require Encryption in Transit for NFS \* ⓘ

☒

Previous

Next

Review + create

Pour le moment pas de Private Endpoint mais implémenter après les premiers tests concluants.

# Create a storage account ...

Basics    Advanced    Networking    Data protection    Security    Encryption    Tags    Review + create

## Public access

Access your resource from anywhere through a public network.

Note: Allowing access to your resource through a public network increases security risk. [Learn more](#)

- Public network access \* ⓘ
- ☒ **Enable**  
Allow inbound and outbound access with the option to restrict select inbound access using resource access configurations for this resource.
  - ☐ **Disable**  
Restrict inbound access while allowing outbound access.
  - ☐ **Secure by perimeter (Most restricted)**  
Restrict inbound and outbound access using a network security perimeter. Secure by perimeter offers the greatest level of inbound and outbound restriction to secure your resource.

- Public network access scope \*
- ☒ **Enable from all networks**
  - ☐ **Enable from selected virtual networks and IP addresses**
- ⚠ Enabling public network access will make this resource available publicly. Unless public access is required, consider using the most restricted access configurations.

## Private endpoint

Create a private endpoint to allow a private connection to this resource. Additional private endpoint connections can be created within the storage account or private link center.

+ Add private endpoint

| Name | Subscription | Resource g... | Region | Target sub-... | Subnet | Private DN... |
|------|--------------|---------------|--------|----------------|--------|---------------|
|------|--------------|---------------|--------|----------------|--------|---------------|

Click on add to create a private endpoint

Previous

Next

Review + create

# Create a storage account ...

Basics

Advanced

Networking

Data protection

Security

Encryption

Tags

Review + create

## Recovery

Protect your data from accidental or erroneous deletion or modification.

- ☐ Enable point-in-time restore for containers  
Use point-in-time restore to restore one or more containers to an earlier state. If point-in-time restore is enabled, then versioning, change feed, and blob soft delete must also be enabled. [Learn more](#)
- ☐ Enable soft delete for blobs  
Soft delete enables you to recover blobs that were previously marked for deletion, including blobs that were overwritten. [Learn more](#)
- ☐ Enable soft delete for containers  
Soft delete enables you to recover containers that were previously marked for deletion. [Learn more](#)  
Enabling soft delete for frequently overwritten data may result in increased storage costs [Learn more](#)
- ☒ Enable soft delete for classic file shares  
Soft delete enables you to recover classic file shares that were previously marked for deletion. [Learn more](#)  
Days to retain deleted classic file shares ⓘ

## Tracking

Manage versions and keep track of changes made to your blob data.

- ☐ Enable versioning for blobs  
Use versioning to automatically maintain previous versions of your blobs. [Learn more](#)  
Consider your workloads, their impact on the number of versions created, and the resulting costs. Optimize costs by automatically managing the data lifecycle. [Learn more](#)
- ☐ Enable blob change feed  
Keep track of create, modification, and delete changes to blobs in your account. [Learn more](#)

## Access control

- ☐ Enable version-level immutability support

Previous

Next

Review + create

## Create a storage account ...

[Basics](#)[Advanced](#)[Networking](#)[Data protection](#)[Security](#)[Encryption](#)[Tags](#)[Review + create](#)

### Security

Configure security settings that impact your storage account.

Require secure transfer for REST API operations ⓘ ☒

Allow enabling anonymous access on individual containers ⓘ ☐

Enable storage account key access ⓘ ☒

Default to Microsoft Entra authorization in the Azure portal ⓘ ☐

Minimum TLS version ⓘ

Permitted scope for copy operations (Preview) ⓘ

### Microsoft Defender for Storage

Microsoft Defender for Storage is an Azure-native layer of security intelligence that detects potential threats of your storage accounts. It helps prevent the three major impacts on your data and workload: malicious file uploads, sensitive data exfiltration and data corruption.

Enable Defender for Storage ⓘ ☐

[Previous](#)[Next](#)[Review + create](#)

## Create a storage account ...

Basics

Advanced

Networking

Data protection

Security

Encryption

Tags

Review + create

Encryption type \* ⓘ

☒ Microsoft-managed keys (MMK)

☐ Customer-managed keys (CMK)

Enable support for customer-managed keys ⓘ

☒ Blobs and files only

☐ All service types (blobs, files, tables, and queues)

⚠ This option cannot be changed after this storage account is created.

Enable infrastructure encryption ⓘ

☐

Previous

Next

Review + create

## a. Création du Fileshare

Attention au quotas, on paie ce qu'on provisionne en premium sku.

em50avdzsta01 | Classic file shares

Storage account

Search

Overview

Activity log

Tags

Diagnose and solve problems

Access Control (IAM)

Data migration

Storage browser

Partner solutions

Resource visualizer

Data storage

Classic file shares

Security + networking

Data management

Settings

Essentials

Identity-based access : Not configured

Default share-level permissions : Disabled

Soft delete : 7 days

SMB Multichannel : Enabled

Security : Maximum compatibility (Recommended)

Classic file share count : 0 of 50 classic file shares used

Provisioned storage : 0 of 262144 GiB used

Provisioned IOPS : 0 of 102400 IOPS used

Provisioned throughput : 0 MiB/sec of 10340 MiB/sec used

Search classic file shares by prefix (case-sensitive)

Name

Protocol

You don't have any classic file shares yet. Click '+ Classic file share' to get started.

## New classic file share

Basics Backup Review + create

The classic file share is billed by provisioned share size, IOPS and throughput, regardless of the used capacity. The minimum share size is 32 GiB. [Learn more](#)

Name \* fslogix

Provisioned storage (GiB) \* 32

[Set to maximum](#)

### Performance

Provisioned IOPS and throughput \* ☒ Recommended provisioning ☐ Manually specify IOPS and throughput

IOPS \* 3032 3000-15160

Throughput (MiB/sec) \* 129 100-520

Protocol ⓘ \* ☒ SMB ☐ NFS

ⓘ To use the SMB protocol with this share, check if you can communicate over port 445. These scripts for [Windows clients](#) and [Linux clients](#) can help. Learn how to [circumvent port 445 issues](#).

Review + create

< Previous

Next : Backup >

## New classic file share ...

Basics **Backup** Review + create

Azure Backup protects your classic file shares from accidental deletion or modification with granular restore and at-scale management capabilities. [Learn more](#) 

Enable backup ☐

Review + create

< Previous

Next : Review >

# New classic file share ...

Basics   Backup   Review + create

## Basics

|                           |         |
|---------------------------|---------|
| File share name           | fslogix |
| Provisioned storage (GiB) | 32      |
| IOPS                      | 3032    |
| Throughput (MiB/sec)      | 129     |
| Protocol                  | SMB     |

---


Create

< Previous

Next >


[Download a template for automation](#)

## b. Ajout du répertoire pour les profils

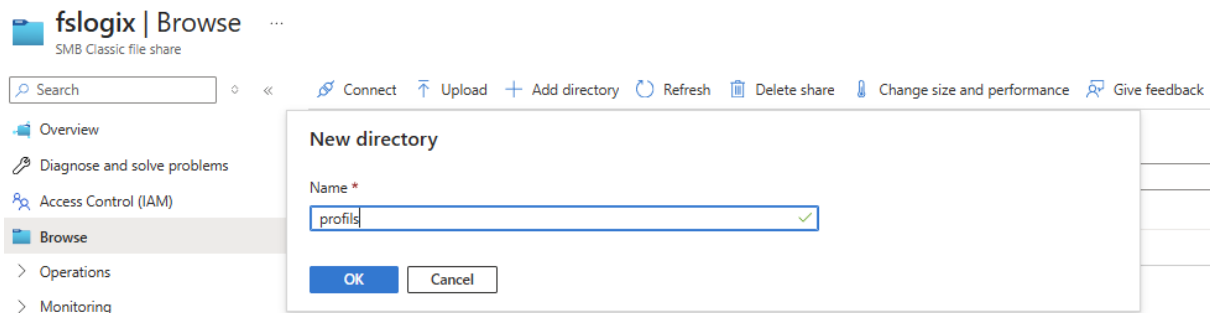

## c. Identity-based access

Nous avons opté pour une authentification **Microsoft Entra Kerberos**.

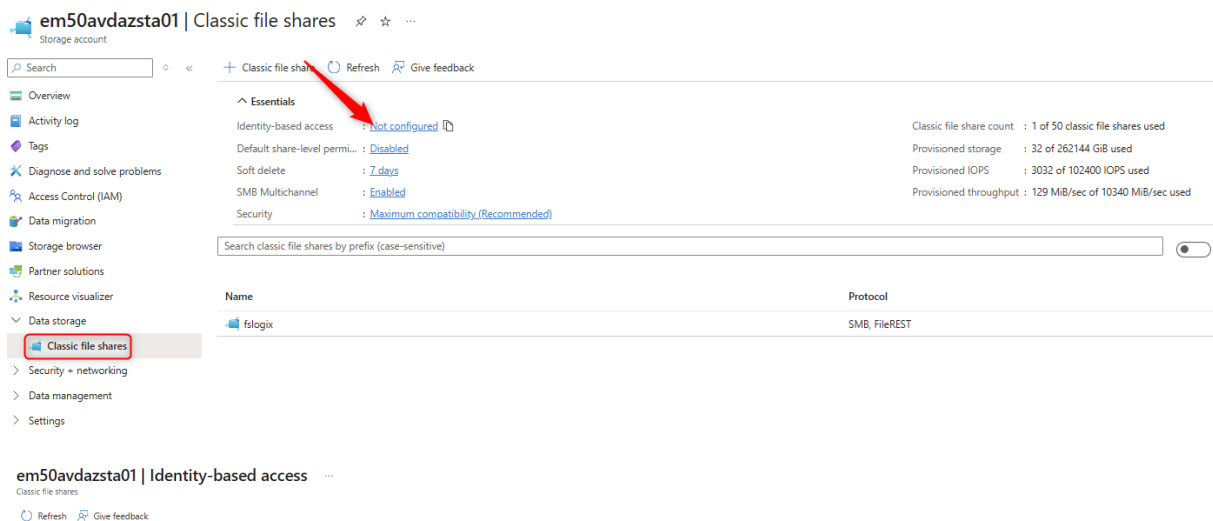

### em50avdzsta01 | Identity-based access

Classic file shares


Refresh Give feedback

Identity-based access can be enabled in two steps for a particular share in this storage account. This allows individual users to use their Active Directory or Microsoft Entra account to gain access to a specific file share.

#### Step 1: Enable an identity source

Choose the identity source that contains the user accounts that will access a share in this storage account. You can set up identity-based access control for user accounts located in either one of these three domain services.

- Active Directory Domain Services (AD DS) you host on a Windows Server (generally referred to as "on-premises AD" even though you might host these servers in Azure)
- Microsoft Entra Domain Services (Microsoft Entra DS), a platform as a service, hosted directory service and domain controller in Azure
- Microsoft Entra Kerberos allows using Kerberos authentication from Microsoft Entra ID joined clients.



#### Step 2: Set share-level permissions

Once you have enabled Active Directory or Microsoft Entra source on your storage account, you must configure share-level permissions in order to get access to your file shares. There are two ways you can assign share level permissions. You can assign them to all authenticated identities as a default share level permission below. You can also assign them to specific Microsoft Entra users/user group from the IAM blade. [Learn more](#)

##### Permissions for all authenticated users and groups

Default share-level permissions

☒ Disable permissions and no access is allowed to file shares

☐ Enable permissions for all authenticated users and groups

#### Step 3: Set file and directory permissions

You can manage permissions for individual files and directories within the browse experience of the share. [Learn more](#)

# Microsoft Entra Kerberos



Identity-based access

Microsoft Entra Kerberos authentication allows users to connect to Azure Files over the internet without requiring a line-of-sight to domain controllers. In order to use Microsoft Entra Kerberos, user accounts must be hybrid identities. [Learn more](#)

Microsoft Entra Kerberos



After enabling Microsoft Entra Kerberos authentication, you will need to explicitly grant admin consent to the new Microsoft Entra ID application registered in your Microsoft Entra tenant. [Learn more](#)

## Domain services

To configure directory and file level permissions through Windows File explorer, you also need to specify domain name and domain GUID for your on-premises AD. You can get this information from your domain admin or from an on-premises AD-joined client. If you prefer to configure using icacfs, this step is not required. [Learn more](#)

Domain name

Domain GUID

Save

Discard

Give feedback

Identity-based access can be enabled in two steps for a particular share in this storage account. This allows individual users to use their Active Directory or Microsoft Entra account to gain access to a specific file share.

Step 1: Enable an identity source

Choose the identity source that contains the user accounts that will access a share in this storage account. You can set up identity-based access control for user accounts located in either one of these three domain services.

- Active Directory Domain Services (AD DS) you host on a Windows Server (generally referred to as "on-premises AD" even though you might host these servers in Azure)
- Microsoft Entra Domain Services (Microsoft Entra DS), a platform as a service, hosted directory service and domain controller in Azure
- Microsoft Entra Kerberos allows using Kerberos authentication from Microsoft Entra ID joined clients.

Active Directory Domain Services (AD DS)  
Another access method is already configured

Microsoft Entra Domain Services  
Another access method is already configured

Microsoft Entra Kerberos  
Enabled  
[Configure](#)

Step 2: Set share-level permissions

Once you have enabled Active Directory or Microsoft Entra source on your storage account, you must configure share-level permissions in order to get access to your file shares. There are two ways you can assign share level permissions. You can assign them to all authenticated identities as a default share level permission below. You can also assign them to specific Microsoft Entra users/user group from the IAM blade. [Learn more](#)

Permissions for all authenticated users and groups

Default share-level permissions

☐

Disable permissions and no access is allowed to file shares

☒

Enable permissions for all authenticated users and groups

Select appropriate role \*

Storage File Data SMB Share Contributor

▼

Step 3: Set file and directory permissions

You can manage permissions for individual files and directories within the browse experience of the share. [Learn more](#)

## d. Consent Service Principal Storage Account + Manifest

[Storage Account] em50avdazsta01.file.core.windows.net | API permissions

Search

Refresh

Got feedback?

Overview

Quickstart

Integration assistant

Diagnose and solve problems

Manage

Branding & properties

Authentication (Preview)

Certificates & secrets

Token configuration

API permissions

Expose an API

App roles

Owners

Roles and administrators

Manifest

Support + Troubleshooting

Some actions may be disabled due to your permissions. To request access, contact the application owner(s) or your administrator. View application owners or administrators.

Granting tenant-wide consent may revoke permissions that have already been granted tenant-wide for that application. Permissions that users have already granted on their own behalf aren't affected. [Learn more](#)

The "Admin consent required" column shows the default value for an organization. However, user consent can be customized per permission, user, or app. This column may not reflect the value in your organization, c

Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions should include all the permissions the application needs. [Learn more about permissions and consent](#)

+ Add a permission

✓ Grant admin consent for Servier Monde

| API / Permissions name | Type      | Description                   | Admin consent req... | Status                      |
|------------------------|-----------|-------------------------------|----------------------|-----------------------------|
| Microsoft Graph (3)    |           |                               |                      |                             |
| openid                 | Delegated | Sign users in                 | No                   | ✓ Granted for Servier Monde |
| profile                | Delegated | View users' basic profile     | No                   | ✓ Granted for Servier Monde |
| User.Read              | Delegated | Sign in and read user profile | No                   | ✓ Granted for Servier Monde |

[Storage Account] em50avdazsta01.file.core.windows.net | Manifest

Search

Save

Discard

Upload

Download

Got feedback?

Successfully updated application.

The editor below allows you to update this application by directly modifying its JSON representation. For more details, see: [Understanding the Microsoft Entra ID application manifest](#).

```
51  "resourceAppId": "00000003-0000-0000-c000-000000000000",
52  "resourceAccess": [
53    {
54      "id": "37f7f235-527c-4136-accd-4a02d197296e",
55      "type": "Scope"
56    },
57    {
58      "id": "14dad69e-099b-42c9-810b-d002981feec1",
59      "type": "Scope"
60    },
61    {
62      "id": "e1fe6dd8-ba31-4d61-89e7-88639da4683d",
63      "type": "Scope"
64    }
65  ],
66  },
67  "samlMetadataUrl": null,
68  "signInUrl": null,
69  "signInAudience": "AzureADMyOrg",
70  "tags": [
71    "kdc_enable_cloud_group_sids"
72  ],
73  "tokenEncryptionKeyId": null
74
```

e. Fileshare permissions

fslogix | Browse

SMB Classic file share

Search

Connect

Upload

Add directory

Refresh

Delete share

Change size and performance

Manage access

Give feedback

Overview

Diagnose and solve problems

Access Control (IAM)

Browse

Operations

Snapshots

Backup

Monitoring

Authentication method: Access key (Switch to Microsoft Entra user account)

Search files by prefix

| Name     | Type      |
|----------|-----------|
| profiles | Directory |

Home > em50avdzsta01\_1780559765336 | Overview > em50avdzsta01 | Classic file shares > fslogix | Browse

Manage access

SMB File Share

Add Entra user/group

Add Security ID

Manage inheritance

Set and manage permissions for the selected file or directory using the access control list (ACL) below. [Learn more](#)

| Name    | Type      | Owner               |
|---------|-----------|---------------------|
| fslogix | Directory | NT AUTHORITY\SYSTEM |

| User/group                                                                       | Full control | Modify | Read & execute | Read | Write | Inherited | Applies to |
|----------------------------------------------------------------------------------|--------------|--------|----------------|------|-------|-----------|------------|
| No permission entries. No groups or users have permission to access this object. |              |        |                |      |       |           |            |

Save

Cancel

Add Security IDs

The Security identifiers (SIDs) that you add will have administrative access to the file/directory.

Search well-known SIDs

|                                     | Name + SID value                             | Description                                                                                                                                                                                                                                                                                 |
|-------------------------------------|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | CREATOR OWNER<br>S-1-3-0                     | A security identifier to be replaced by the security identifier of the user who created a new object. This SID is used in inheritable access control entries (ACEs).                                                                                                                        |
| <input type="checkbox"/>            | CREATOR GROUP<br>S-1-3-1                     | A security identifier to be replaced by the primary-group SID of the user who created a new object. Use this SID in inheritable ACEs.                                                                                                                                                       |
| <input type="checkbox"/>            | OWNER RIGHTS<br>S-1-3-4                      | A group that represents the current owner of the object. When an ACE that carries this SID is applied to an object, the system ignores the implicit READ_CONTROL and WRITE_DAC permissions for the object owner.                                                                            |
| <input type="checkbox"/>            | NT AUTHORITY\Authenticated Users<br>S-1-5-11 | A group that includes all users and computers with identities that have been authenticated. Authenticated Users doesn't include Guest even if the Guest account has a password. This group includes authenticated security principals from any trusted domain, not only the current domain. |

Add custom SID

Selected security IDs  
CREATOR OWNER (S-1-3-0)

Select

Cancel

Give feedback

## Manage access

SMB File Share

[Add Entra user/group](#) [Add Security ID](#) [Manage inheritance](#)

Set and manage permissions for the selected file or directory using the access control list (ACL) below. [Learn more](#)

Name fslogix  
Type Directory  
Owner NT AUTHORITY\SYSTEM

| User/group        | Full control | Modify  | Read & execute | Read    | Write   | Inherited | Applies to                                      |
|-------------------|--------------|---------|----------------|---------|---------|-----------|-------------------------------------------------|
| CREATOR OWNER     | Not set      | ✓ Allow | ✓ Allow        | ✓ Allow | ✓ Allow | -         | Applies to subfolders and subfiles              |
| CB-GO-AVDZ-ADMINS | ✓ Allow      | ✓ Allow | ✓ Allow        | ✓ Allow | ✓ Allow | -         | Applies to this folder, subfolders and subfiles |
| CB-GO-AVDZ-USERS  | Not set      | ✓ Allow | ✓ Allow        | ✓ Allow | ✓ Allow | -         | Applies to this folder                          |

Save

Cancel

## f. RBAC Permission on Storage Account

em50avdazsta01 | Access Control (IAM)

Storage account

[Add](#) [Download role assignments](#) [Edit columns](#) [Refresh](#) [Delete](#) [Feedback](#)

- Overview
- Activity log
- Tags
- Diagnose and solve problems
- Access Control (IAM)
- Data migration
- Storage browser
- Partner solutions
- Resource visualizer
- Data storage
  - Classic file shares
- Security + networking
- Data management
- Settings
- Monitoring

Check access **Role assignments** Roles Deny assignments

Number of role assignments for this subscription  
514 4000

× Type: All Role: All Scope: All scopes Group by: Role

All (2) Job function roles (2) Privileged administrator roles (0)

| <input type="checkbox"/> | Name ↑↓                                                                                                                                       | Type ↑↓ | Role ↑↓                                          | Scope ↑↓                                                                                            |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|---------|--------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| ✓                        | Storage File Data SMB Share Contributor (1)                                                                                                   |         |                                                  |                                                                                                     |
| <input type="checkbox"/> |  CB-GO-AVDZ-USERS<br>66ed21ea-ba73-4de0-9a61-613b101575d8  | Group   | Storage File Data SMB Share Contributor          |  This resource |
| ✓                        | Storage File Data SMB Share Elevated Contributor (1)                                                                                          |         |                                                  |                                                                                                     |
| <input type="checkbox"/> |  CB-GO-AVDZ-ADMINS<br>afad2115-2e6b-4303-b9ae-1b25e27fac34 | Group   | Storage File Data SMB Share Elevated Contributor |  This resource |

Showing 1 - 2 of 2 results.

## g. Private Endpoint

**Je pense qu'il vaut mieux réserver le 10.200.80.0/24 pour les Private Endpoint des Storage Account (sécuriser les flux).**

### Create a private endpoint ...

 Changes you make on this tab may affect any configuration you've done on other tabs. Review all options prior to creating the private endpoint.

✓ Basics   ② Resource   ③ Virtual Network   ④ DNS   ⑤ Tags   ⑥ Review + create

Use private endpoints to privately connect to a service or resource. Your private endpoint must be in the same region as your virtual network, but can be in a different region from the private link resource that you are connecting to. [Learn more](#) 

#### Project details

Subscription \* ⓘ  ✓  
Resource group \* ⓘ  ✓  
[Create new](#)

#### Instance details

Name \*  ✓  
Network Interface Name \*  ✓  
Region \*  ✓

< Previous

Next : Resource >

## Create a private endpoint ...

✓ Basics   **2 Resource**   ③ Virtual Network   ④ DNS   ⑤ Tags   ⑥ Review + create

Private Link offers options to create private endpoints for different Azure resources, like your private link service, a SQL server, or an Azure storage account. Select which resource you would like to connect to using this private endpoint. [Learn more](#) 

Subscription      EM50-NPR-MUT (603402ed-1313-4cbe-8916-d154303fa560)

Resource type      Microsoft.Storage/storageAccounts

Resource      em50avdazsta01

Target sub-resource \*        

---

< Previous

Next : Virtual Network >

# Create a private endpoint ...

✓ Basics   ✓ Resource   ✓ Virtual Network   **4 DNS**   5 Tags   6 Review + create

## Private DNS integration

To connect privately with your private endpoint, you need a DNS record. We recommend that you integrate your private endpoint with a private DNS zone. You can also utilize your own DNS servers or create DNS records using the host files on your virtual machines. [Learn more](#) 

Integrate with private DNS zone   ☒ Yes   ☐ No

| Configuration name            | Subscription                                                                                      | Resource group                                                                                 | Private DNS zone               |
|-------------------------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------------|
| privatelink-file-core-wind... | GL50-HUBCENTRAL  | GL50-RG006  | privatelink.file.core.windo... |

 Existing Private DNS Zones tied to a single service should not be associated with two different Private Endpoints as it will not be possible to properly resolve two different A-Records that point to the same service. However, Private DNS Zones tied to multiple services would not face this resolution constraint.

< Previous

Next : Tags >

# Create a private endpoint ...

✓ Validation passed

## Basics

|                        |                         |
|------------------------|-------------------------|
| Subscription           | EM50-NPR-MUT            |
| Resource group         | EM50-NPR-AVDAZ-TST-RG02 |
| Region                 | France Central          |
| Name                   | EM50-NPR-AVDAZ-PE01     |
| Network Interface Name | EM50-NPR-AVDAZ-NIC01    |

## Resource

|                     |                                                     |
|---------------------|-----------------------------------------------------|
| Subscription ID     | 603402ed-1313-4cbe-8916-d154303fa560 (EM50-NPR-MUT) |
| Link type           | Microsoft.Storage/storageAccounts                   |
| Resource group      | EM50-NPR-AVDAZ-TST-RG02                             |
| Resource            | em50avdazsta01                                      |
| Target sub-resource | file                                                |

## Virtual Network

|                                |                                        |
|--------------------------------|----------------------------------------|
| Virtual network resource group | EM50-NPR-AVDAZ-TST-RG01                |
| Virtual network                | EM50-NPR-AVDAZ-VNET01                  |
| Subnet                         | EM50-NPR-AVDAZ-SNET01 (10.202.80.0/24) |
| Network Policies               | Disabled                               |
| Application security groups    | None                                   |

## DNS

|                                  |                                   |
|----------------------------------|-----------------------------------|
| Integrate with private DNS zone? | Yes                               |
| Statically allocate Private IP   | No                                |
| Private DNS zone resource group  | GL50-RG006                        |
| Private DNS zone                 | privatelink.file.core.windows.net |

Create

< Previous

Next >

[Download a template for automation](#)

# Create a private endpoint ...

✓ Basics   ✓ Resource   **3 Virtual Network**   ④ DNS   ⑤ Tags   ⑥ Review + create

## Networking

To deploy the private endpoint, select a virtual network subnet. [Learn more](#)

Virtual network ⓘ EM50-NPR-AVDZ-VNET01 (EM50-NPR-AVDZ-TST-RG01) ▼

Subnet \* ⓘ EM50-NPR-AVDZ-SNET01 ▼

Network policy for private endpoints   Disabled [\(edit\)](#)

## Private IP configuration

- ☒ Dynamically allocate IP address  
☐ Statically allocate IP address

## Application security group

Configure network security as a natural extension of an application's structure. ASG allows you to group virtual machines and define network security policies based on those groups. You can specify an application security group as the source or destination in an NSG security rule [Learn more](#)

[+](#) Create

Application security group

▼

< Previous

Next : DNS >

# Create a private endpoint ...

✓ Validation passed

## Basics

|                        |                         |
|------------------------|-------------------------|
| Subscription           | EM50-NPR-MUT            |
| Resource group         | EM50-NPR-AVDAZ-TST-RG02 |
| Region                 | France Central          |
| Name                   | EM50-NPR-AVDAZ-PE01     |
| Network Interface Name | EM50-NPR-AVDAZ-NIC01    |

## Resource

|                     |                                                     |
|---------------------|-----------------------------------------------------|
| Subscription ID     | 603402ed-1313-4cbe-8916-d154303fa560 (EM50-NPR-MUT) |
| Link type           | Microsoft.Storage/storageAccounts                   |
| Resource group      | EM50-NPR-AVDAZ-TST-RG02                             |
| Resource            | em50avdazsta01                                      |
| Target sub-resource | file                                                |

## Virtual Network

|                                |                                        |
|--------------------------------|----------------------------------------|
| Virtual network resource group | EM50-NPR-AVDAZ-TST-RG01                |
| Virtual network                | EM50-NPR-AVDAZ-VNET01                  |
| Subnet                         | EM50-NPR-AVDAZ-SNET01 (10.202.80.0/24) |
| Network Policies               | Disabled                               |
| Application security groups    | None                                   |

## DNS

|                                  |                                   |
|----------------------------------|-----------------------------------|
| Integrate with private DNS zone? | Yes                               |
| Statically allocate Private IP   | No                                |
| Private DNS zone resource group  | GL50-RG006                        |
| Private DNS zone                 | privatelink.file.core.windows.net |

Create

< Previous

Next >

[Download a template for automation](#)

## Public network access ...

Configure what inbound access is enabled through this resource's public endpoint. [Learn more](#)

Public network access ⓘ

☒ Enable

Allow inbound and outbound access with the option to restrict select inbound access using resource access configurations for this resource.

☐ Disable

Restrict inbound access while allowing outbound access.

☐ Secured by perimeter (Most restricted)

Restrict inbound and outbound access using a network security perimeter. Secure by perimeter offers the greatest level of inbound and outbound restriction to secure your resource.

 Enabling public network access will make this resource available publicly. Unless public access is required, consider using the most restricted access configurations. [Learn more](#)

Public network access scope ⓘ

☐ Enable from all networks

☒ Enable from selected networks

### Virtual Networks

Allow select virtual networks to connect to your resource using service endpoints. [Learn more](#)

+ Add a virtual network ▾

| Virtual Network         | Subnet               | Address Range  | Endpoint Status | Resource Group          | Subscription |
|-------------------------|----------------------|----------------|-----------------|-------------------------|--------------|
| ▾ em50-npr-avdaz-vnet01 | 2                    | 10.202.80.0/20 |                 | em50-npr-avdaz-tst-rg01 | EM50-NPR-MUT |
|                         | EM50-NPR-AVDZ-SNET01 | -              | ✔ Enabled       | em50-npr-avdaz-tst-rg01 | EM50-NPR-MUT |
|                         | EM50-NPR-AVDZ-SNET02 | -              | ✔ Enabled       | em50-npr-avdaz-tst-rg01 | EM50-NPR-MUT |

### IPv4 Addresses

Allow select public internet IP addresses to access your resource. [Learn more](#)

+ Add your client IPv4 address ("194.9.101.92")

Save

Cancel ⓘ

# 5. Log Analytics Workspace

# Create Log Analytics workspace ...

Basics   Tags   Review + Create

**i** A Log Analytics workspace is the basic management unit of Azure Monitor Logs. There are specific considerations you should take when creating a new Log Analytics workspace. [Learn more](#)

With Azure Monitor Logs you can easily store, retain, and query data collected from your monitored resources in Azure and other environments for valuable insights. A Log Analytics workspace is the logical storage unit where your log data is collected and stored.

## Project details

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

Subscription \* ⓘ

EM50-NPR-MUT

Resource group \* ⓘ

EM50-NPR-AVDAZ-TST-RG02

[Create new](#)

## Instance details

Name \* ⓘ

EM50-TST-AVDAZ-LOG01

Region \* ⓘ

France Central

Review + Create


« Previous

Next : Tags >

# Create Log Analytics workspace ...

✓ Validation passed

Basics   Tags   Review + Create



Basics

|                |                         |
|----------------|-------------------------|
| Subscription   | EM50-NPR-MUT            |
| Resource group | EM50-NPR-AVDAZ-TST-RG02 |
| Name           | EM50-TST-AVDAZ-LOG01    |
| Region         | France Central          |

Pricing

|              |                             |
|--------------|-----------------------------|
| Pricing tier | Pay-as-you-go (Per GB 2018) |
|--------------|-----------------------------|

The cost of your workspace depends on the volume of data ingested and how long it is retained. Regional pricing details are available on the [Azure Monitor pricing page](#). You can change to a different pricing tier after the workspace is created. [Learn more](#) about Log Analytics pricing models.

Tags

None

Create

« Previous

[Download a template for automation](#)

## a. Diagnostic settings

EMVMNPRAVD

Host pool

Diagnostic settings

Can you explain how to send diagnostic logs to Azure Monitor? What is the purpose of diagnostic settings? How do diagnostic settings differ from other Azure services?

Search

Refresh Feedback

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

Scaling plan

RDP Properties

Properties

Networking

Identity (Preview)

Scheduled agent updates

Locks

Manage

Application groups

Session hosts

Applications

Monitoring

Insights

**Diagnostic settings**

Logs

Diagnostic settings are used to configure streaming export of platform logs and metrics for a resource to the destination of your choice. You may create up to five different diagnostic settings to send different logs and metrics to independent destinations. [Learn more about diagnostic settings](#)

Diagnostic settings

| Name                                     | Storage account | Event hub | Log Analytics workspace | Partner solution | Edit setting                 |
|------------------------------------------|-----------------|-----------|-------------------------|------------------|------------------------------|
| Diagnostic setting                       | -               | -         | EM50-TST-AVDZ-LOG01     | -                | <a href="#">Edit setting</a> |
| <a href="#">+ Add diagnostic setting</a> |                 |           |                         |                  |                              |

Click 'Add Diagnostic setting' above to configure the collection of the following data:

- Checkpoint
- Error
- Management
- Connection
- HostRegistration
- AgentHealthStatus
- Network Data Logs
- Connection Graphics Data Logs Preview
- Session Host Management Activity Logs
- Autoscale logs for pooled host pools
- Network links logs for AVD connections

Add or remove favorites by pressing Ctrl+Shift+F

## b. Insights

Home > Azure Virtual Desktop | Host pools > EMVMNPRAVD | Insights

CheckAMAConfiguration

What metrics are available for this resource Are there any outages impacting this resource List metrics for this resource

emvnpnpradv

Workbooks Edit Refresh Help Auto refresh: Off

Host pool diagnostic settings: /subscriptions/603402ed-1313-4cbe-8916-d154303fa560/resourceGroups/em50-npr-avdaz-tst-rg02/providers/Microsoft.DesktopVirtualization/hostpools/emvnpnpradv

| Name               | Workspace           | Category group | Table | Required | Enabled |
|--------------------|---------------------|----------------|-------|----------|---------|
| Diagnostic setting | EM50-TST-AVDZ-LOG01 | allLogs        |       | No       | Yes     |

Workspace EMVMNPRAVD-VDWS

No existing diagnostic configuration was found for the selected workspace.

Azure Monitor is not configured for the selected workspace.  
Configure diagnostic settings for the workspace.

1. Select the Log analytics workspace in the **Log Analytics workspace** parameter  
2. Select **Configure workspace**  
3. Select **Deploy**. After the deployment is completed, refresh the workbook by selecting the refresh button on the top.

[More information on Azure Monitor for Azure Virtual Desktop](#)

**Configure workspace**

CheckAMAConfiguration

emvnpnpradv

Workbooks Edit Save Refresh Help Auto refresh: Off

Subscription: EM50-NPR-MUT Resource Group: em50-npr-avdaz-tst-rg02 Host Pool: emvnpnpradv

To use the configuration workbook, follow the setup instructions in our [How-To](#) guide. For additional resources, see our [glossary](#) and [troubleshooting](#) documents.

Resources diagnostic settings Session host data settings Data Generated

Data collection rule

Create DCR

Available DCRs

| DCR                          | LA workspace         | Resource group          | Subscription       |
|------------------------------|----------------------|-------------------------|--------------------|
| microsoft-avdi-francecentral | EM50-TST-TALEN-LOG01 | em50-npr-avd00-poc-rg01 | EM50-POC-ARCHITECH |

To create a new DCR, select the Log Analytics workspace destination, the resource group where it will be located, and click **Create data collection rule**.

Workspace destination: EM50-TST-AVDZ-LOG01 DCR resource group: EM50-NPR-AVDZ-TST-RG02

Create data collection rule

Deploy Template

Deploy Cancel View Template

CheckAMAConfiguration

emvnpnpradv

Workbooks Edit Save Refresh Help Auto refresh: Off

Selected DCR: microsoft-avdi-francecentral (em50-npr-avd00-poc-rg01)

DCR associations

The following session hosts do not have the correct DCR associations

Session host

- emvnpnpradv-0
- emvnpnpradv-1
- emvnpnpradv-2
- emvnpnpradv-3
- emvnpnpradv-4

Deploy Association

# Diagnostic setting ...

 Save  Discard  Delete  Feedback

A diagnostic setting specifies a list of categories of platform logs and/or metrics that you want to collect from a resource, and one or more destinations that you would stream them to. Normal usage charges for the destination will occur. [Learn more about the different log categories and contents of those logs](#)

Diagnostic setting name \* 

Diagnostic setting ✓

## Logs

Category groups ⓘ

☒ allLogs

### Categories

- ☒ Checkpoint
- ☒ Error
- ☒ Management
- ☒ Connection
- ☒ HostRegistration
- ☒ AgentHealthStatus
- ☒ Network Data Logs
- ☒ Connection Graphics Data Logs Preview
- ☒ Session Host Management Activity Logs
- ☒ Autoscale logs for pooled host pools

## Destination details

☒ Send to Log Analytics workspace

Subscription

EM50-NPR-MUT ▼

Log Analytics workspace

EM50-TST-AVDAZ-LOG01 ( francecentral ) ▼

☐ Archive to a storage account

☐ Stream to an event hub

☐ Send to partner solution