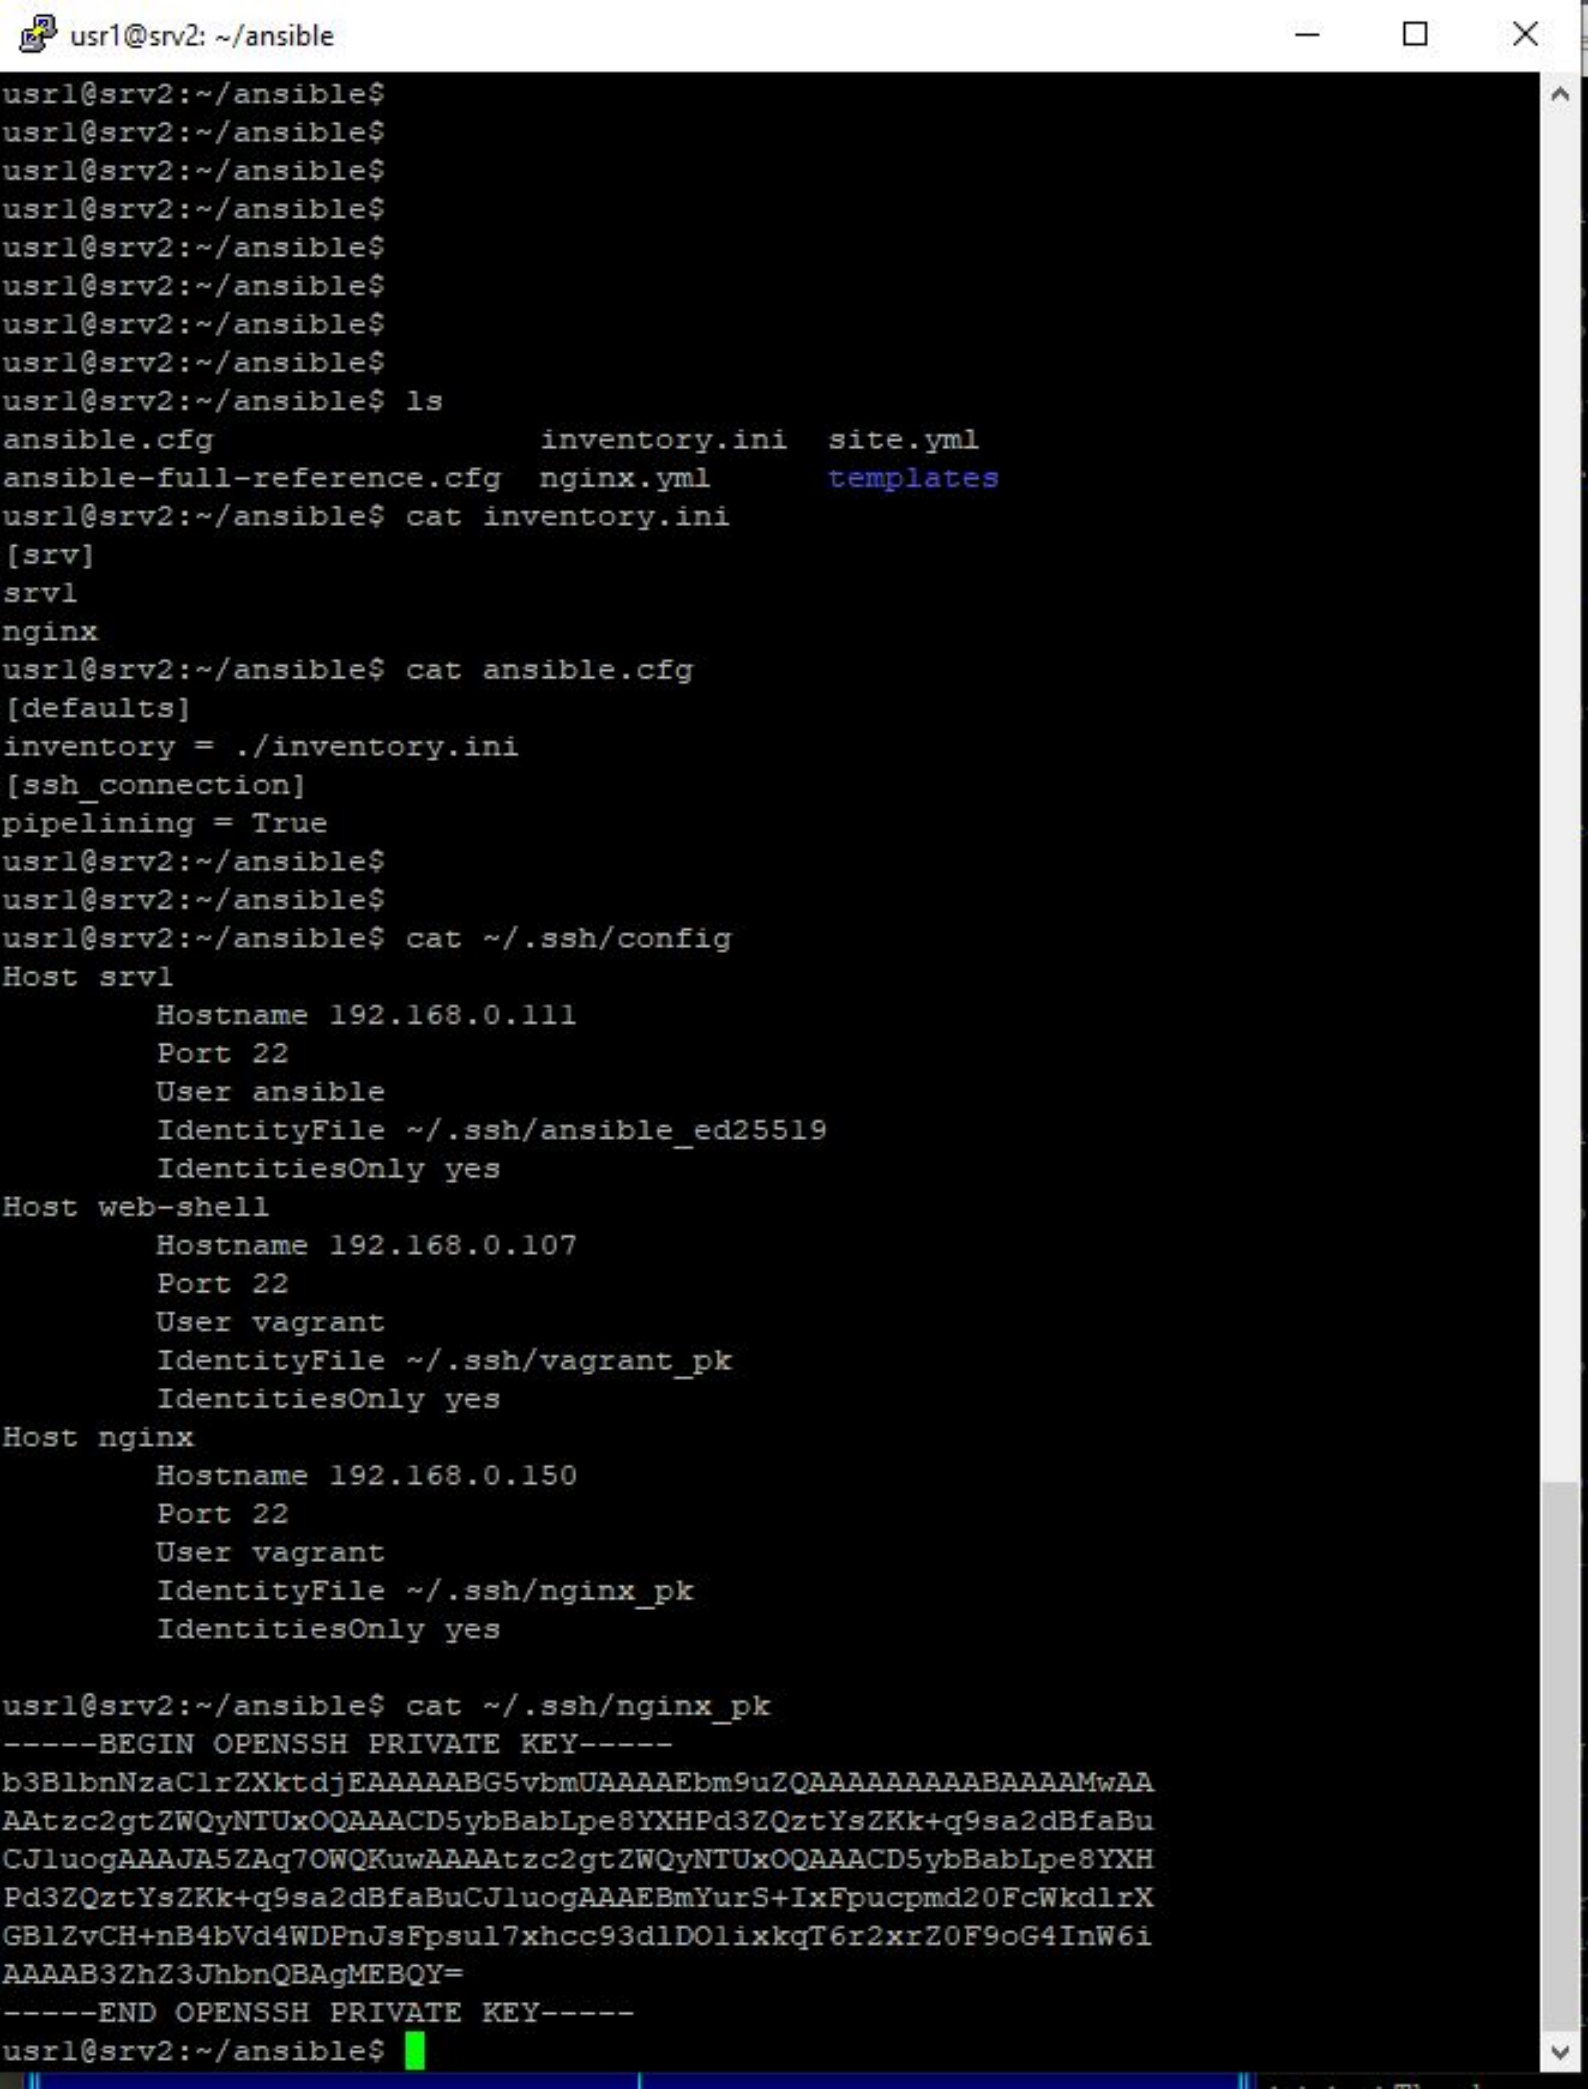
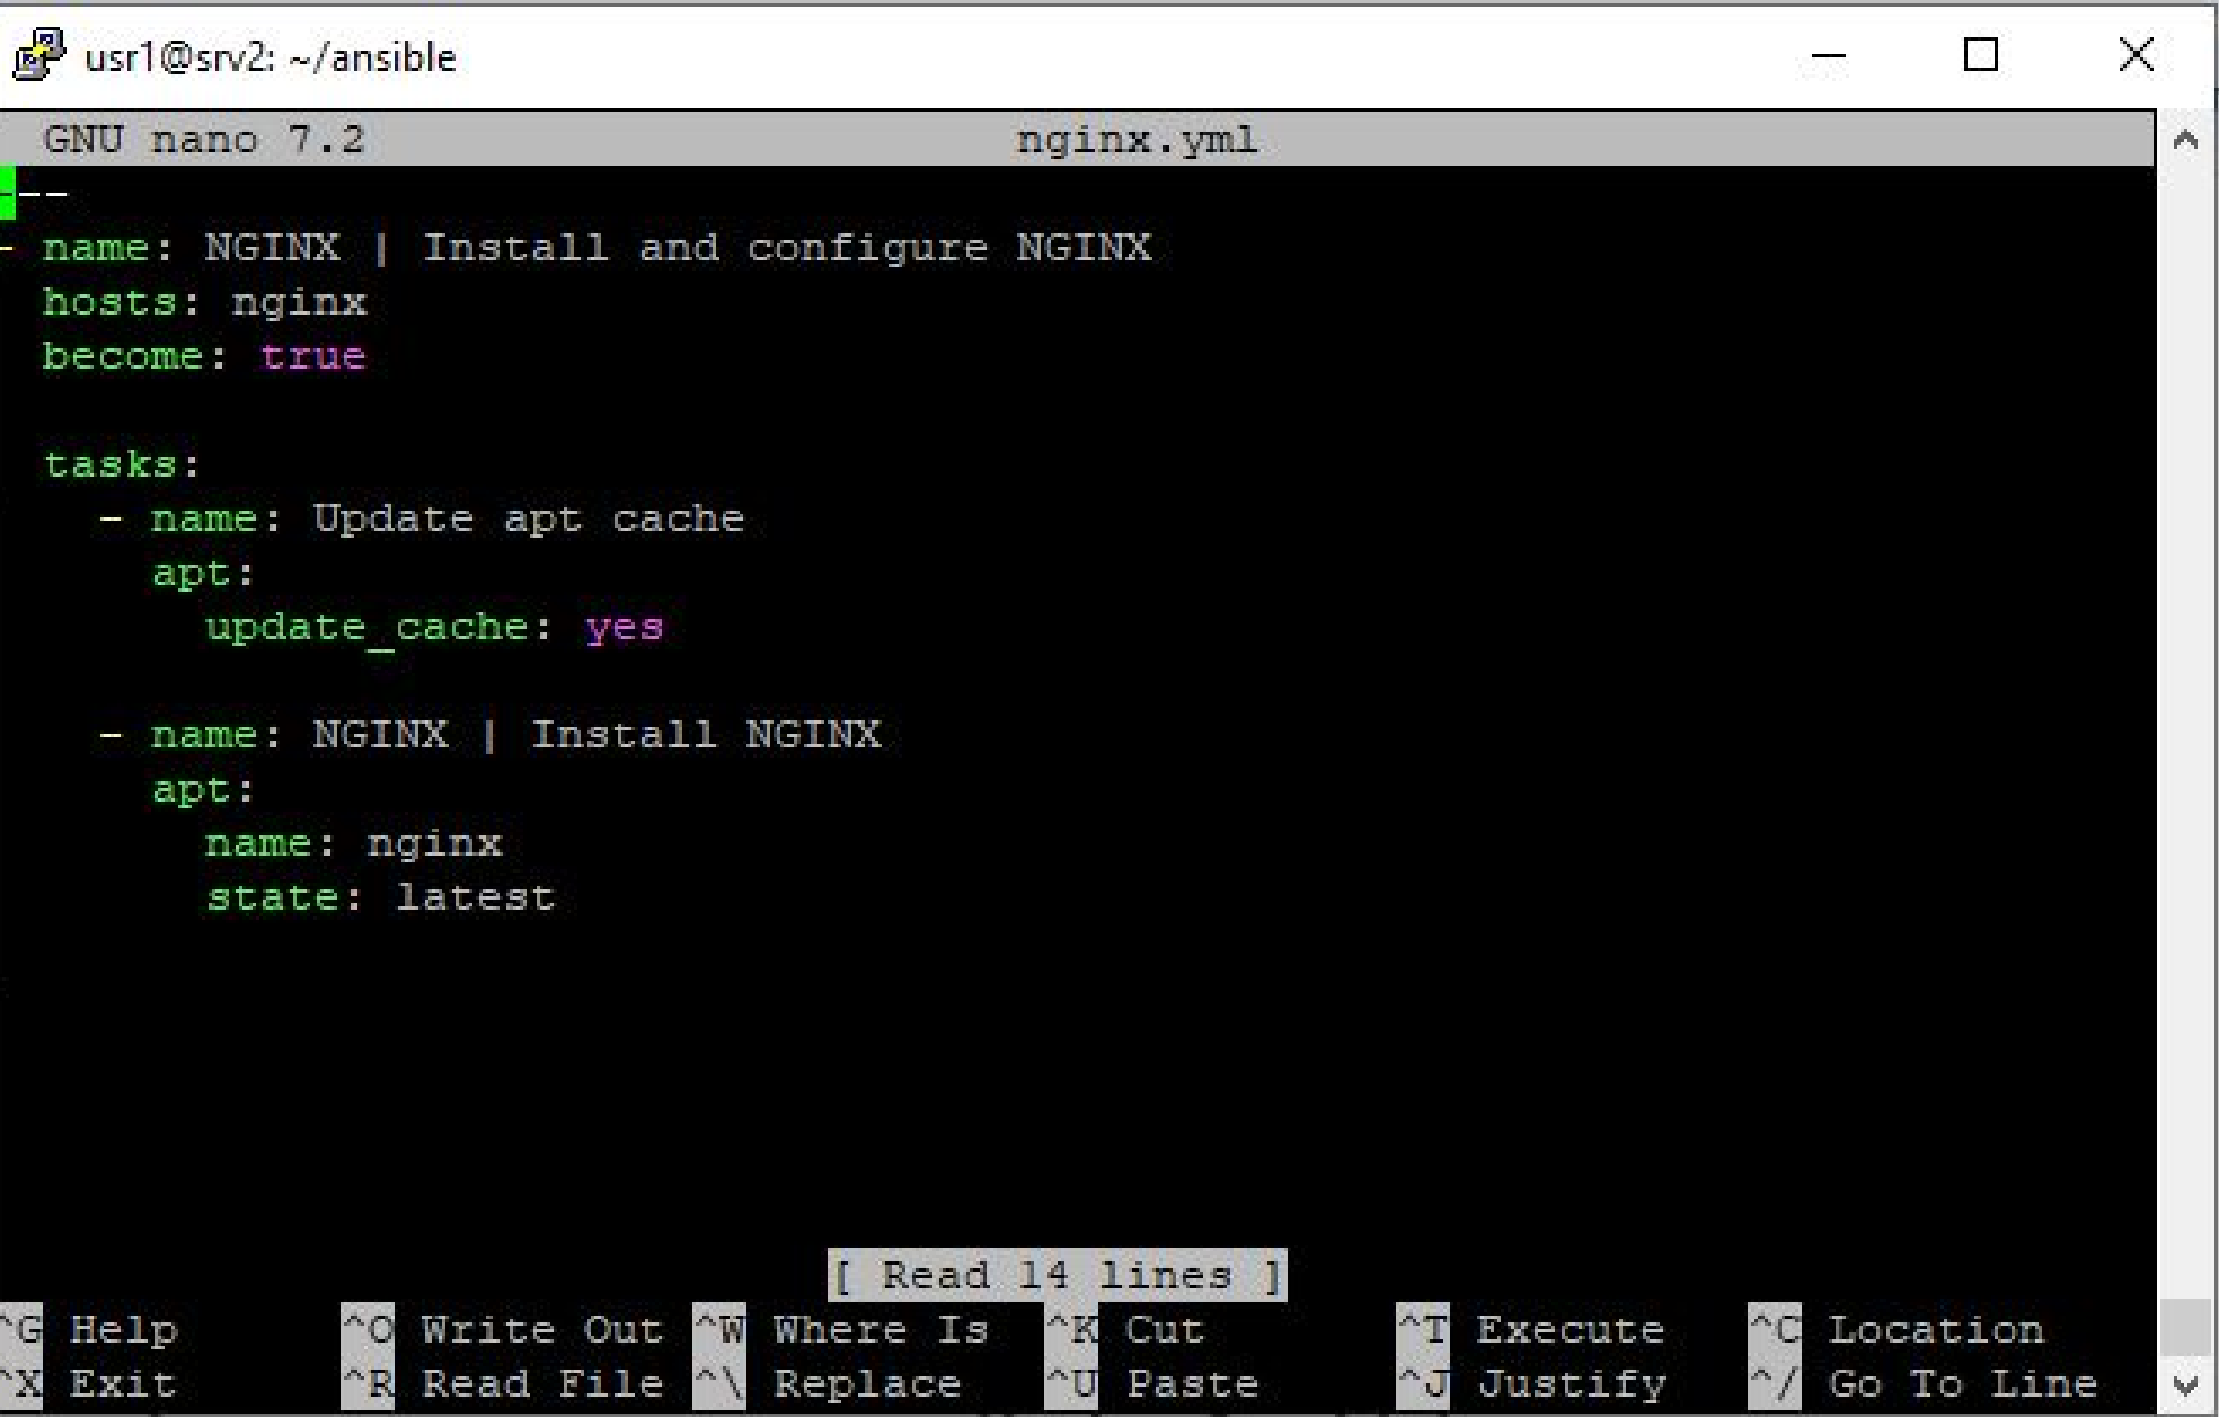
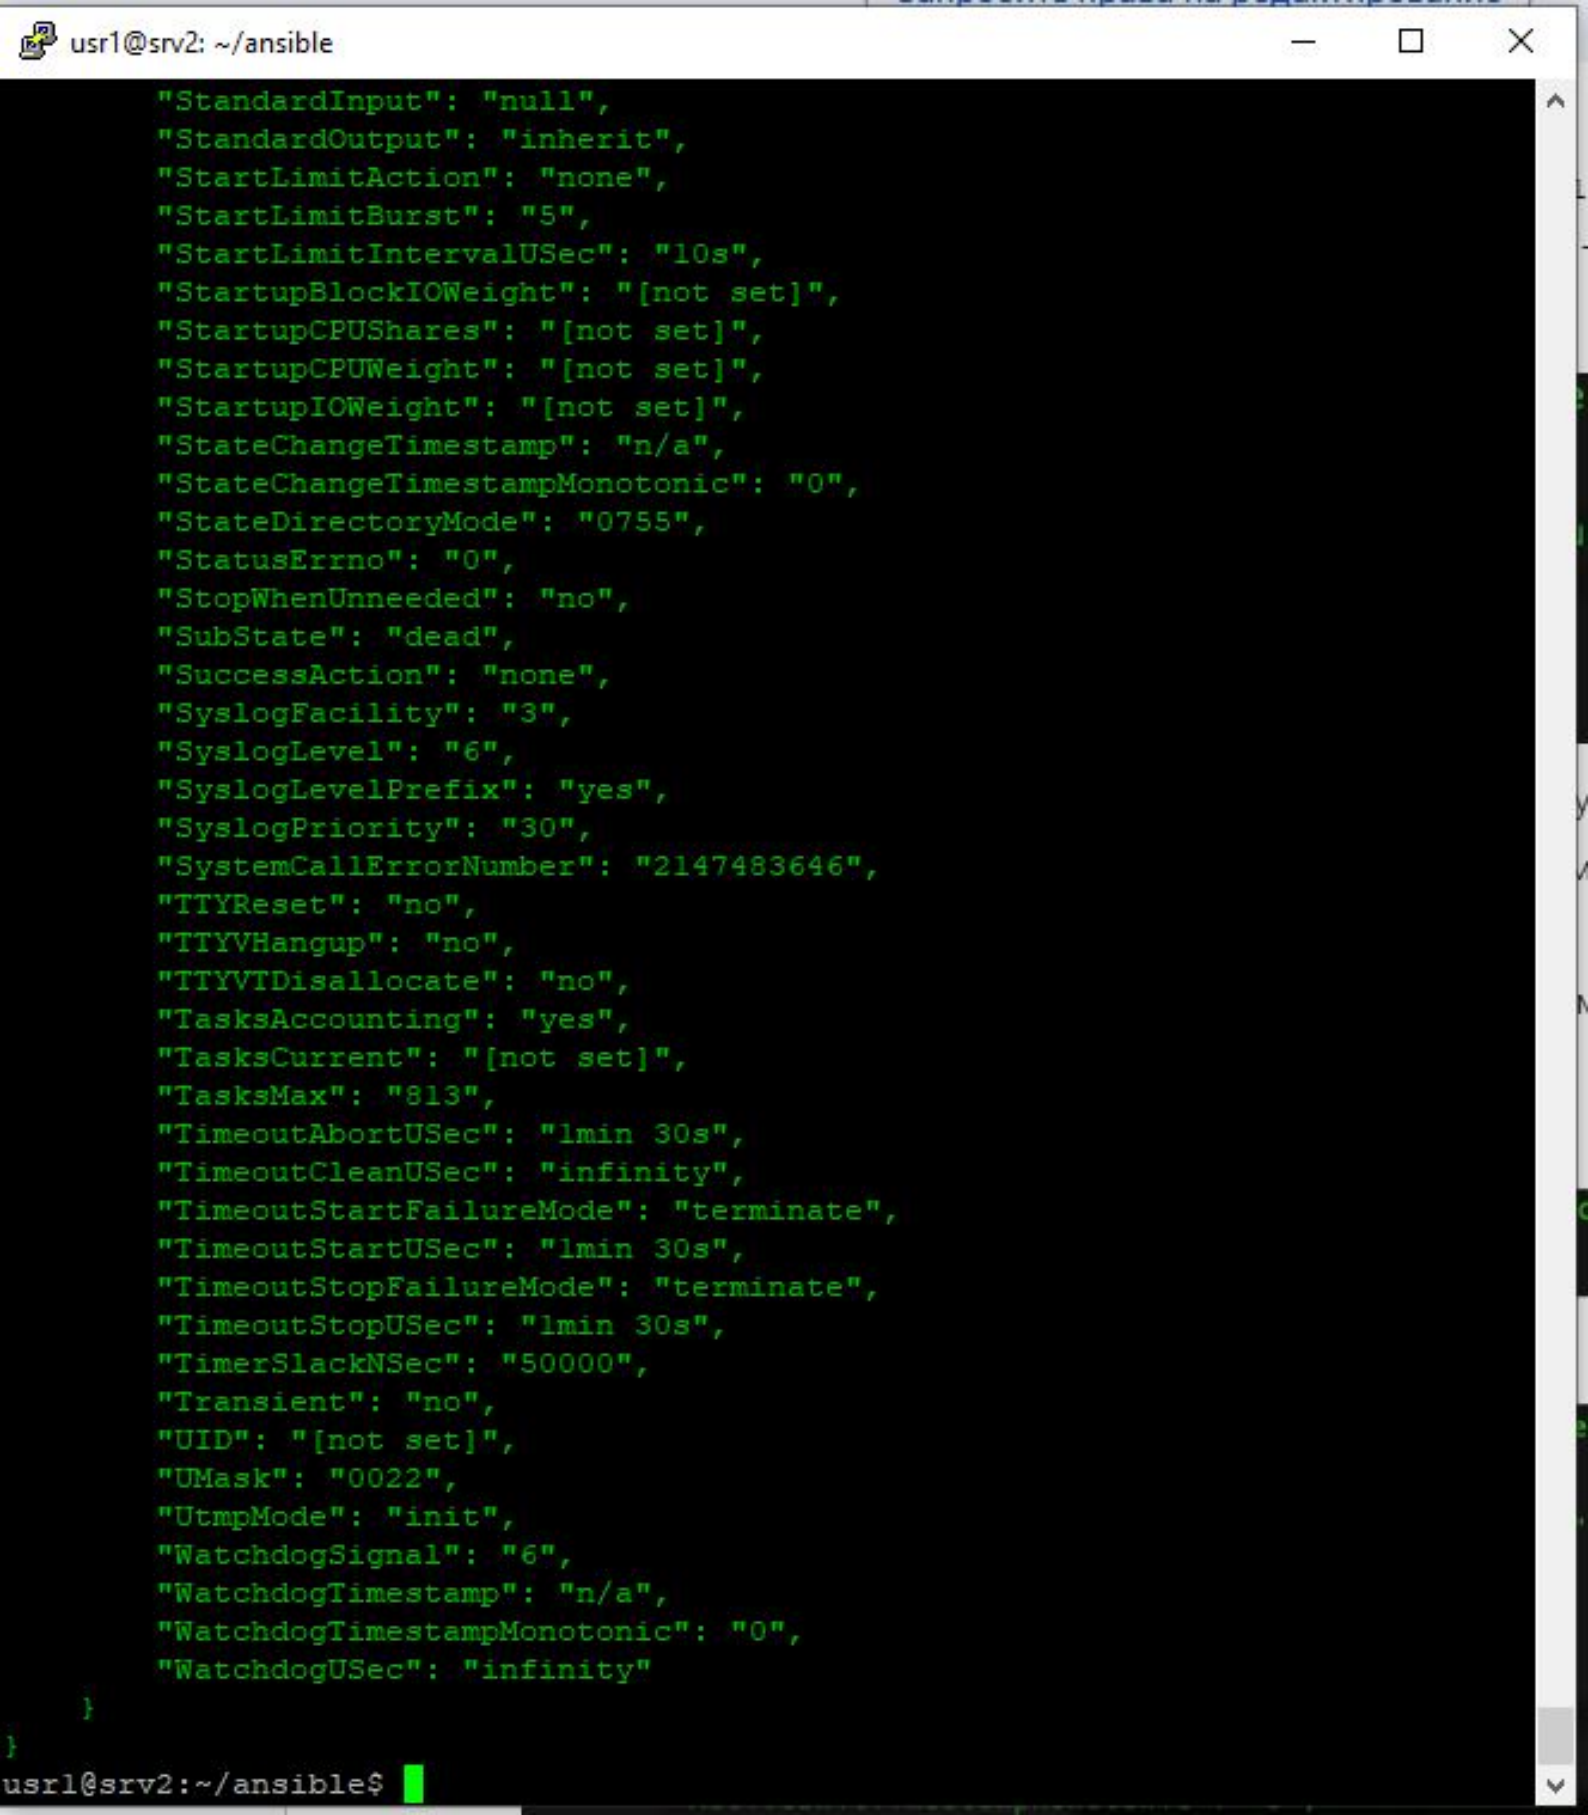

usr1@srv2: ~/ansible
usr1@srv2:~/ansible$
usr1@srv2:~/ansible$
usr1@srv2:~/ansible$
usr1@srv2:~/ansible$
usr1@srv2:~/ansible$
usr1@srv2:~/ansible$
usr1@srv2:~/ansible$
usr1@srv2:~/ansible$
usr1@srv2:~/ansible$ ls
ansible.cfg inventory.ini site.yml
ansible-full-reference.cfg nginx.yml templates
usr1@srv2:~/ansible$ cat inventory.ini
[srv]
srv1
nginx
usr1@srv2:~/ansible$ cat ansible.cfg
[defaults]
inventory = ./inventory.ini
[ssh_connection]
pipelining = True
usr1@srv2:~/ansible$
usr1@srv2:~/ansible$
usr1@srv2:~/ansible$ cat ~/.ssh/config
Host srv1
Hostname 192.168.0.111
Port 22
User ansible
IdentityFile ~/.ssh/ansible_ed25519
IdentitiesOnly yes
Host web-shell
Hostname 192.168.0.107
Port 22
User vagrant
IdentityFile ~/.ssh/vagrant_pk
IdentitiesOnly yes
Host nginx
Hostname 192.168.0.150
Port 22
User vagrant
IdentityFile ~/.ssh/nginx_pk
IdentitiesOnly yes
usr1@srv2:~/ansible$ cat ~/.ssh/nginx_pk
-----BEGIN OPENSSH PRIVATE KEY-----
b3BlbnNzaC1rZXktdjEAAAAABG5vbmUAAAAEbm9uZQAAAAAAAAABAAAAMwAA
AAtzc2gtZWQyNTUxOQAAACD5ybBabLpe8YXHPd3ZQztYsZKk+q9sa2dBfaBu
CJluogAAAJA5ZAq7OWQKuwAAAAtzc2gtZWQyNTUxOQAAACD5ybBabLpe8YXH
Pd3ZQztYsZKk+q9sa2dBfaBuCJluogAAAEBmYurS+IxFpucpmd20FcWkdlrX
GBlZvCH+nB4bVd4WDPnJsFpsul7xhcc93dlDOlixkqT6r2xrZ0F9oG4InW6i
AAAAB3ZhZ3JhbnQBAgMEBQY=
-----END OPENSSH PRIVATE KEY-----
usr1@srv2:~/ansible$

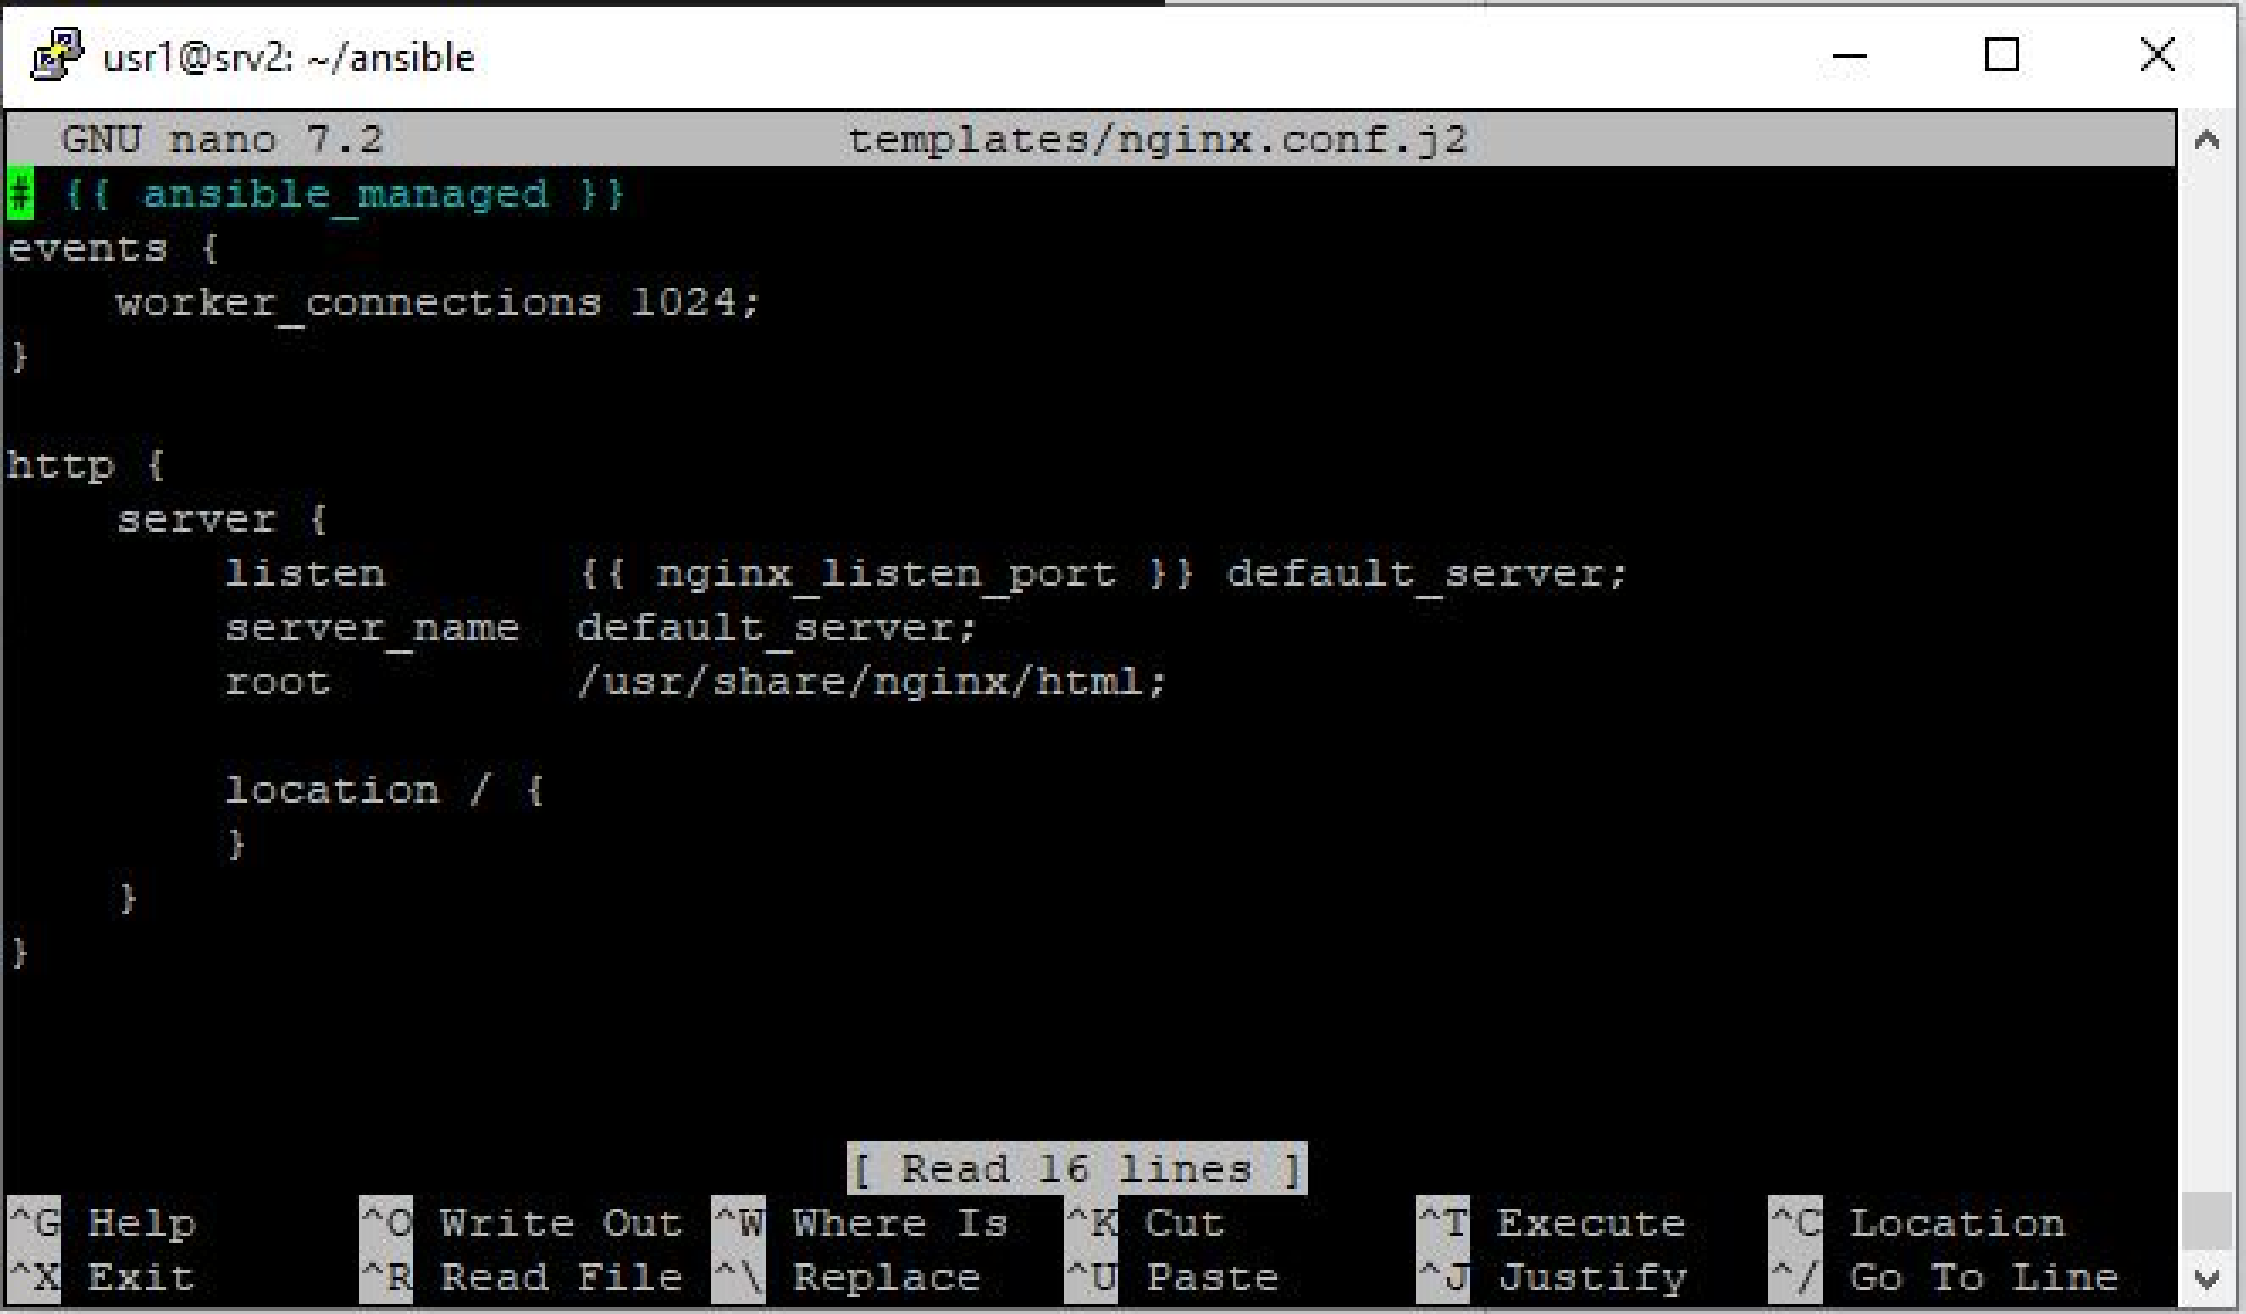

usr1@srv2: ~/ansible
GNU nano 7.2 nginx.yml

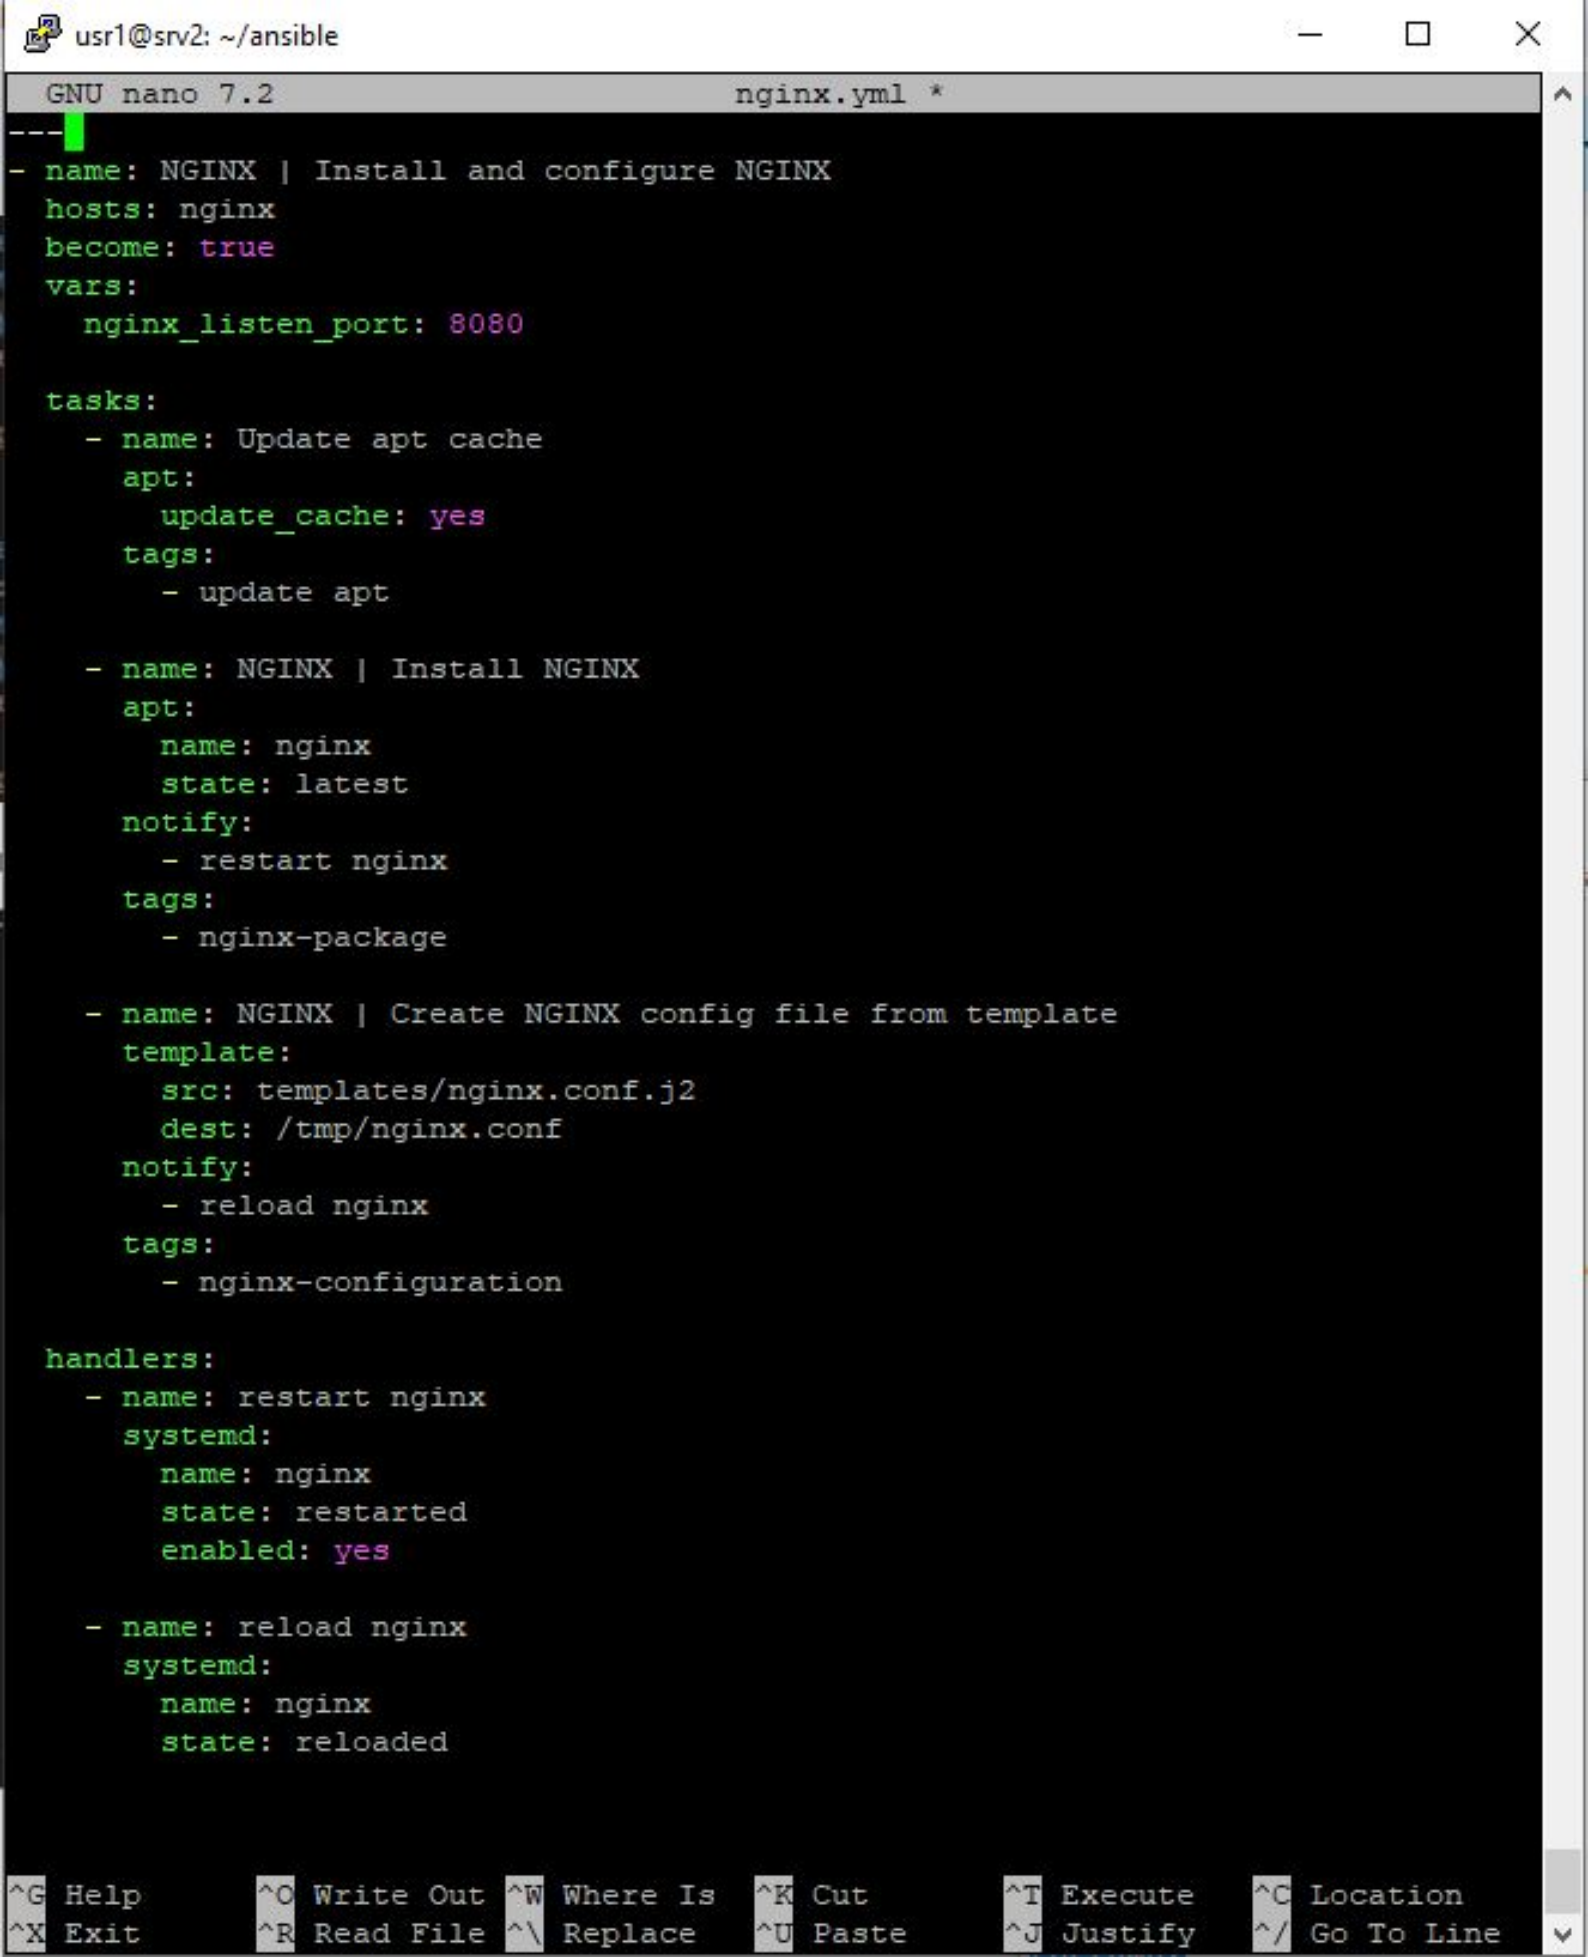
- name: NGINX | Install and configure NGINX
hosts: nginx
become: true
tasks:
- name: Update apt cache
apt:
update_cache: yes
- name: NGINX | Install NGINX
apt:
name: nginx
state: latest
[Read 14 lines]
^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line

usr1@srv2: ~/ansible

```
usr1@srv2:~/ansible$ nano nginx.yml
usr1@srv2:~/ansible$ ansible nginx -m ping
nginx | SUCCESS => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3"
    },
    "changed": false,
    "ping": "pong"
}
usr1@srv2:~/ansible$ ansible nginx -m command -a "uname -r"
nginx | CHANGED | rc=0 >>
5.15.0-71-generic
usr1@srv2:~/ansible$ ansible nginx -m systemd -a name=firewalld
nginx | SUCCESS => {
    "ansible_facts": {
        "discovered_interpreter_python": "/usr/bin/python3"
    },
    "changed": false,
    "name": "firewalld",
    "status": {
        "ActiveEnterTimestamp": "n/a",
        "ActiveEnterTimestampMonotonic": "0",
        "ActiveExitTimestamp": "n/a",
        "ActiveExitTimestampMonotonic": "0",
        "ActiveState": "inactive",
        "AllowIsolate": "no",
        "AssertResult": "no",
        "AssertTimestamp": "n/a",
        "AssertTimestampMonotonic": "0",
        "BlockIOAccounting": "no",
        "BlockIOWeight": "[not set]",
        "CPUAccounting": "yes",
        "CPUAffinityFromNUMA": "no",
        "CPUQuotaPerSecUSec": "infinity",
        "CPUQuotaPeriodUSec": "infinity",
        "CPUSchedulingPolicy": "0",
        "CPUSchedulingPriority": "0",
        "CPUSchedulingResetOnFork": "no",
        "CPUShares": "[not set]",
        "CPUUsageNSec": "[not set]",
        "CPUWeight": "[not set]",
        "CacheDirectoryMode": "0755",
        "CanFreeze": "yes",
        "CanIsolate": "no",
        "CanReload": "no",
```


usr1@srv2: ~/ansible
"StandardInput": "null",
"StandardOutput": "inherit",
"StartLimitAction": "none",
"StartLimitBurst": "5",
"StartLimitIntervalUSec": "10s",
"StartupBlockIOWeight": "[not set]",
"StartupCPUShares": "[not set]",
"StartupCPUWeight": "[not set]",
"StartupIOWeight": "[not set]",
"StateChangeTimestamp": "n/a",
"StateChangeTimestampMonotonic": "0",
"StateDirectoryMode": "0755",
"StatusErrno": "0",
"StopWhenUnneeded": "no",
"SubState": "dead",
"SuccessAction": "none",
"SyslogFacility": "3",
"SyslogLevel": "6",
"SyslogLevelPrefix": "yes",
"SyslogPriority": "30",
"SystemCallErrorNumber": "2147483646",
"TTYReset": "no",
"TTYVHangup": "no",
"TTYVTDisallocate": "no",
"TasksAccounting": "yes",
"TasksCurrent": "[not set]",
"TasksMax": "813",
"TimeoutAbortUSec": "1min 30s",
"TimeoutCleanUSec": "infinity",
"TimeoutStartFailureMode": "terminate",
"TimeoutStartUSec": "1min 30s",
"TimeoutStopFailureMode": "terminate",
"TimeoutStopUSec": "1min 30s",
"TimerSlackNSec": "50000",
"Transient": "no",
"UID": "[not set]",
"UMask": "0022",
"UtmpMode": "init",
"WatchdogSignal": "6",
"WatchdogTimestamp": "n/a",
"WatchdogTimestampMonotonic": "0",
"WatchdogUSec": "infinity"
}
}
usr1@srv2:~/ansible$


usr1@srv2: ~/ansible
GNU nano 7.2 templates/nginx.conf.j2
{{ ansible_managed }}
events {
worker_connections 1024;
}
http {
server {
listen {{ nginx_listen_port }} default_server;
server_name default_server;
root /usr/share/nginx/html;
location / {
}
}
}
[Read 16 lines]
^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line


usr1@srv2: ~/ansible
GNU nano 7.2 nginx.yml *

- name: NGINX | Install and configure NGINX
hosts: nginx
become: true
vars:
nginx_listen_port: 8080
tasks:
- name: Update apt cache
apt:
update_cache: yes
tags:
- update apt
- name: NGINX | Install NGINX
apt:
name: nginx
state: latest
notify:
- restart nginx
tags:
- nginx-package
- name: NGINX | Create NGINX config file from template
template:
src: templates/nginx.conf.j2
dest: /tmp/nginx.conf
notify:
- reload nginx
tags:
- nginx-configuration
handlers:
- name: restart nginx
systemd:
name: nginx
state: restarted
enabled: yes
- name: reload nginx
systemd:
name: nginx
state: reloaded
^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line

usr1@srv2: ~/ansible

```
PLAY [NGINX | Install and configure NGINX] *************************************

TASK [Gathering Facts] *********************************************************
ok: [nginx]

TASK [Update apt cache] ********************************************************
changed: [nginx]

TASK [NGINX | Install NGINX] ***************************************************
changed: [nginx]

PLAY RECAP *********************************************************************
nginx                      : ok=3    changed=2    unreachable=0    failed=0    s
kipped=0    rescued=0    ignored=0

usr1@srv2:~/ansible$
usr1@srv2:~/ansible$
usr1@srv2:~/ansible$
usr1@srv2:~/ansible$
usr1@srv2:~/ansible$ ls
ansible.cfg  ansible-full-reference.cfg  inventory.ini  nginx.yml  site.yml
usr1@srv2:~/ansible$ mkdir templates
usr1@srv2:~/ansible$ nano templates/nginx.conf.j2
usr1@srv2:~/ansible$ nano templates/nginx.conf.j2
usr1@srv2:~/ansible$ nano nginx.yml
usr1@srv2:~/ansible$ ansible-playbook nginx.yml

PLAY [NGINX | Install and configure NGINX] *************************************

TASK [Gathering Facts] *********************************************************
ok: [nginx]

TASK [Update apt cache] ********************************************************
changed: [nginx]

TASK [NGINX | Install NGINX] ***************************************************
ok: [nginx]

TASK [NGINX | Create NGINX config file from template] **************************
changed: [nginx]

RUNNING HANDLER [reload nginx] *************************************************
changed: [nginx]

PLAY RECAP *********************************************************************
nginx                      : ok=5    changed=3    unreachable=0    failed=0    s
kipped=0    rescued=0    ignored=0

usr1@srv2:~/ansible$
```

usr1@srv2: ~/ansible

```
PLAY RECAP *********************************************************************
nginx                      : ok=5    changed=3    unreachable=0    failed=0    s
kipped=0    rescued=0    ignored=0

usr1@srv2:~/ansible$ nano nginx.yml
usr1@srv2:~/ansible$ ansible-playbook nginx.yml

PLAY [NGINX | Install and configure NGINX] *************************************

TASK [Gathering Facts] *********************************************************
ok: [nginx]

TASK [Update apt cache] ********************************************************
changed: [nginx]

TASK [NGINX | Install NGINX] ***************************************************
ok: [nginx]

TASK [NGINX | Create NGINX config file from template] **************************
changed: [nginx]

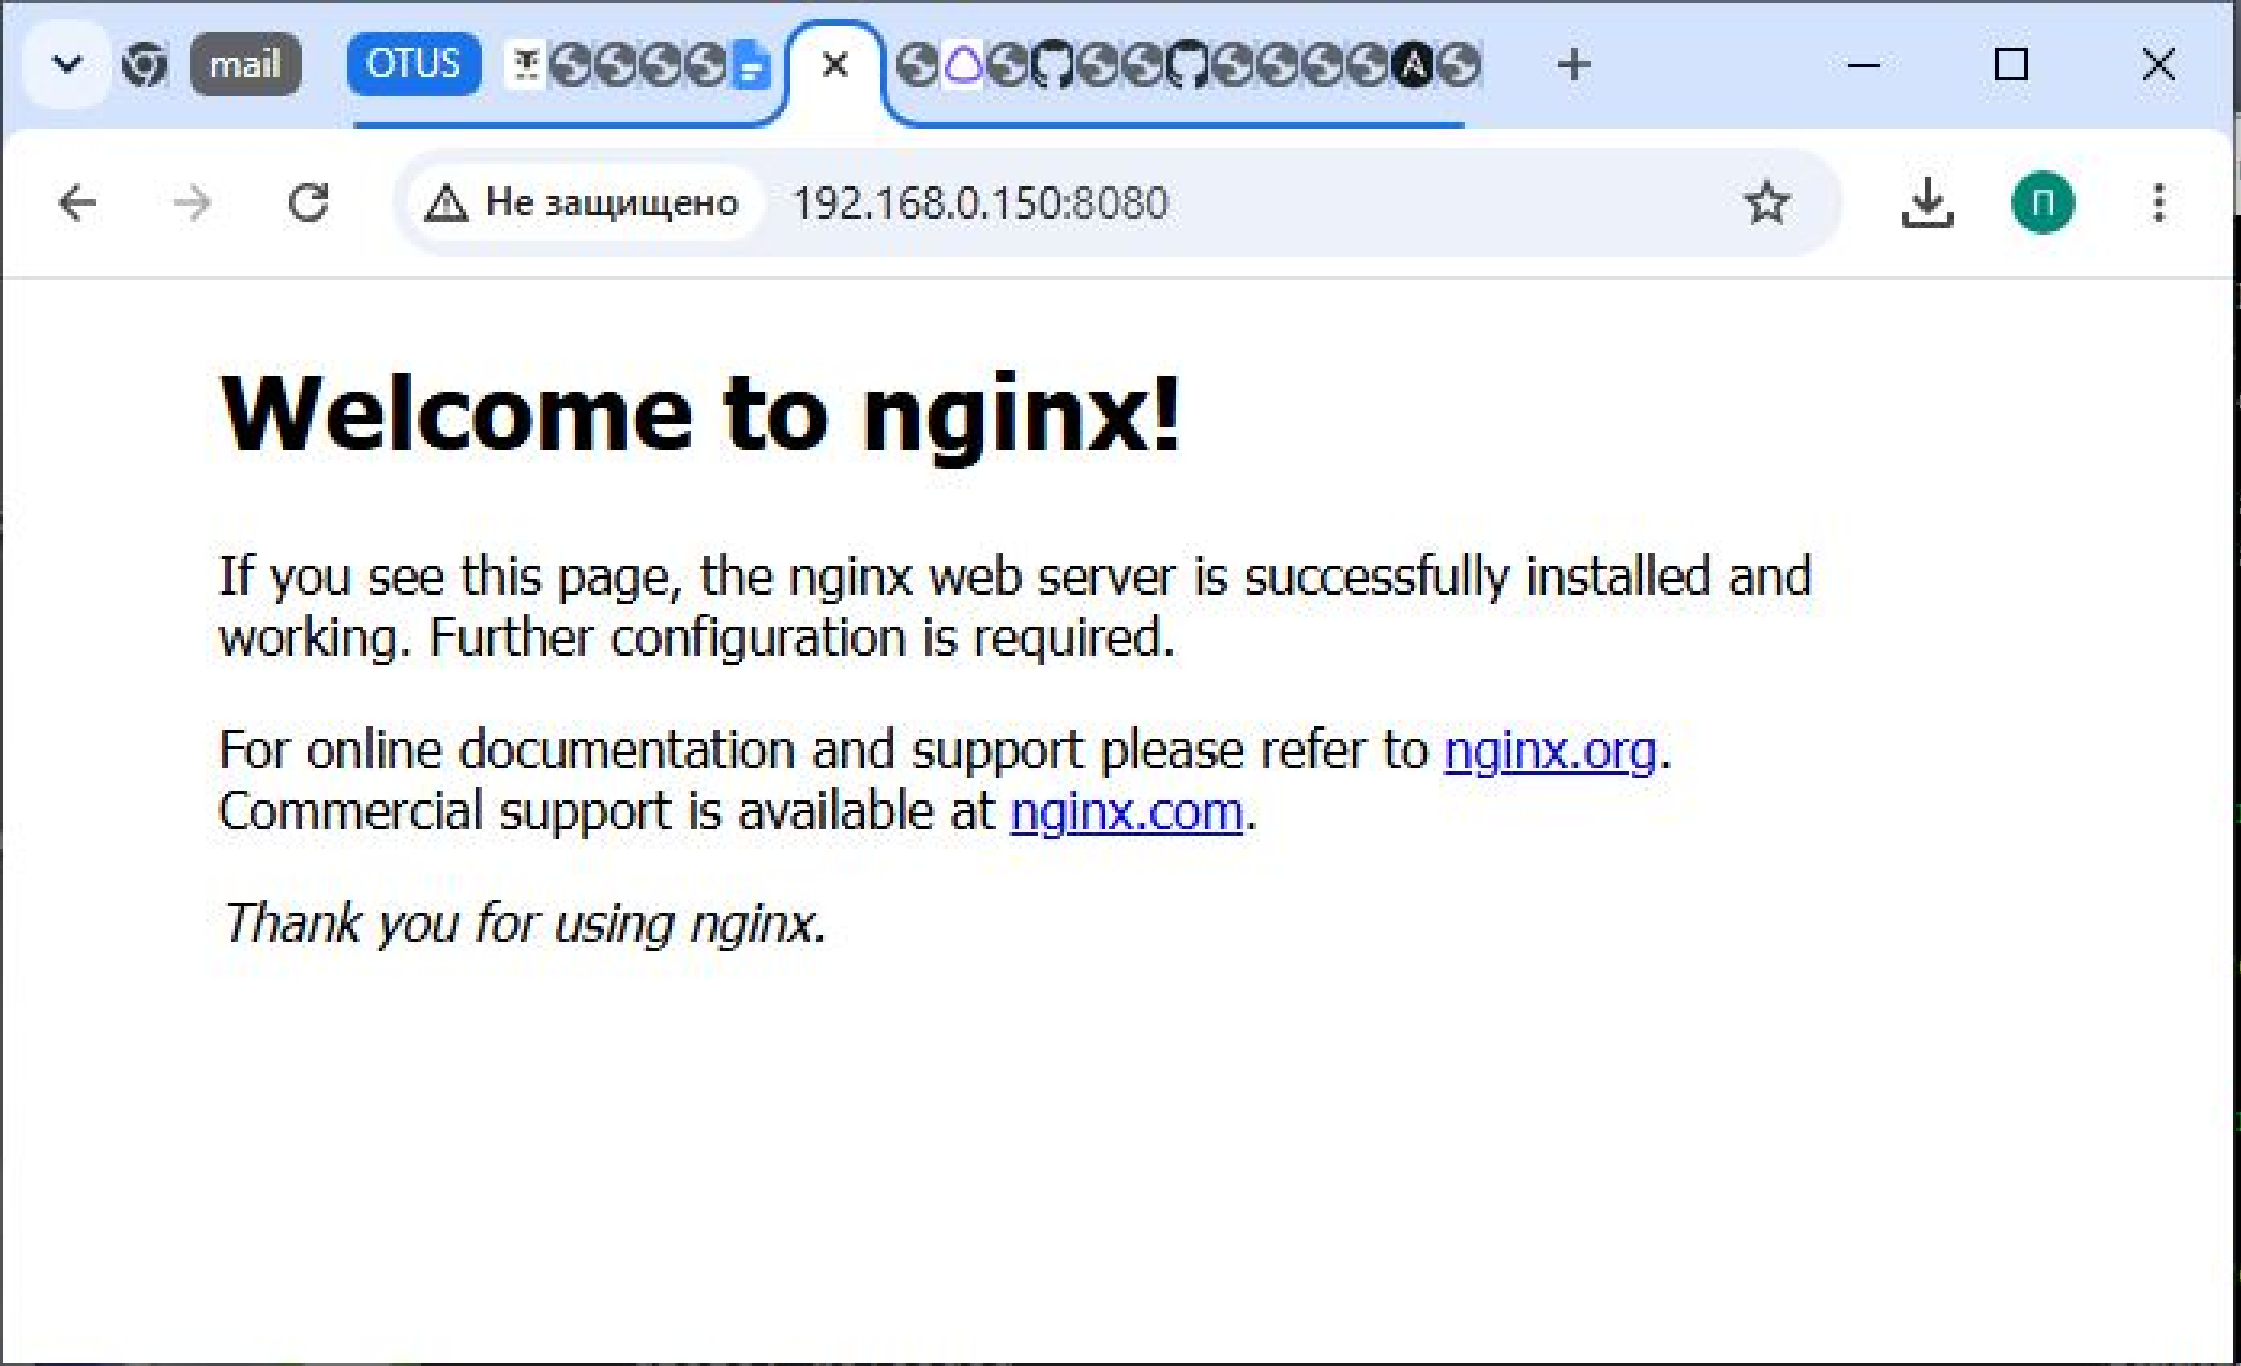
RUNNING HANDLER [reload nginx] *************************************************
changed: [nginx]

PLAY RECAP *********************************************************************
nginx                      : ok=5    changed=3    unreachable=0    failed=0    s
kipped=0    rescued=0    ignored=0

usr1@srv2:~/ansible$ curl http://192.168.0.150:8080
<!DOCTYPE html>
<html>
<head>
<title>Welcome to nginx!</title>
<style>
    body {
        width: 35em;
        margin: 0 auto;
        font-family: Tahoma, Verdana, Arial, sans-serif;
    }
</style>
</head>
<body>
<h1>Welcome to nginx!</h1>
<p>If you see this page, the nginx web server is successfully installed and
working. Further configuration is required.</p>

<p>For online documentation and support please refer to
<a href="http://nginx.org/">nginx.org</a>.<br/>
Commercial support is available at
<a href="http://nginx.com/">nginx.com</a>.</p>

<p><em>Thank you for using nginx.</em></p>
</body>
</html>
usr1@srv2:~/ansible$
```


mail
OTUS
Не защищено
192.168.0.150:8080
Welcome to nginx!
If you see this page, the nginx web server is successfully installed and working. Further configuration is required.
For online documentation and support please refer to nginx.org.
Commercial support is available at nginx.com.
Thank you for using nginx.