

VIETNAM NATIONAL UNIVERSITY - HO CHI MINH CITY  
HO CHI MINH CITY UNIVERSITY OF TECHNOLOGY  
FACULTY OF COMPUTER SCIENCE AND ENGINEERING



---

**Assignment 2 - Phase 1**

**BKU Tree**

---

HO CHI MINH CITY, 11/2020

# ASSIGNMENT 2 SPECIFICATION (Phase 1)

Version 1.0

## 1 Outcome

After successfully completing this assignment, students will be able to:

- Perform competently tree data structure in programming languages C / C ++.
- Understand and manipulate well two types of binary search tree, AVL and Splay Tree.

## 2 Introduction

Binary search tree is a group of storage-capable trees that search for elements with average complexity  $\mathcal{O}(n \log n)$  which N is the number of stored data points. In which, AVL belongs to a tree group that is balanced with the complexity when searching in all cases is  $\mathcal{O}(n \log n)$  thanks to the height adjustment operators so that each node satisfies the property of the disparity of the subtrees.

However, if there are data points that are frequently searched and are always at the end of the AVL tree, then using the AVL structure for storage would be inefficient. The Splay Tree was invented to solve the above problem by automatically bringing frequently searched nodes closer to the root node, making searching for these data points more efficient.

The biggest disadvantage of Splay Tree is the unbalanced height, so if the search above is random, the searching on Splay Tree is ineffective due to continuous tree adjustment operations. If an application requests at different stages, the sequence of lookup values will be randomized or concentrated on a few data points, both of these trees are at a disadvantage in different stages.

Therefore, the BKU Tree data structure was given in this assignment as an idea to address the time inefficiency for both trees.

## 3 BKU Tree Binary search tree

The BKU Tree Binary search tree is a tree which carries both the AVL tree and the Splay tree in it so that the program can both search like on an AVL Tree, and to search like on a Splay

Tree. Specifically, in the structure of BKU Tree, it will be stored as follows:

1. Splay tree
2. AVL tree
3. A queue stores most recent search keys (Maximum number of queue elements was initialized by the user).


In it, each node in the Splay tree stores the address of (or has a pointer to) the corresponding node in the AVL tree and vice versa.

### 3.1 Insertion and deletion operation

When perform insertion and deletion operations on BKU Tree, the corresponding operation must take place on both the Splay tree and the AVL tree.

- In case of insertion: The added key must be added to the queue, but if the queue is already full then we do not add to the queue.
- In case of deletion: If this key has existed in the queue, we have to delete this key from the queue and add the key currently located at the root of the Splay tree (after deletion).

Example: Insert a list of integer keys [1, 3, 5, 7, 9, 2, 4] into a BKU Tree (the queue size is 5) respectively, we have the following tree in model:

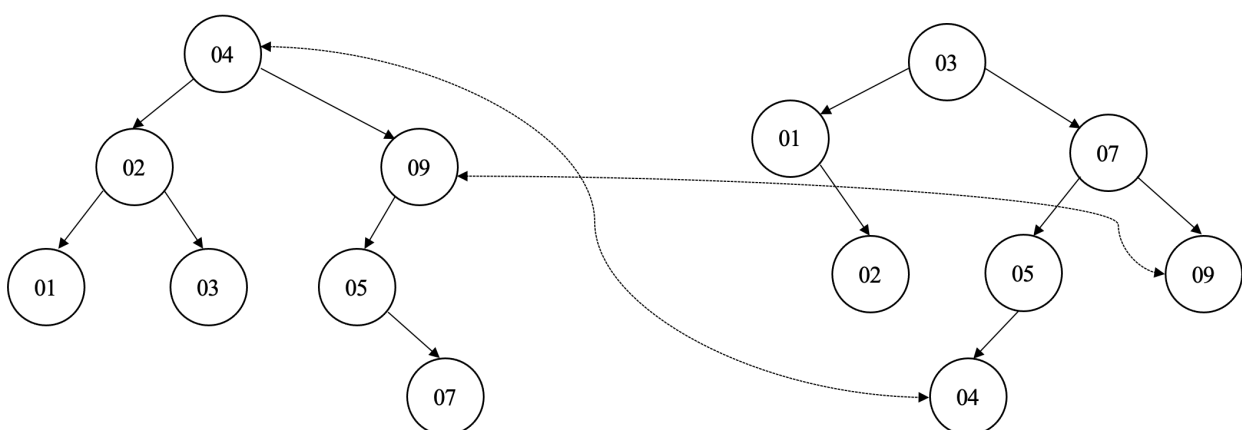

Hình 1: The result after inserting [1, 3, 5, 7, 9, 2, 4] into BKU Tree

Note: To ignore intricacy, there are some corresponding link between nodes in two trees, so students have to know other links to connect two nodes.

## 3.2 Search operation

When searching for an element with key  $k$  on BKU Tree, we do the following steps:


1. If the key is at the root of the Splay Tree, we return the found node and finish.
2. If the key is in a queue, we search on the Splay Tree.
3. If the key is not in a queue, we do the following step:
  - (a) From the root node  $r$  of the Splay Tree, we refer to the corresponding  $r'$  node on the AVL Tree.
  - (b) Search on the AVL sub-tree where node  $r'$  is the root node.
  - (c) If found in the AVL tree in step (b), returns the found node  $f'$ .
  - (d) If not found, we search from the root of the AVL tree total. During the search process, if we go through node  $r'$ , then returns the result is not found. On the contrary, returns the found node  $f'$ .
  - (e) From node  $f'$  of the AVL Tree, we refer to corresponding node  $f$  on the Splay Tree. Perform splay at the node  $f$  to bring the node up as the root node.
4. Put the key you searched for at the end of the queue (enqueue) (even if it already exists in the queue). In the case of an overloaded queue, we remove the key at the head of queue (dequeue) before adding this key.

## 4 Task

Students are required to build a program in C++ to implement the BKU Tree data structure proposed above. Students are given two files: 201.dsa-a1p1-des.pdf to describe the assignment and the BKUTree.cpp file contains the initialization code, where:

- Class `BKUTree` (with template `K` and template `V`) represents the BKUTree data structure with attributes and methods:
  - Attributes:
    1. `AVLTree* avl` used to store AVL Tree.
    2. `SplayTree* splay` used to store Splay Tree.
    3. `queue<K>* keys` used to store the recently searched key queue with `queue` is queue data structure in STL C++.
  - Methods:

1. `BKUTree(int maxNumOfKeys = 5)`: constructor to set the maximum number of keys that can be stored in the queue. If the user does not pass in, the maximum number of keys to be used is 5.
  2. `void add(K key, V value)`: adds an element with the `key` and `value` to the BKU Tree structure. If the key already exists, the program will throw an exception "Duplicate key".
  3. `void remove(K key)`: delete an element that has the `key` from the BKU Tree data structure. If the key does not exist, the program will throw an exception "Not found".
  4. `V search(K key, vector<K>& traversedList)`: searches for an element that has the `key` in the BKU Tree data structure. If the key does not exist, the program will throw an exception "Not found", otherwise it returns the value corresponding to that key. In addition, `traversedList` will store the passed keys in turn before finding the element that has the `key` or until the end in the case of not finding it.
  5. `traverseNLROnAVL` and `traverseNLROnSplay`: are two methods used to traverse pre-order on the two AVL trees and the Splay tree that BKUTree is storing with `func` is the pointer function that stores the processing at each traversing each node.
- Nested class `Entry` within BKU Tree is a structure used to store the key and corresponding value of a data point.

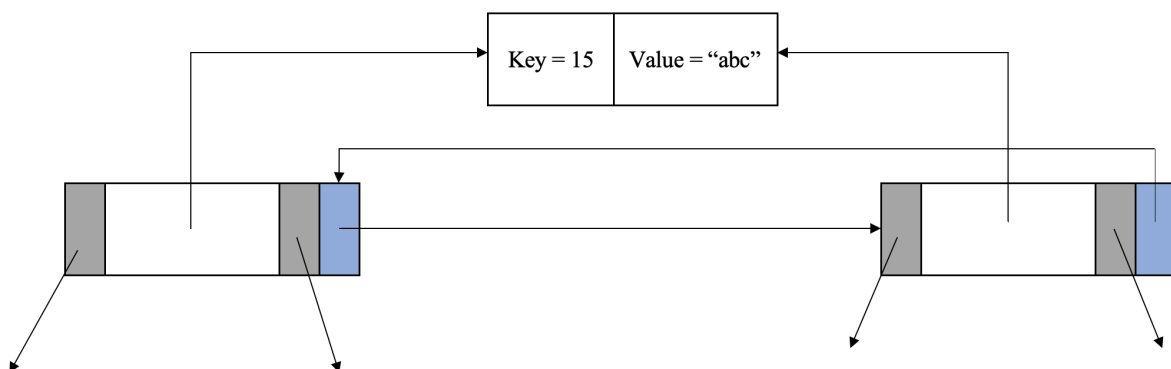

Hình 2: Example for sharing entry between corresponding nodes on two trees

In figure 2, at each node, the grey area point out two subtree on left and right sides, blue one stores the link with corresponding node and the white area keeps the memory of stored entry.

Students are allowed to implement additional methods to support your task, change the return type of any methods except for `search` methods but the name of class and defined methods cannot be modified.

## 5 Evaluation

To test your submission, testcases are divided into 3 groups:

1. Testcase 00 - 24: Test your implementations on AVL Tree.
2. Testcase 25 - 59: Test your implementations on Splay Tree.
3. Testcase 60 - 99: Test your implementations on BKU Tree.

On the other hand, students are required to release whole allocated memory after running. Testcase from 80 to 99 will be test this requirement, if you do not try, evaluation result will be failed on these testcases.

## 6 Regulation and Submission

Students will be provided with an initialization code framework on the general course site. Students code directly on the BKeL system and the student's final submission will be used for grading.

All of the students' questions about this assignment will be answered on the course site forum. DO NOT SEND ANY EMAIL FOR QUESTIONING to the teachers or teaching assistants under any circumstances.

—————THE END—————